KOHLER
OF
KOHLER

K56

The Gift of

ANNA M. SCHWEINFURTH
TRUST

to the
CLEVELAND
PUBLIC LIBRARY
FINE ARTS DEPARTMENT

PERSONAL COPY

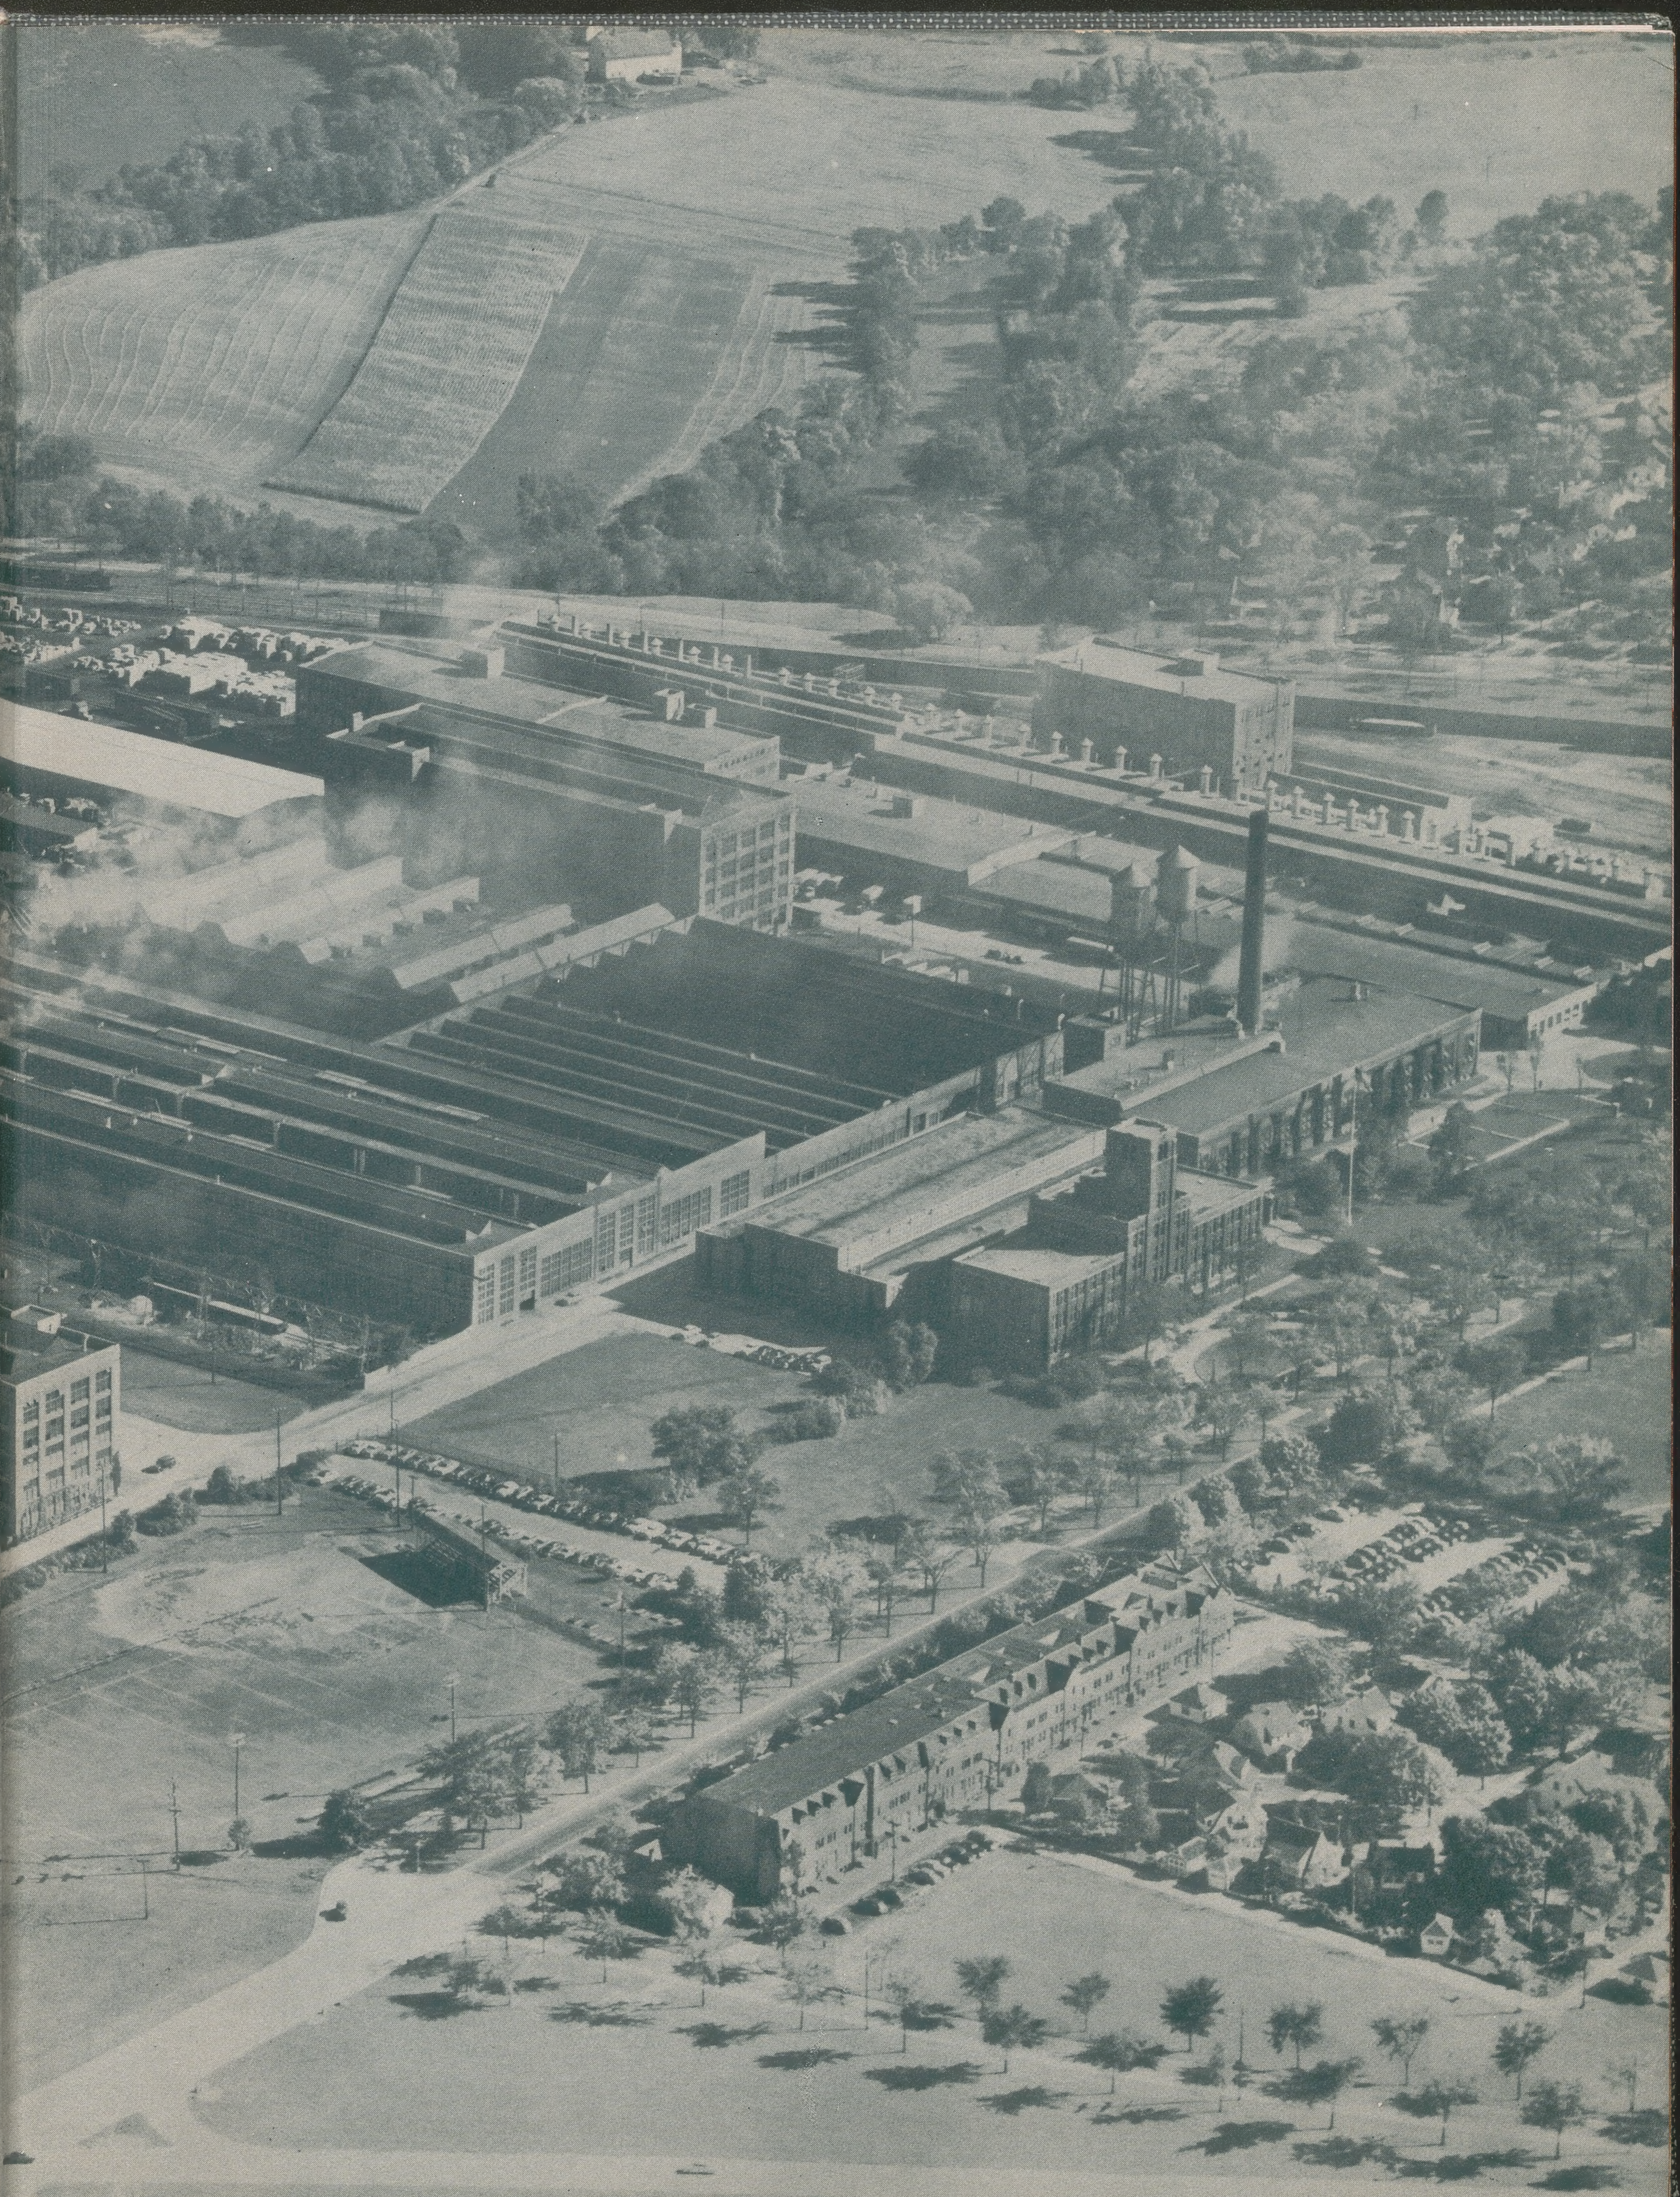

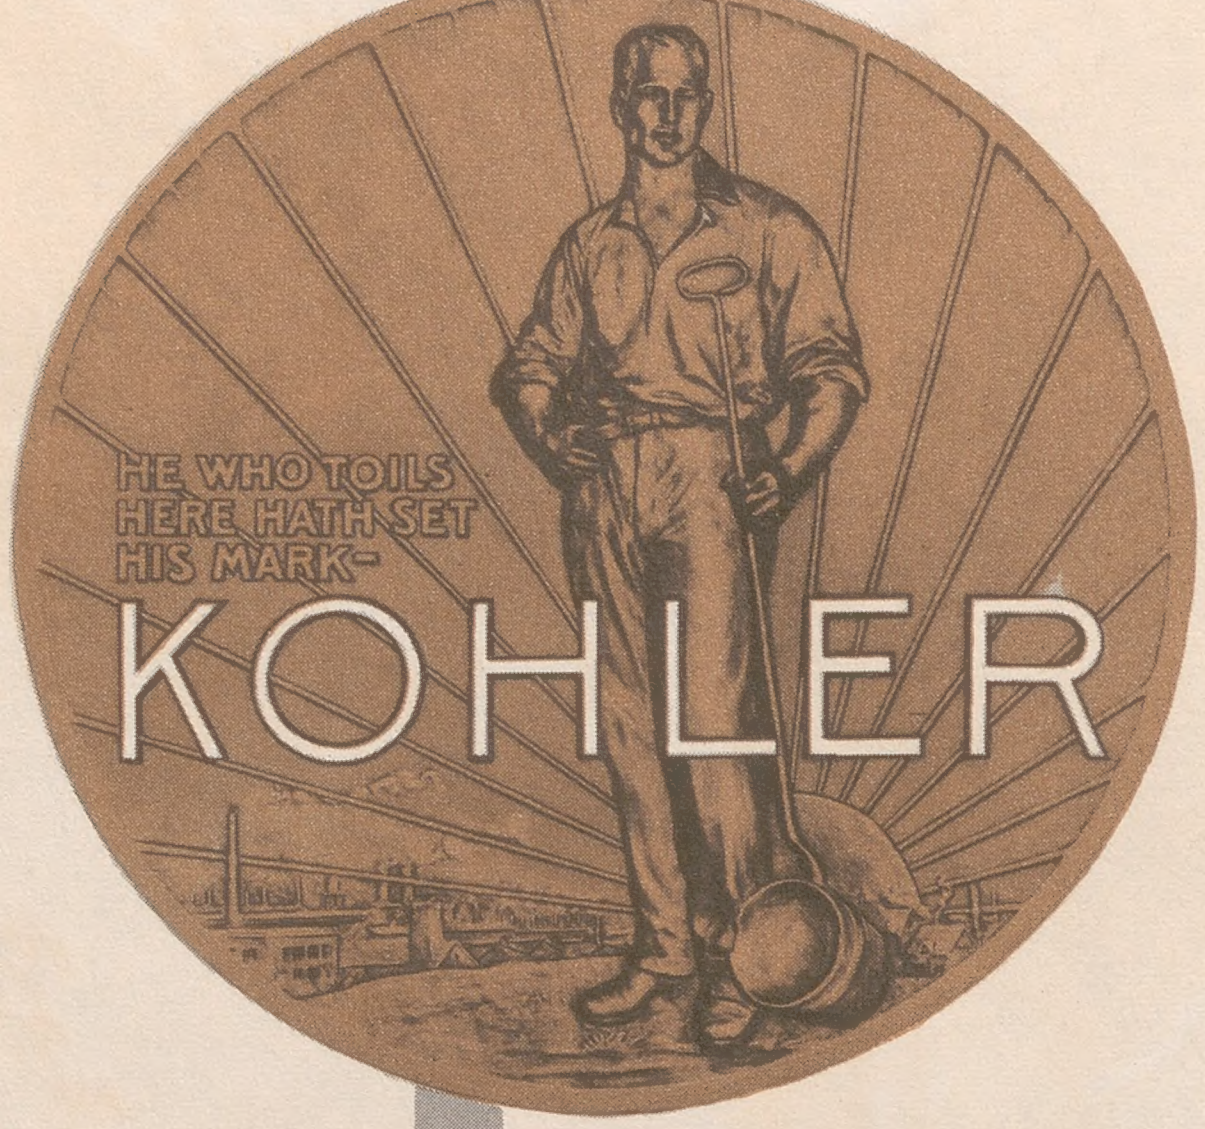

Catalog K56

KOHLER CO.
Kohler, Wisconsin

Shipping Point
Sheboygan, Wisconsin

Founded 1873
by John Michael Kohler

BRANCH SALES OFFICES

Boston 16, Massachusetts
139 Newbury Street

Chicago 11, Illinois
Tribune Tower
431 N. Michigan Avenue

Cleveland 14, Ohio
910 Union Commerce Building
9th and Euclid

Detroit 2, Michigan
3094 E. Grand Boulevard

Houston 2, Texas
856 Merchants and Manufacturer's Bldg.
1 Main Street

Kansas City 5, Missouri
1016 Baltimore Avenue

Los Angeles 5, California
3458 Wilshire Boulevard

Milwaukee 2, Wisconsin
751 N. Jefferson Street

Minneapolis 2, Minnesota
1116 Nicollet Avenue

Newark 5, New Jersey
406 Raymond Boulevard

New York 17, New York
Showroom only
99 Park Avenue

Long Island City 1, New York
36-02 Northern Boulevard

Philadelphia 3, Pennsylvania
Architect's Building
17th and Sansom Streets

Richmond 19, Virginia
1501-03 Central National Bank Bldg.

St. Louis 8, Missouri
Continental Building
3615 Olive Street

San Francisco 2, California
505 Post Street

Seattle 1, Washington
1907-09 Third Avenue

Washington 6, D. C.
209 Heurich Building
1627 K Street, N.W.

London, England
66 Bolsover Street

KOHLER of KOHLER

CLEVELAND PUBLIC LIBRARY

KOHLER VILLAGE

A Garden Industrial Community

Kohler Village, widely known as a town-planned garden community, is the site of Kohler Co.'s entire manufacturing plant as well as the home of many of the people who make Kohler products.

The village is located in pleasant rolling country four miles west of Lake Michigan's shore and near the fringe of Wisconsin's beautiful Kettle Moraine country.

In 1899 the Kohler plant was moved to this then rural area by John Michael Kohler who 26 years earlier had founded the company in Sheboygan.

Within a few years, individuals started building homes near the plant. In 1912, the village was incorporated and far-reaching plans for its development were initiated. Local government in Kohler is that prescribed for villages under the laws of Wisconsin.

The community not only has all the utilities found in modern American cities, but is beautifully landscaped and well maintained.

Winding streets, lined with shade trees, are characteristic of Kohler Village. The Nature Theatre and Ravine Park are at the right.

ocm 4932/643

Flowers and pleasant landscaping provide a friendly setting for all village homes.

The village is zoned by municipal ordinance and there are well-defined commercial, industrial and residential areas. A broad avenue planted with elms screens the industrial section.

There are wide tree-lined main thoroughfares, and interestingly winding residential streets. The residents appear to possess in common a genius for gardening and home grounds wherever one goes are most attractive.

Well-equipped school and public park playgrounds are maintained. A terraced Nature Theatre, able to accommodate thousands of people, is located centrally in Ravine Park, providing a delightful place for band concerts and other forms of open-air entertainment.

In the community are facilities also for baseball, tennis, target-shooting, and practically every form of sport and exercise.

The public school system rates high among Wisconsin communities for the excellence of its program

OCM 4932/1643

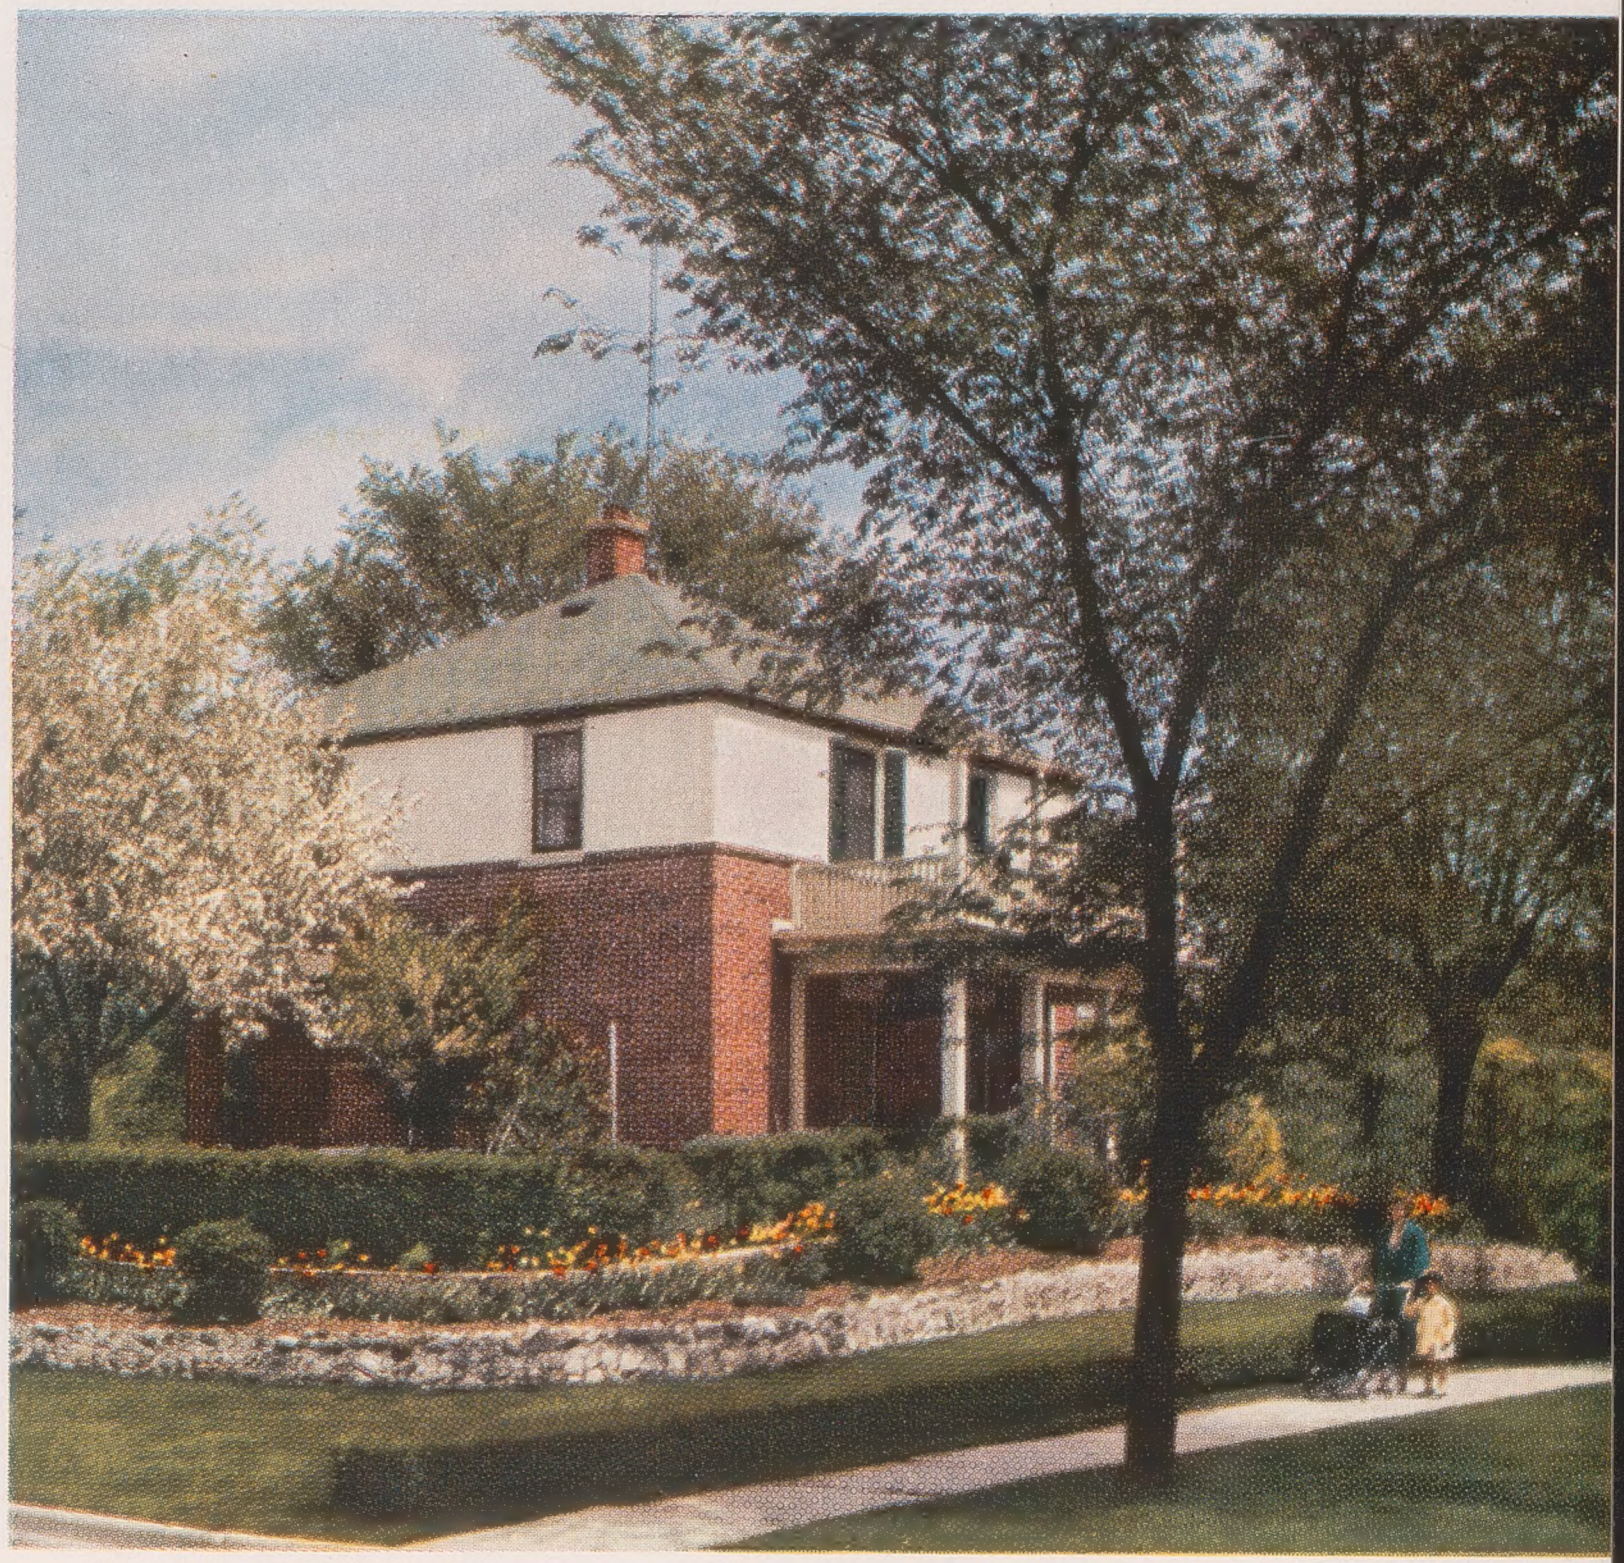

Though modest in size and cost the homes are substantial and have character and individuality. Grounds are enhanced by well-kept lawns.

Demonstration House sponsored by the Kohler Woman's Club is open to public throughout the summer.

The modern public school system is well-known for its general high quality. There is a fully accredited high school course.

Bethany Lutheran, one of the churches in Kohler, ministering to the religious life of the people.

and staff and for the strength developed in special fields such as home economics, manual arts, fine arts and music.

Three churches foster the spiritual and religious life of the people.

Active organized groups in the village include the Girl Scouts, Boy Scouts, Brownies and Cubs. The Garden Club has played a role in the development of the community's natural attractiveness.

Of notable importance in Kohler Village has been its Woman's Club. Inspired and guided by the late Ruth DeYoung (Mrs. Herbert V.) Kohler, the club has brought to its rostrum nationally and internationally famed speakers and artists who have helped make this a renowned cultural center. Among the club's numerous civic activities has been the Better Homes program, stimulating interest in the arts and in home development and featuring each year a Demonstration House open to the public throughout the summer and autumn months.

The American Club, suggestive of a college hall, is a home for single men and women, and out-of-town visitors. It has dining rooms, lounging rooms and bowling alleys.

One of several playgrounds in wooded areas.

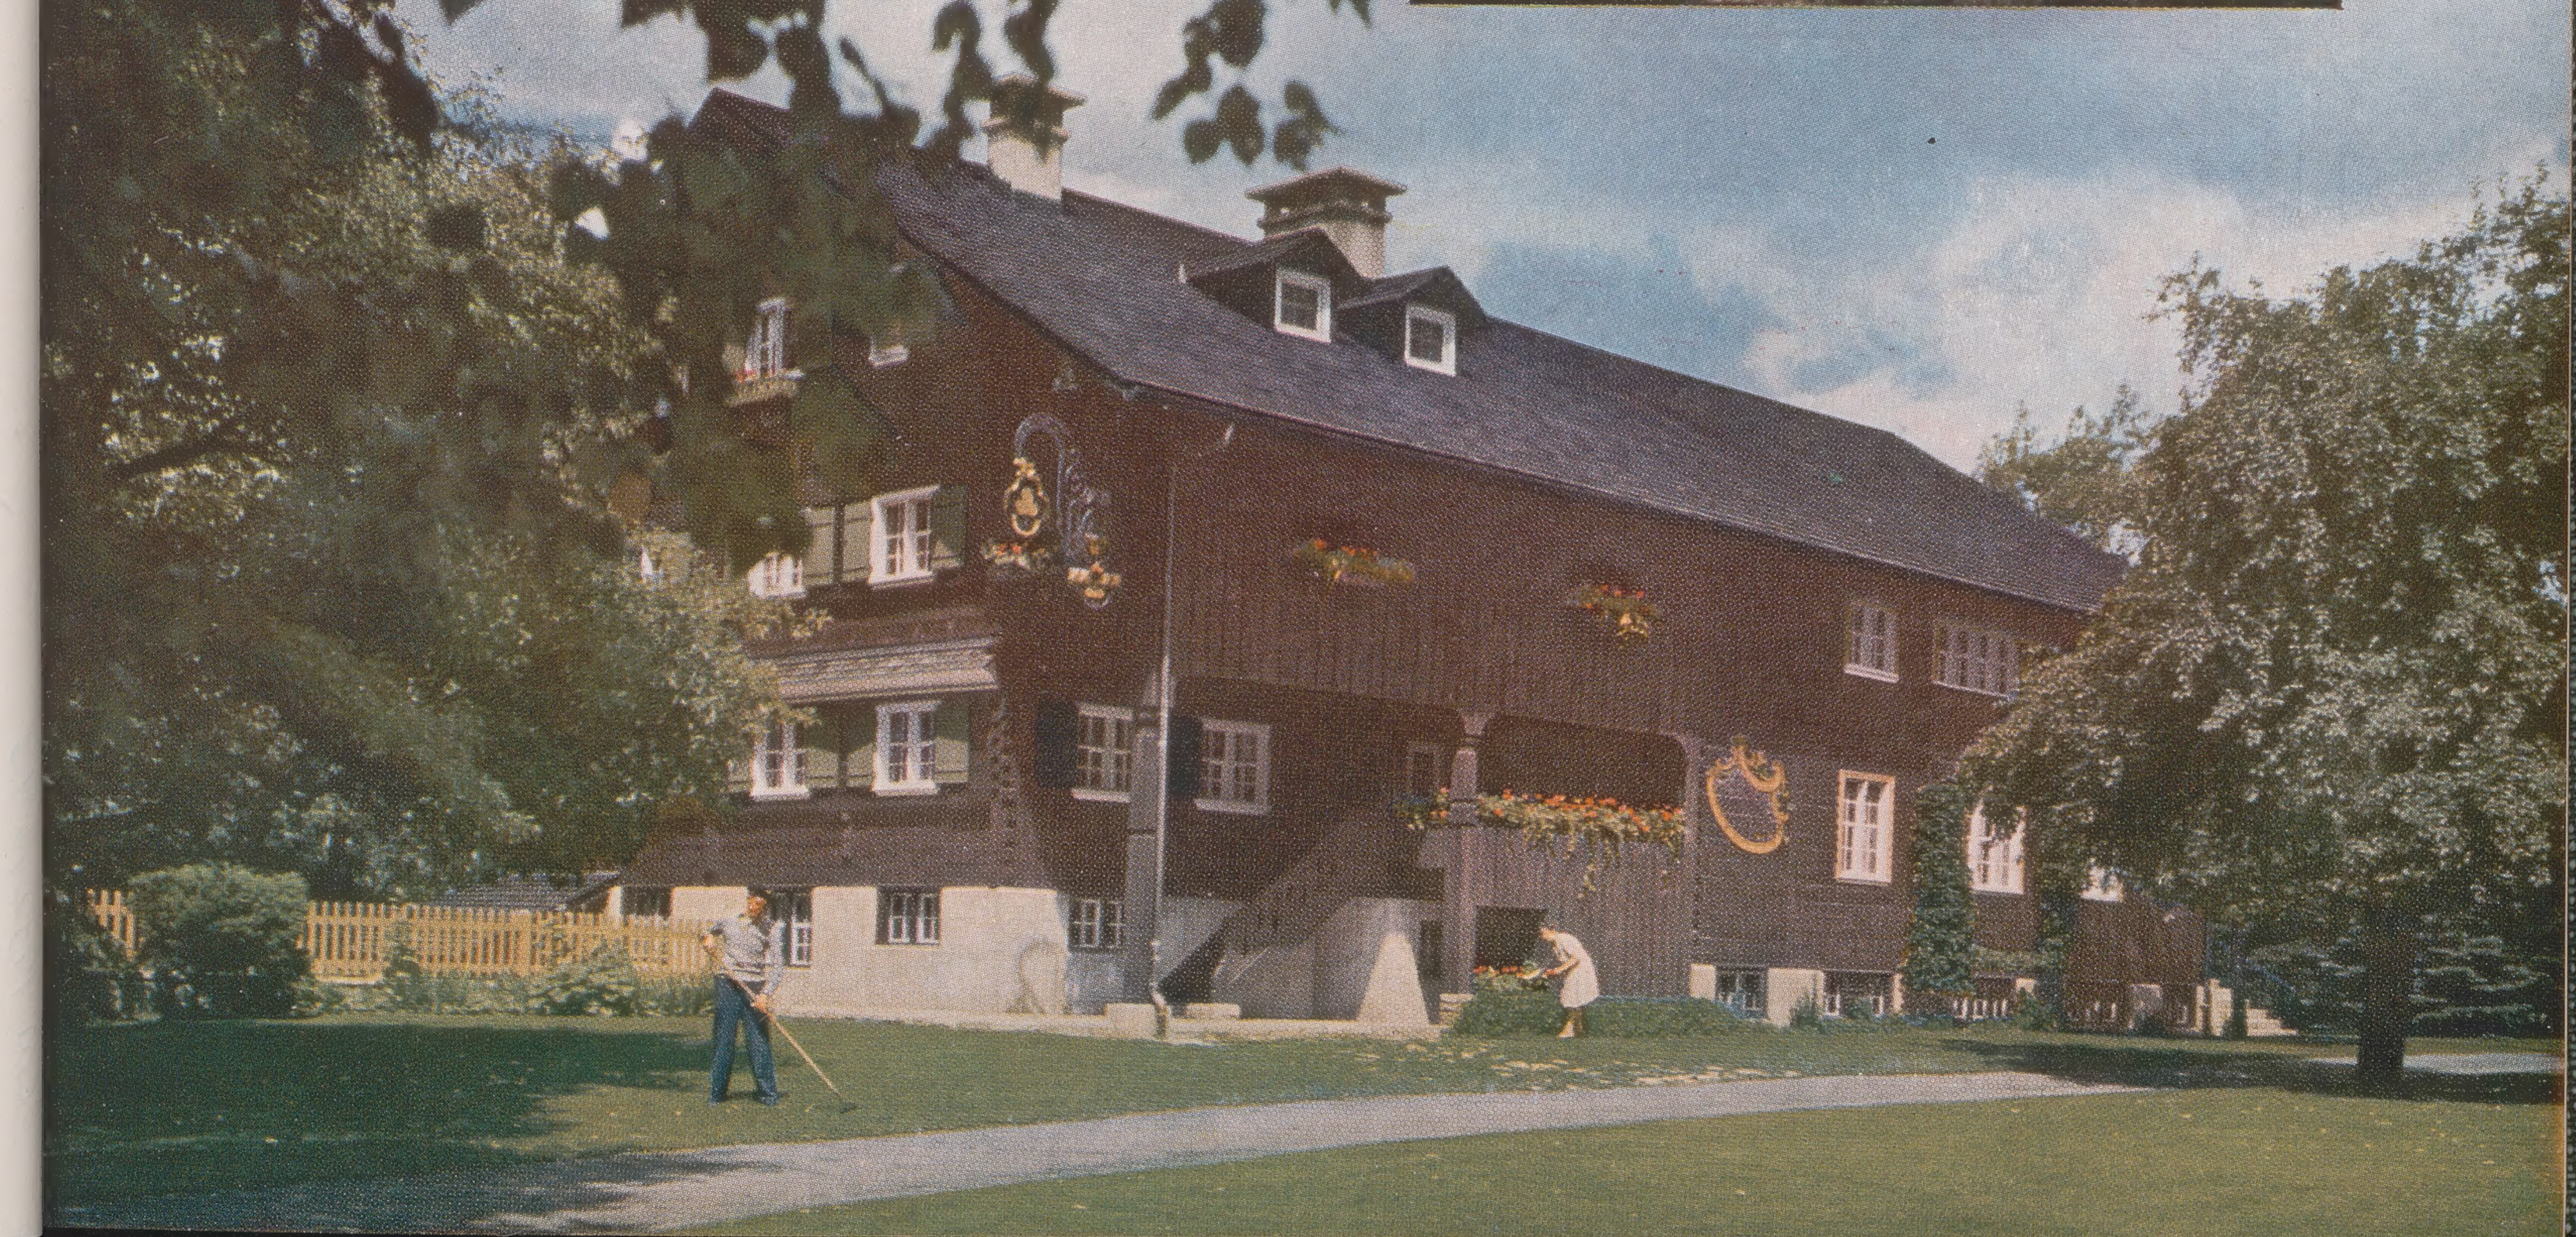

The Waelderhaus, erected in memory of John Michael Kohler, founder of Kohler Co., by his daughter Marie Christine Kohler, is in the architecture of the Bregenzerwald, Vorarlberg, Austria, where John Michael Kohler was born.

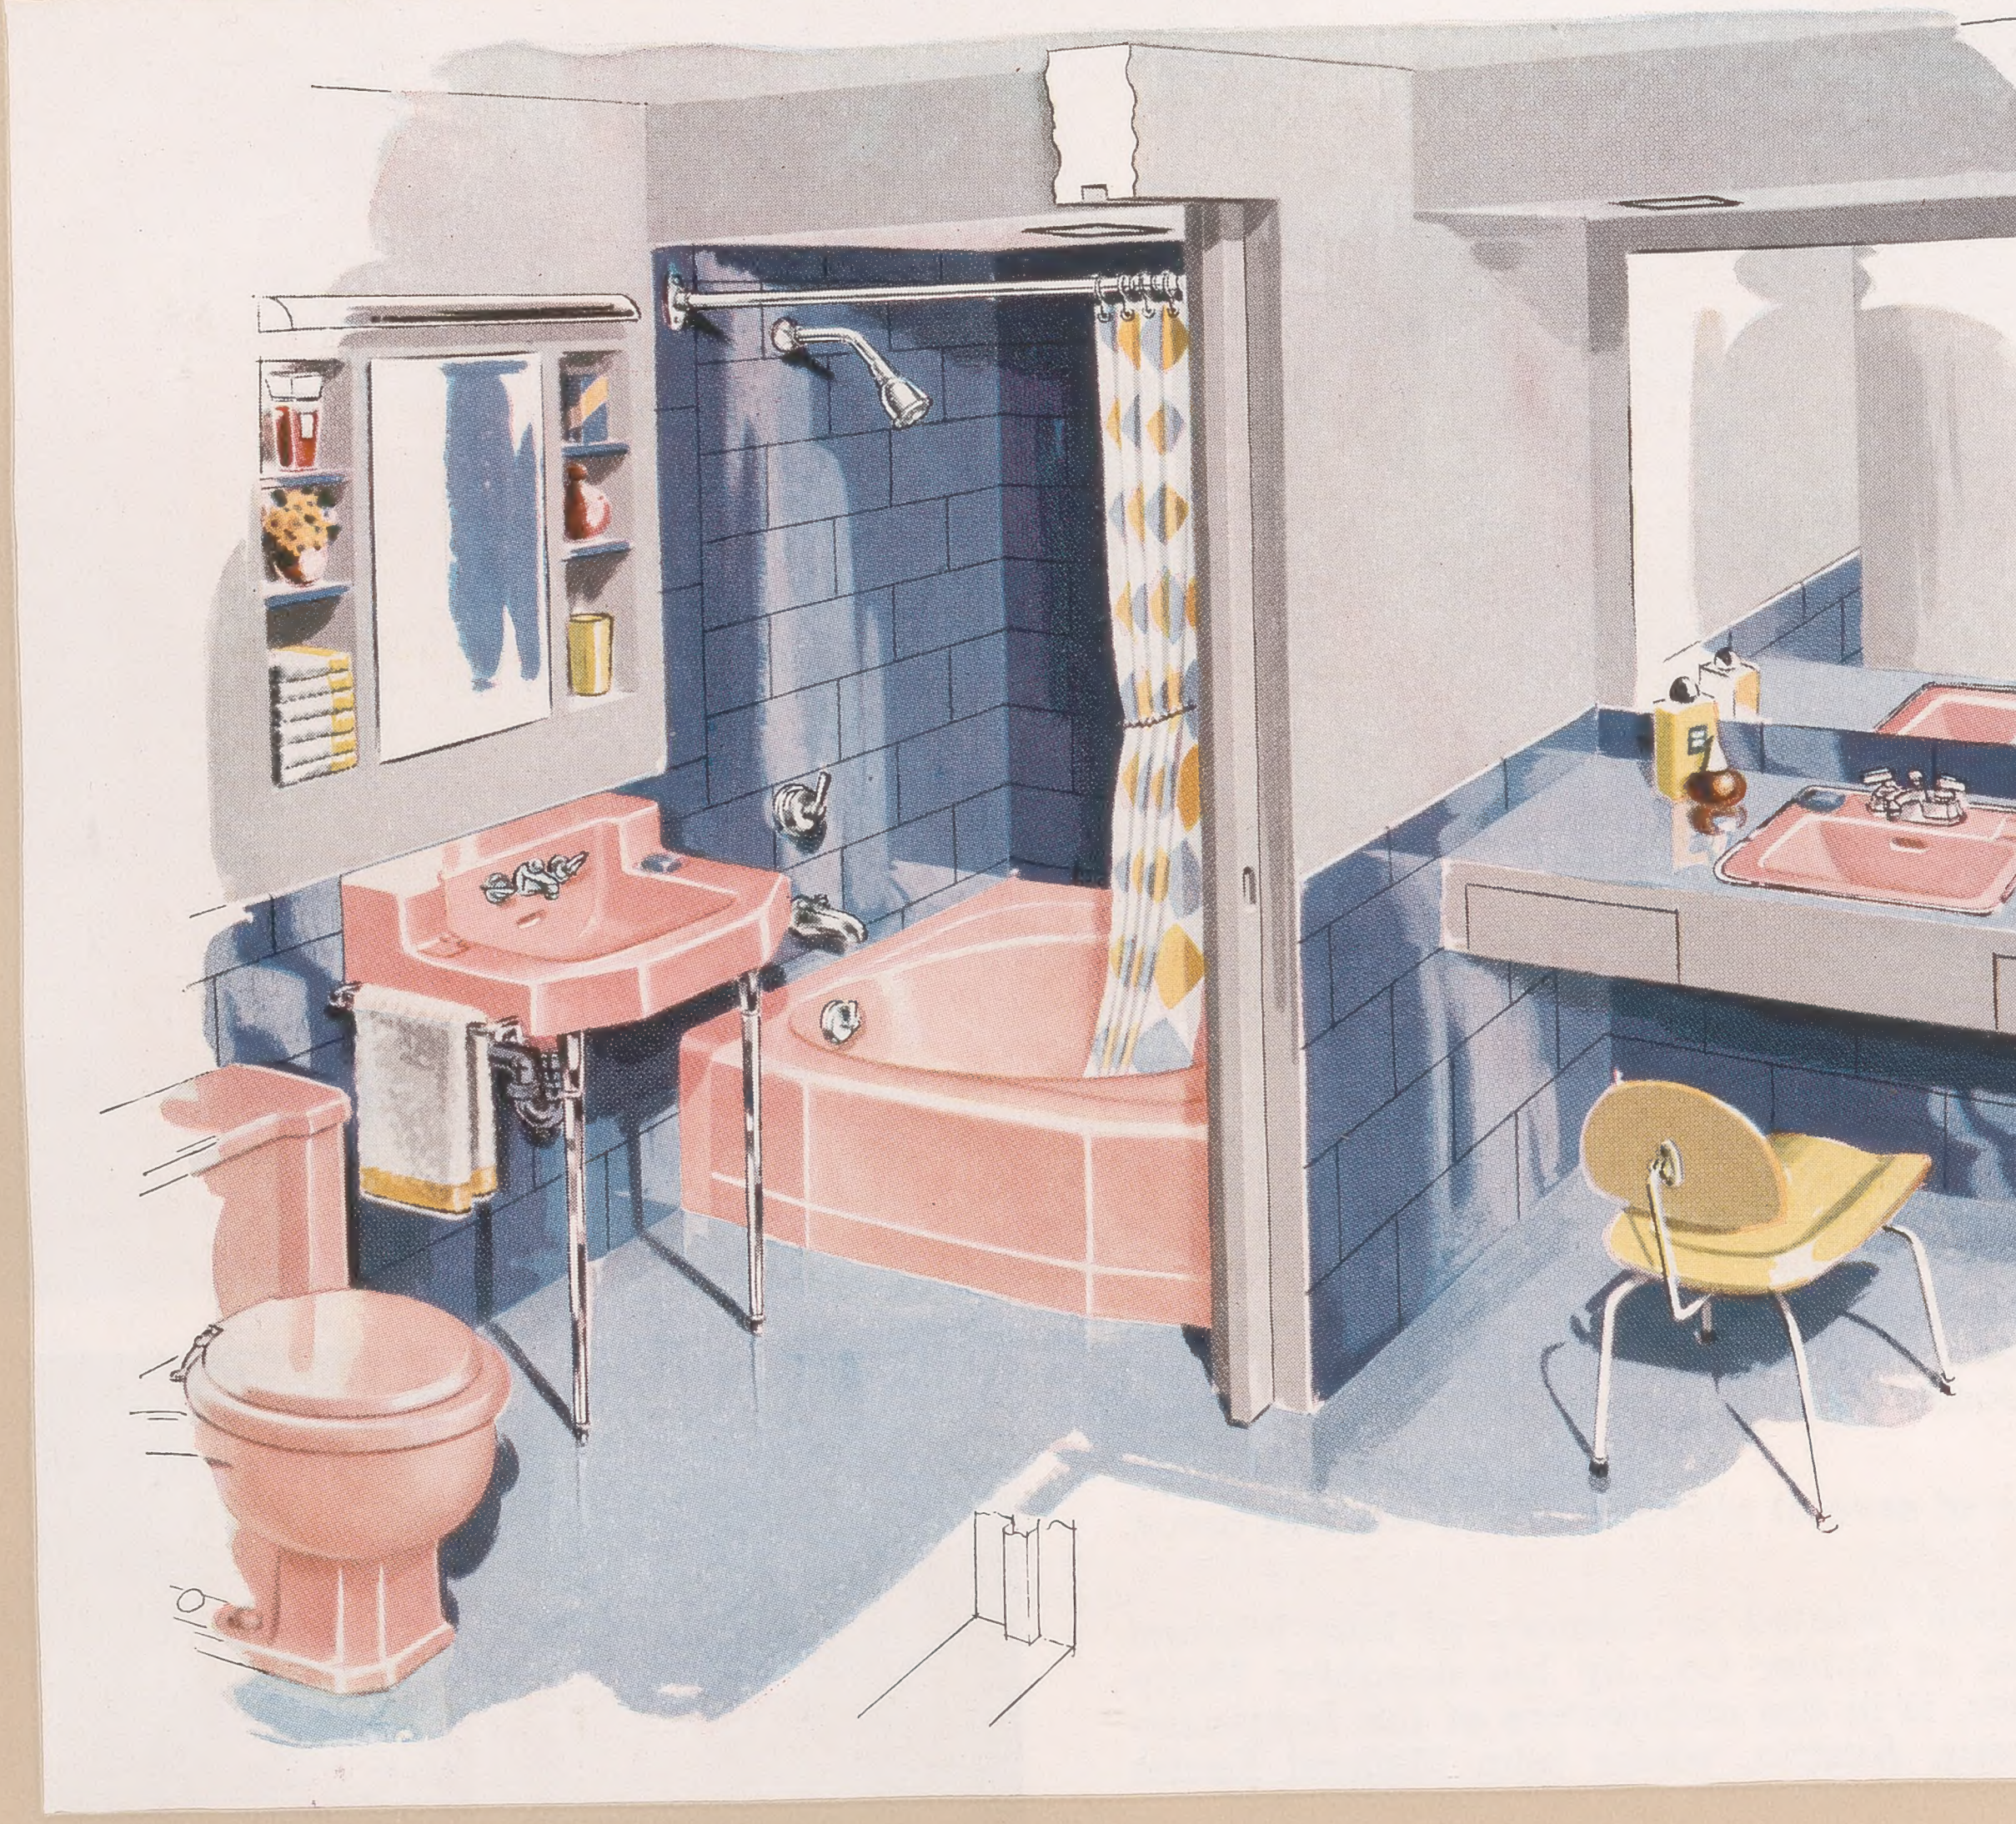

Bath and Dressing Room

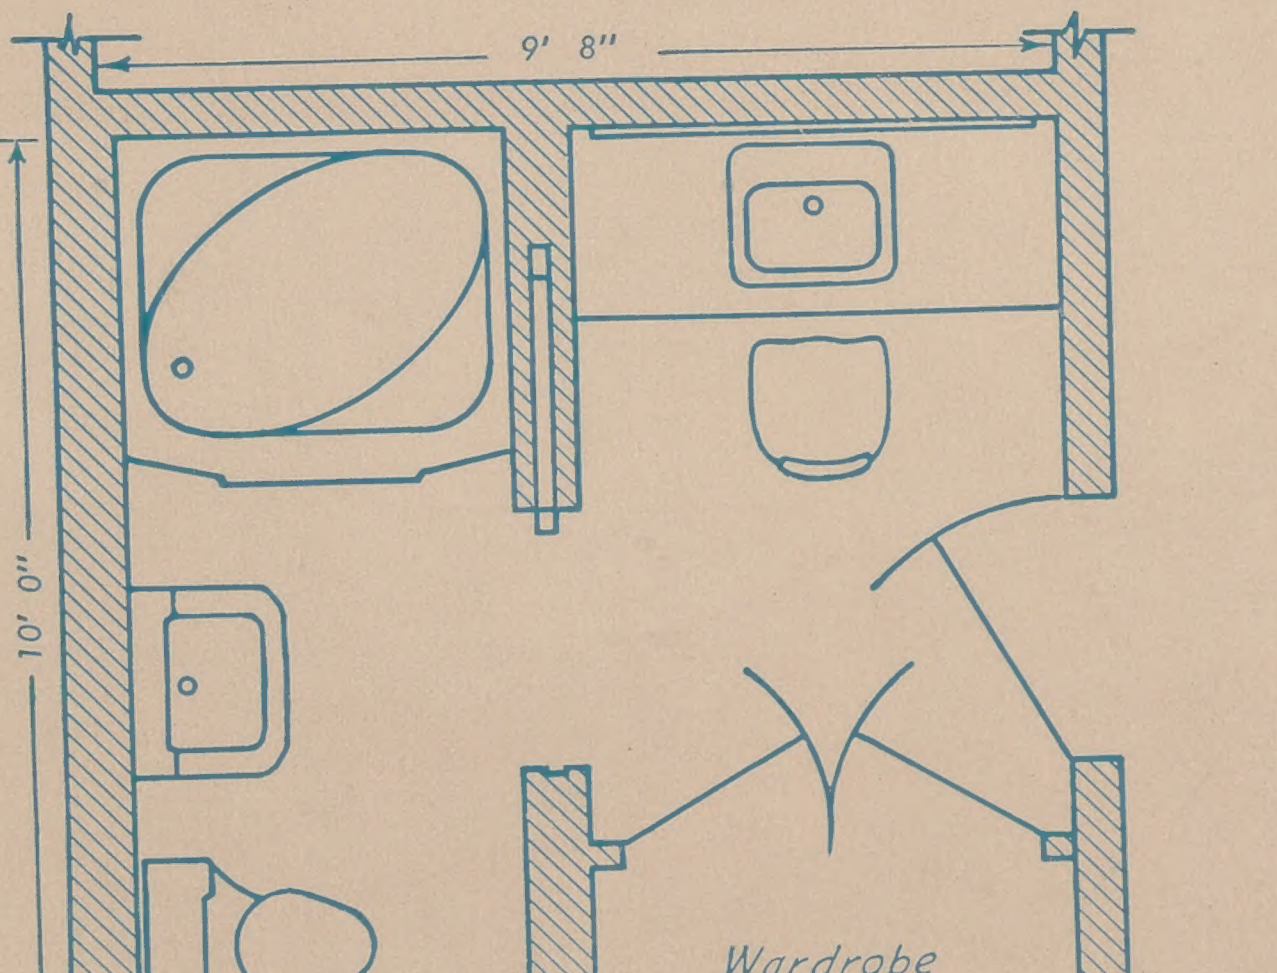

K-215-F	Mayflower bath—4'
K-1600-A	Gramercy lavatory—24x20"
K-1890-C	Arrowhead lavatory—20x18"
K-3605-EB	Placid closet

The pleasing combination of Peachblow fixtures and modern appointments gives this bathroom an atmosphere of elegance. The individual design of the oval-shaped Mayflower bath has ample room for either showering or bathing. Unobstructed shelf space is a feature of the popular vitreous china Gramercy lavatory with its convenient towel bars and smartly designed legs. The low, one-piece Placid closet is a popular choice for custom-built homes. Utility in the dressing room is provided by the vitreous china Arrowhead lavatory built into the counter, while full-length mirrored doors on the wardrobe closets create a feeling of spaciousness.

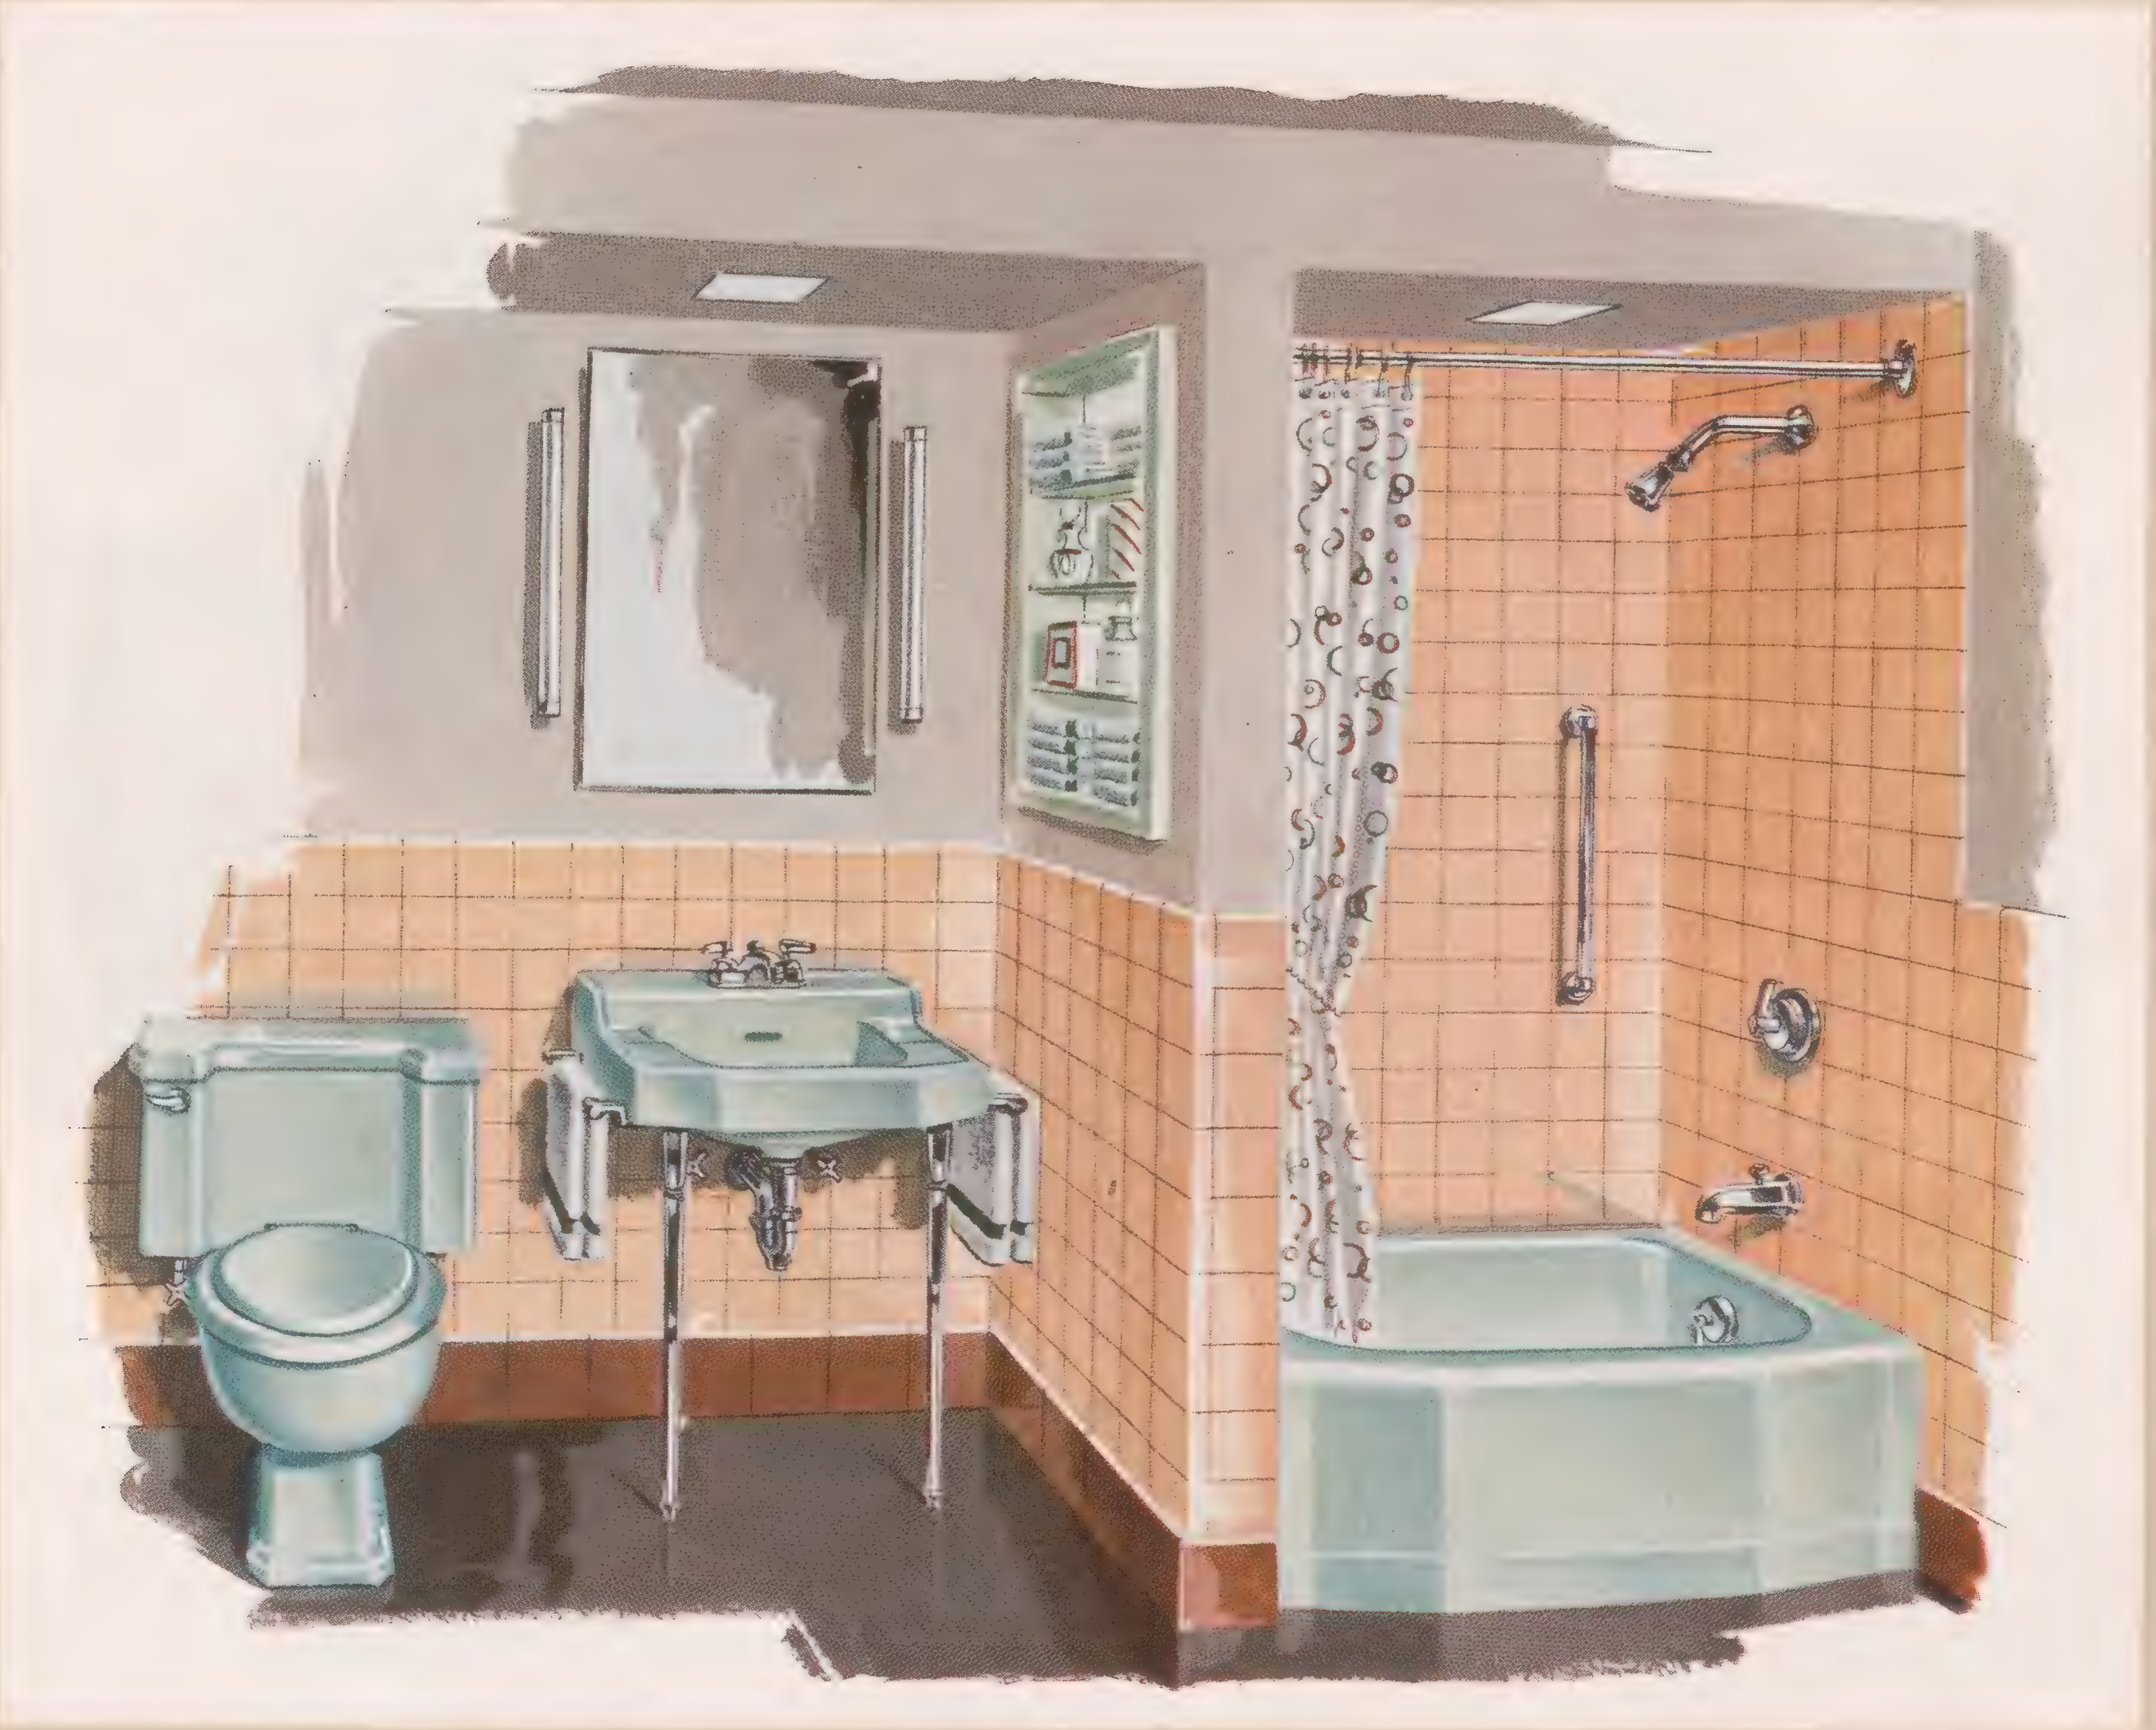

Modern Convenience in Fixture and Appointment

The Standish is a compact bath for showering or for bathing youngsters. The size, 42x36″, suggests its use in apartments, motor courts and hotels as well as in the home. Chromium plated Triton shower and bath fitting, including Niedecken mixer, over rim diverter spout, shower head and pop-up drain, adds to its utility. The practical ledge-type Chesapeake lavatory is equipped with the space-saving Centra fitting which tempers the water, and with convenient built-in soap dishes. A close-coupled Channel closet and Hygienic sheet-covered seat complete the installation. The fixtures are Spruce Green, shown with parchment brown tile and gray walls.

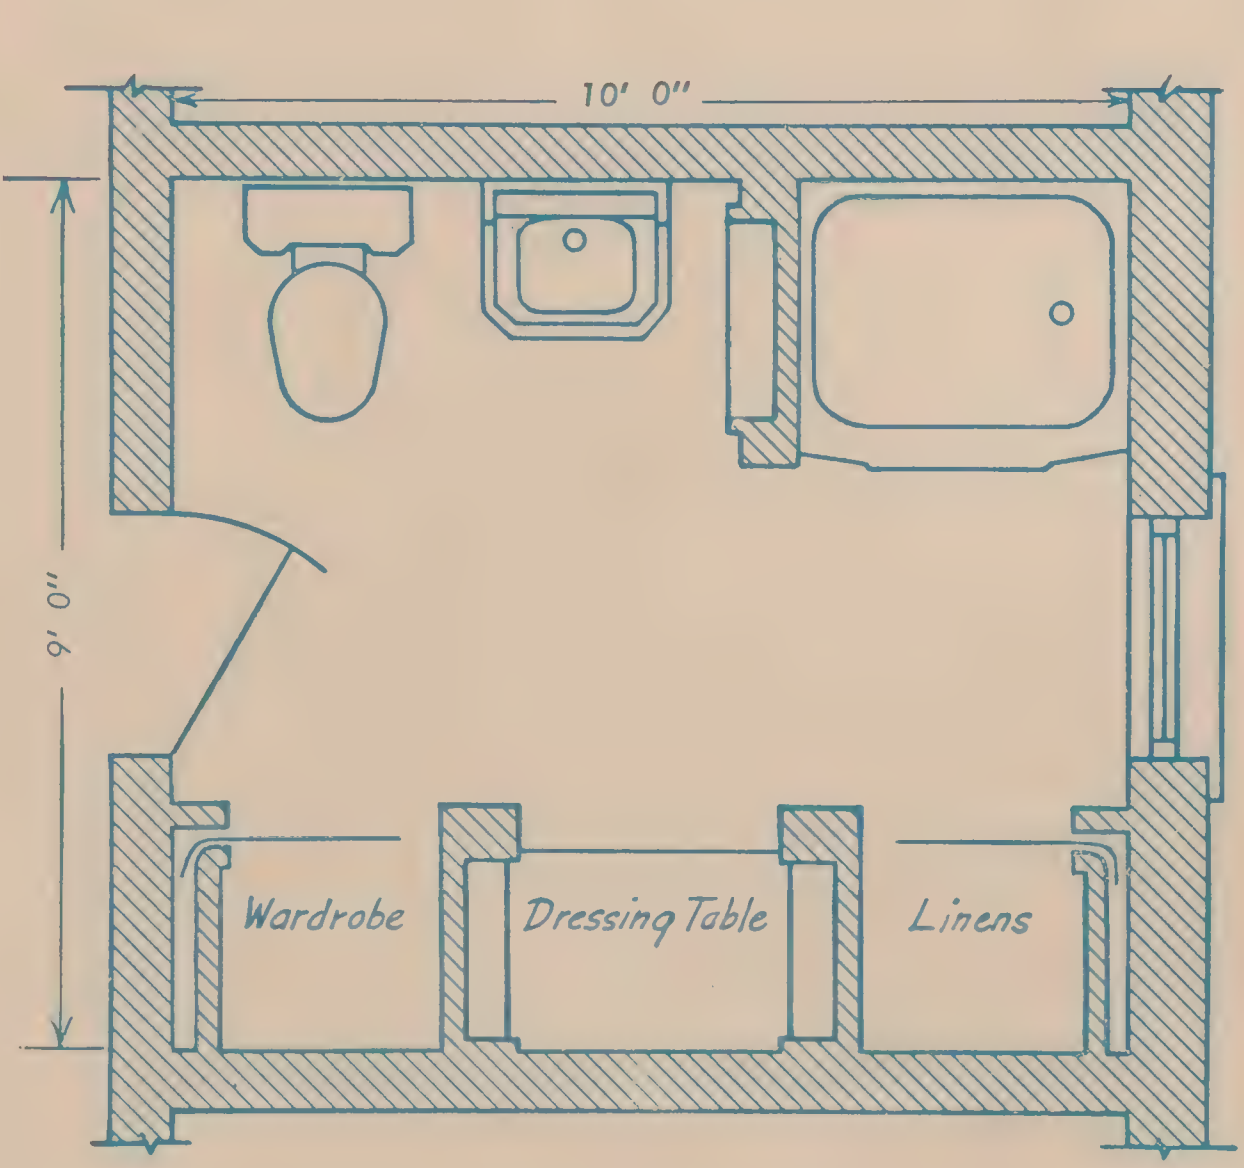

K-306-F Standish bath—42x36″
K-1740-C Chesapeake lavatory—24x20″
K-3655-EB Channel closet

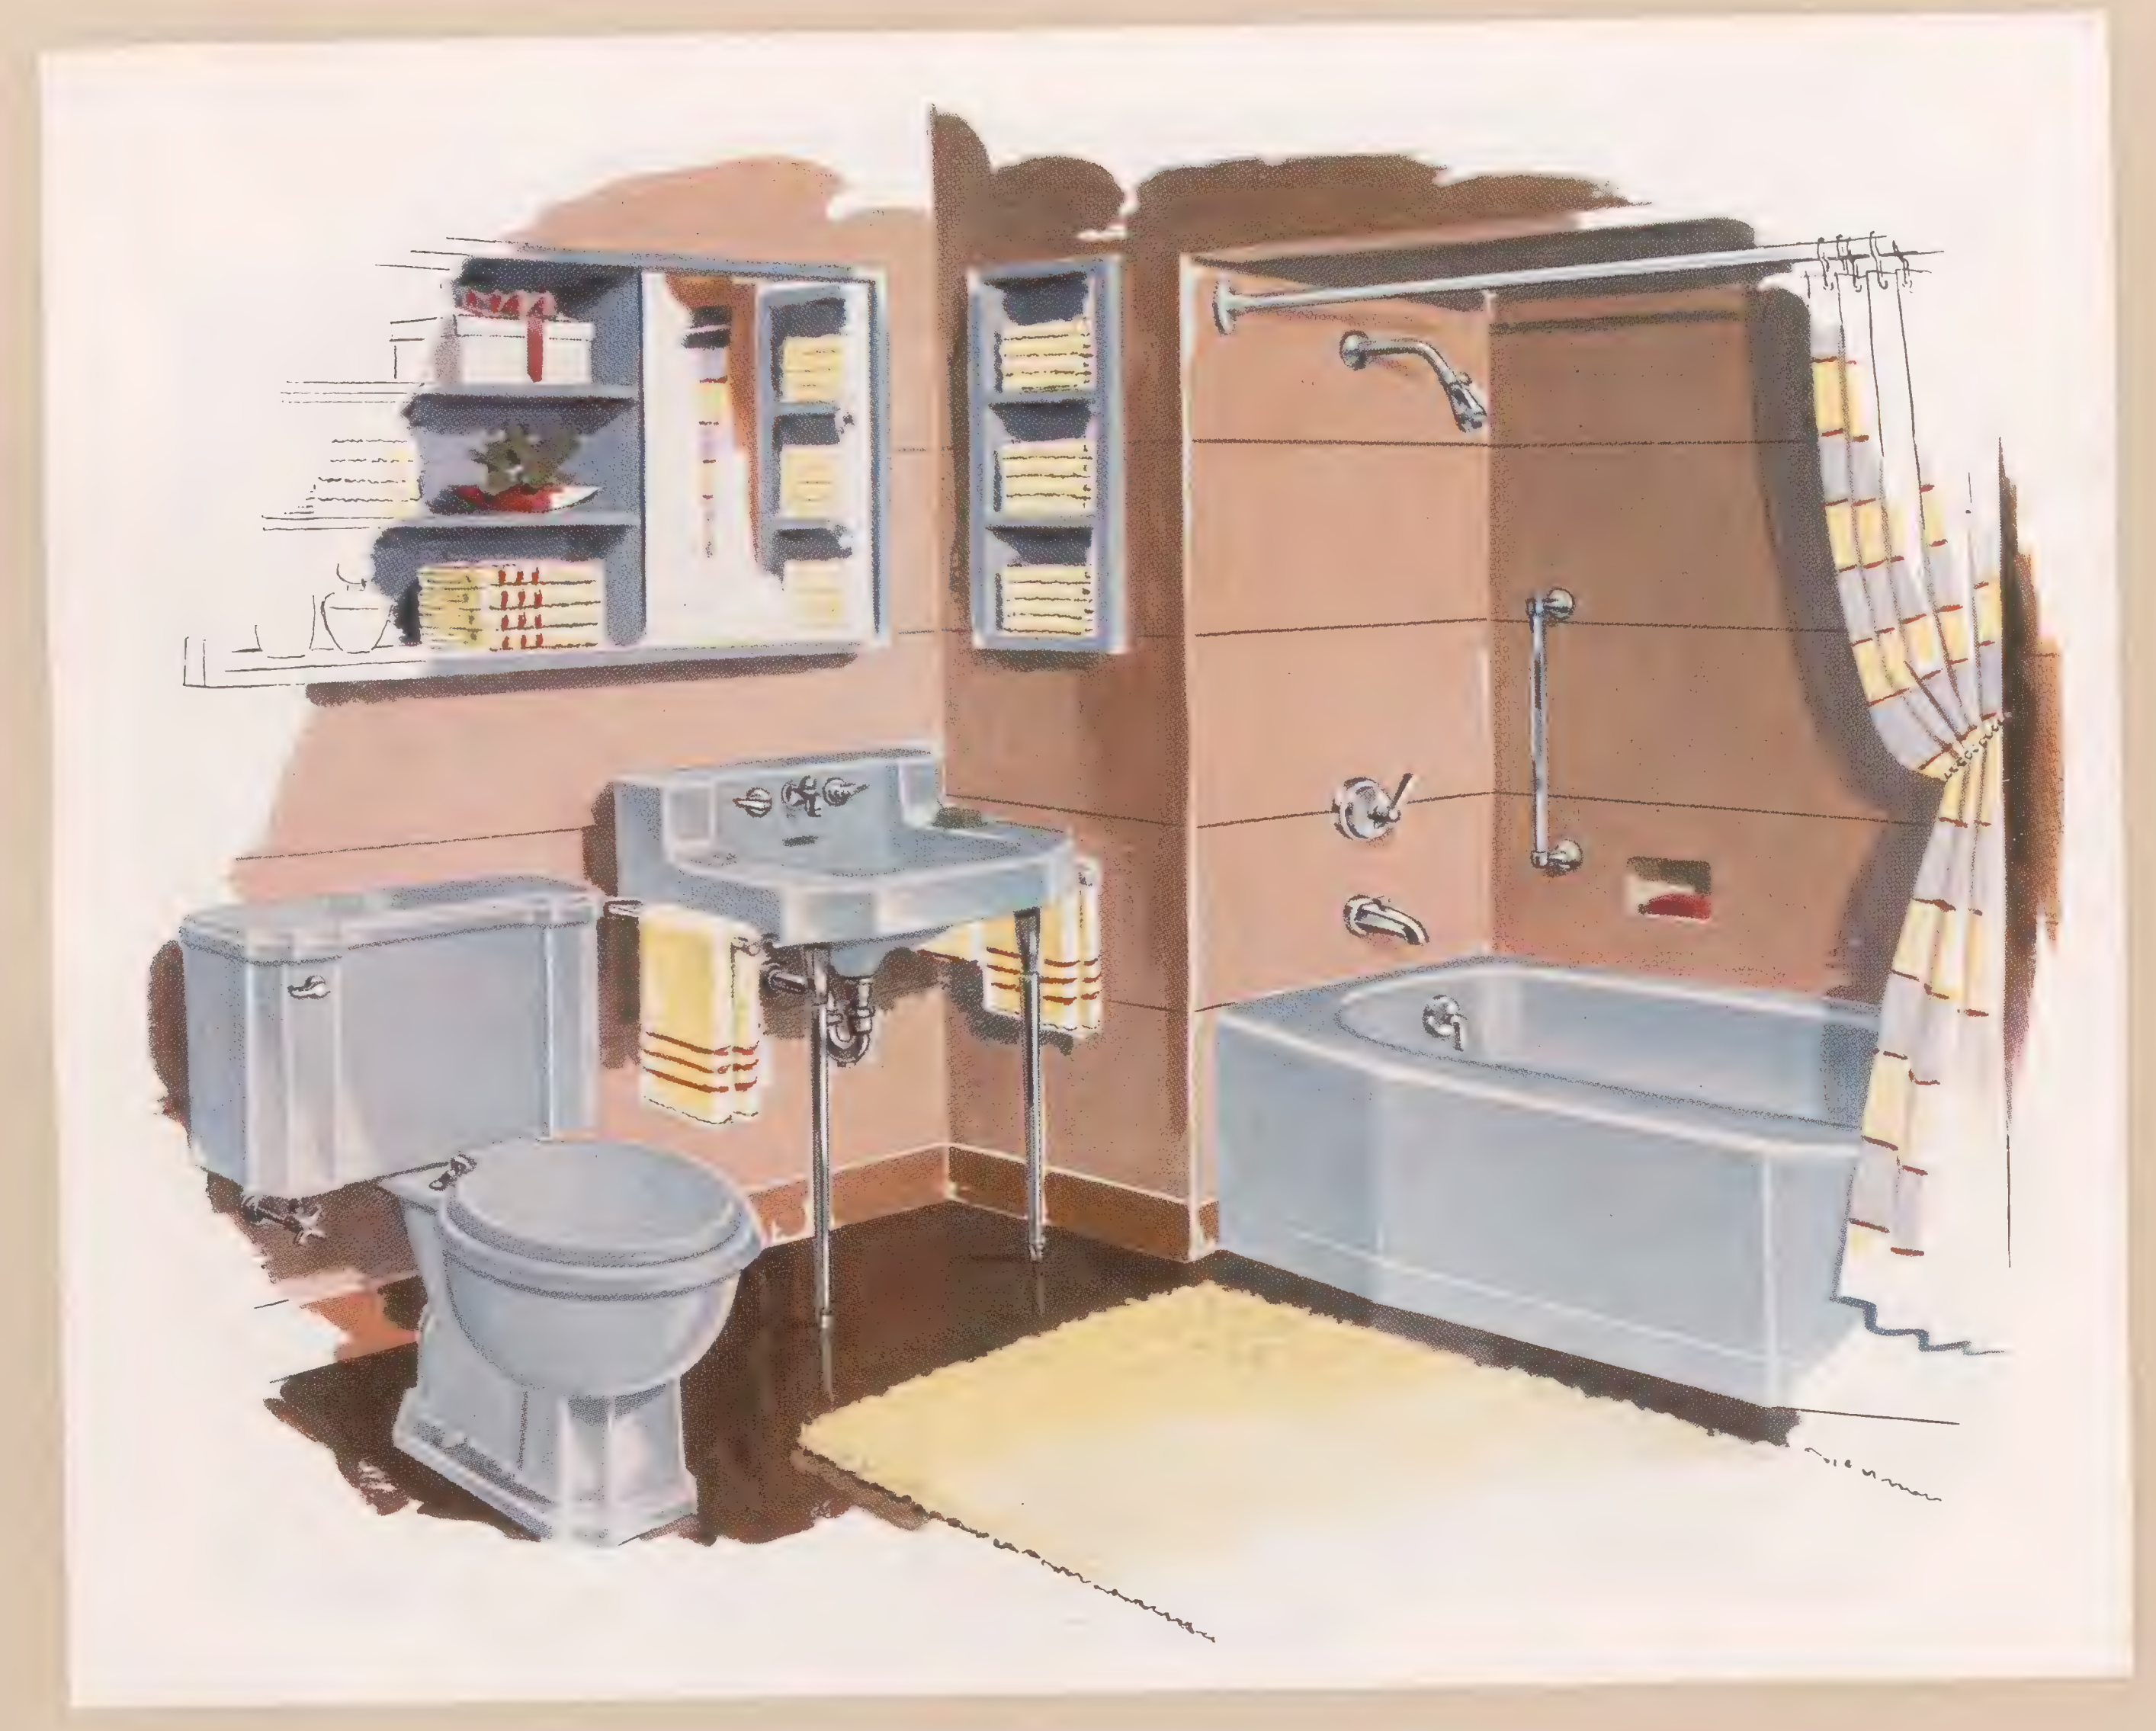

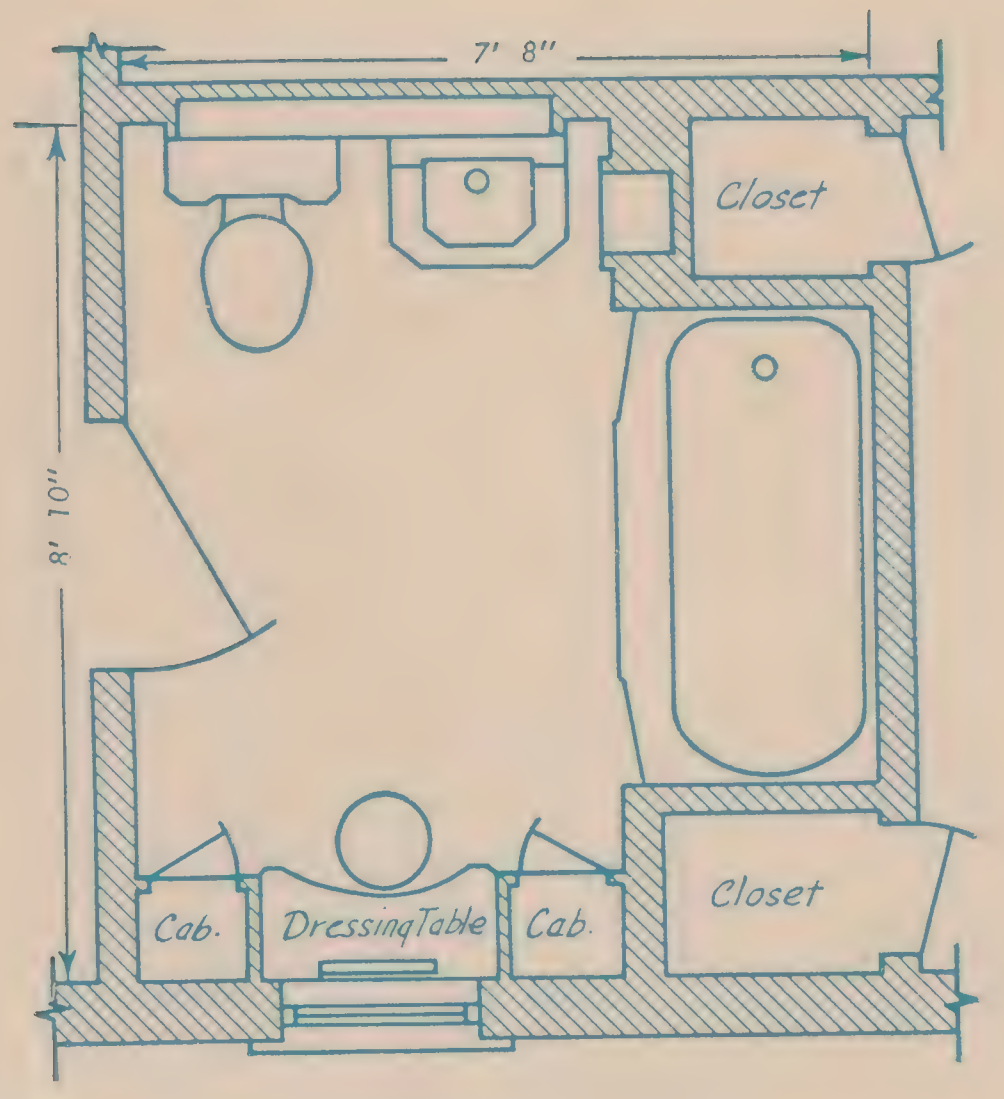

K-535-F Cosmopolitan bath—5'
K-1600-A Gramercy lavatory—24x20"
K-3665-PB Bolton closet

Maximum Utility in Color

Cerulean Blue fixtures against a background of peach colored walls and berry brown floor. The recessed Cosmopolitan bath has a useful wide bench, slope head end, and flat bottom for safety. The clean-cut lines of the Gramercy lavatory and the Bolton close-coupled closet match the design of the bath. The shelves of the large cabinet above the lavatory are 10" deep and the mirror slides for easy access to the medicine cabinet.

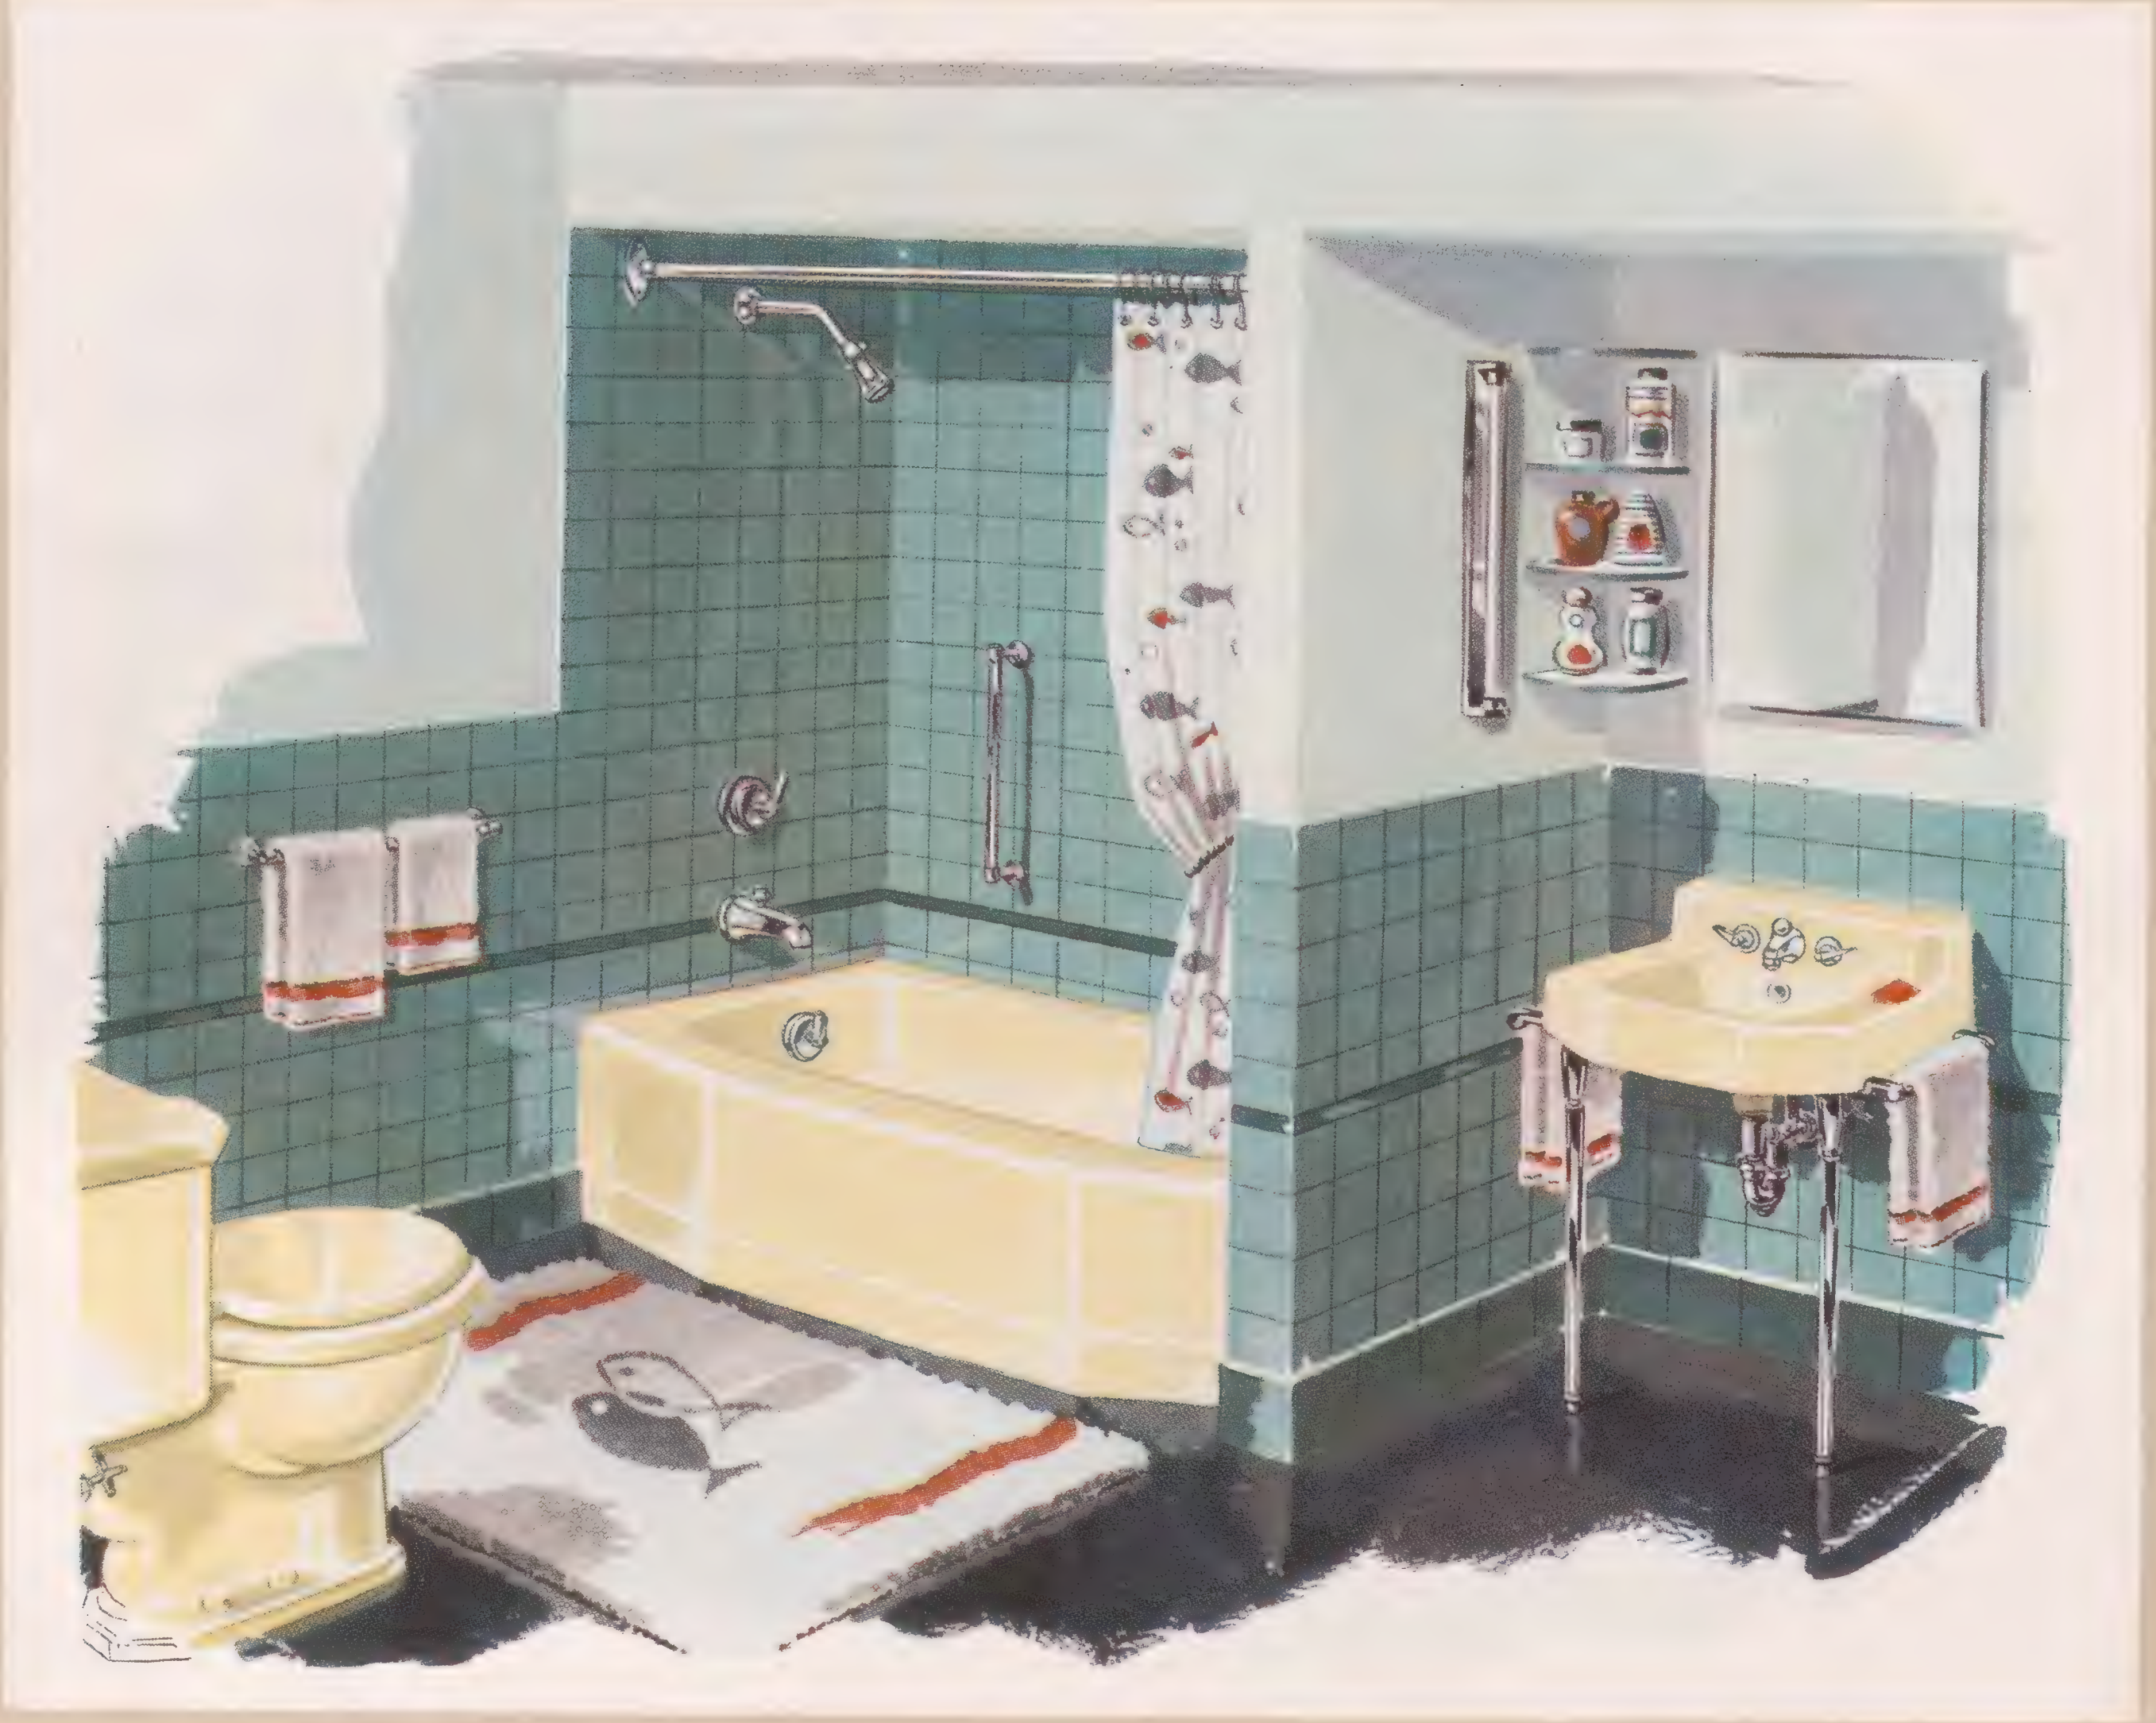

A Radiant Bathroom

Kohler fixtures in Sunrise add vitality to this compact bathroom with blue floor and aqua green walls and ceiling. The use of red in accessories completes the picture. The floor plan shows a storage cabinet or linen closet. The glass corner shelves next to the medicine cabinet may be used for toilet accessories. Cosmopolitan bench bath—Hampton enameled lavatory—Wellworth reverse trap closet.

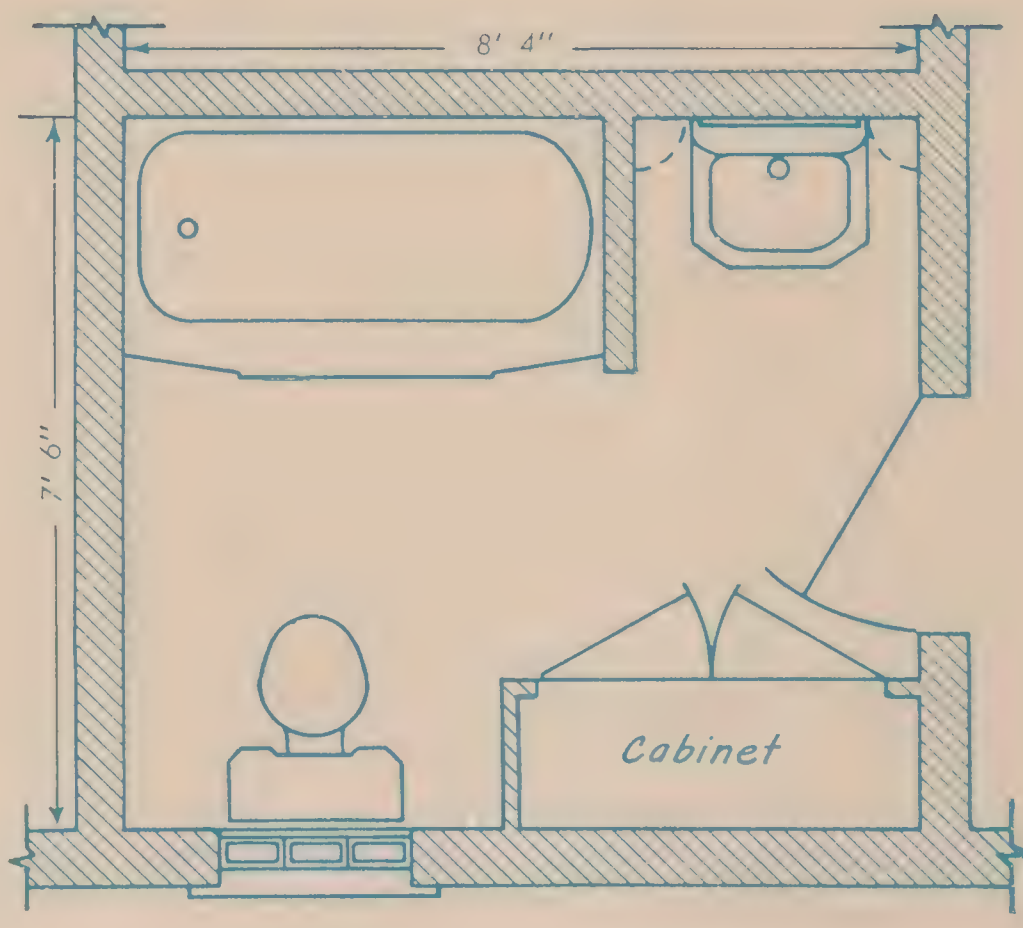

K-535-F Cosmopolitan bath—5'
K-2707-A Hampton lavatory—22x19"
K-3705-PB Wellworth closet

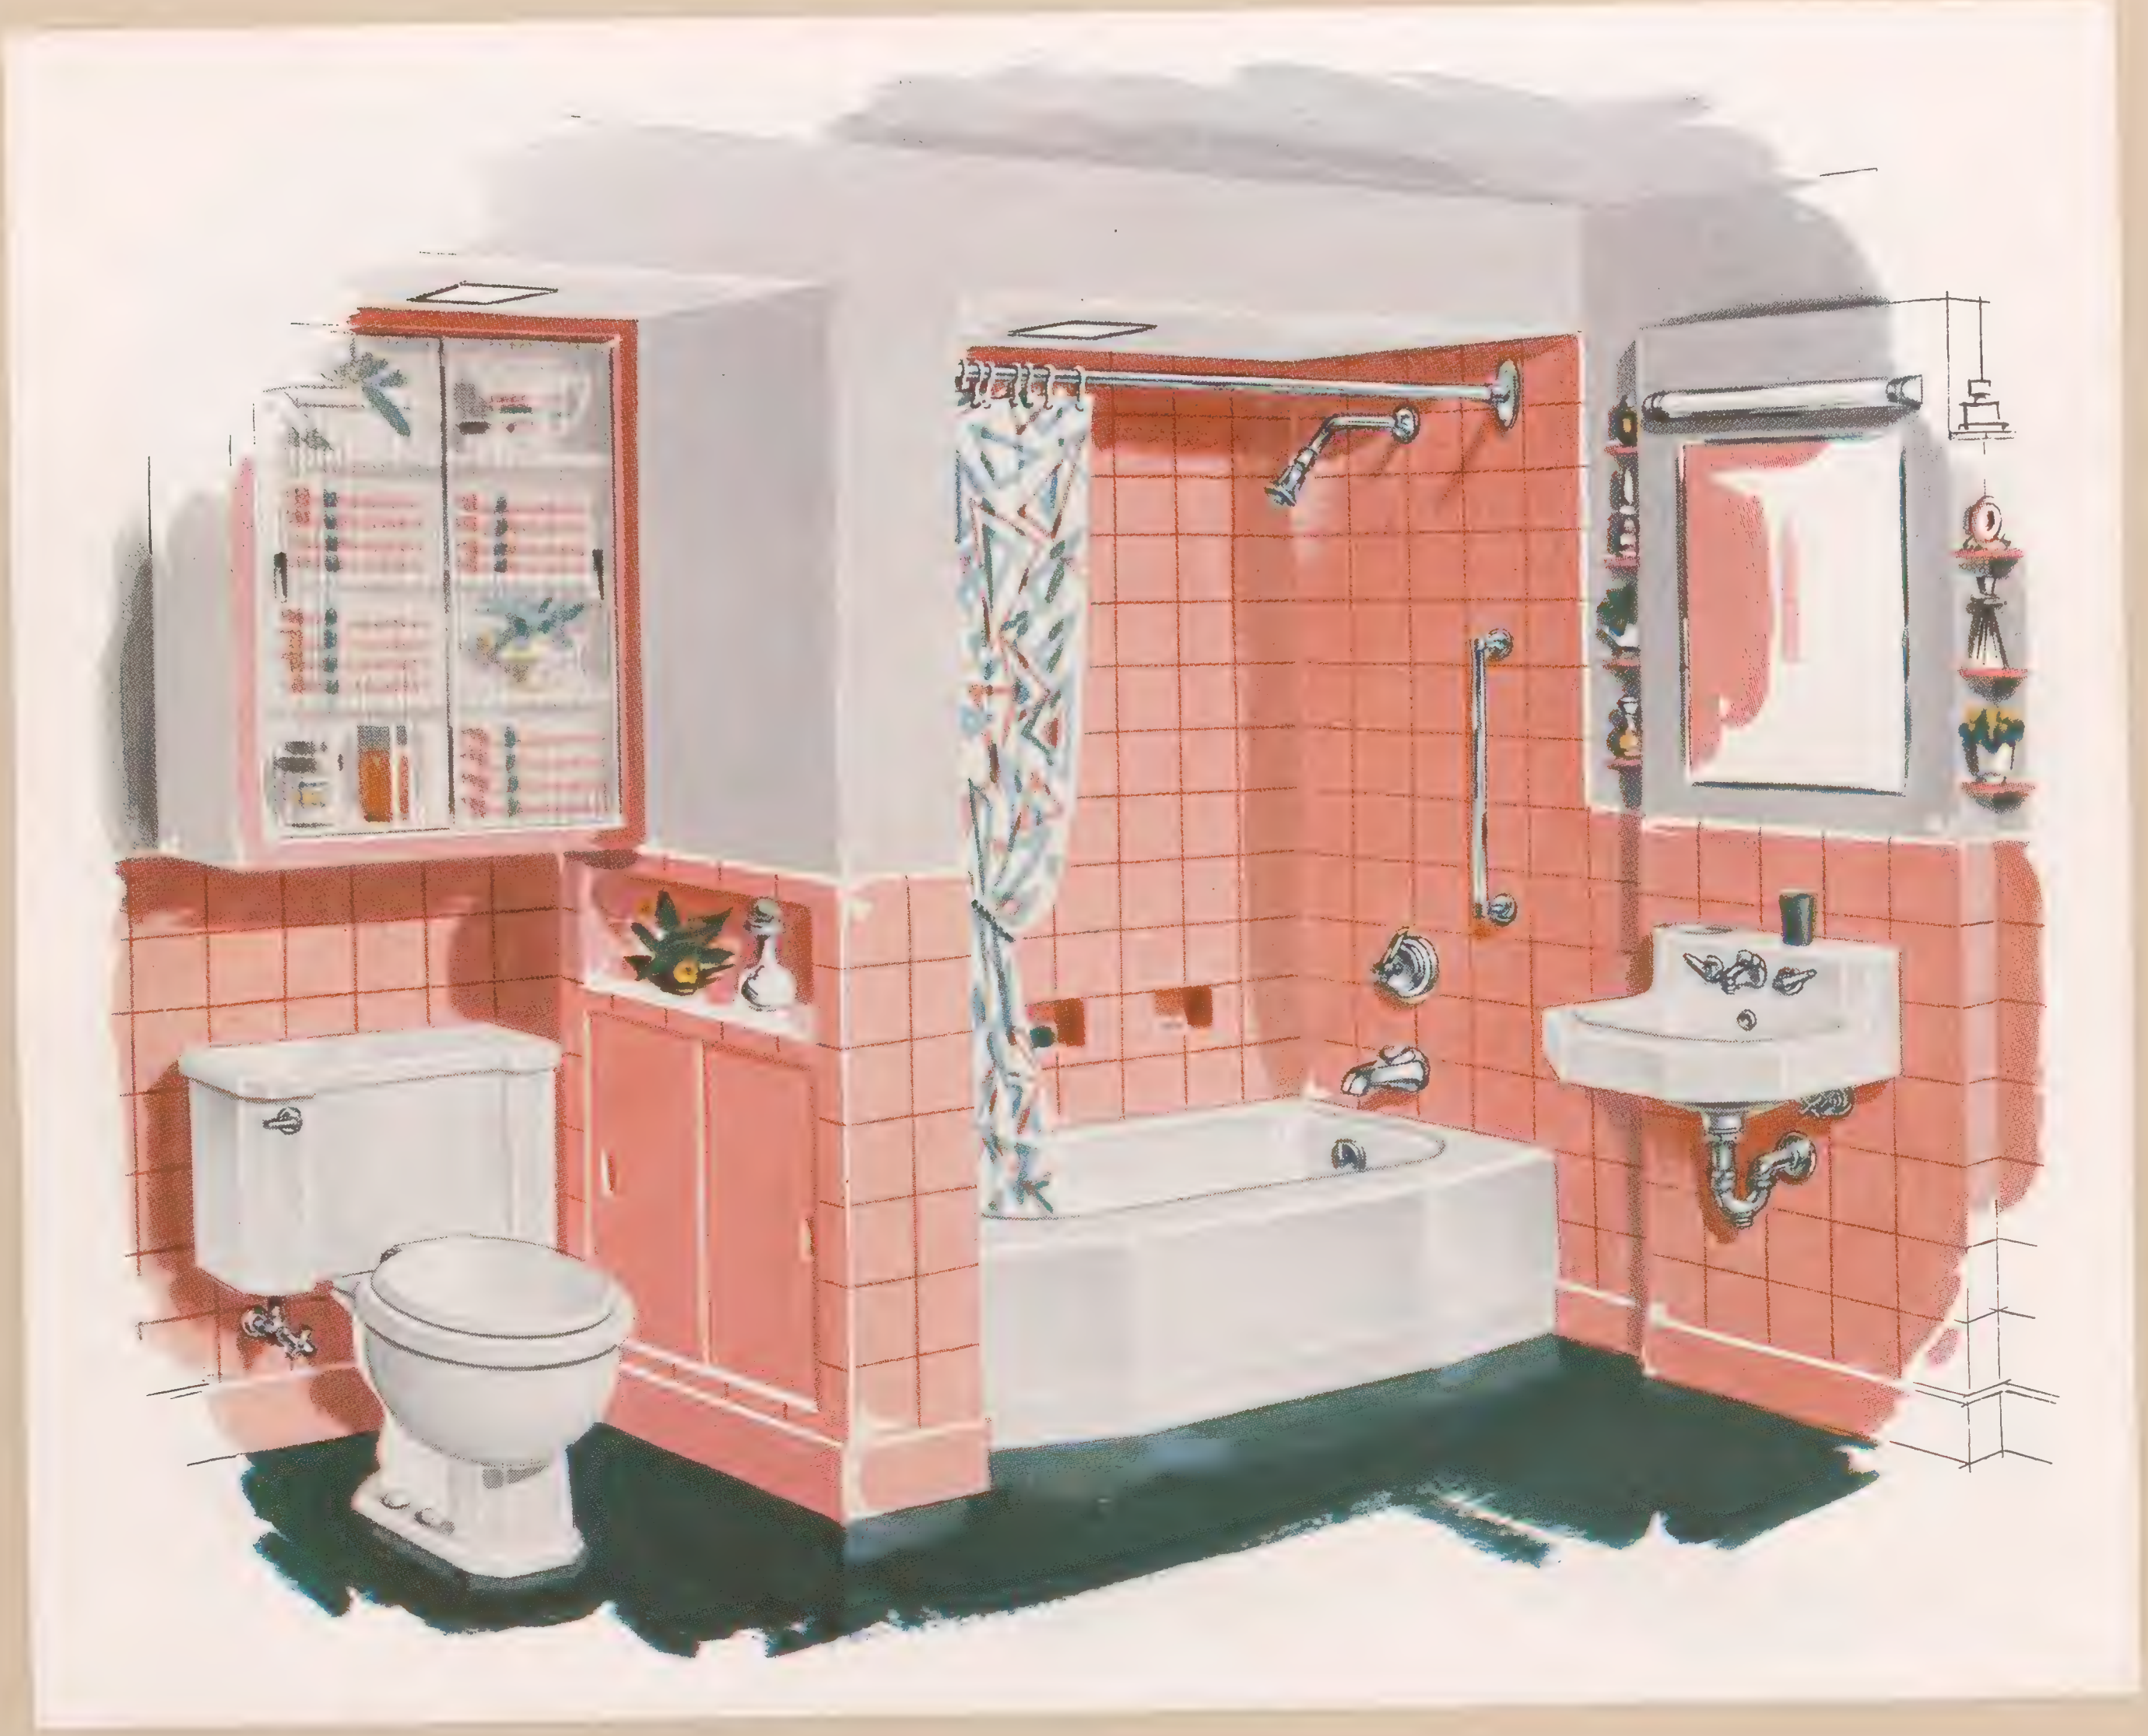

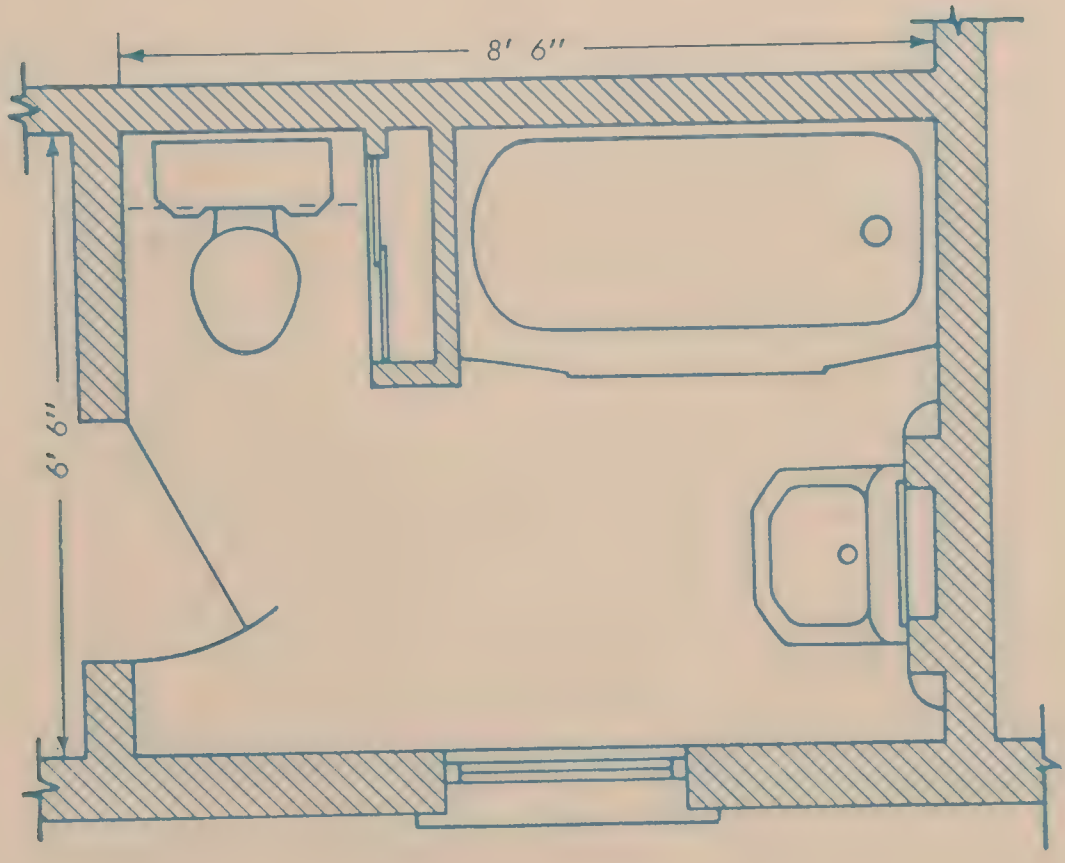

K-536-F Cosmopolitan bath—5'
K-2701-A Hampton lavatory—19x17"
K-3705-PB Wellworth closet

For Beauty and Ease of Cleaning

Originality that commands admiration is evident in this attractive bathroom. The famous Kohler white, and expressive colors give full credit to every detail. The vividness of the pink tile recess and wainscot provides a contrast with the dark green of the floor. The fixture selection comprises the Cosmopolitan bath, Wellworth reverse trap closet and compact shelf-type Hampton enameled lavatory.

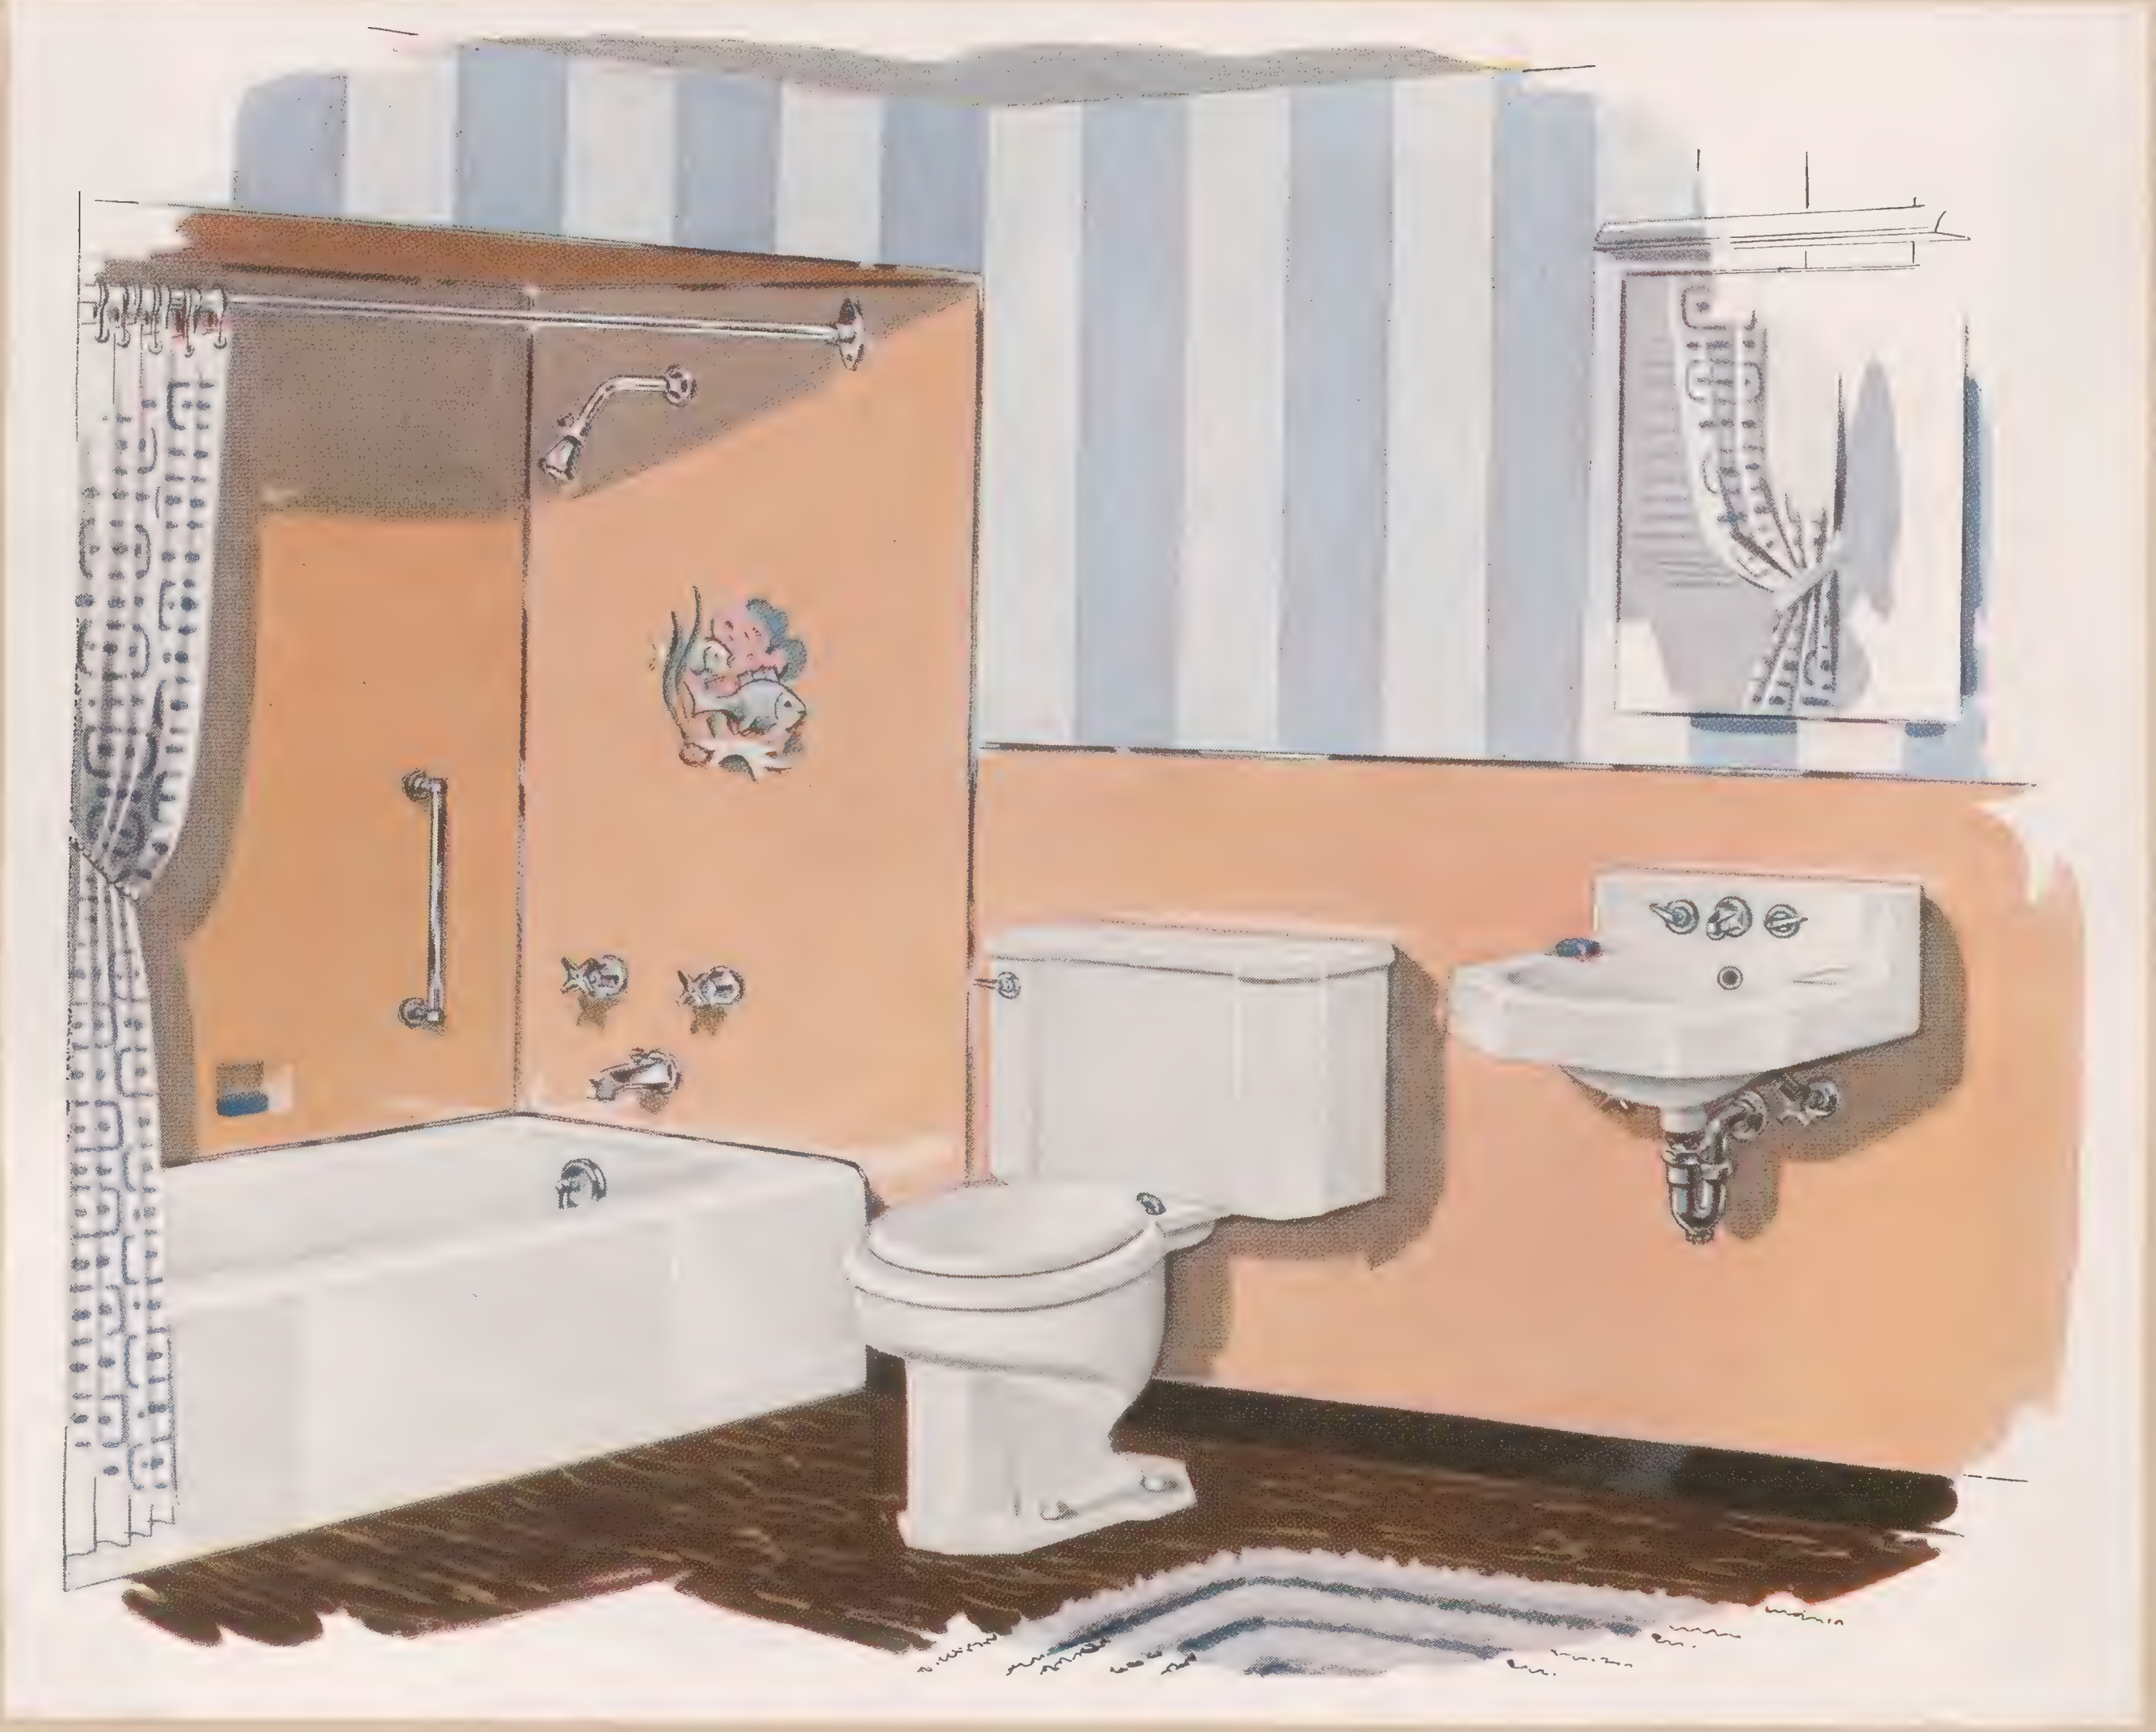

Economy in Space and Cost

Builders frequently choose for modest homes the 5-foot Minocqua, a space-saving first quality fixture that is only 29 inches wide and 14 inches high. The Delton shelf-type lavatory and Trylon closet contribute further to the economy sought. The placing of three fixtures on one wall effects a saving in installation costs. The white of the vitreous china and enameled iron fixtures is emphasized by the tan wall paneling, dark brown linoleum floor and black base. Blue and gray vertical stripes complete the wall decoration.

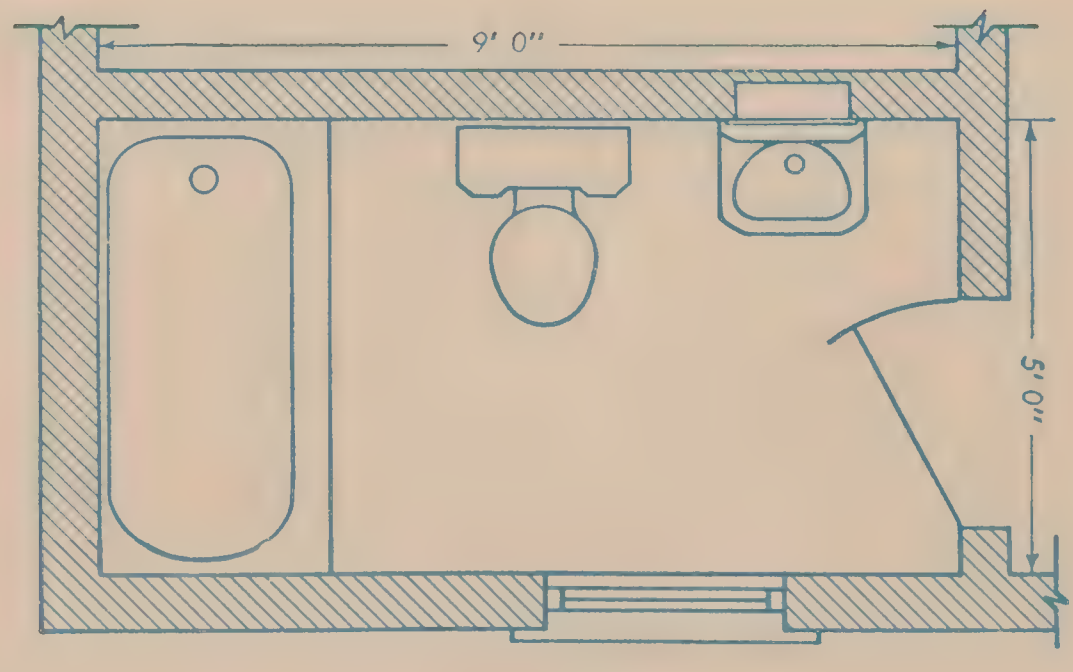

K-736-A Minocqua bath—5'
K-2736-A Delton lavatory—18x15"
K-3715-PB Trylon closet

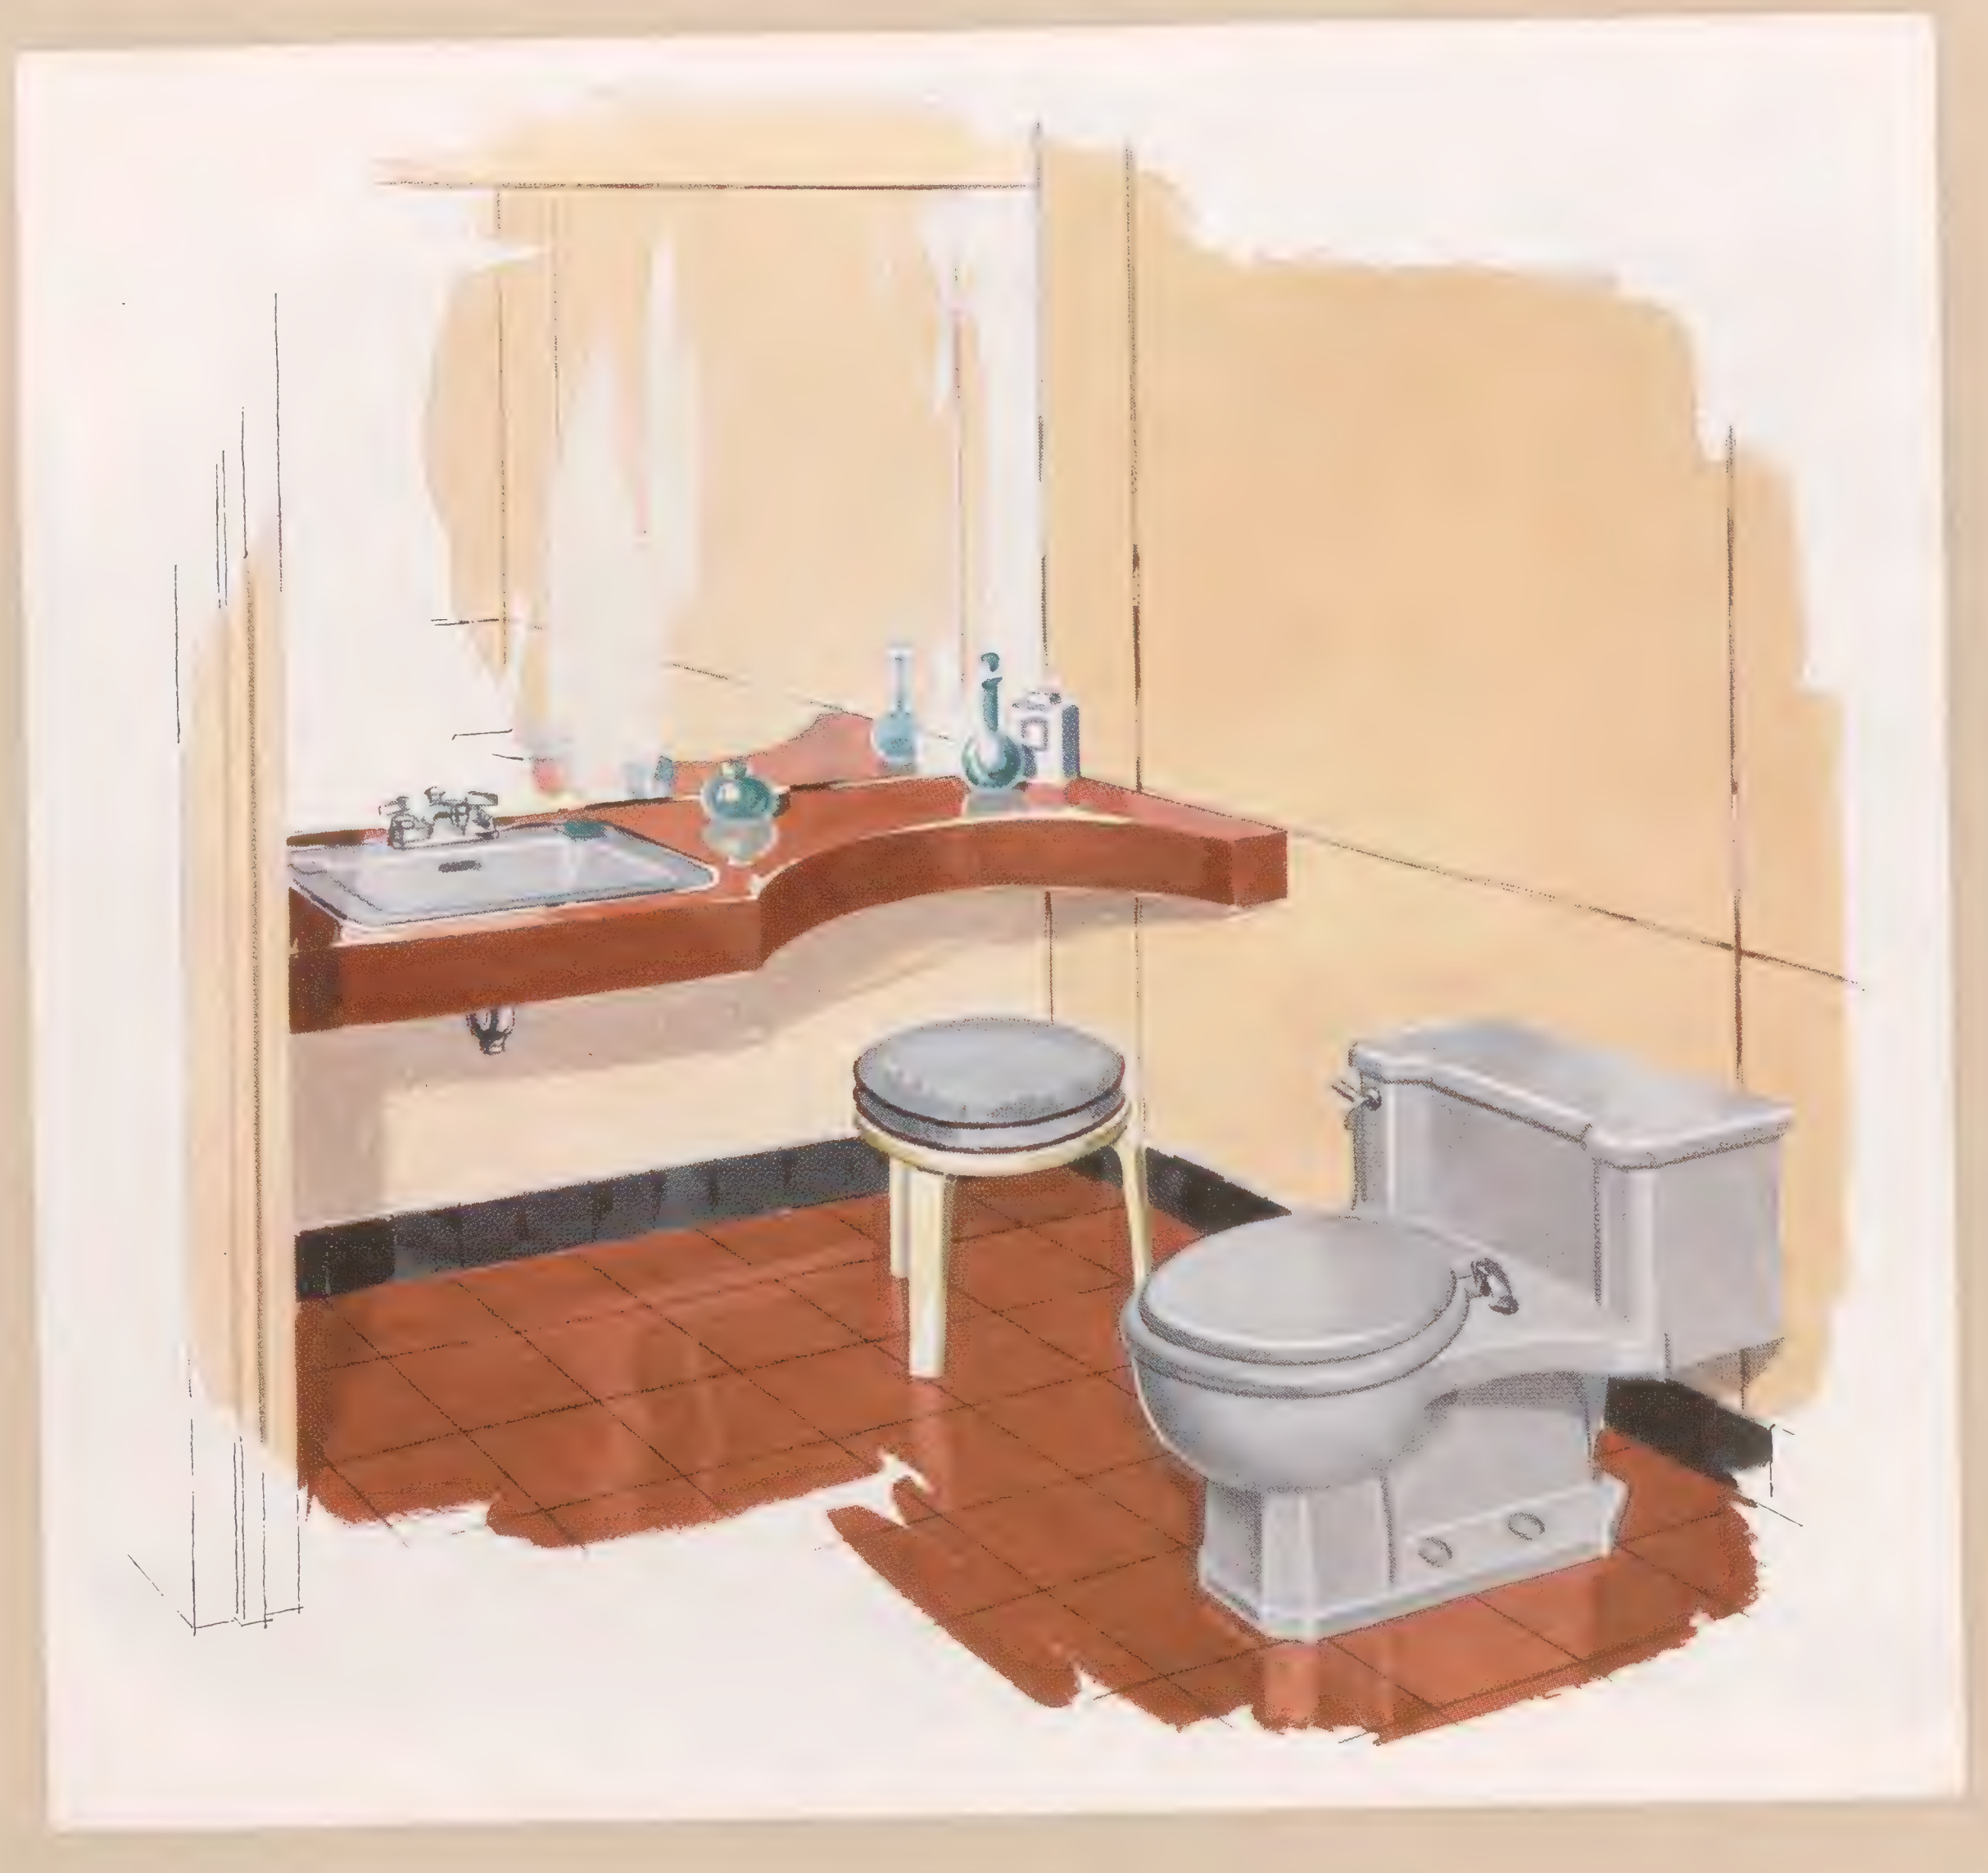

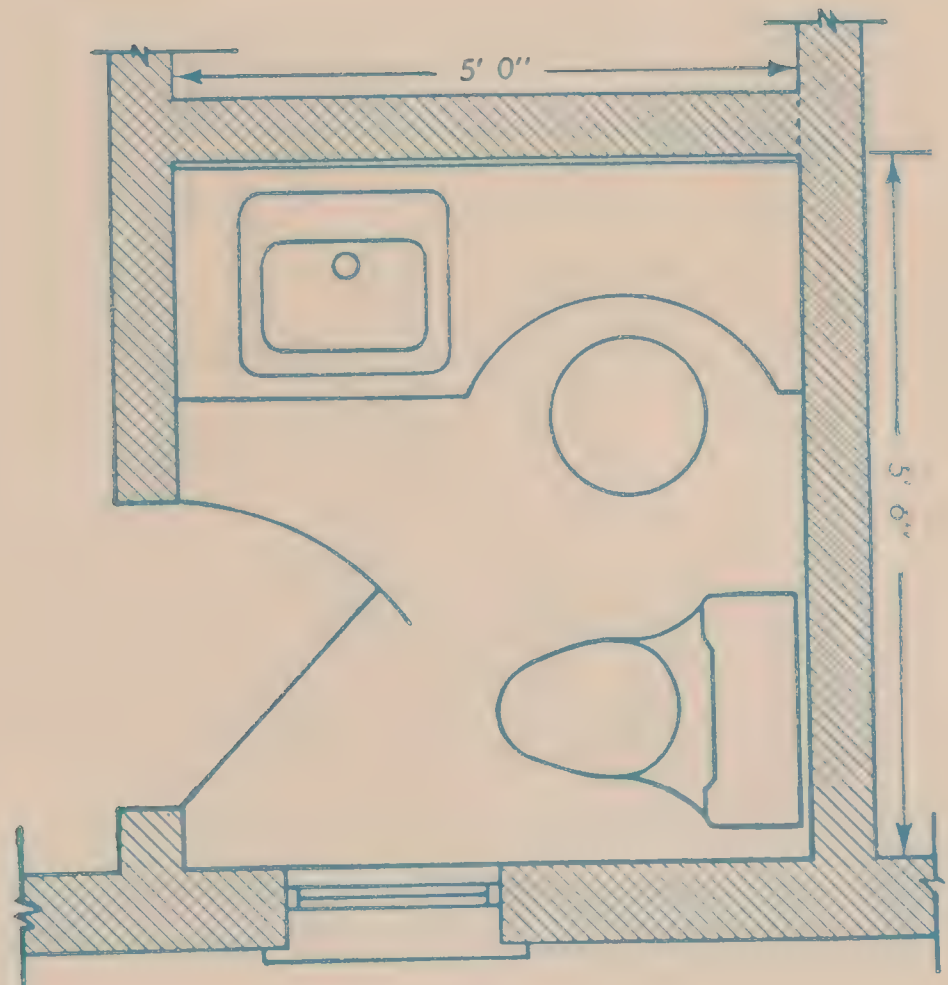

K-1890-C Arrowhead lavatory—20x18"
K-3605-EB Placid closet

Gray for a Restrained Washroom

Family and guests alike appreciate a first floor washroom. Convenient, it is one of the important rooms in the home. For this room the designer selected the low one-piece Placid closet, which is noted for its quiet, positive action. The vitreous china Arrowhead lavatory is built into a dressing table. The silvery Argent fixtures and dark brown tile floor and table top are in striking contrast with the pale yellow walls.

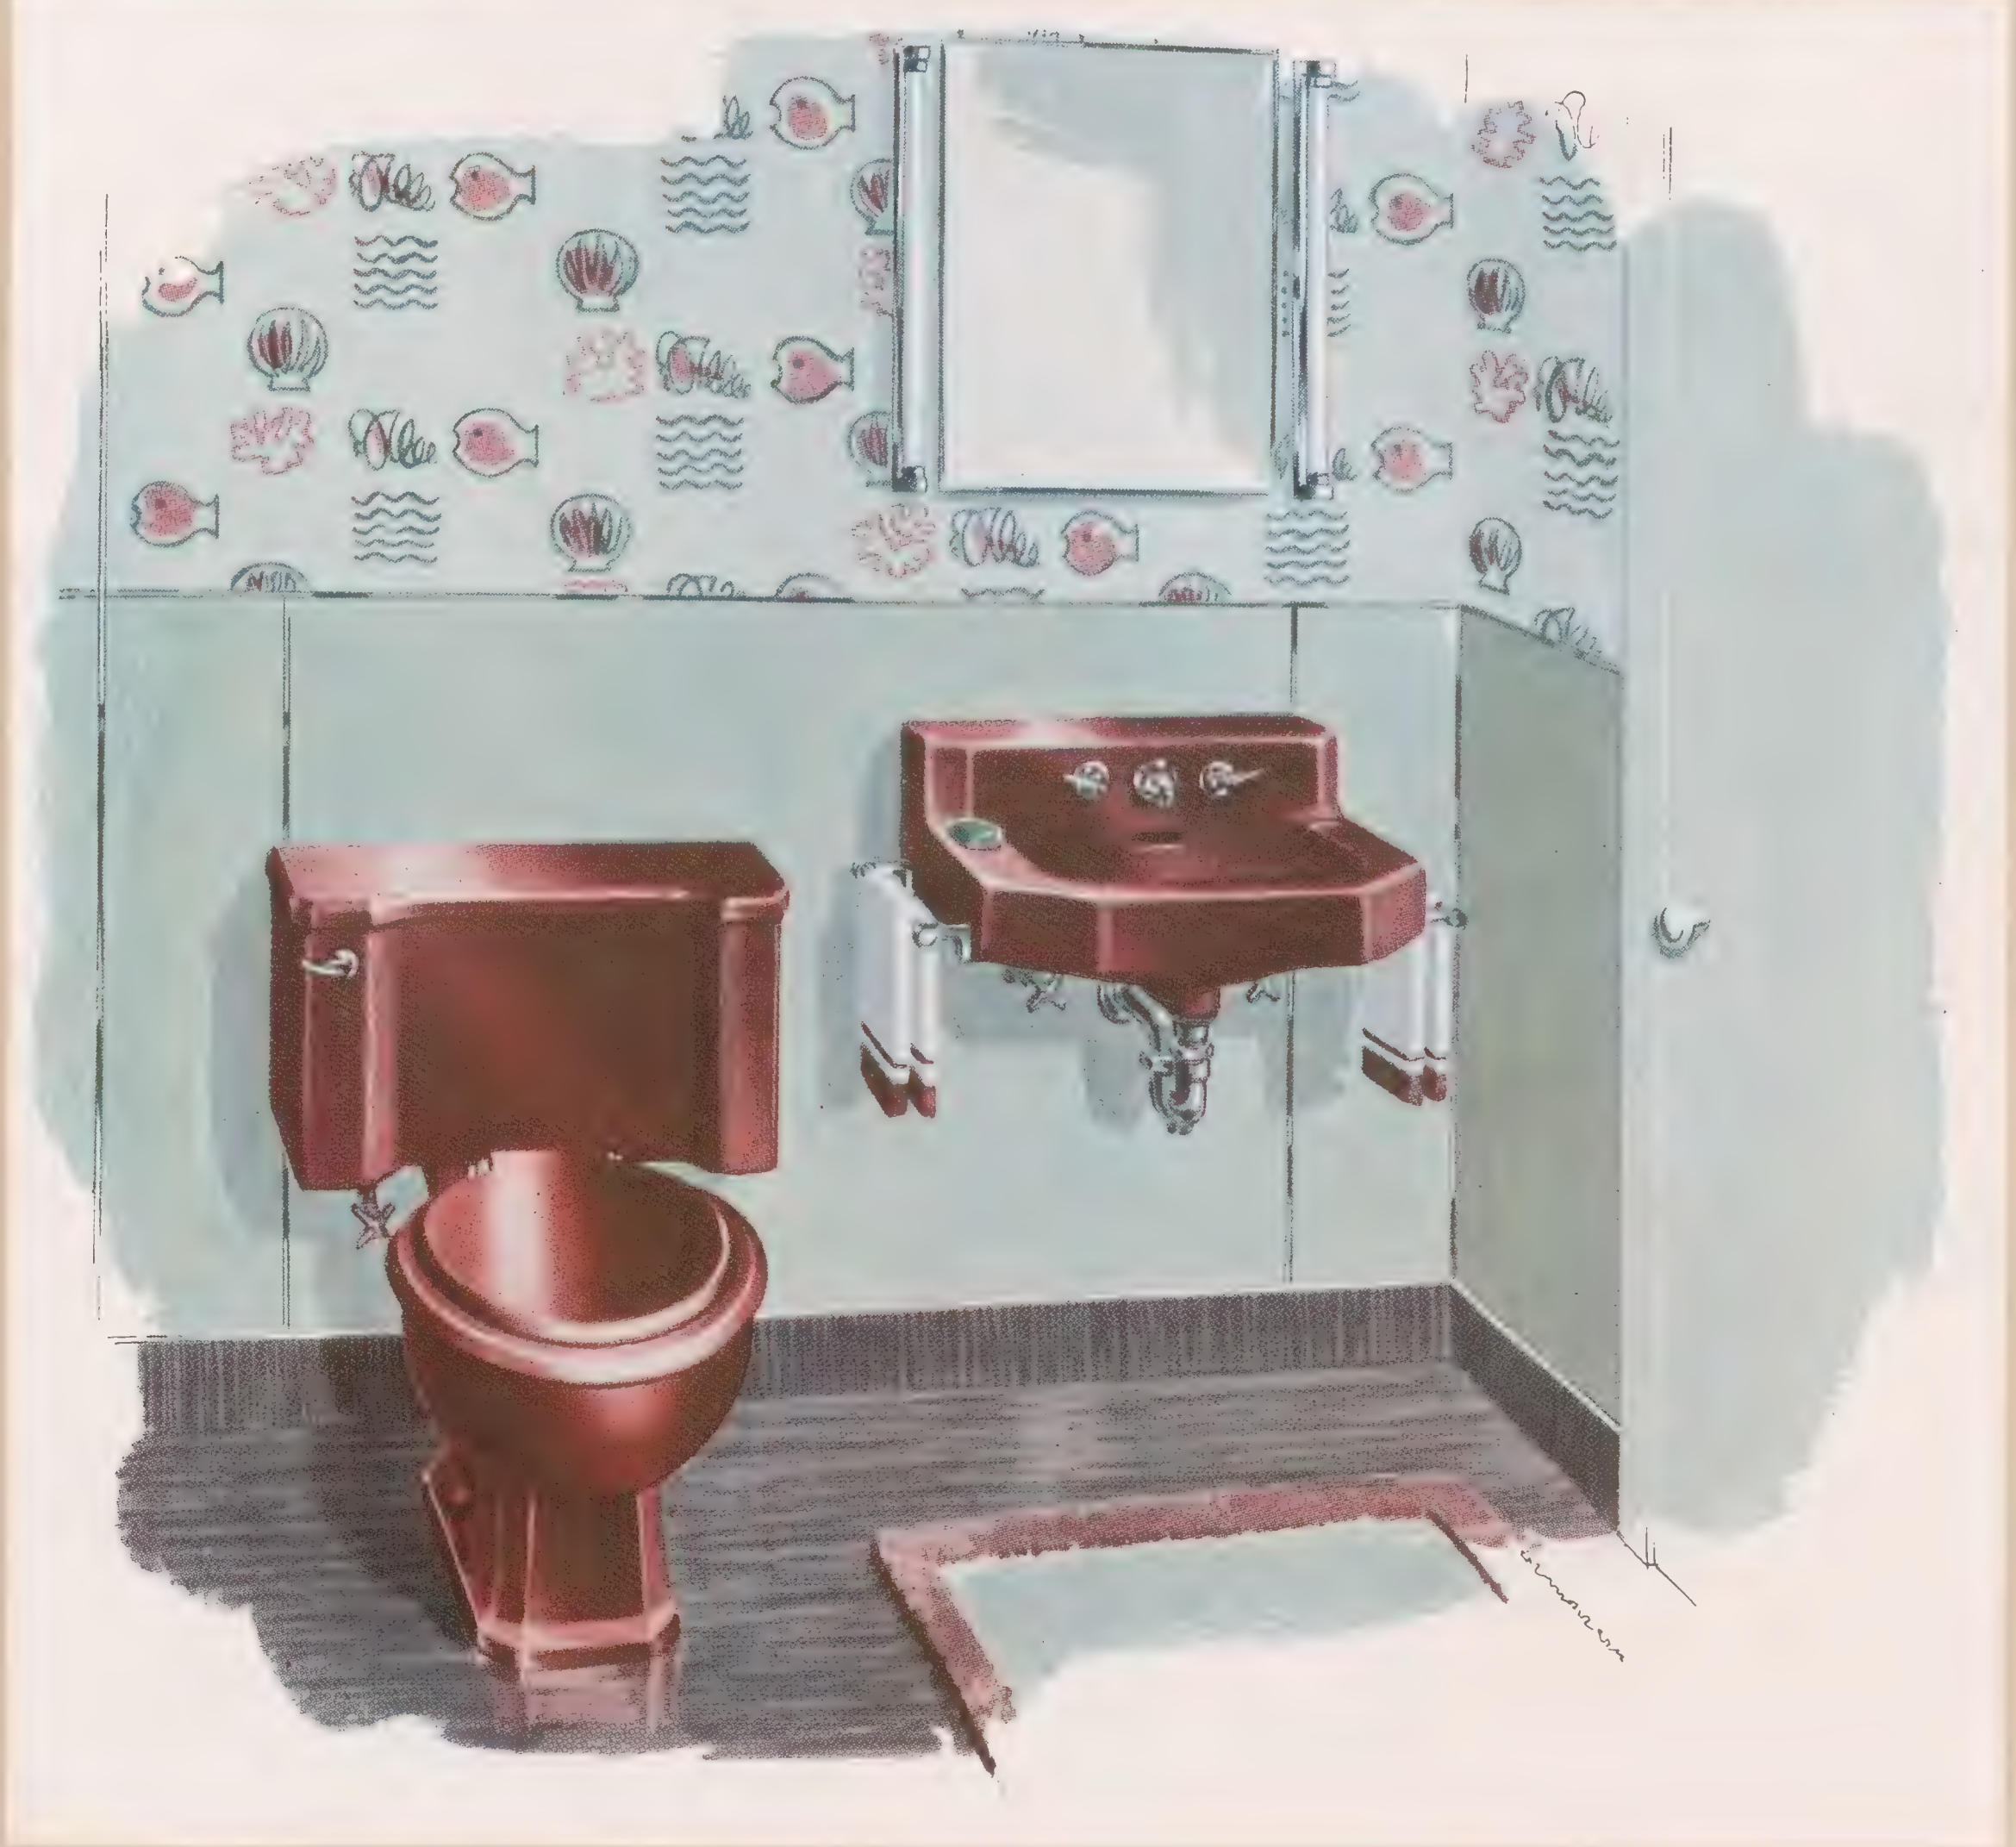

A Room Accented by Rouge Fixtures

Reducing through-the-house traffic, a first floor washroom is a step-saver to the mother of small children. Pale green walls and striated black linoleum form a color background for the Strand, a narrow, shelf-type lavatory, and the Bolton reverse trap closet. Two convenient wall-free towel bars are attached to the lavatory. Both fixtures, made of highly fired vitreous china, can be kept clean with a damp cloth. Bright light is provided for the medicine cabinet mirror by fluorescent tubes.

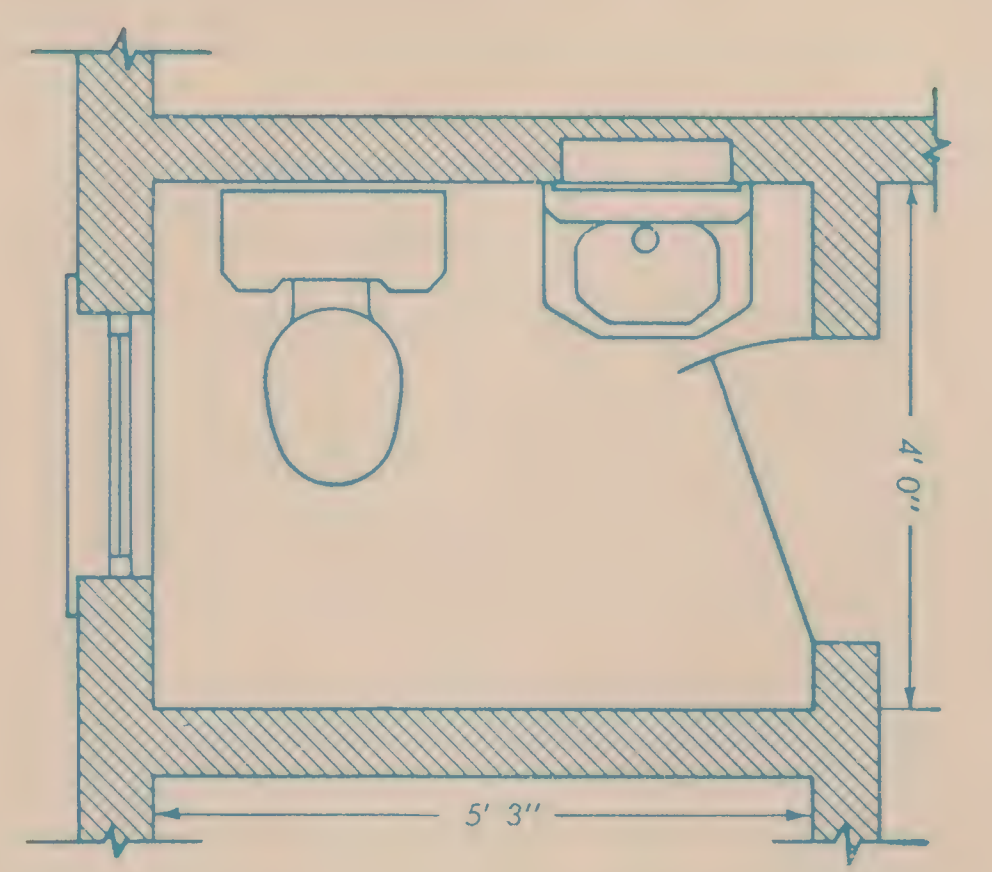

K-1645-A Strand lavatory—20x14"
K-3665-PB Bolton closet

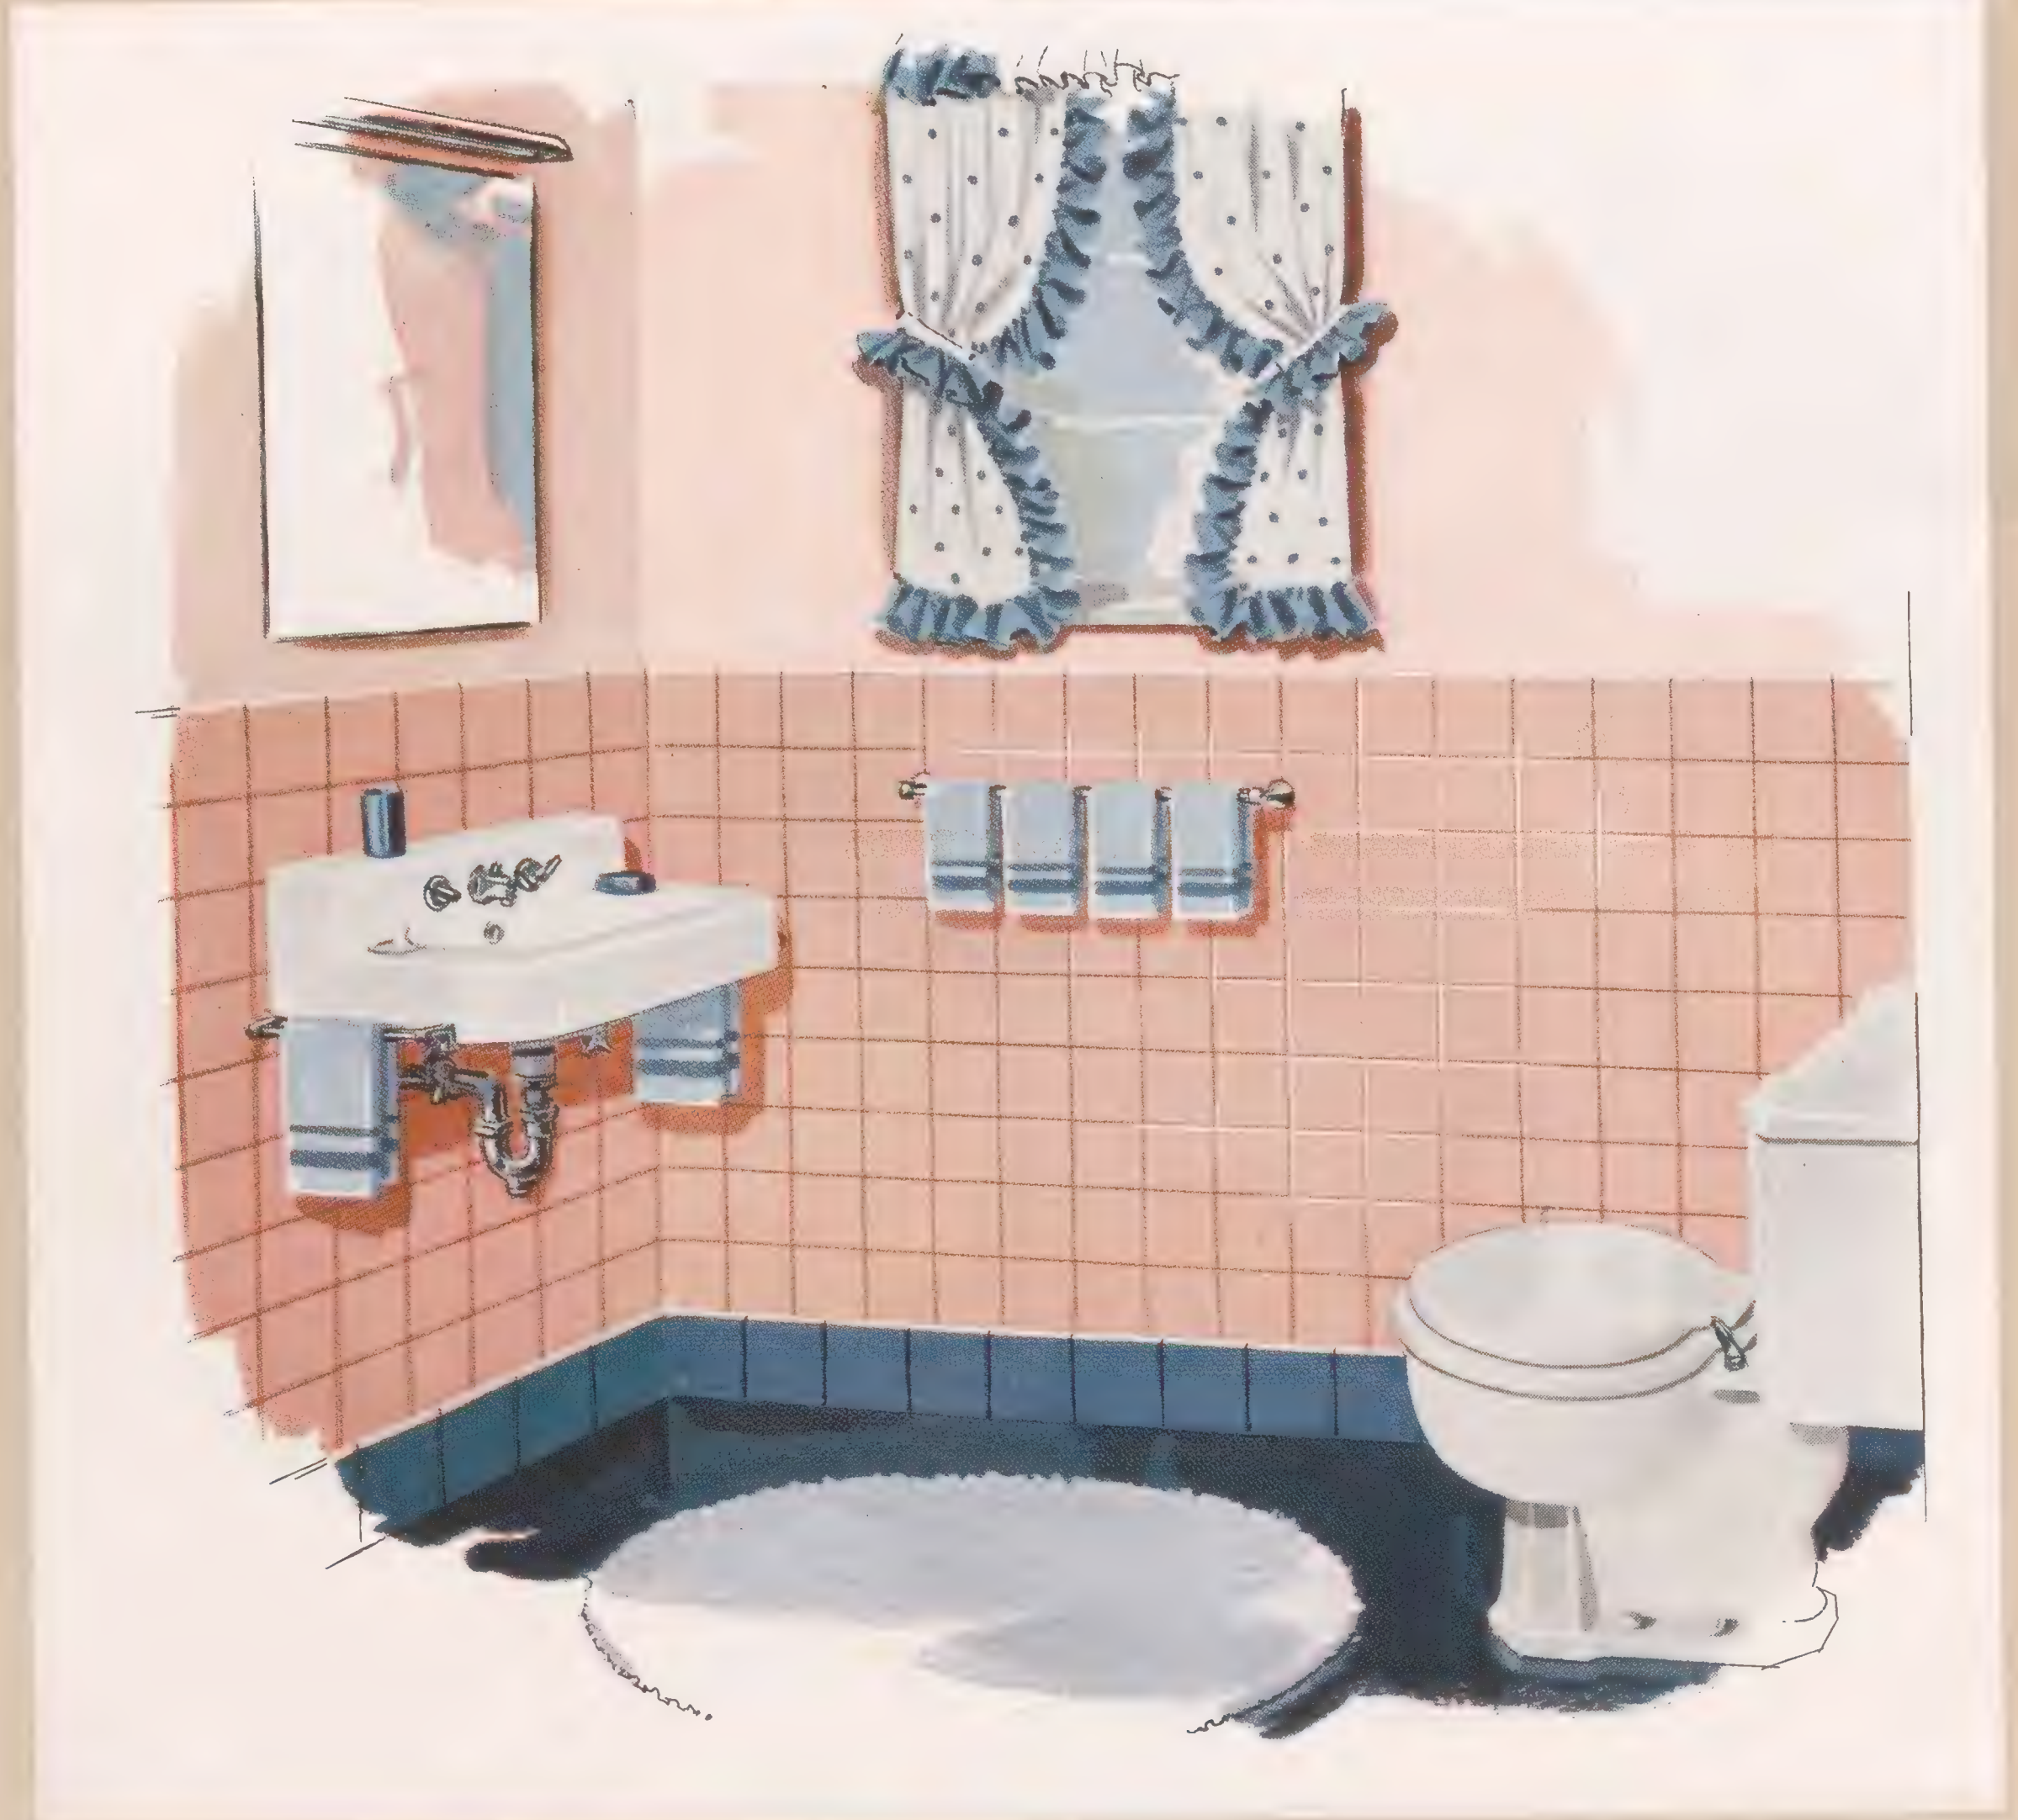

Budget Washroom for Remodeling

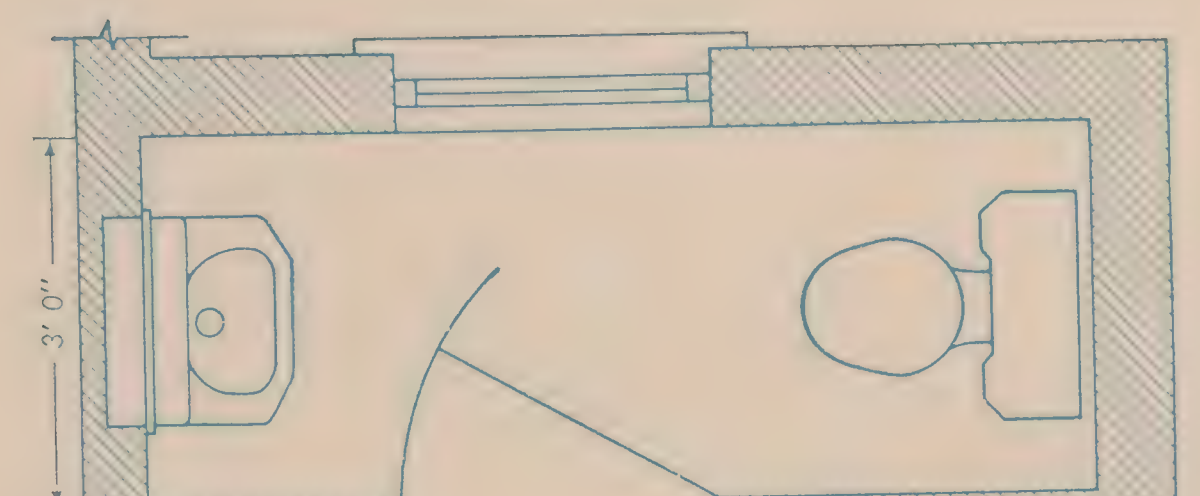

K-2731-A Taunton lavatory—24x14"
K-3705-PB Wellworth closet

The home owner can increase the value of his property by remodeling unused space into a bright washroom. Frequently a hall-end or clothes closet can be easily and inexpensively converted. Attention to the decorative scheme will make a room appear larger. Popular white fixtures such as the Taunton enameled iron lavatory, and the Wellworth reverse trap closet, will save wall and floor space. In this plan, the floor is blue linoleum and the wall paneling is coral.

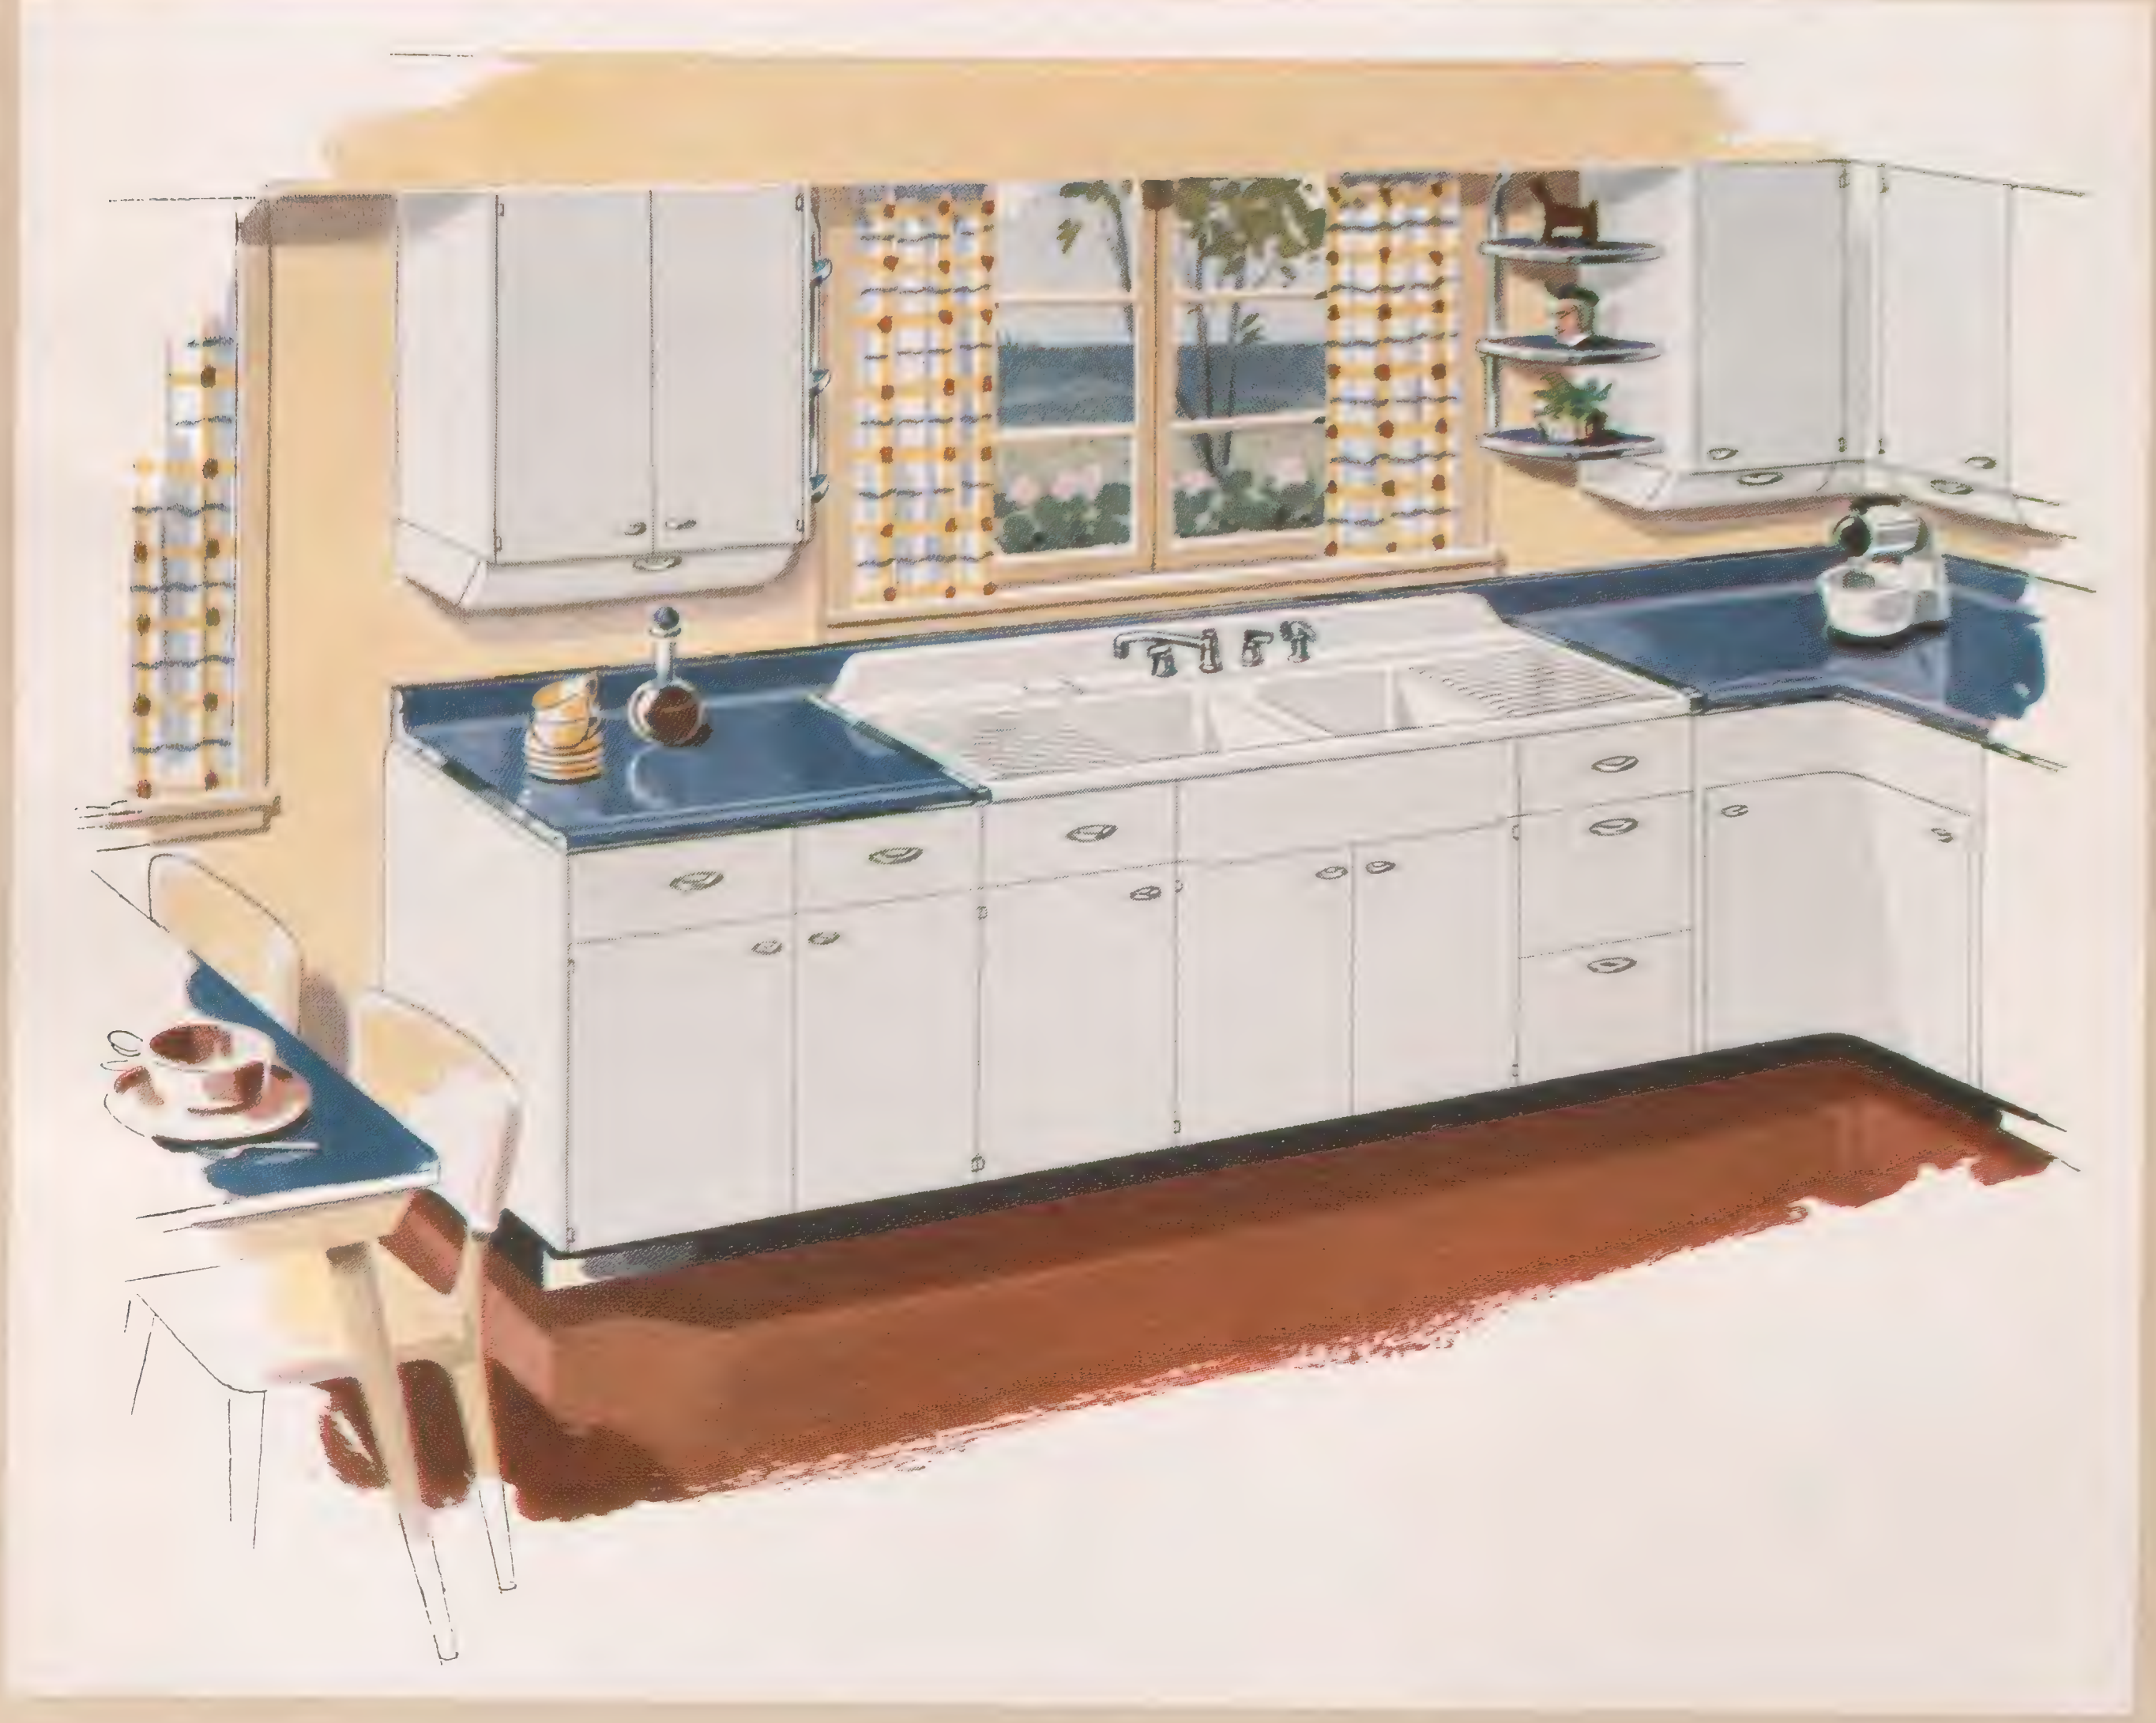

Center of Interest and Activity

A practical working area and convenience are significant factors in the planning of this modern U-shaped kitchen. The double compartment Wilshire sink, with lever-control sprayer and twin drainboard, is centrally located. Storage space for food, utensils and other household articles is provided by the metal floor and wall cabinets, which feature doors which open easily, adjustable shelves, free-sliding drawers and toe recesses. Effective color contrast is provided by the white cabinets, sink and major appliances with the brown floor, blue counter-top and yellow walls.

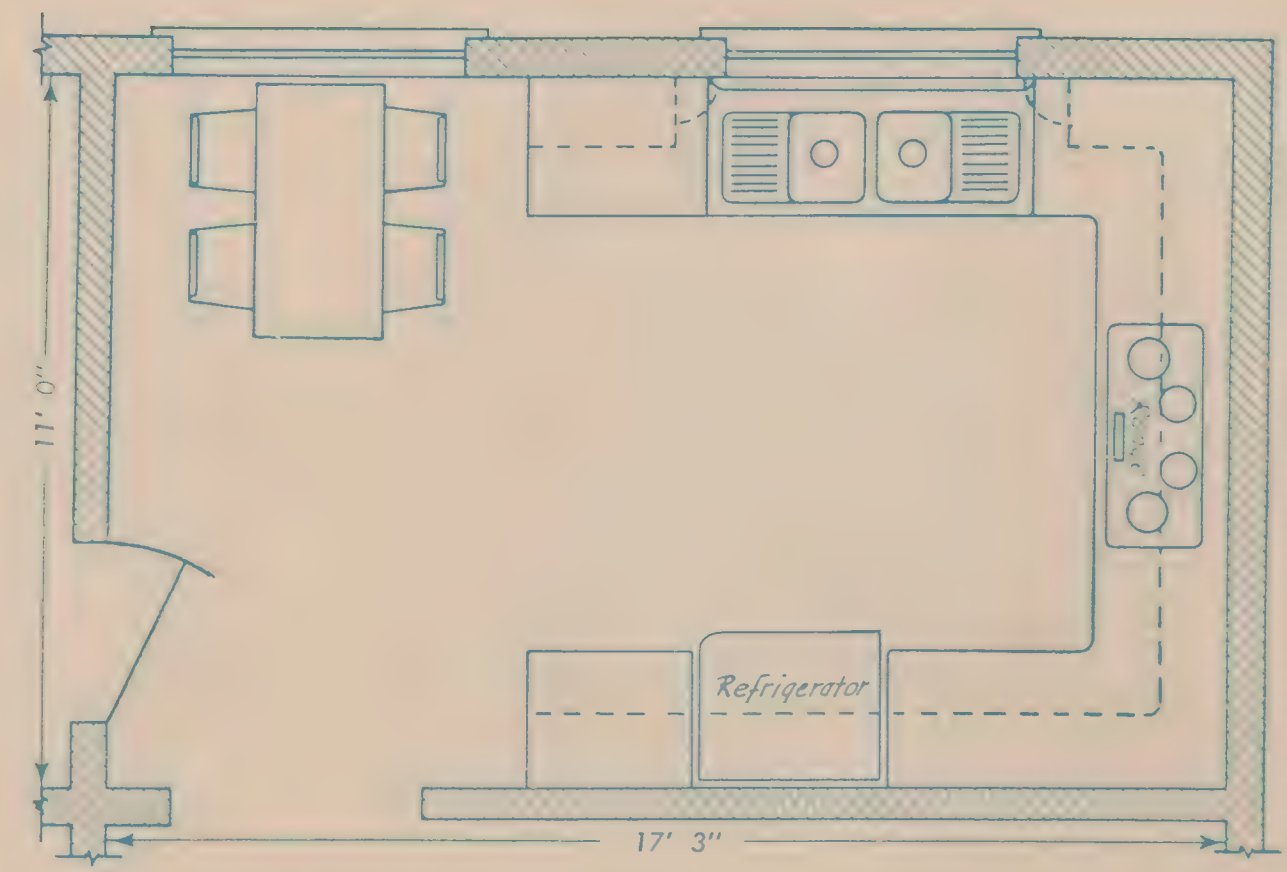

K-5500-AC Wilshire sink—60x25"

KOHLER OF KOHLER

TRADE MARK

REG. U.S. PAT. OFF.

MARKS OF VALUE

KOHLER
U.S.A.

K OF K
U.S.A.



Kohler Co. believes that a freely competitive market is beneficial to consumers, to enterprising manufacturers and to distributors. It consistently maintains an independent and competitive position.

Resourceful and aggressive product development is well established in Kohler manufacturing and sales policies. Many products in the plumbing industry are Kohler innovations.

Over half a century ago Kohler Co. decided that its products could be marketed most efficiently through wholesalers from whom it would choose distributors. Subsequent experience has confirmed this judgment.

Kohler Co. believes that the skill and experience of licensed plumbing contractors are good assurance that Kohler fixtures will be properly specified, supplied, and installed in accordance with sanitation codes.

The Company's long, friendly relationships with its customers rest on a solid foundation of superior products and service, competent distribution—and fair and considerate dealings. We propose to hold to this purpose.

KOHLER CO.

Herbert V. Kohler
President

PALETTE OF COLORS

Color, as one of the most important of decorative resources, contributes to the beauty of the bathroom as well as to other parts of the home. This is in contrast to the prevalent bathroom of years ago—which was sometimes likened to a laboratory.

It should be possible to introduce new color notes in the bathroom from time to time without incurring the trouble and expense of disturbing fixtures whose installation is designed to be essentially permanent.

This makes it advisable to use fixtures in white, or in pastels sufficiently soft and neutral to permit of a wide selection of colors that will harmonize.

Kohler Co., the earliest manufacturer to produce and market enameled iron and vitreous china plumbing fixtures in matching colors, offers a superb palette of pastels—Argent, a silvery gray; Sunrise, a cheerful yellow; Peachblow, a lively color suggestive of blossoms; Cerulean Blue, like the sky; and Spruce Green, one of nature's colors taken from the forest.

White, of course, allows the widest flexibility of all in decoration. The white of Kohler fixtures makes it easy to achieve the most varied, pleasing interiors with the use of color in walls and floor, with accents in curtains, towels and other accessories.

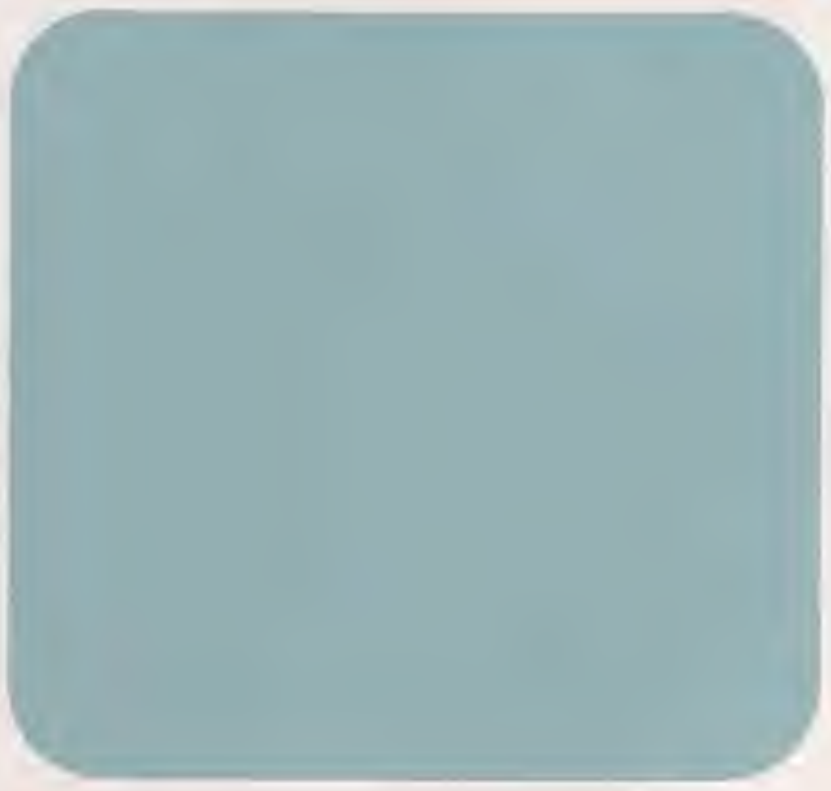

SPRUCE GREEN

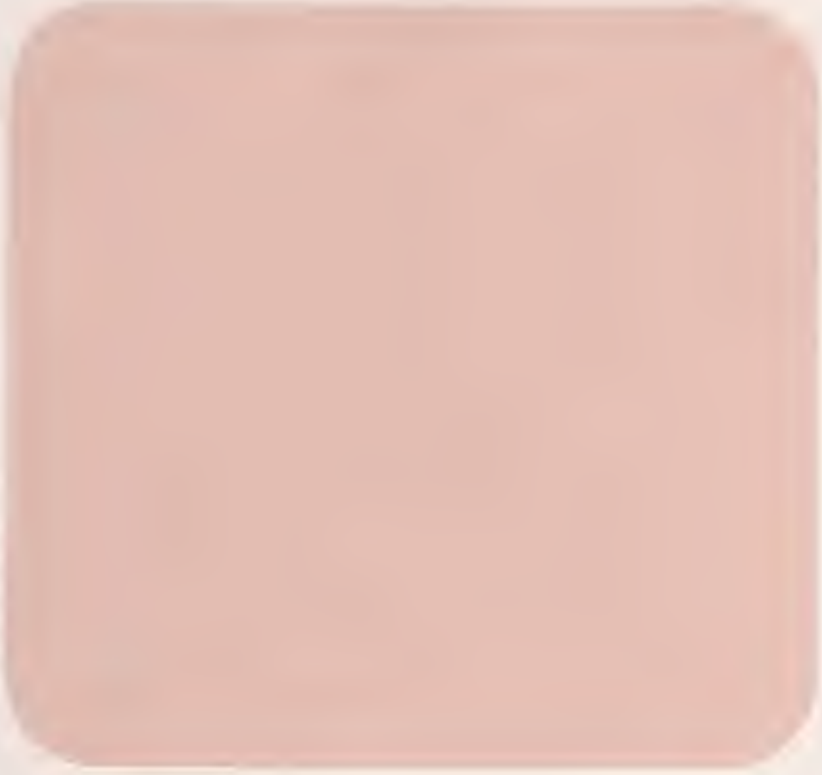

PEACHBLOW

SUNRISE

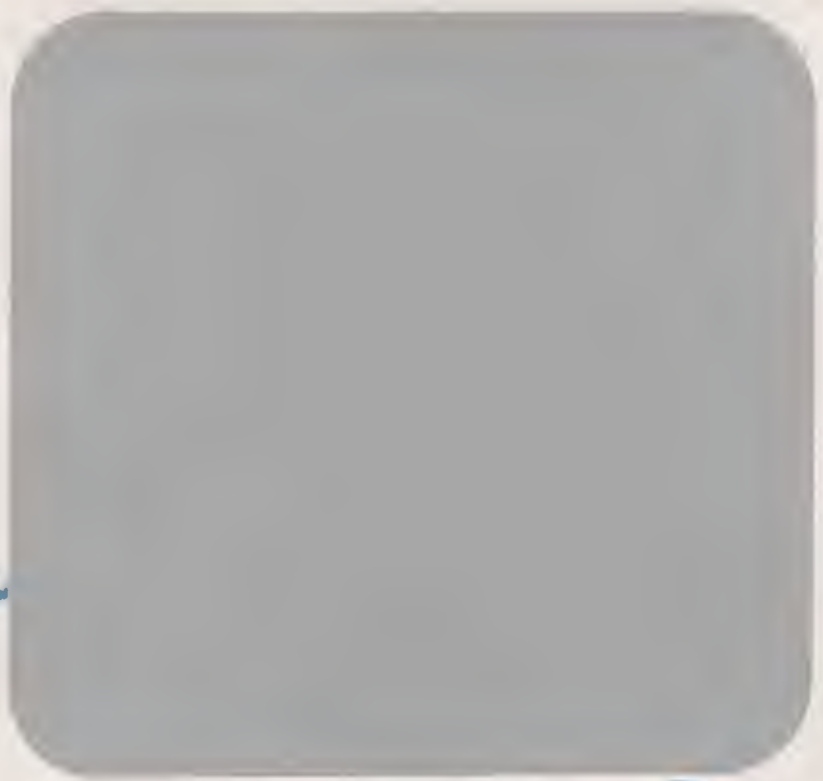

ARGENT

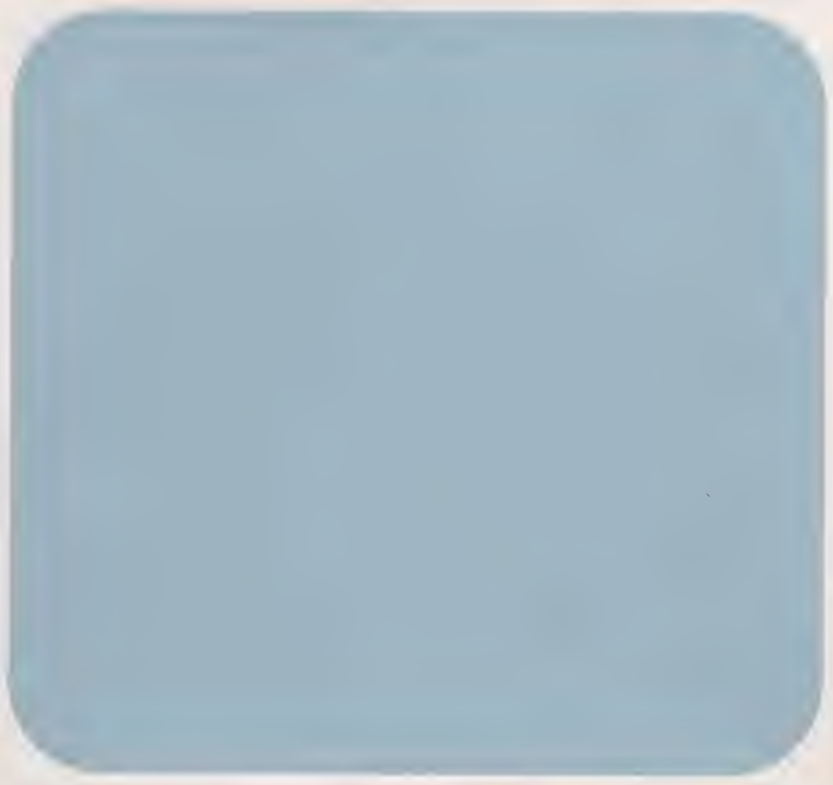

CERULEAN BLUE

FACILITIES FOR MODERN PRODUCTION

KOHLER CO. is concluding its 80th year as a manufacturer. Leadership has remained in the family of the founder, John Michael Kohler. At the father's passing, his son, Robert, became president, and then Walter served for many years. Since 1937 the president has been and now is Herbert V. Kohler, the youngest son.

Early in its existence the company established a policy of manufacturing products of high quality. Adherence to this basic principle through the years has brought about the unquestioned acceptance of Kohler products by the public. It has built the company's reputation and standing.

First step in the production of Kohler plumbing fixtures is the use of the most suitable raw materials. In choosing these the company relies on its long background of experience. Materials from many parts of the world are utilized. Their purity and uniformity are checked and controlled by frequent and accurate chemical, physical and batch tests.

Kohler products are manufactured in factories located in Kohler Village. The extensive iron foundries have the up-to-date machines and facilities for efficient volume output. The pottery is unsurpassed in size and equipment. In the large brass plant the facilities for casting fittings and chromium plating them are extensive and modern.

The integration of factories brings a unity of supervision and control of production.

The Kohler organization, stable and experienced, consists of several thousand workers, a large percentage of whom have been continuously employed by the company for years. Membership of the Quarter Century Club numbers 717 active men and women.

All foundry operations are mechanized. Here workmen prepare sand mold in flask for the pouring operation.

rmity
urate

es lo-
ndries
icient
n size
facil-
them

super-

enced,
rcent-
by the
r Cen-
n.

ration.

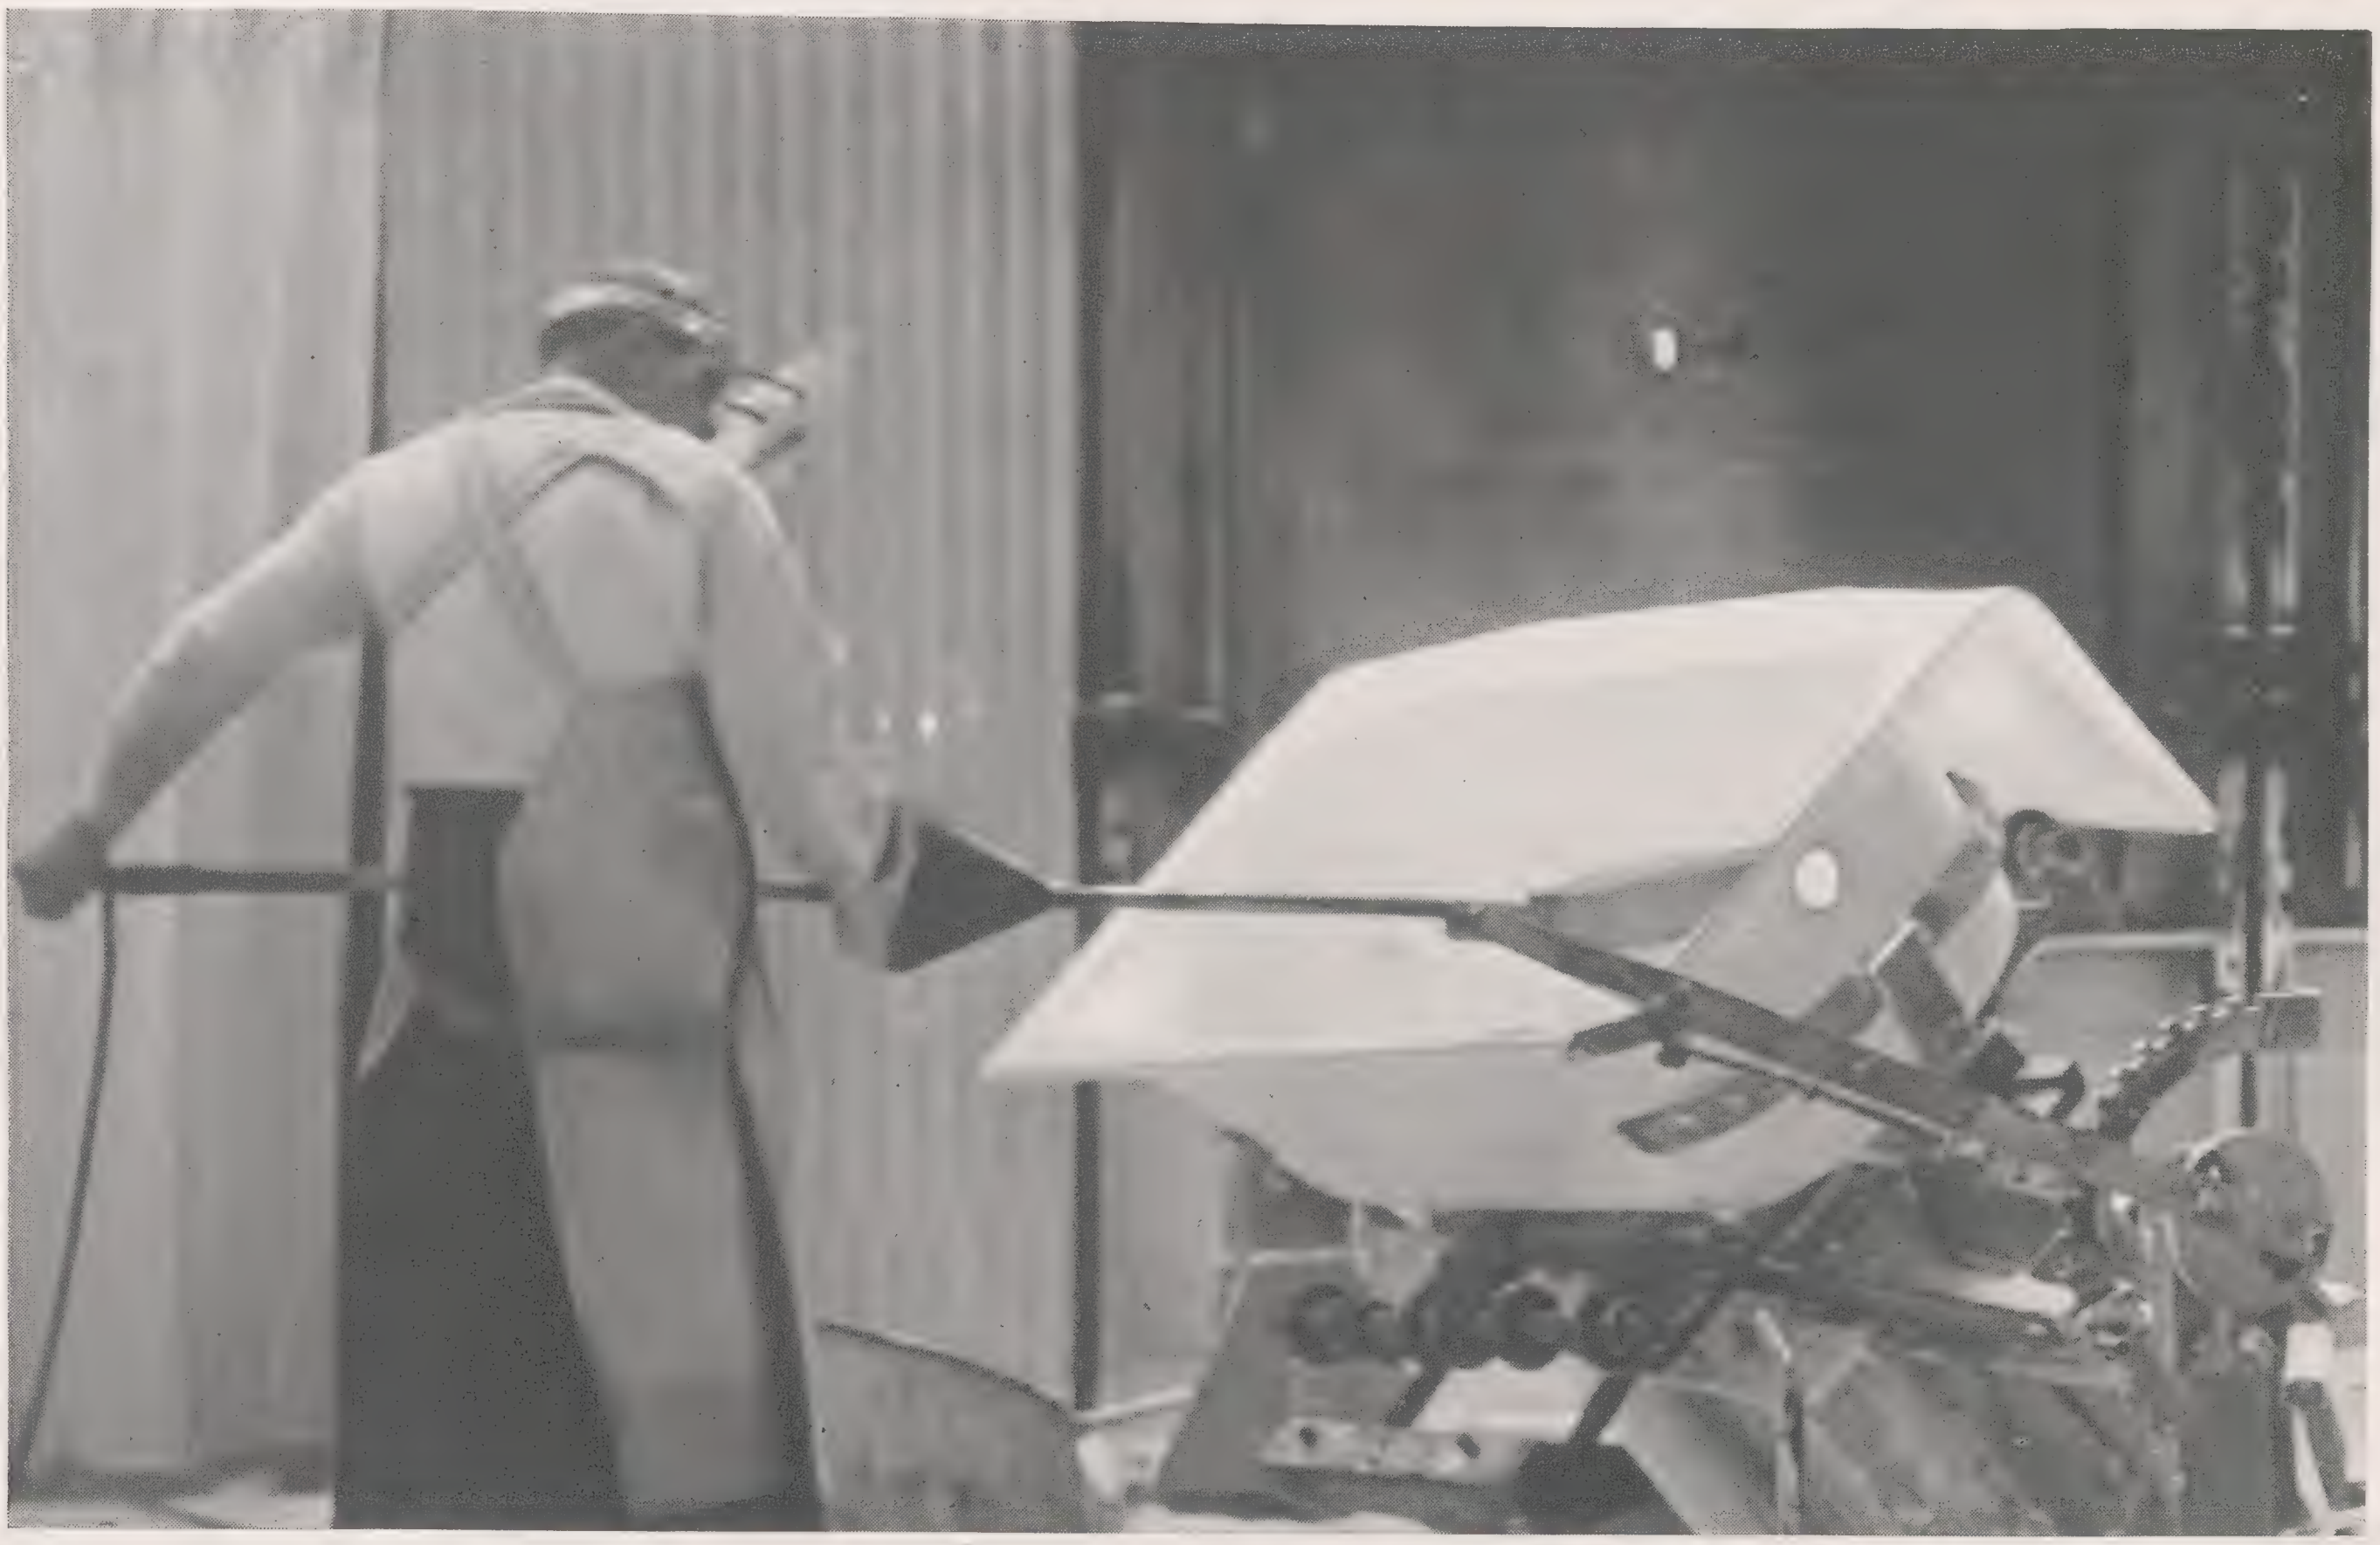

Enamel in the form of fine powder is applied to hot casting, where it fuses to form a lustrous, permanent finish.

The enamel is inspected under light, and the fixture is checked to make sure it is straight and level.

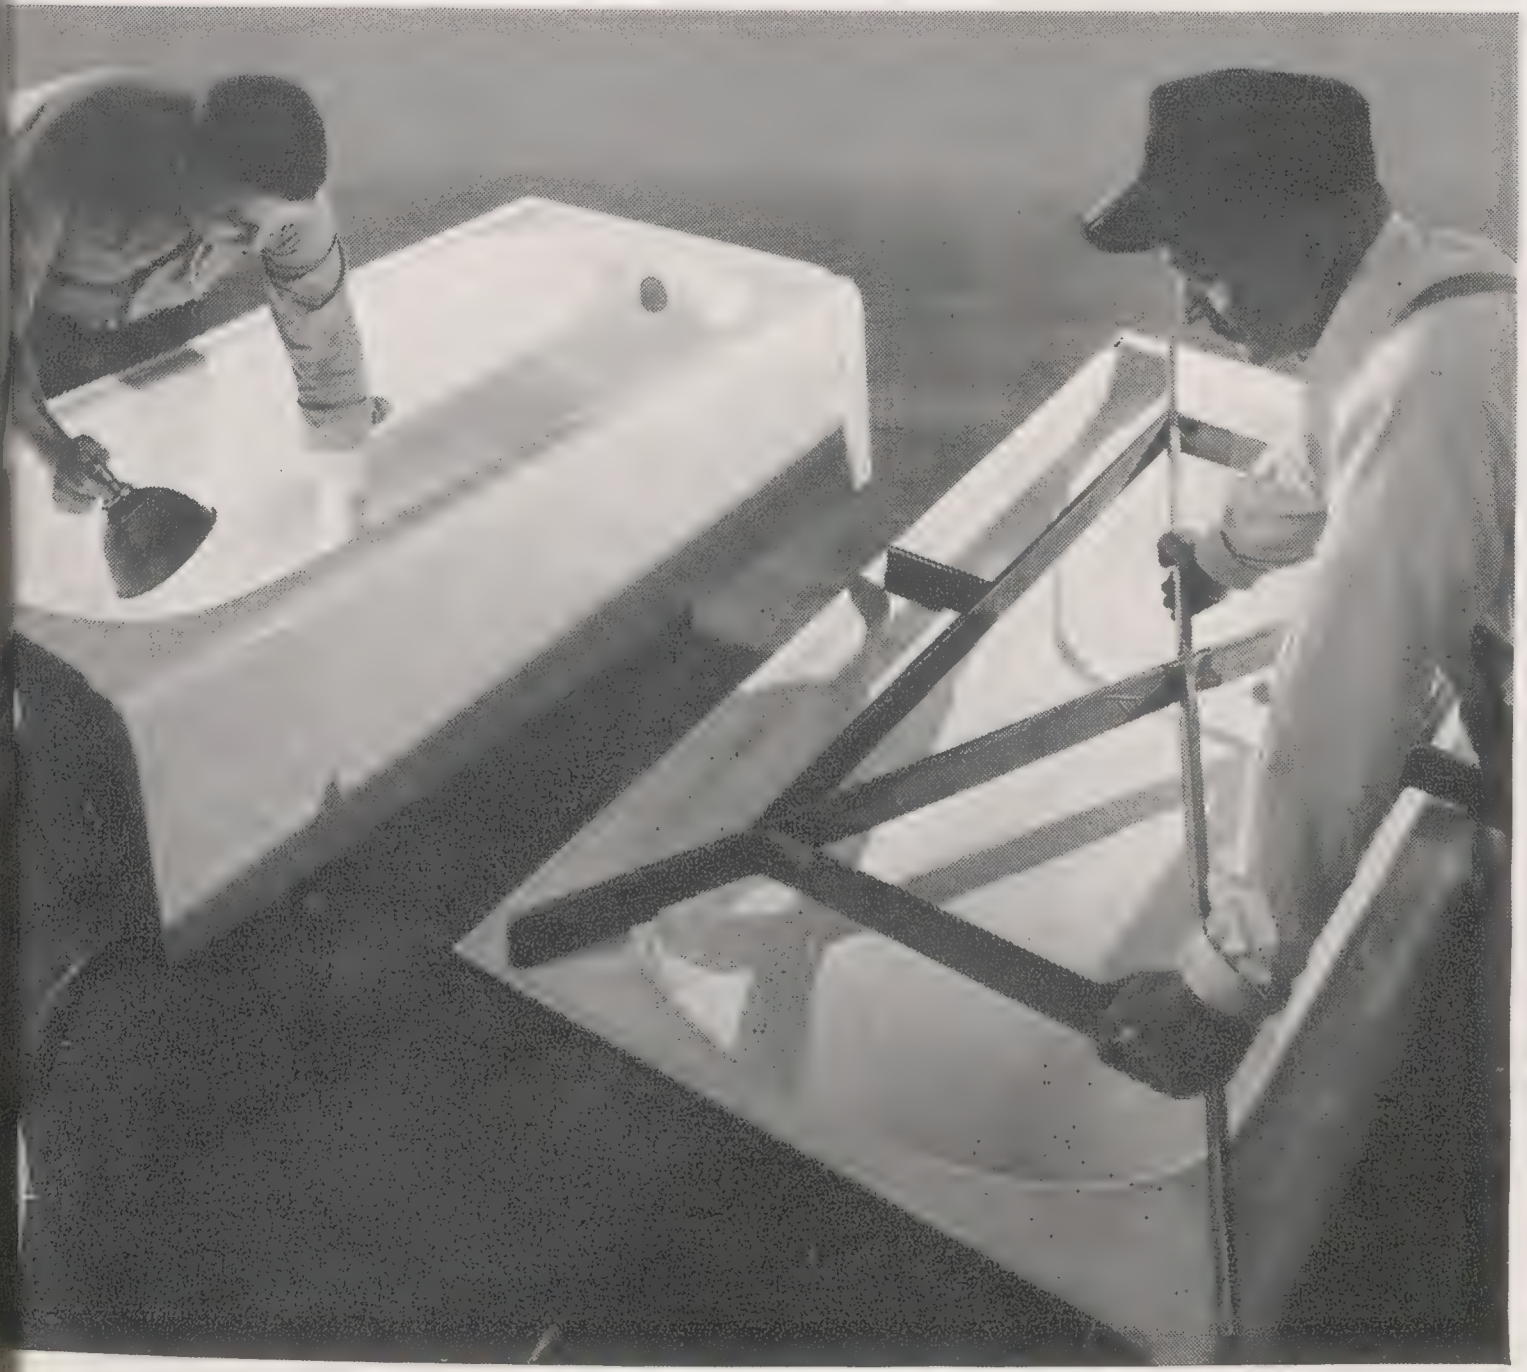

Strong crates, padded to protect the enameled surface, insure safe delivery of baths to the ultimate user.

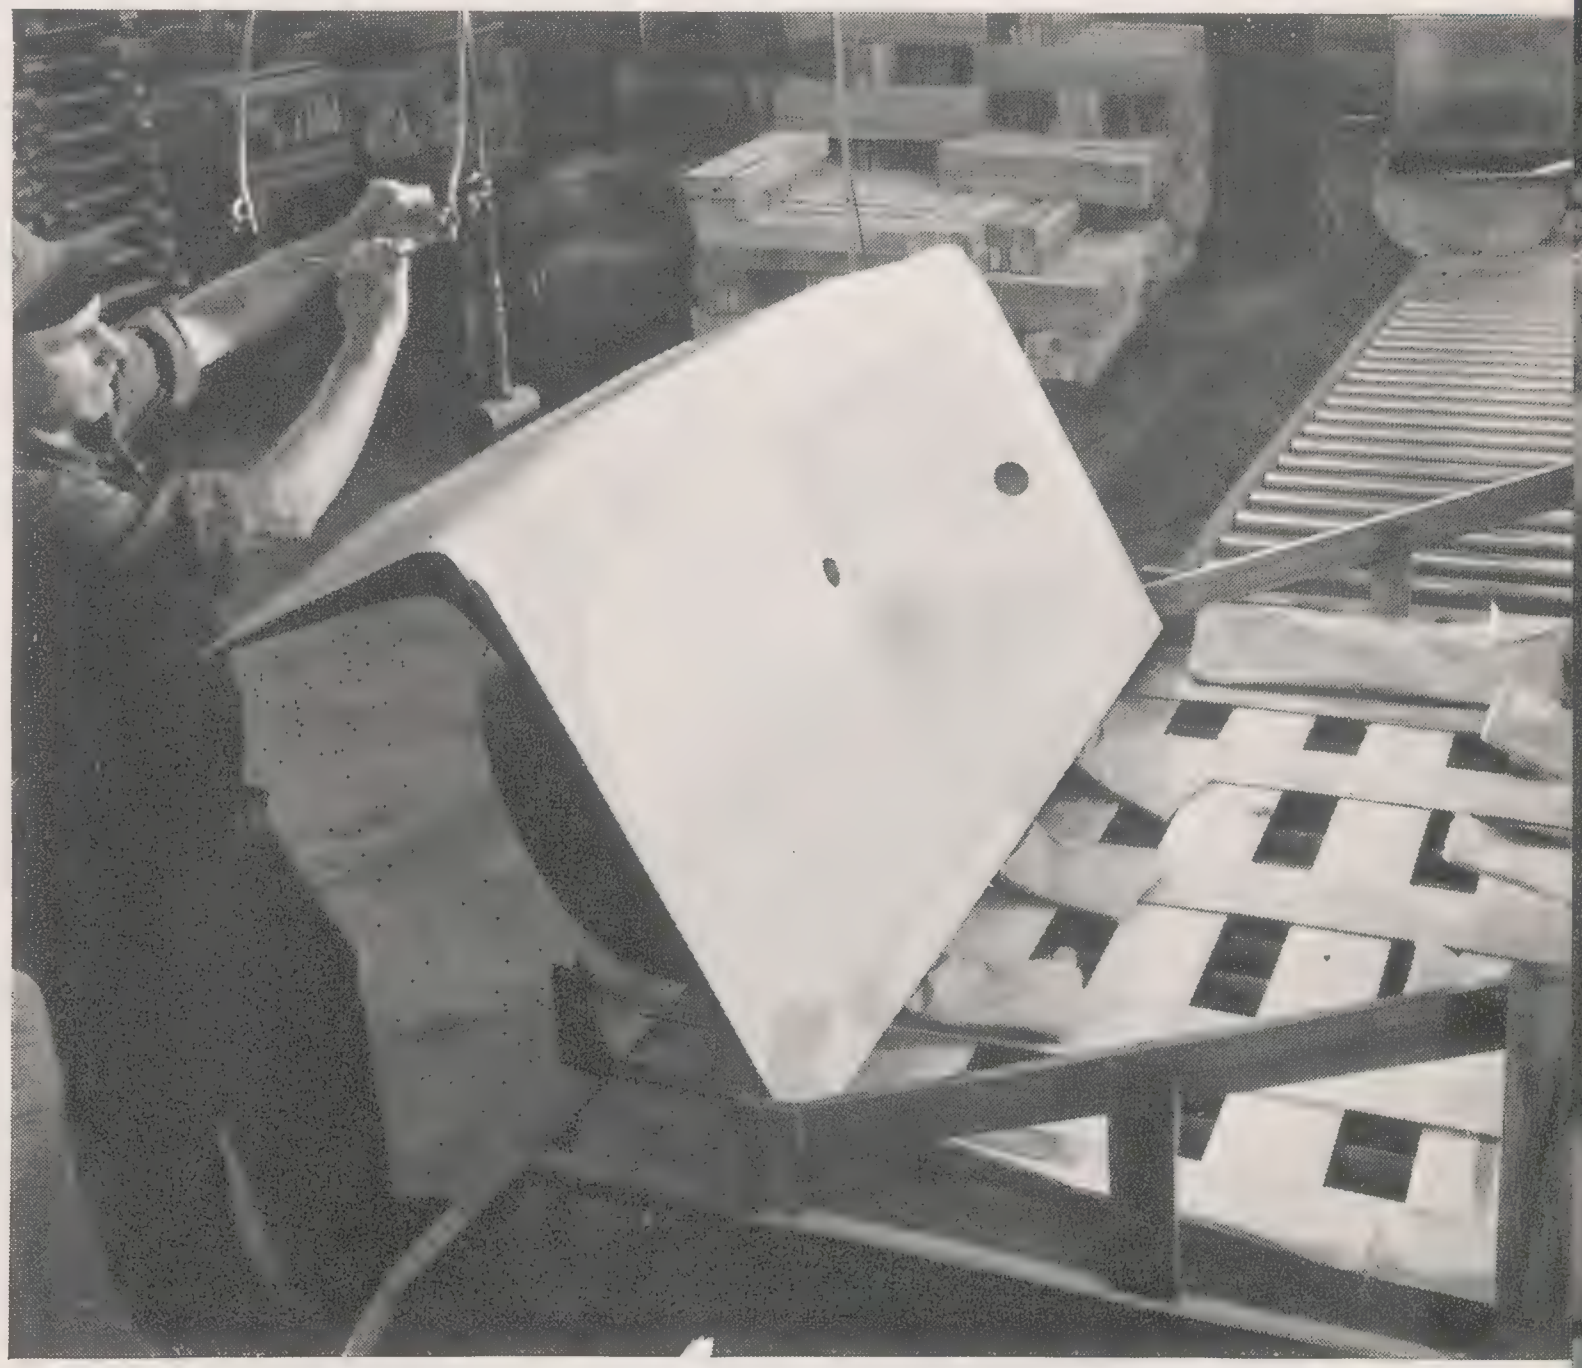

In the skilled hands of the modeler, the designer's ideas take the form of a master model.

Pyrometers and other instruments record and control the temperature and progress of vitreous china fixtures as they move on cars on their long journey through the kilns.

FINEST RAW MATERIALS ● CAREFUL WORKMANSHIP

A portion of the extensive Kohler pottery.

ature
their

HIP



Brass fittings are tested under water pressure.

A row of self-closing faucets is assembled.

RIGID CONTROLS ● SEARCHING INSPECTIONS

Precision Control — Jet engine fuel system valves are tested with volatile liquids.

A crankshaft for Kohler engine is being checked for balance.

MAYFLOWER

ENAMELED CAST IRON RECESS BATH WITH INTEGRAL SEAT

A Completely New Design

Roomy Oval Bathing and Showering Area

Low Front for Easy Access

LEFT OUTLET

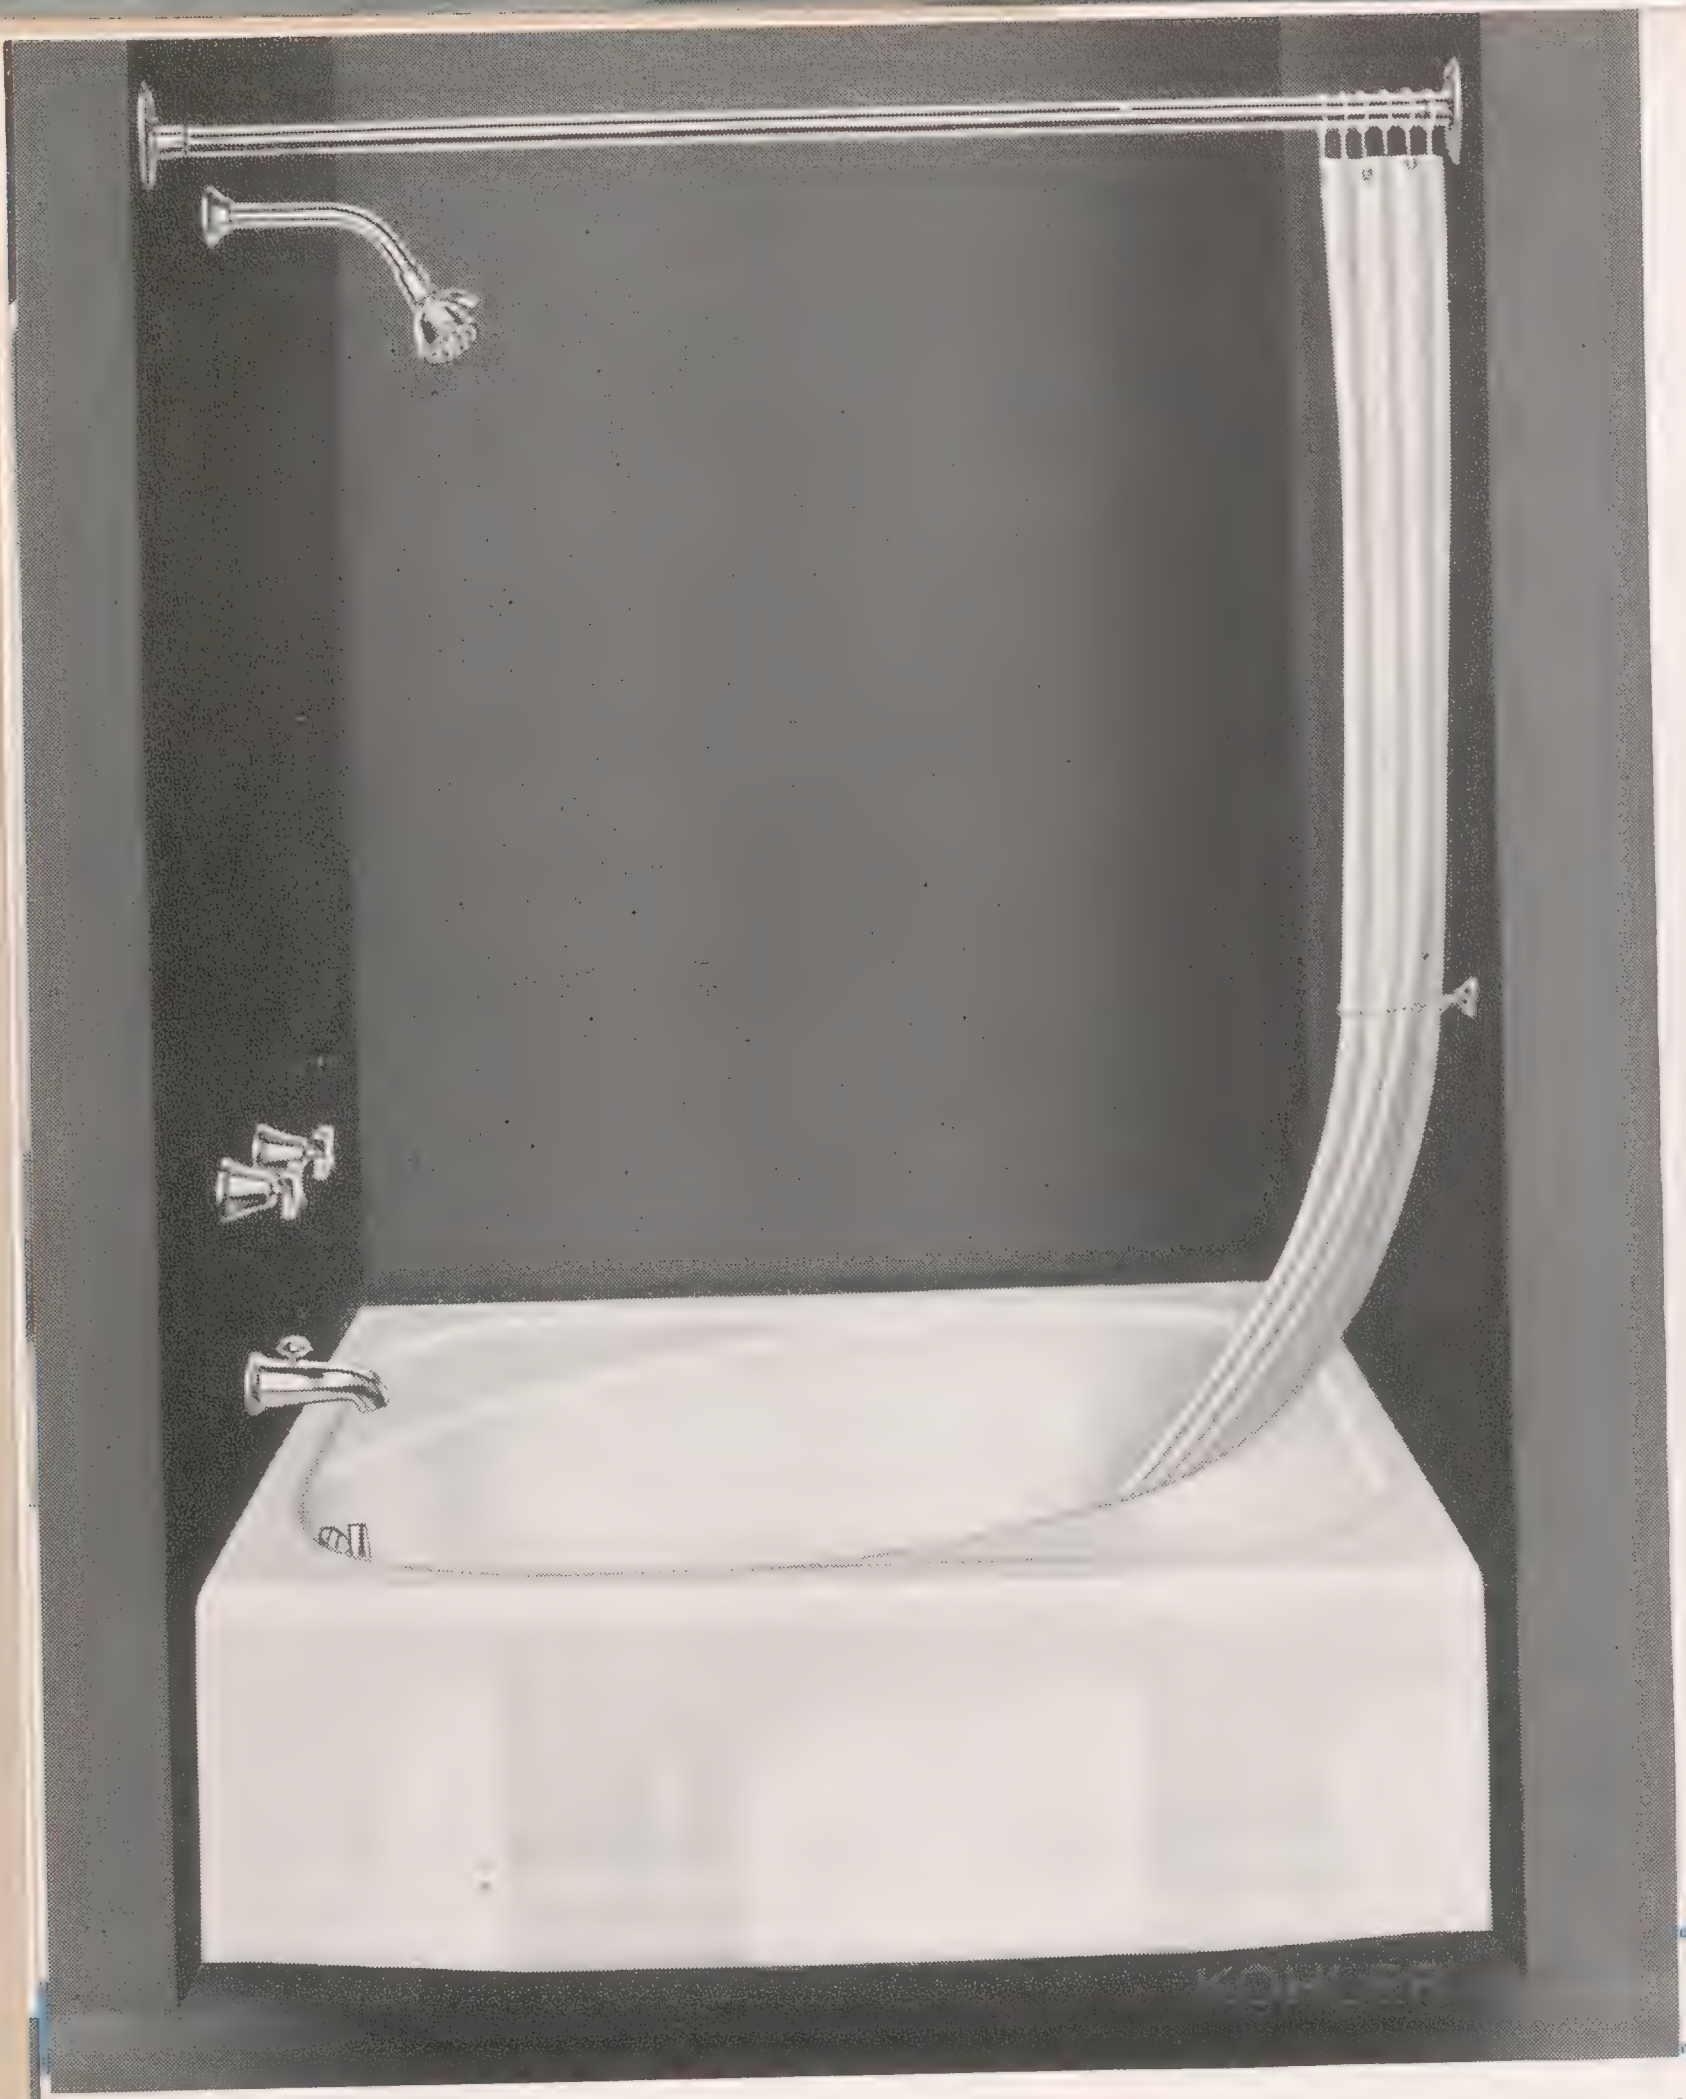

MAYFLOWER K-215-A

Size 48x44x14"

K-215-A	Bath, recess, left outlet, with fittings illustrated.
K-215	Bath, recess, left outlet.
	FITTINGS
K-7032-M	Dalton shower and bath fitting, Remov units, union couplings for ½" I.P., ball joint Multi-spray shower head with volume regulator, diverter spout.
K-7176	1½" pop-up drain.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)
	•
K-216-A	Bath, recess, right outlet, with above fittings.

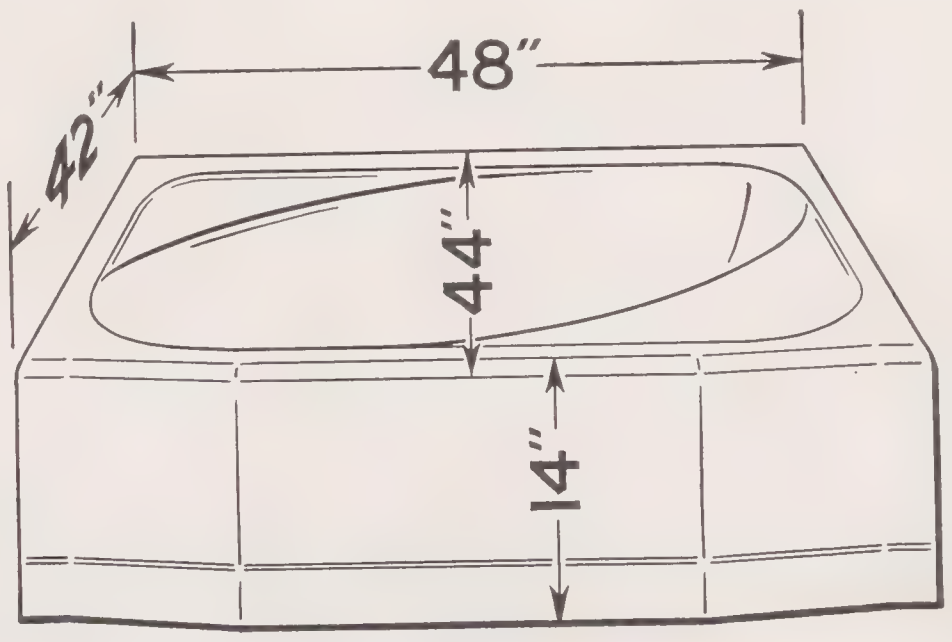

OTHER FITTINGS AVAILABLE

K-215-F Left Outlet
K-216-F Right Outlet



K-7027-M Triton shower and bath fitting with mixer, Multi-spray shower head, diverter spout.



K-7176 1½" pop-up drain.

K-215-E Left Outlet
K-216-E Right Outlet



K-7042-M Dalney shower and bath fitting, Multi-spray shower head, diverter valve.



K-7176 1½" pop-up drain.

For protection of bath tub during construction,

MAYFLOWER

ENAMELED CAST IRON CORNER BATH WITH INTEGRAL SEAT

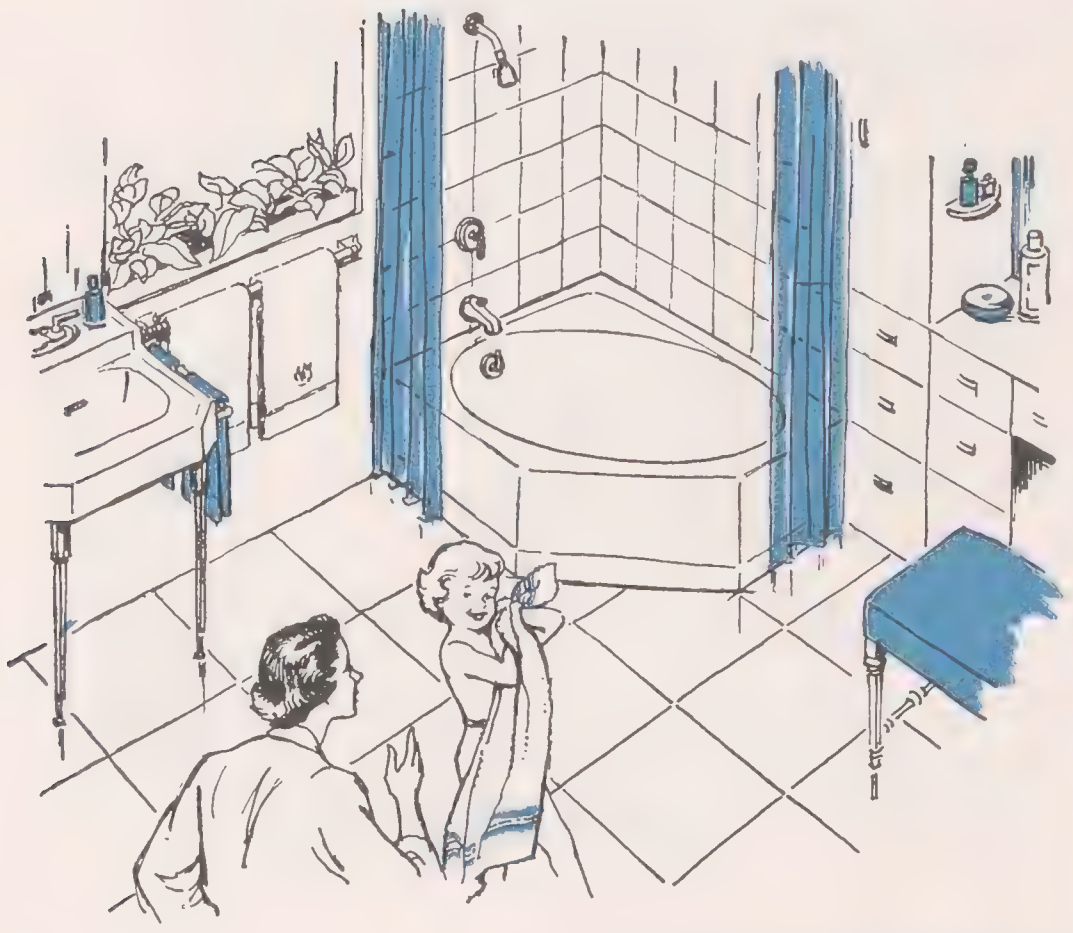

RIGHT OUTLET

OTHER FITTINGS AVAILABLE

K-221-A Left Outlet
K-224-A Right Outlet



K-7032-M Dalton shower and bath fitting with Multi-spray shower head, diverter spout.



K-7176 1½″ pop-up drain.

K-221-E Left Outlet
K-224-E Right Outlet



K-7042-M Dalney shower and bath fitting, Multi-spray shower head, diverter valve.



K-7176 1½″ pop-up drain.

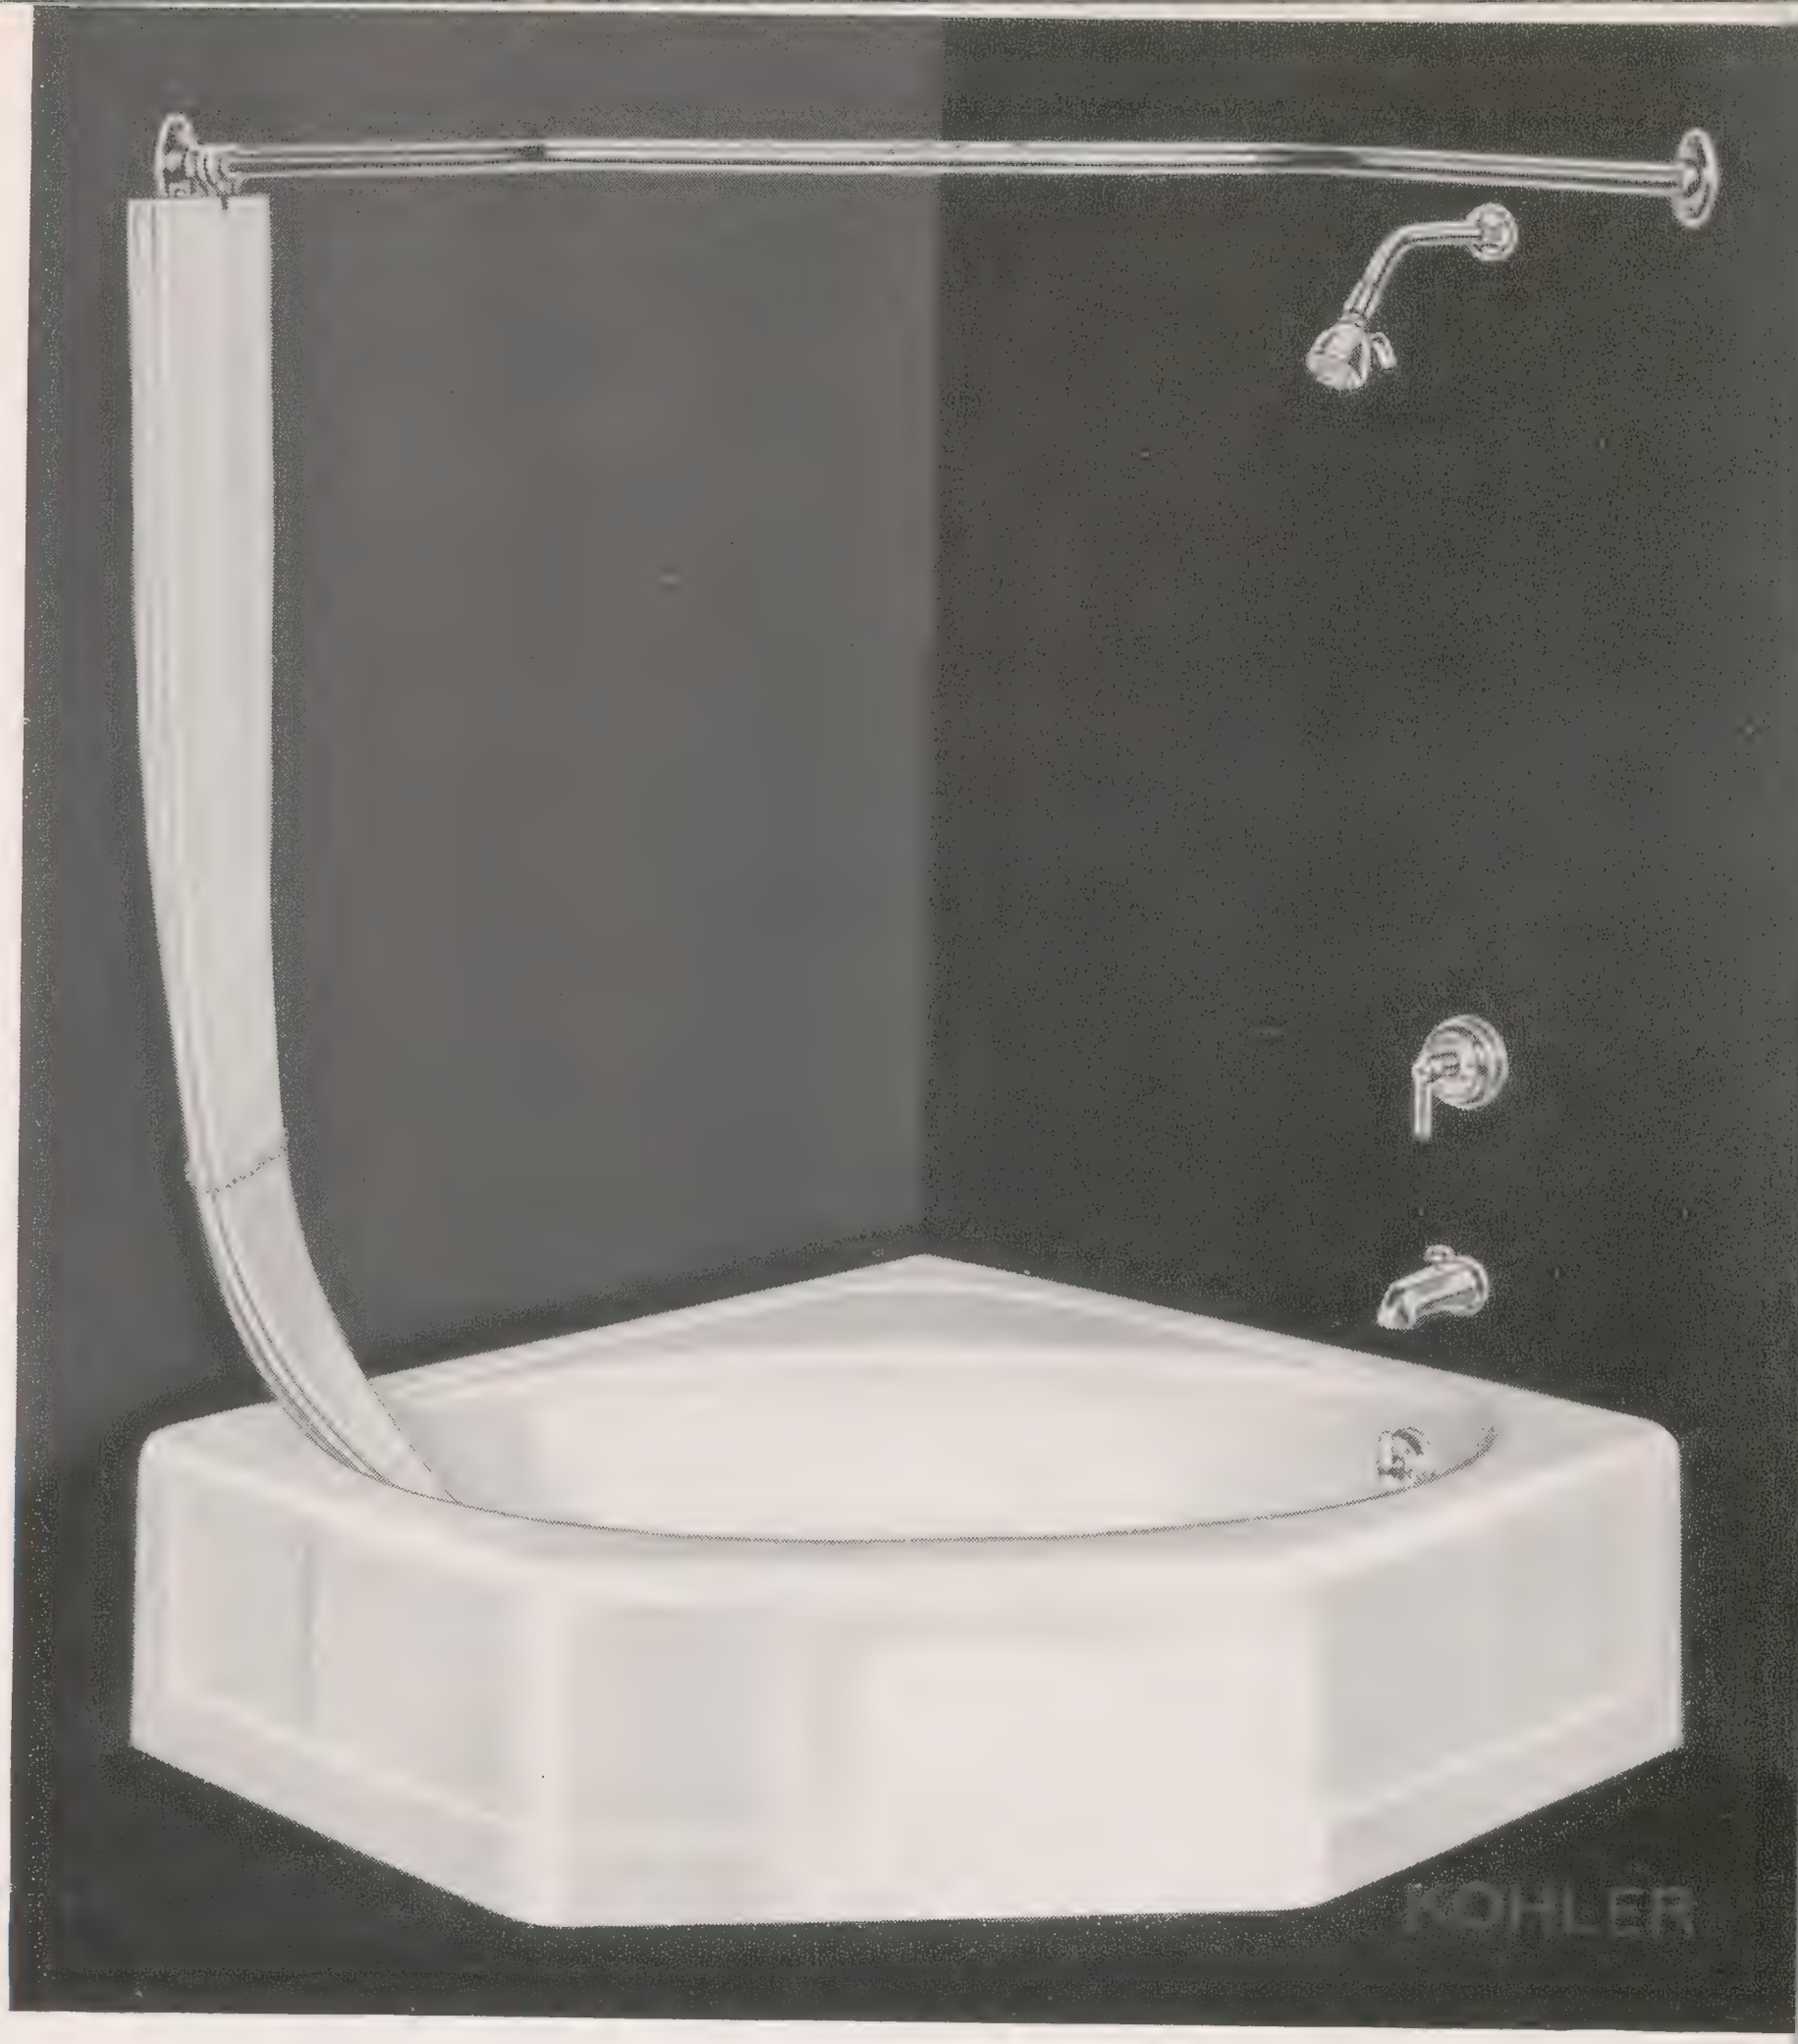

MAYFLOWER K-224-F Size 48x44x14″

K-224-F	Bath, corner, right outlet, with fittings illustrated.
K-224	Bath, corner, right outlet.
	FITTINGS
K-7027-M	Triton shower and bath fitting, Niedecken mixer, ball joint Multi-spray shower head with volume regulator, diverter spout.
K-7176	1½″ pop-up drain.
K-9702	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

•

K-221-F	Bath, corner, left outlet, with above fittings.

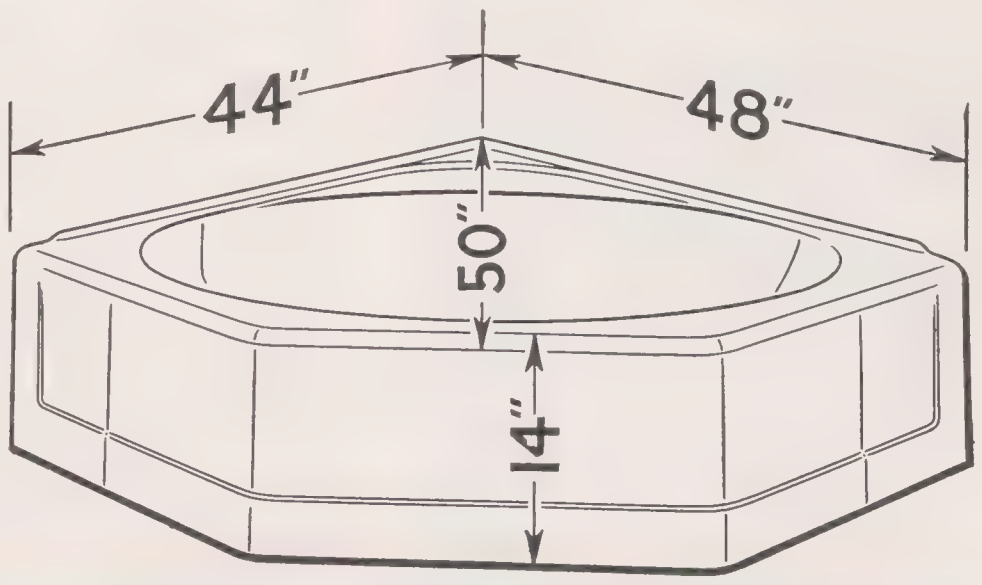

use Kohler Protek paste. See details on page 32.

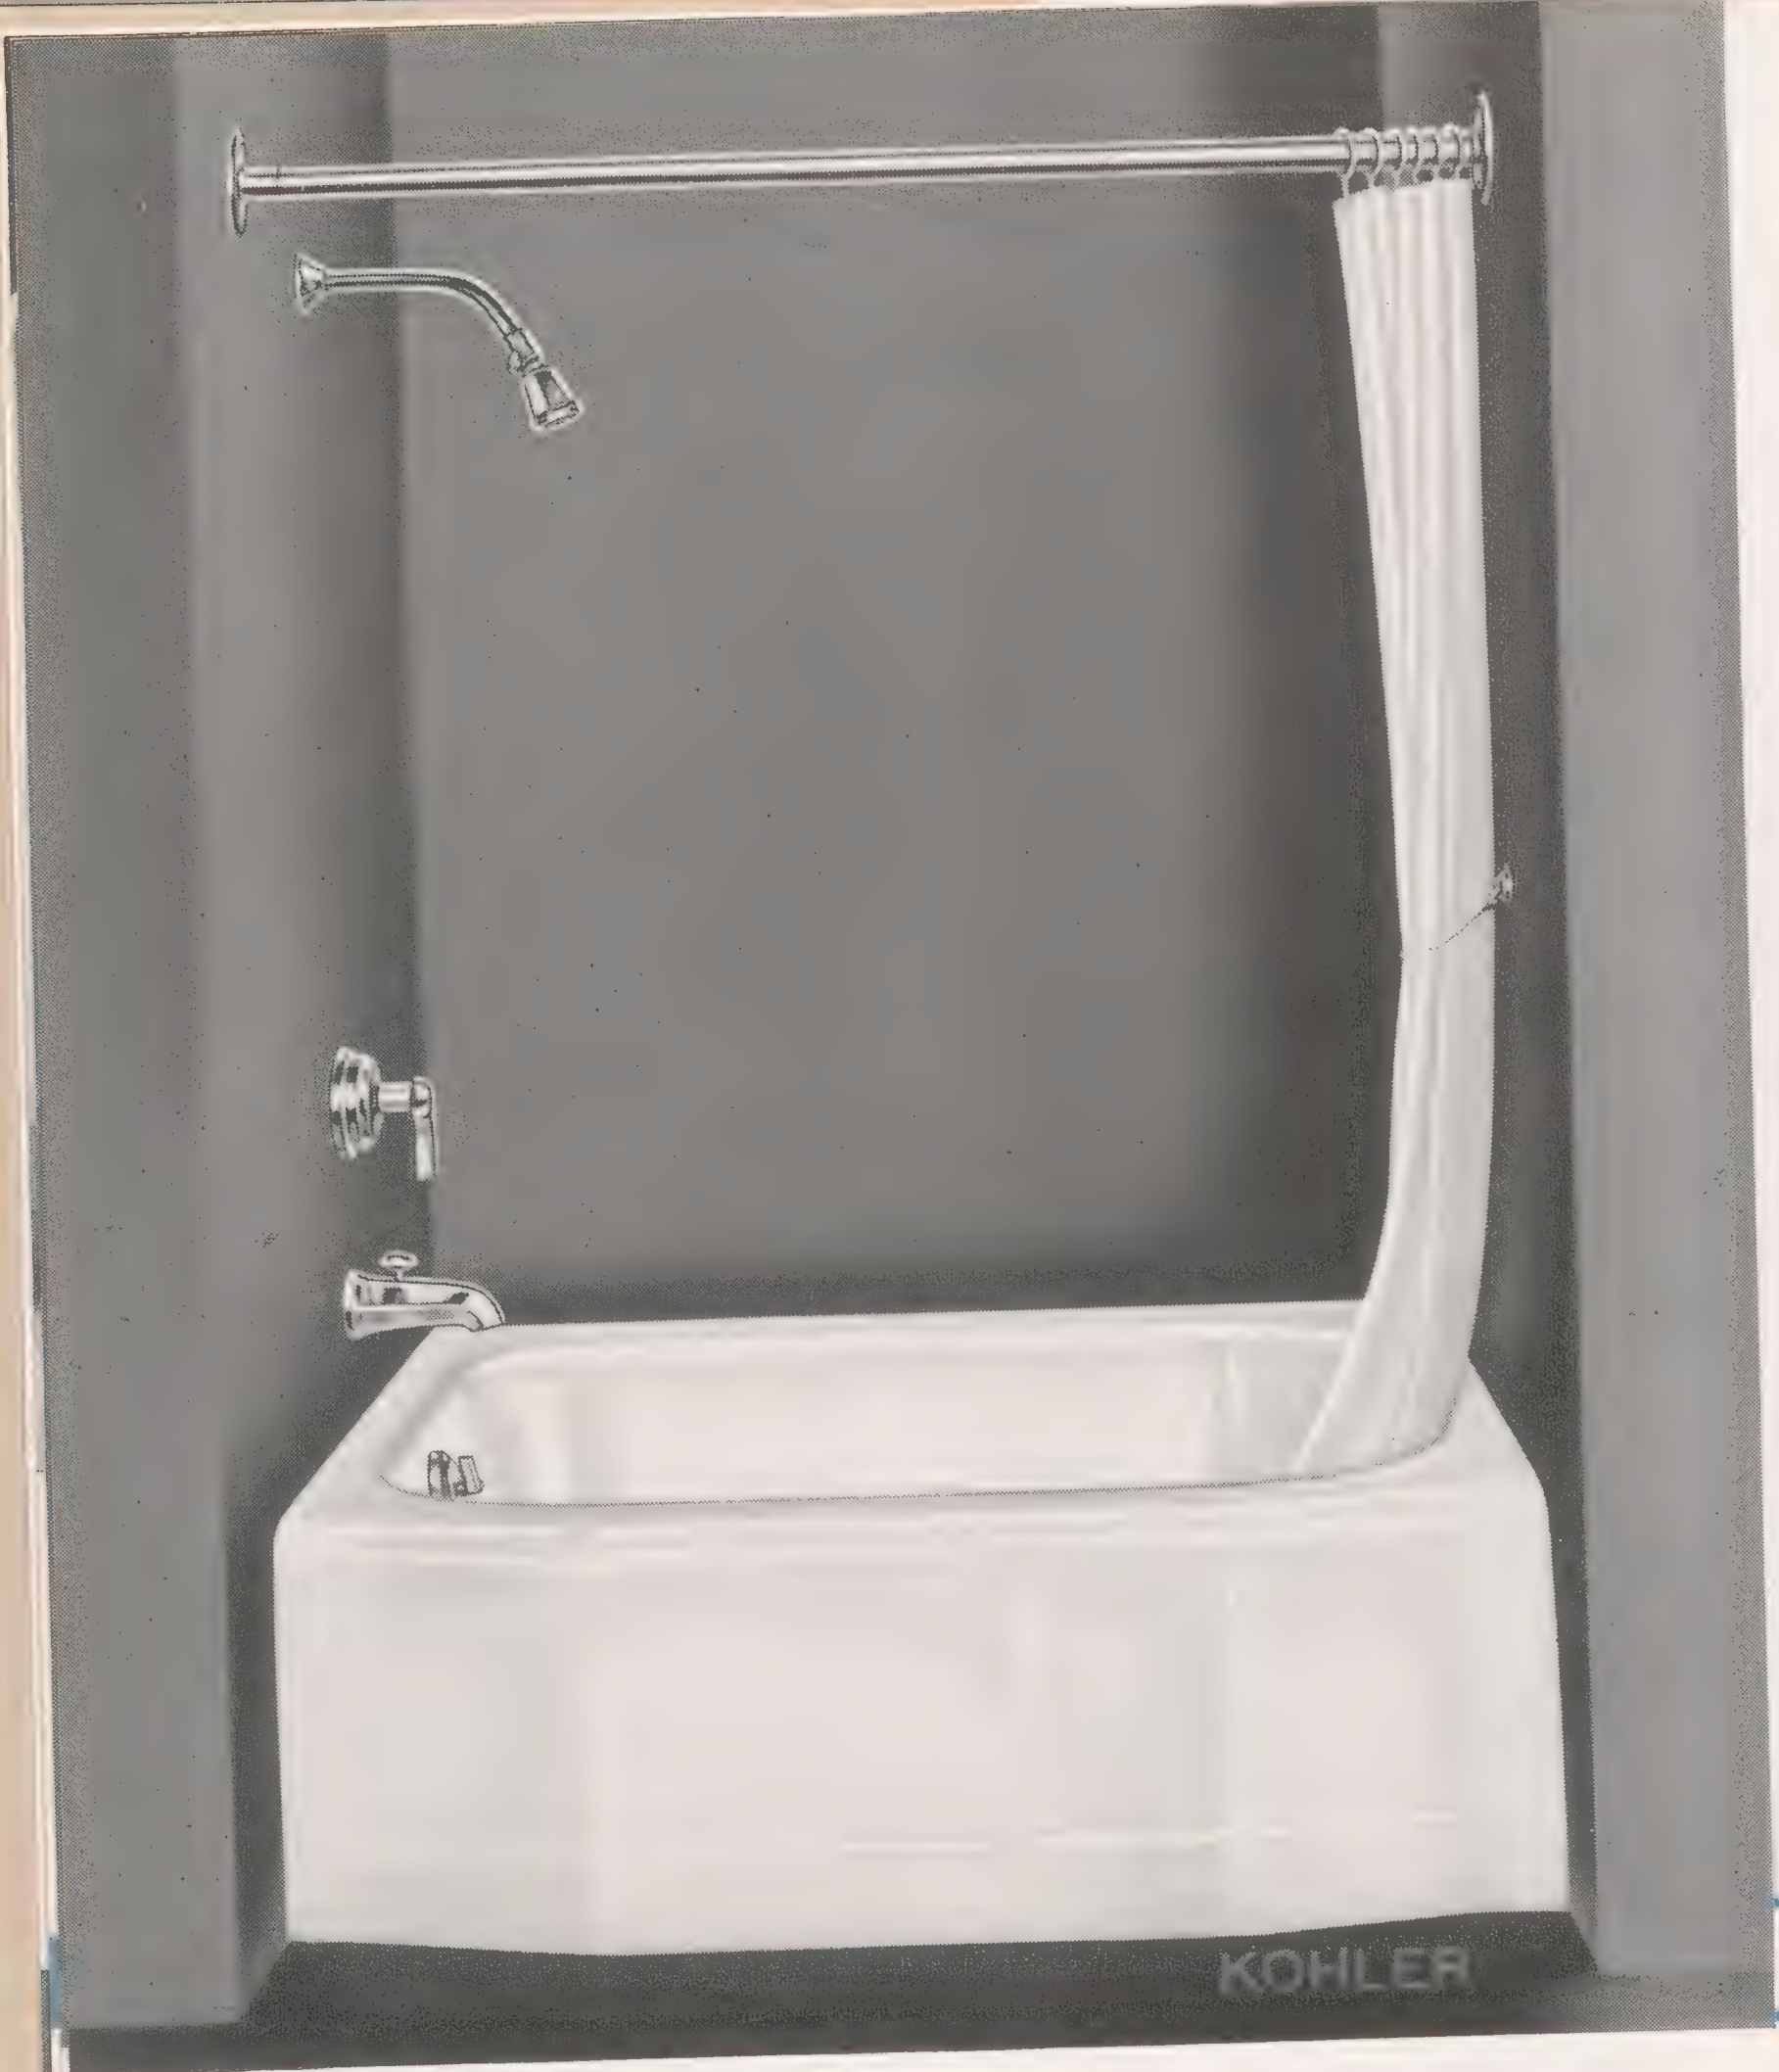

STANDISH

Deep Receptor for Showering

Occupies the Space of an Ordinary Shower Bath

Ideal Fixture for Bathing Small Children

A Practical, Space-conserving Bath for Homes, Apartments, Motor Courts

LEFT OUTLET

STANDISH K-305-F

Size 42x36″

K-305-F	Bath, recess, left outlet, with fittings illustrated.
K-305	Bath, recess, left outlet.
	FITTINGS
K-7027	Triton shower and bath fitting, Niedecken mixer, ball joint shower head with volume regulator, diverter spout.
K-7172	1½″ pop-up drain.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

The Standish shower bath is available with a water-tight, two-door enclosure with clear glass. Doors open in and out. Available with opaque glass, when specified.

If glass enclosure is desired, specify No. **K-812** 42″.

OTHER FITTINGS AVAILABLE

K-305-A Left Outlet



K-7032 Dalton shower and bath fitting with diverter spout.



K-7172 1½″ pop-up drain.

K-305-E Left Outlet



K-7042 Dalney shower and bath fitting with diverter valve.



K-7172 1½″ pop-up drain.

Specify K-7185 for connected drain and overflow

For protection of bath tub during construction,

ENAMELED CAST IRON SHOWER BATH

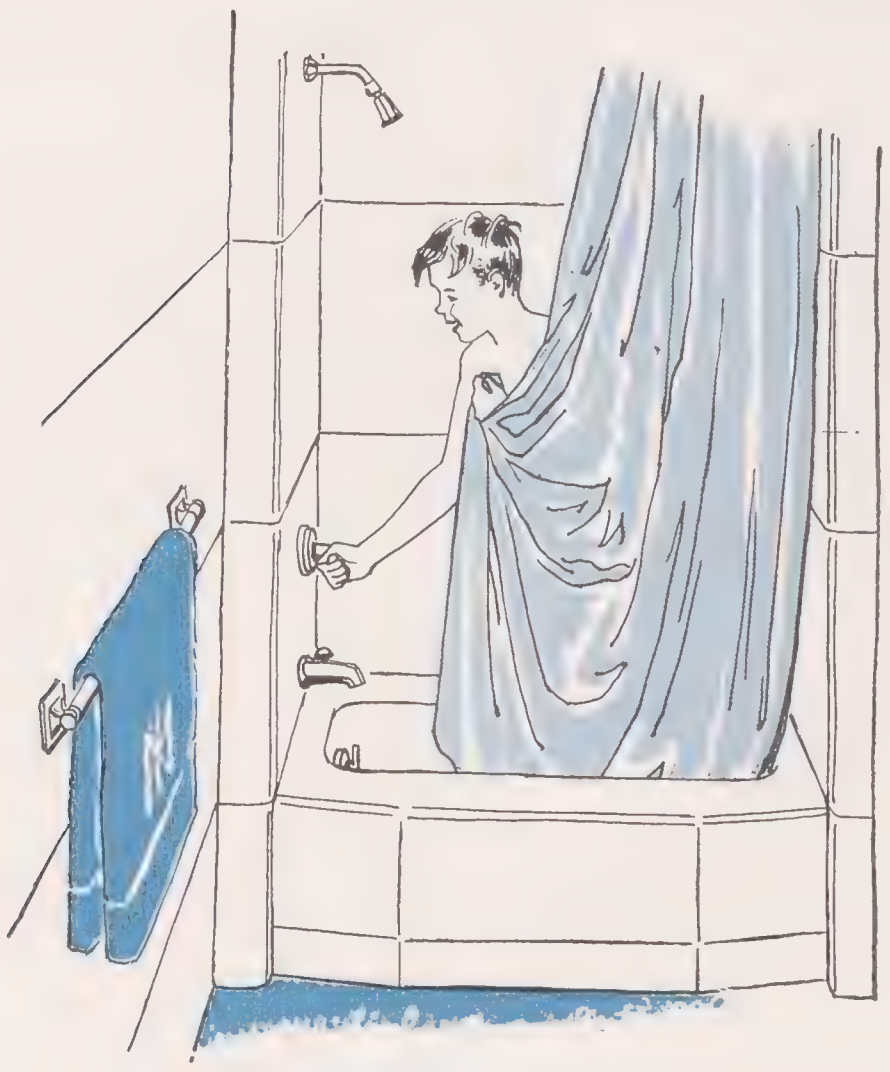

RIGHT OUTLET

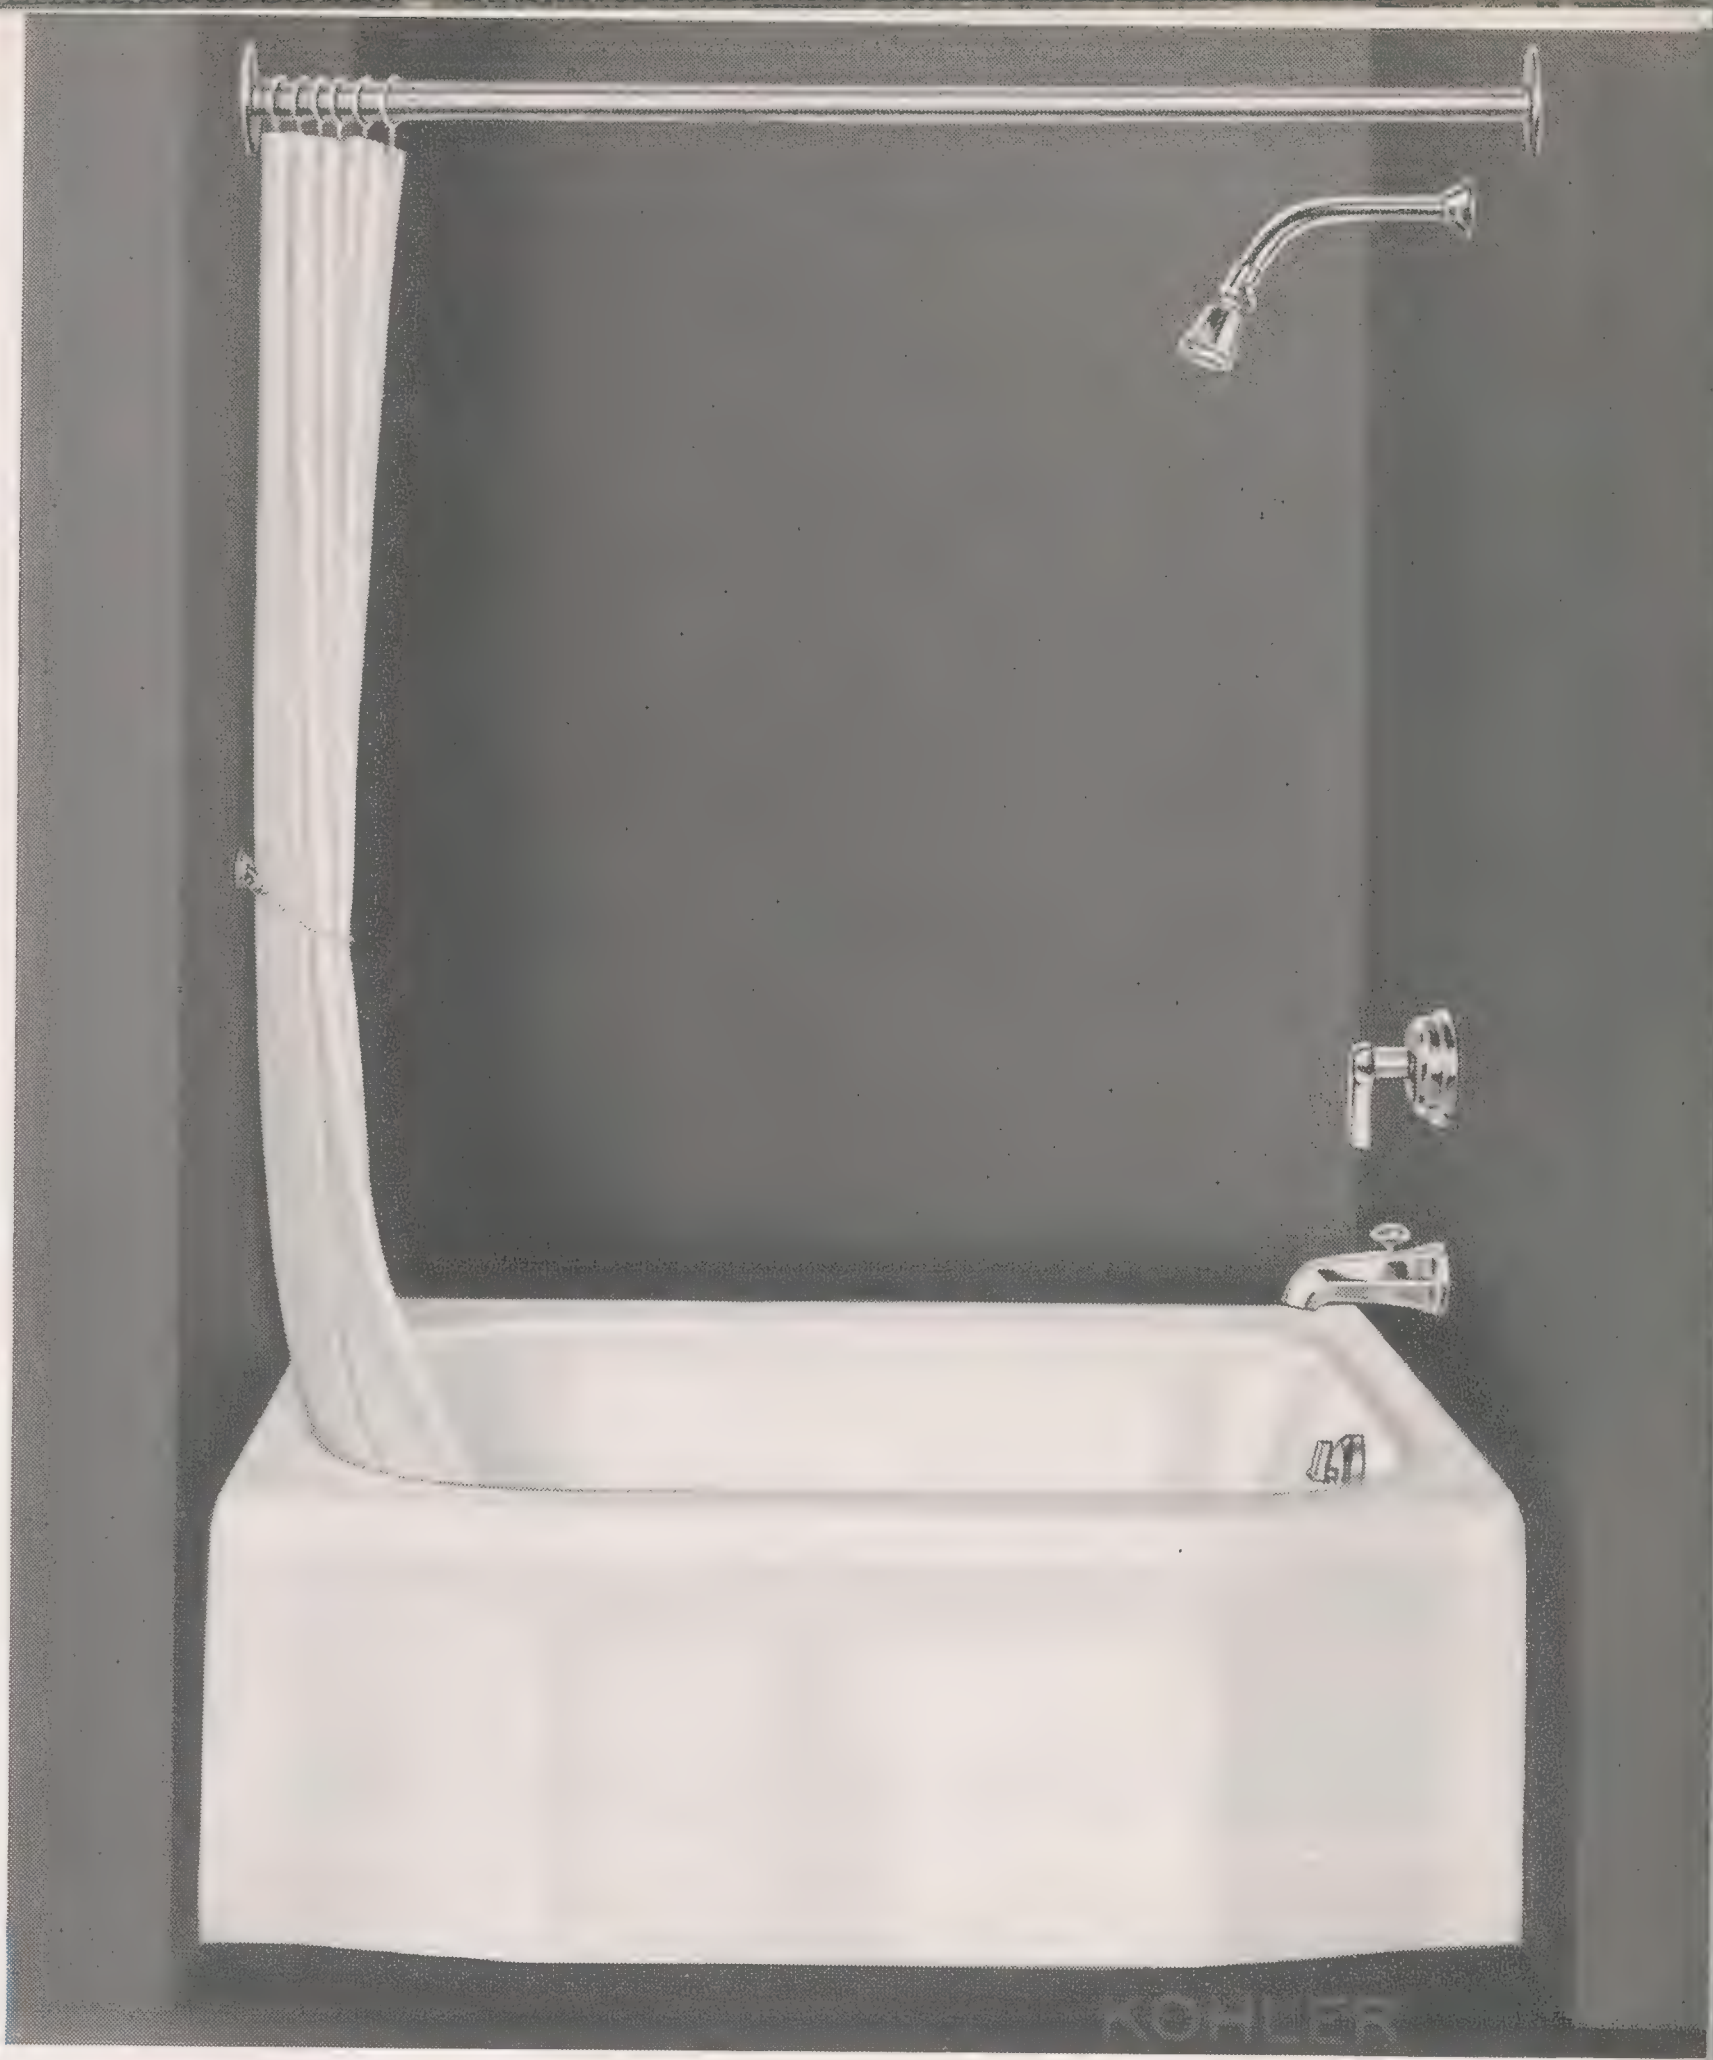

OTHER FITTINGS AVAILABLE

K-306-A Right Outlet



K-7032 Dalton shower and bath fitting with diverter spout.



K-7172 1½" pop-up drain.

K-306-E Right Outlet



K-7042 Dalney shower and bath fitting with diverter valve.



K-7172 1½" pop-up drain.

Specify K-7185 for connected drain and overflow.

STANDISH K-306-F

Size 42x36"

K-306-F	Bath, recess, right outlet, with fittings illustrated.
K-306	Bath, recess, right outlet.

FITTINGS

K-7027	Triton shower and bath fitting, Niedecken mixer, ball joint shower head with volume regulator, diverter spout.
K-7172	1½" pop-up drain.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

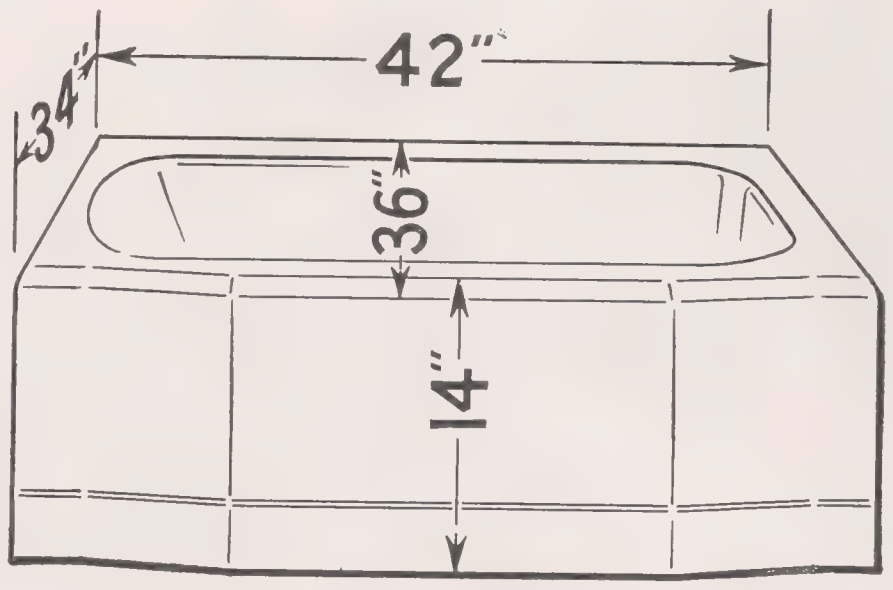

use Kohler Protek paste. See details on page 32.

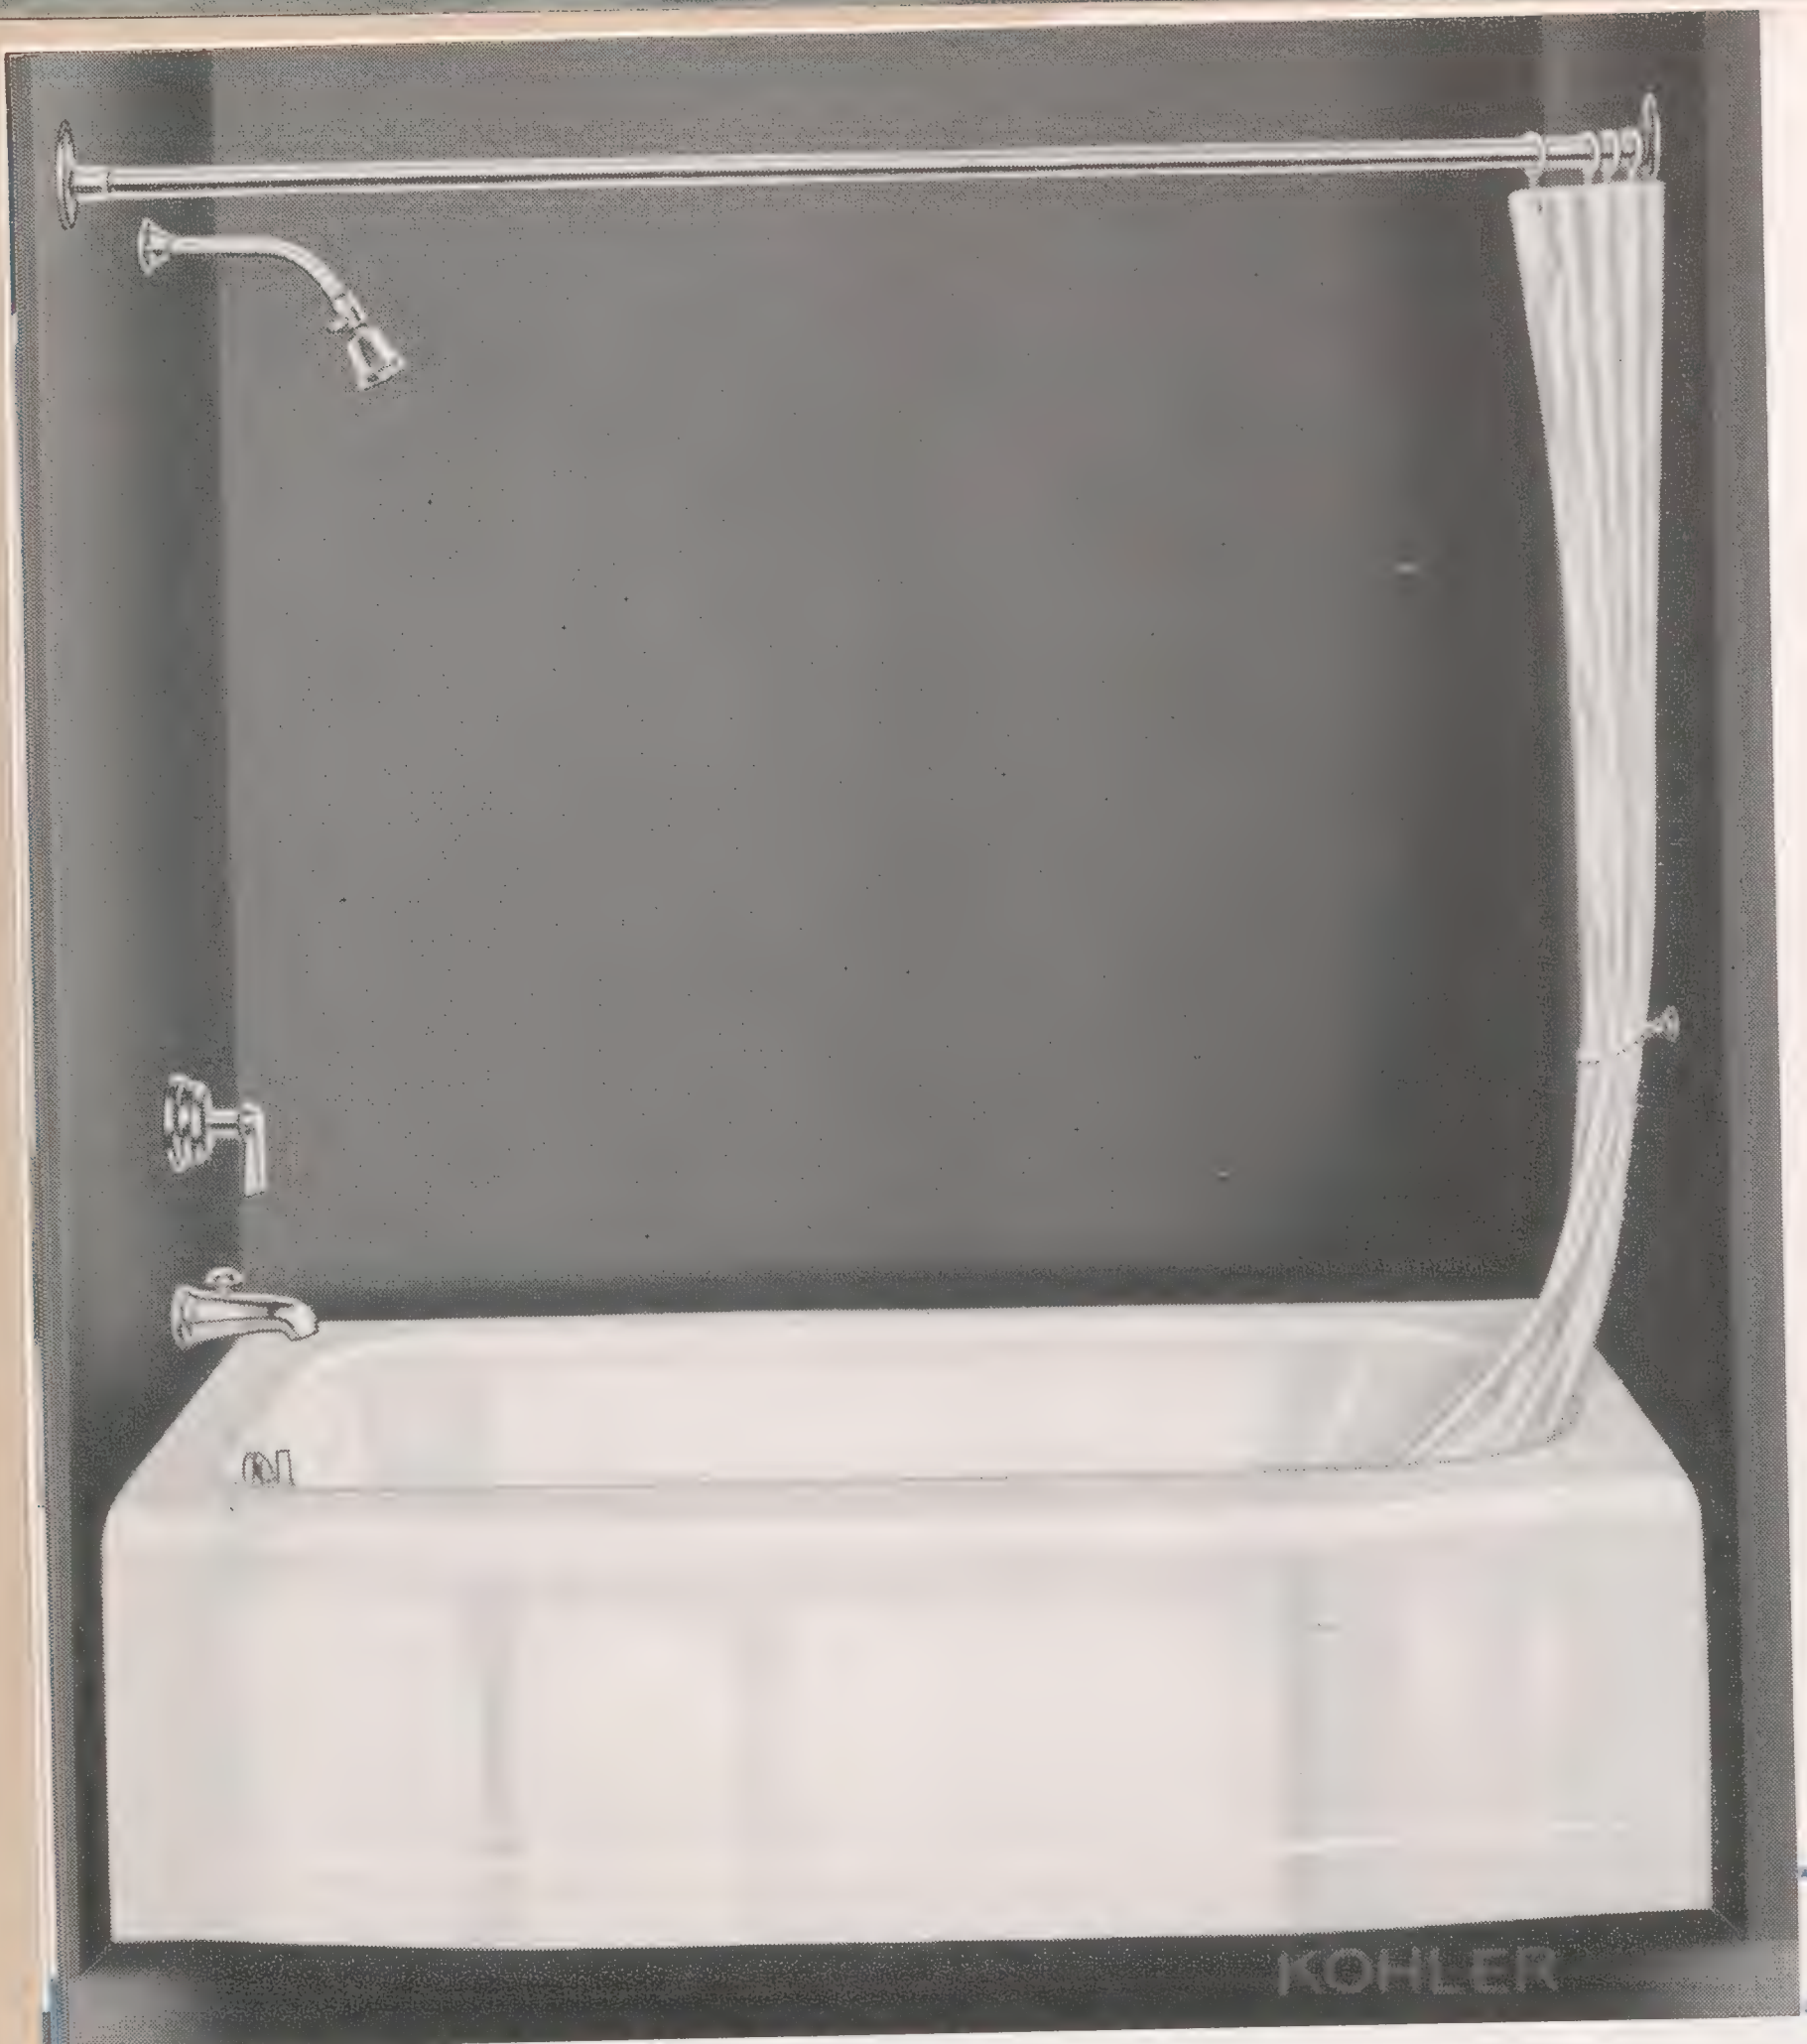

COSMOPOLITAN

ENAMELED CAST IRON RECESS BENCH BATH

Wide Bench

Slope End for Reclining

Flat Bottom for Safe Showering

Fast Draining for Easier Cleaning

LEFT OUTLET

COSMOPOLITAN K-535-F

Sizes 4½′, 5′, 5½′

K-535-F	Bath, recess, left outlet, with fittings illustrated.
K-535	Bath, recess, left outlet.

FITTINGS

K-7027	Triton shower and bath fitting, Niedecken mixer, ball joint shower head with volume regulator, diverter spout.
K-7150	1½″ pop-up drain.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished.)

OTHER FITTINGS AVAILABLE WITH SHOWER

K-535-A Left Outlet
K-536-A Right Outlet



K-7032 Dalton shower and bath fitting with diverter spout.



K-7150 1½″ pop-up drain.

K-535-E Left Outlet
K-536-E Right Outlet



K-7042 Dalney shower and bath fitting with diverter valve.



K-7150 1½″ pop-up drain.

Specify K-7180 for connected drain and overflow.

For protection of bath tub during construction,

New DYNAMETRIC ENAMELED CAST IRON RECESS BATH

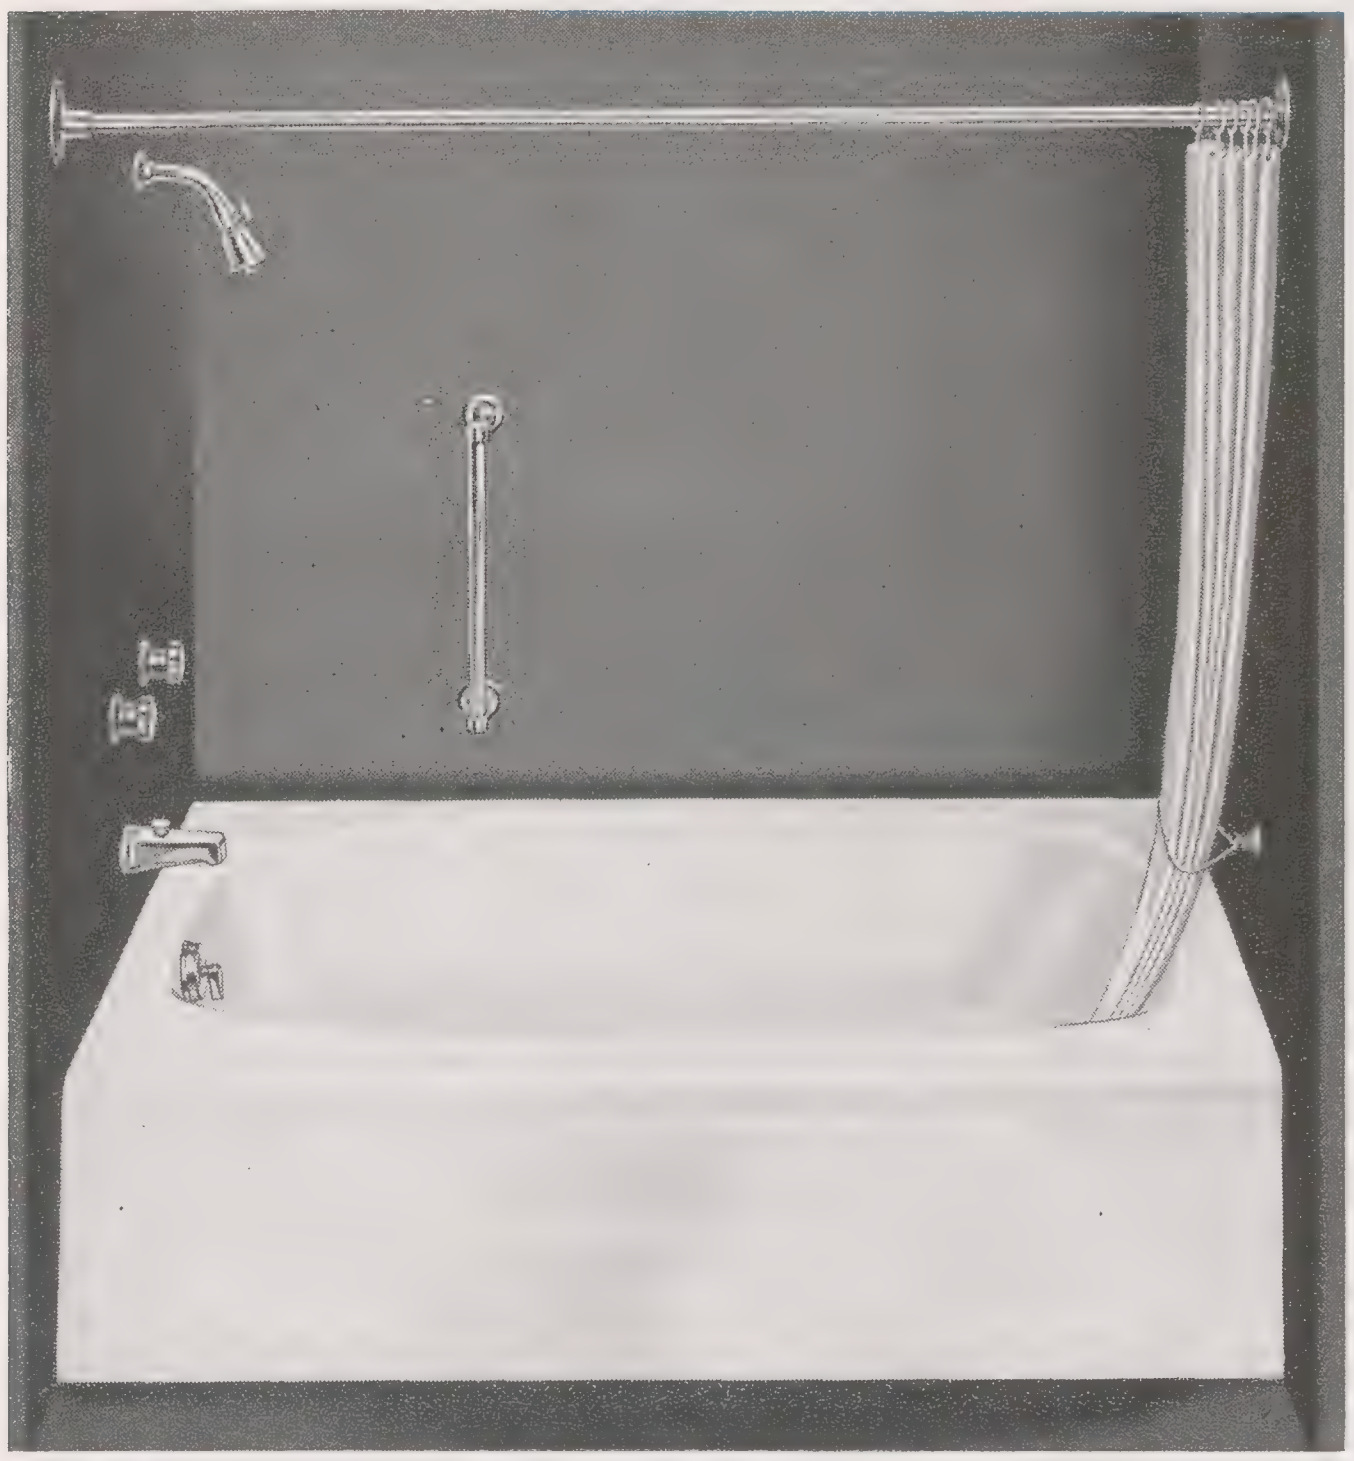

DYNAMETRIC K-515-A Size 5′ Height 16″

K-515-A	Bath, recess, left outlet, with fittings illustrated.
K-515	Bath, recess, left outlet.
	FITTINGS
K-7006	Dalton Constellation Series shower and bath fitting, ½″ valves with interchangeable units, over rim diverter spout, **K-7370** ball joint shower head with volume regulator.
K-7150	1½″ pop-up drain.
K-9612	18″ Wall grip rail.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished.)
K-516-A	Bath, recess, right outlet with above fittings.

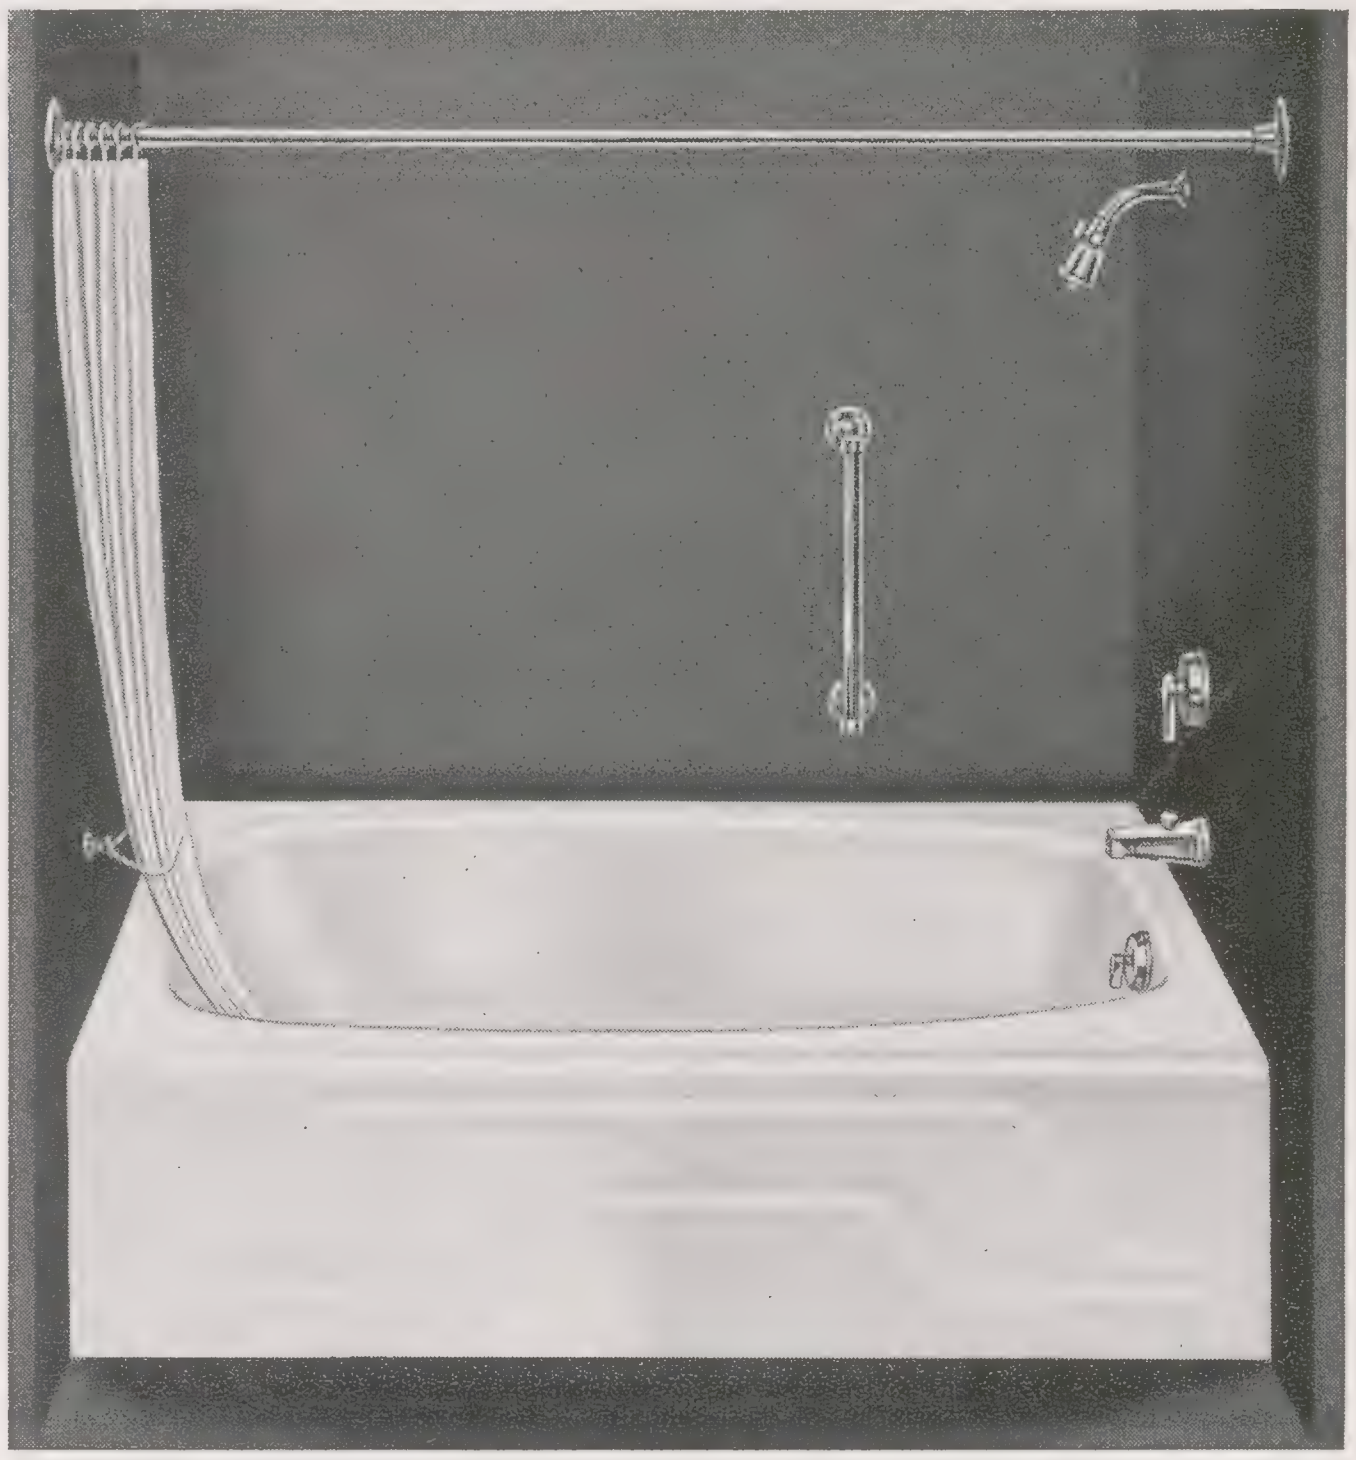

DYNAMETRIC K-516-F Size 5′ Height 16″

K-516-F	Bath, recess, right outlet, with fittings illustrated.
K-516	Bath, recess, right outlet.
	FITTINGS
K-7000	Triton Constellation Series shower and bath fitting, Niedecken mixer, over rim diverter spout, **K-7370** ball joint shower head with volume regulator.
K-7150	1½″ pop-up drain.
K-9612	18″ Wall grip rail.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished.)
K-515-F	Bath, recess, left outlet, with above fittings.

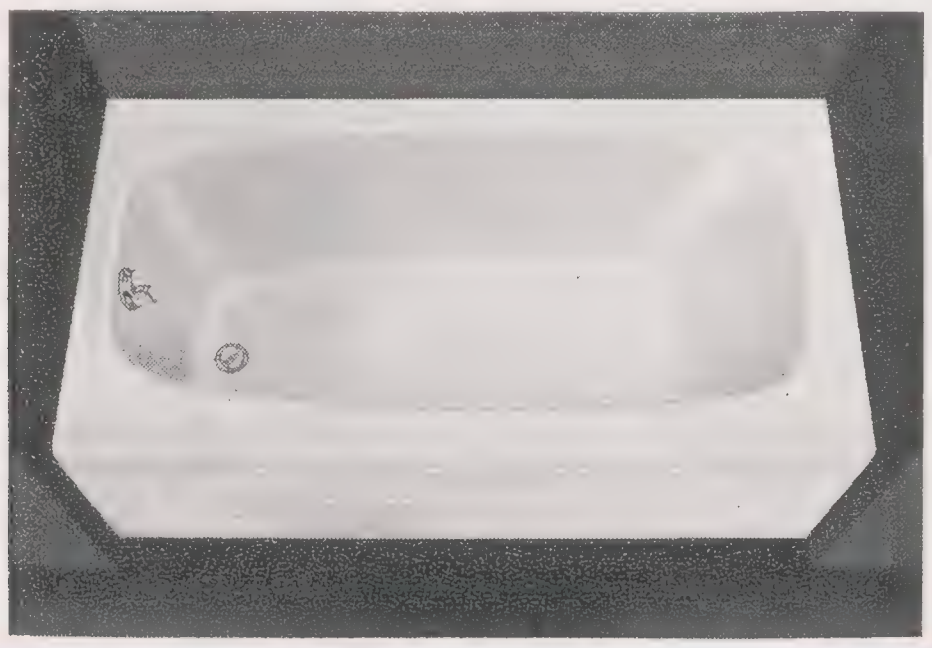

Styled for today . . . enduring beauty for tomorrow
More room for bathing and showering
Two corner seats for bathing children, foot bathing
Corner shelves for soap, cosmetics
Sloped end for the soaking bath

35M-7-59 Printed in U. S. A

Insert between pages 26 and 27 of K-56 catalog.

New DYNAMETRIC ENAMELED CAST IRON RECESS BATH

For Bathing and Showering

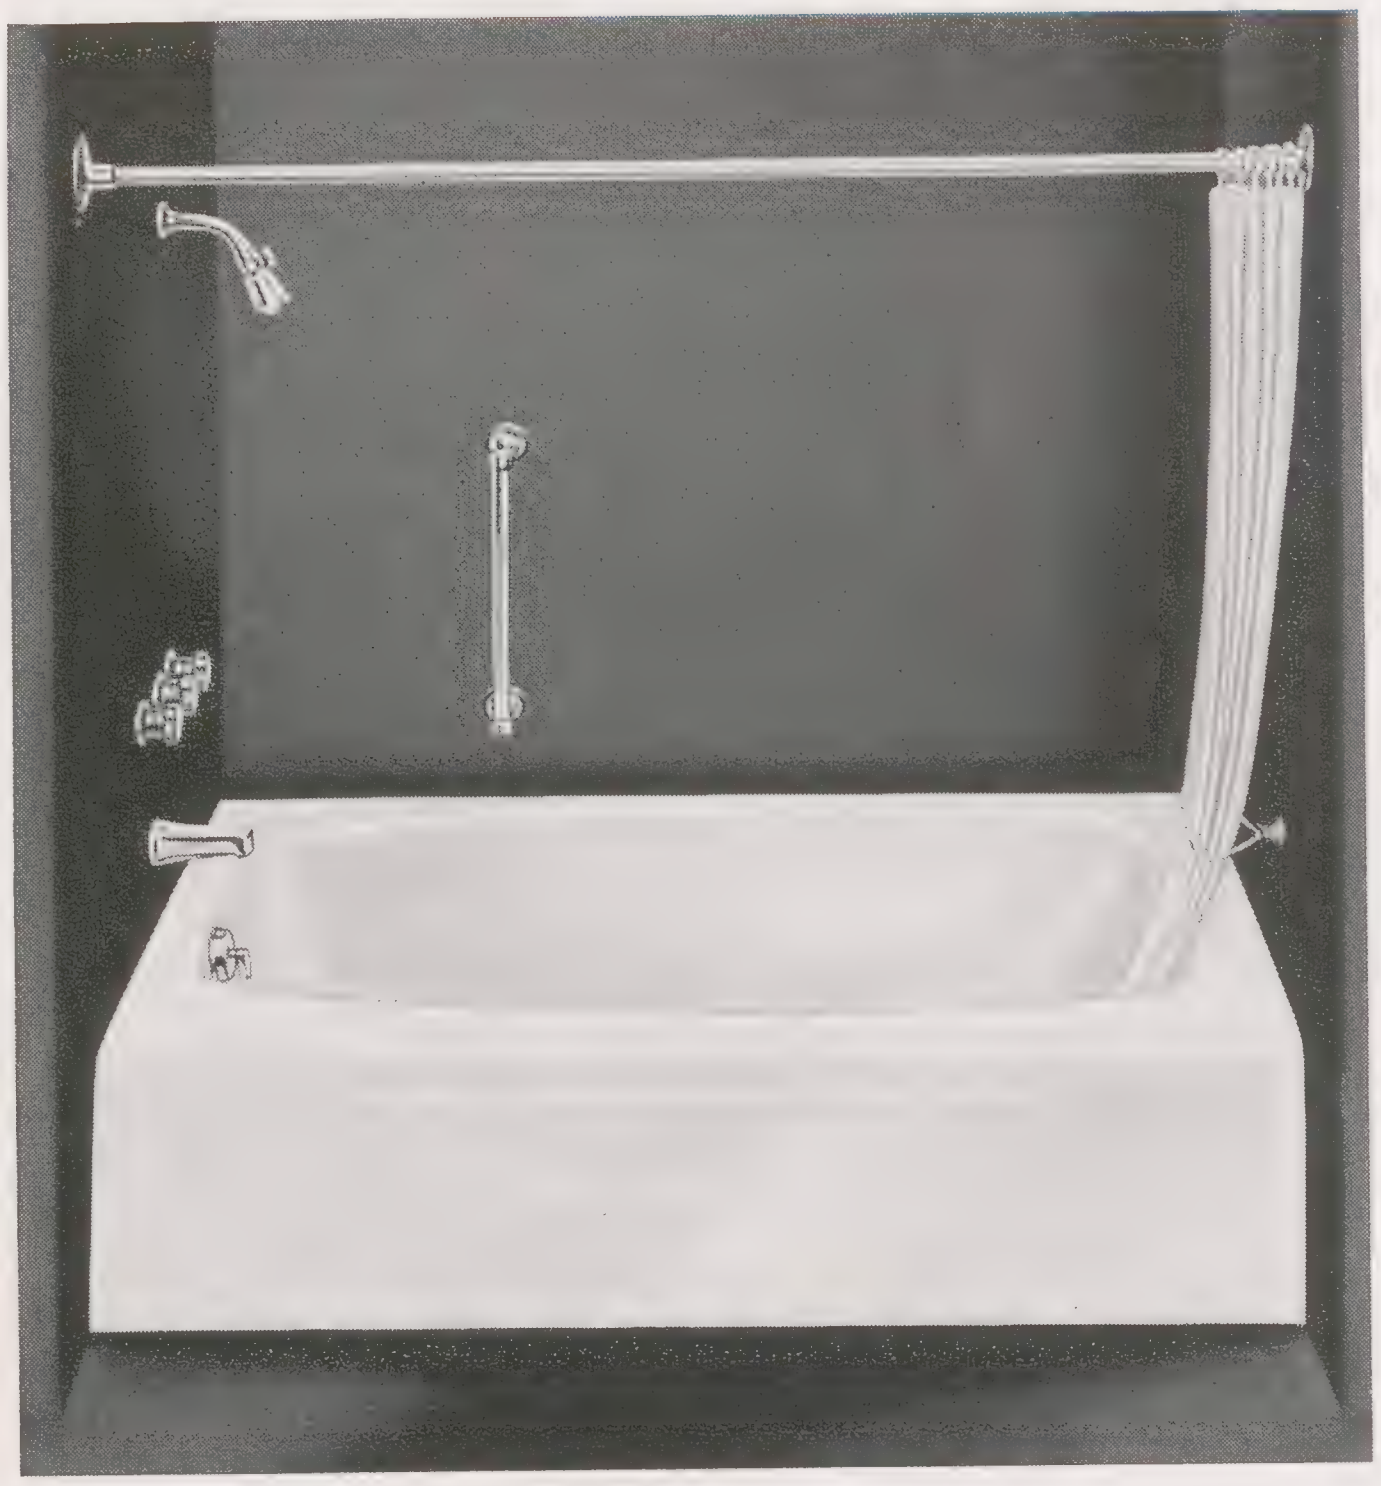

DYNAMETRIC K-515-E Size 5′ Height 16″

K-515-E	Bath, recess, left outlet, with fittings illustrated.
K-515	Bath, recess, left outlet.
	FITTINGS
K-7016	Dalney Constellation Series diverter shower and bath fitting, ½″ valves with interchangeable units, over rim spout, **K-7370** ball joint shower head with volume regulator.
K-7150	1½″ pop-up drain.
K-9612	18″ Wall grip rail.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished.)
K-516-E	Bath, recess, right outlet, with above fittings.

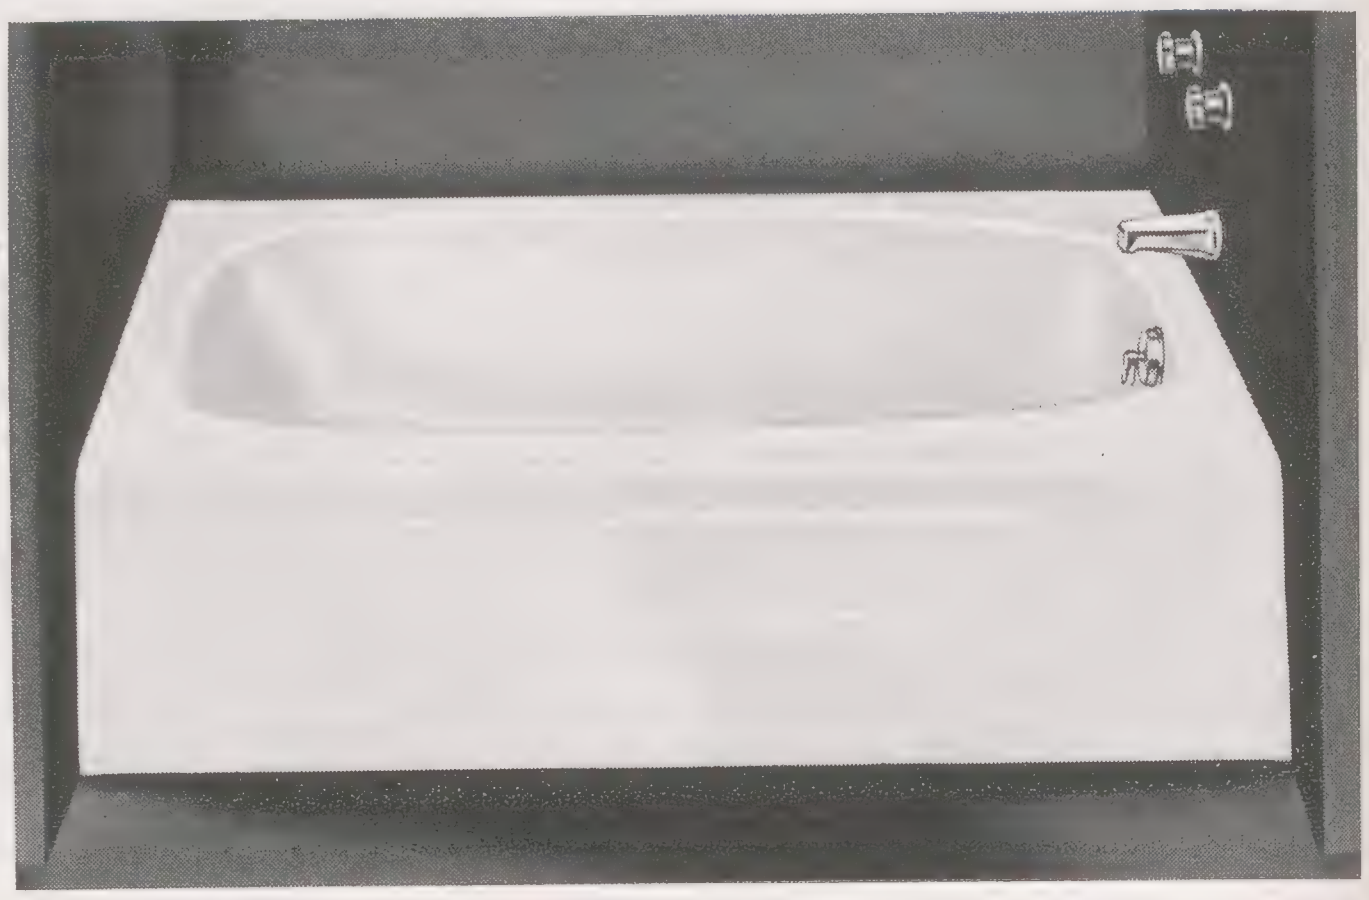

DYNAMETRIC K-516-P Size 5′ Height 16″

K-516-P	Bath, recess, right outlet, with fittings illustrated.
K-516	Bath, recess, right outlet.
	FITTINGS
K-7036	Denton Constellation Series bath fitting, ½″ by-pass valves with interchangeable units, over rim spout.
K-7150	1½″ pop-up drain.
K-515-P	Bath, recess, left outlet, with above fittings.

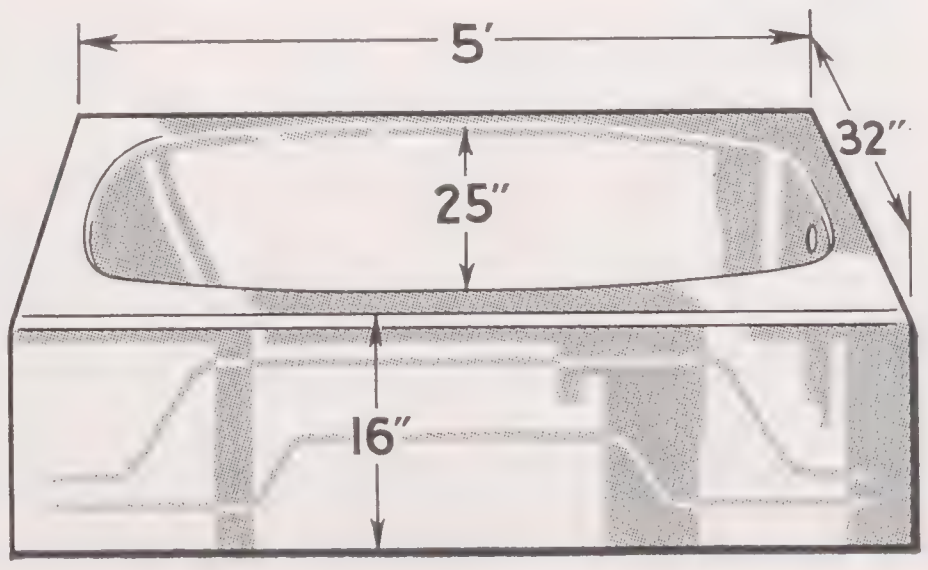

IMPORTANT FACTS ABOUT KOHLER BATHS

The Enamel is Fused at High Temperature to an Iron Base Cast for Rigidity. Lustrous, Durable, Sanitary Surface

The Chromium Plated Fittings are Made to Go with Kohler Fixtures

Integral Tiling-in Flange to Prevent Leakage

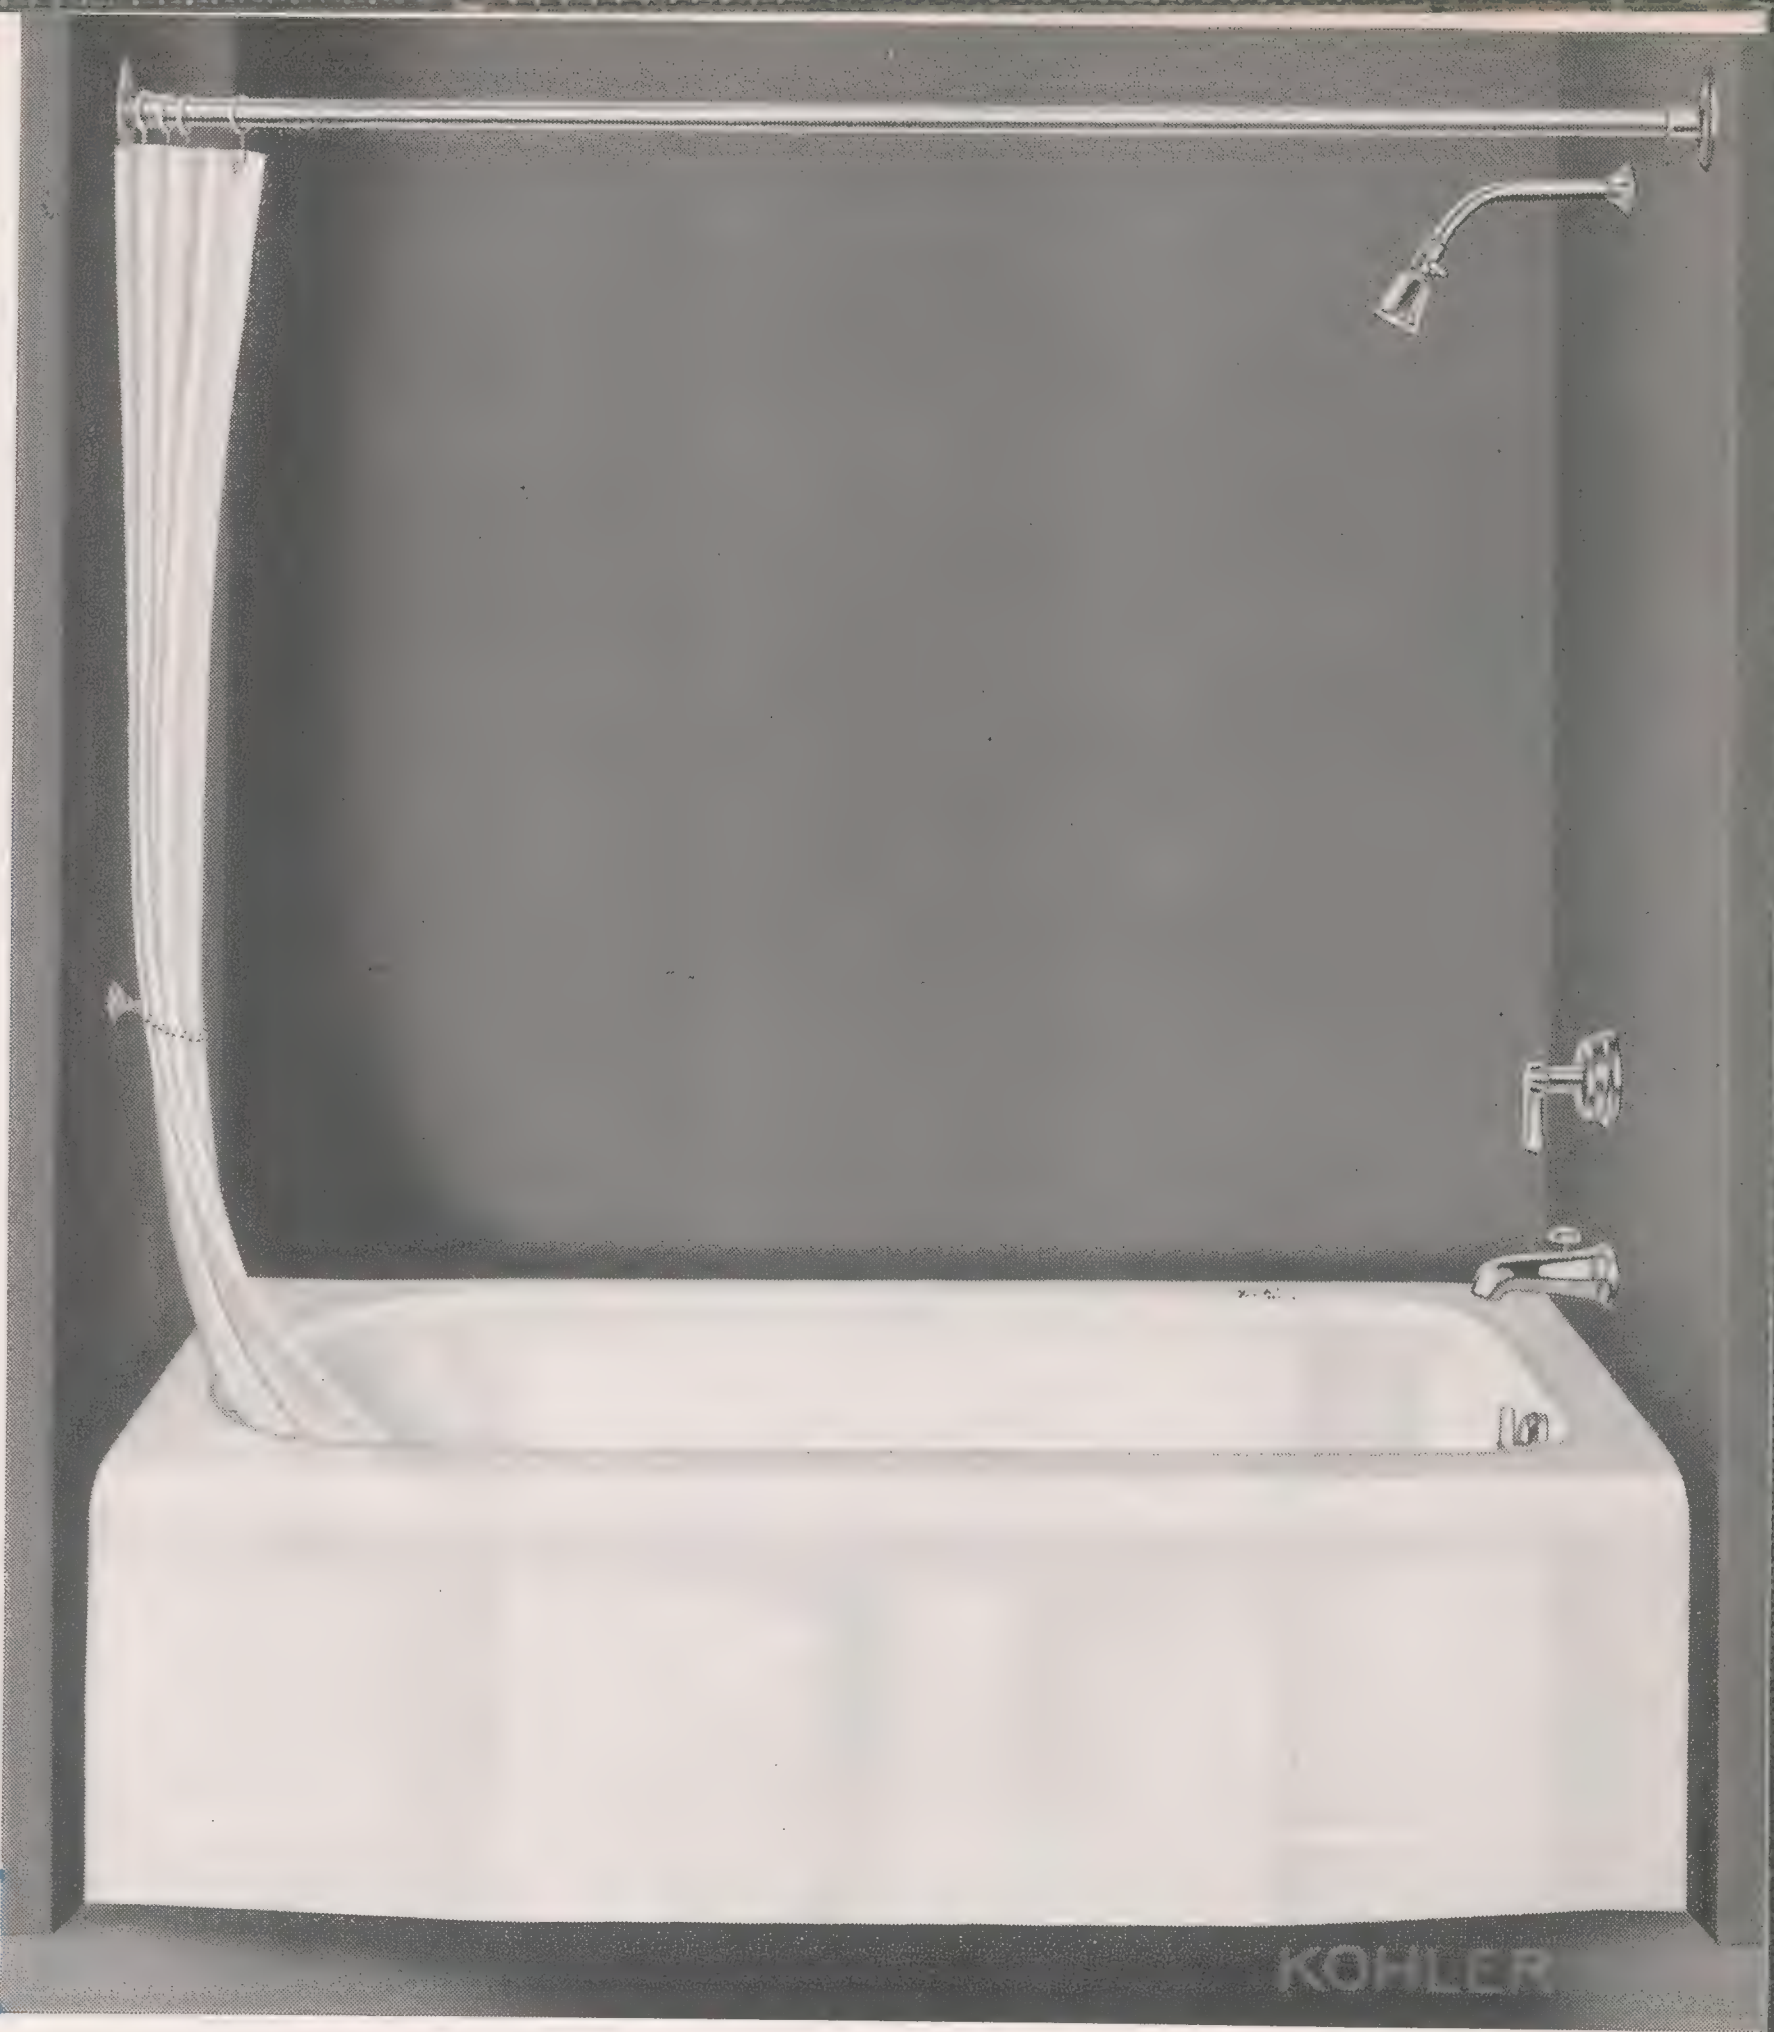

RIGHT OUTLET

COSMOPOLITAN **K-536-F** Sizes 4½′, 5′, 5½′

K-536-F Bath, recess, right outlet, with fittings illustrated.

K-536 Bath, recess, right outlet.

FITTINGS

K-7027 Triton shower and bath fitting, Niedecken mixer, ball joint shower head with volume regulator, diverter spout.

K-7150 1½″ pop-up drain.

K-9710 Curtain rod.

K-9720 Curtain hook and chain. (Curtain and pins not furnished.)

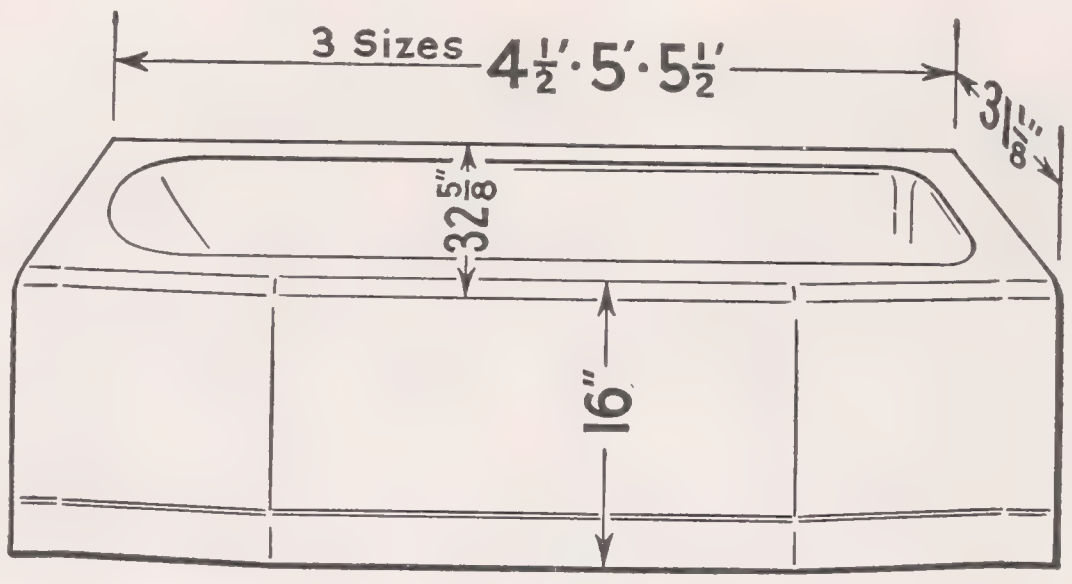

OTHER FITTINGS AVAILABLE **WITHOUT SHOWERS**

K-535-P Left Outlet
K-536-P Right Outlet



K-7100 Denton bath fitting.



K-7150 1½″ pop-up drain.

K-535-I Left Outlet
K-536-I Right Outlet

K-7100 Denton bath fitting.



K-7180 1½″ connected drain and overflow.

use Kohler Protek paste. See details on page 32.

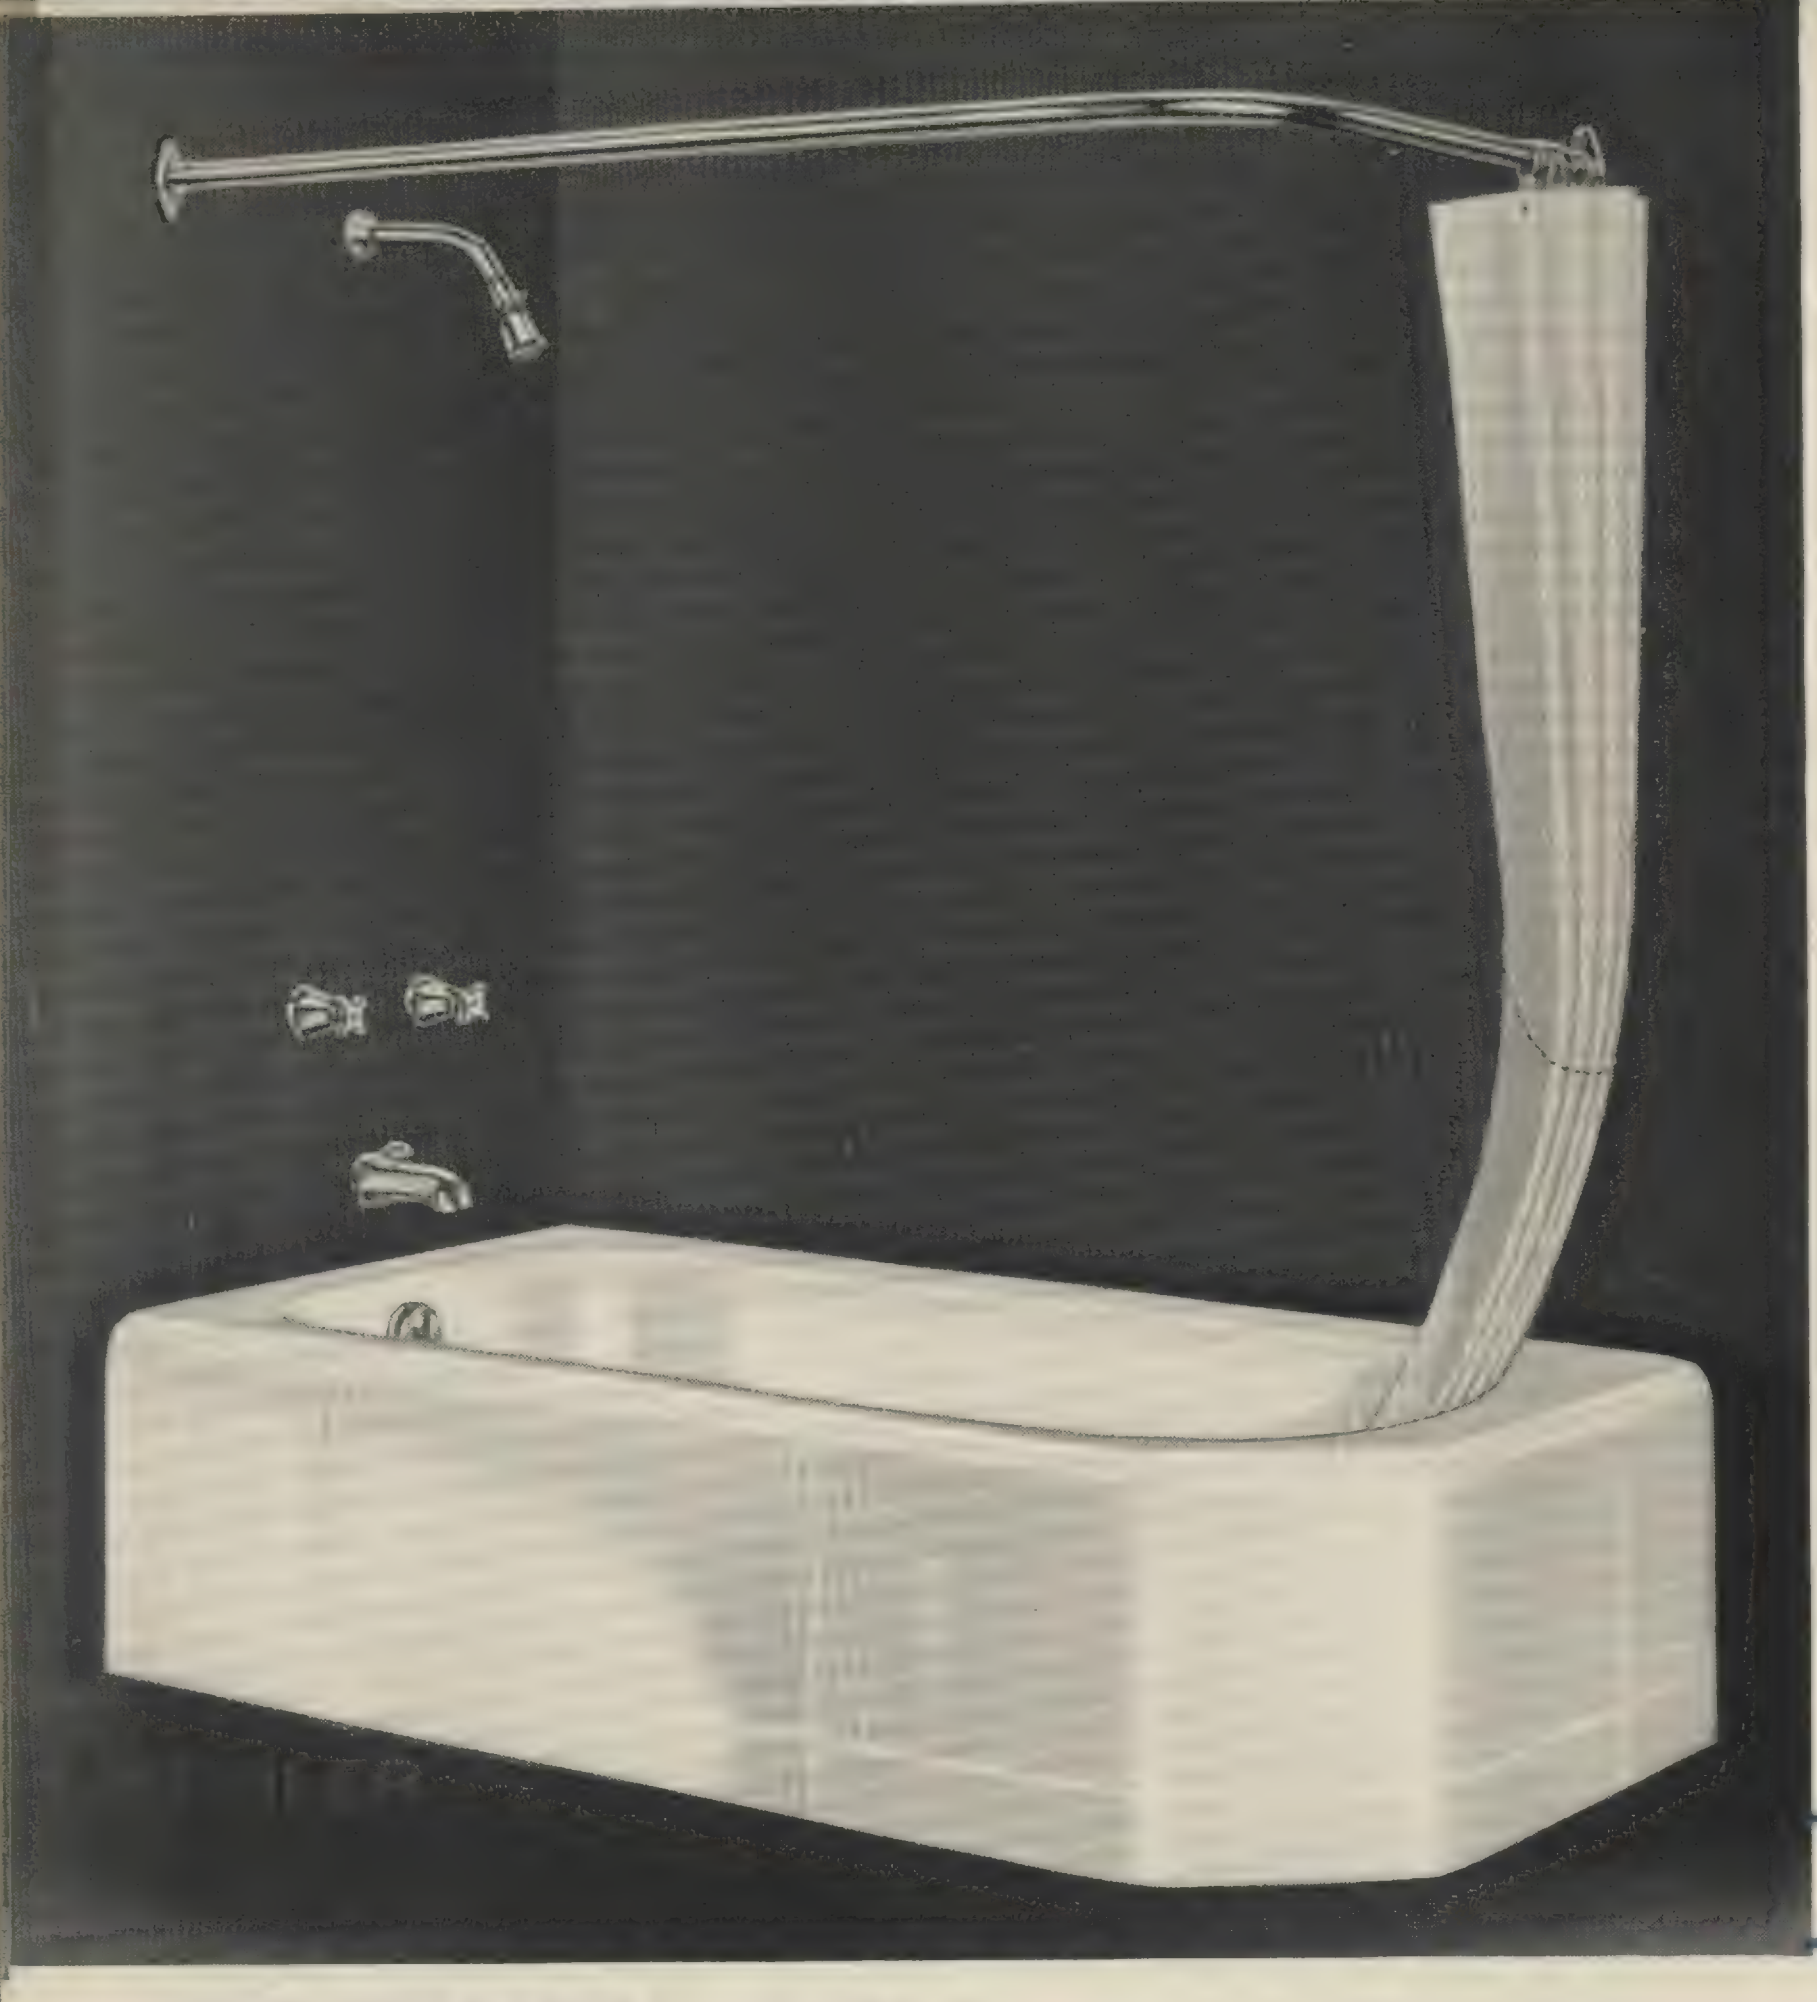

COSMOPOLITAN

Slope End for Reclining

Flat Bottom for Showering

Fast Draining for Easier Cleaning

For the Larger Bathroom. Popular for Modernizing

LEFT OUTLET

COSMOPOLITAN K-561-A

Sizes 4½′, 5′

K-561-A	Bath, left corner, left outlet, with fittings illustrated.
K-561	Bath, left corner, left outlet.
	FITTINGS
K-7032	Dalton shower and bath fitting, Remov Units, union couplings for ½″ I.P., ball joint shower head with volume regulator, diverter spout.
K-7150	1½″ pop-up drain.
K-9700	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

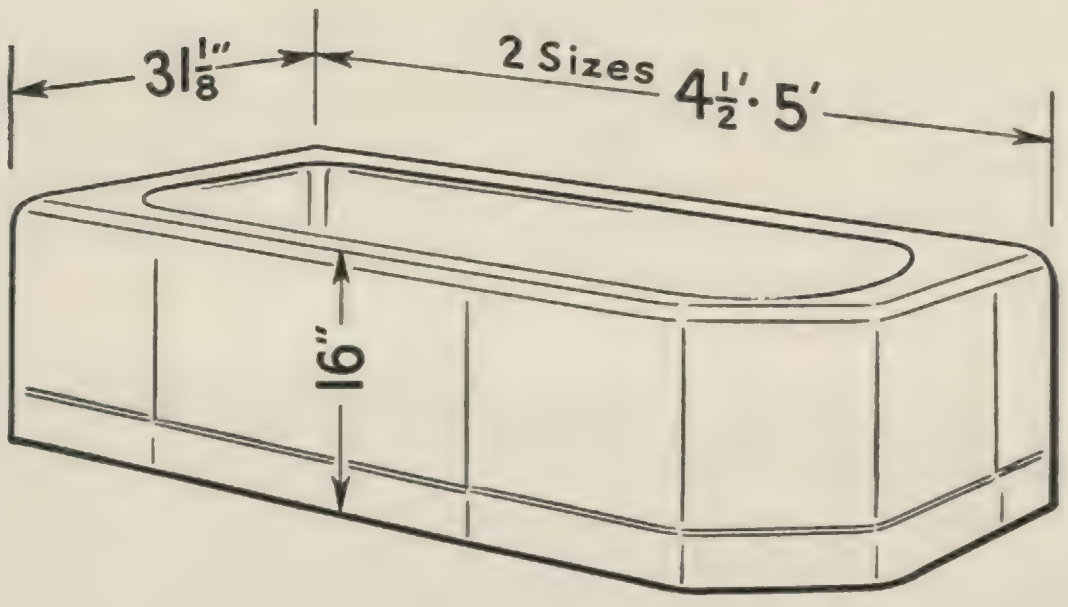

OTHER FITTINGS AVAILABLE WITH SHOWERS

K-561-F Left Outlet
K-564-F Right Outlet



K-7027 Triton shower and bath fitting with mixer and diverter spout

K-7150 1½″ pop-up drain.

K-561-E Left Outlet
K-564-E Right Outlet

K-7042 Dalney shower and bath fitting with diverter valve.

K-7150 1½″ pop-up drain.

Specify K-7180 for connected drain and overflow.

For protection of bath tub during construction,

ENAMELED CAST IRON CORNER BATH

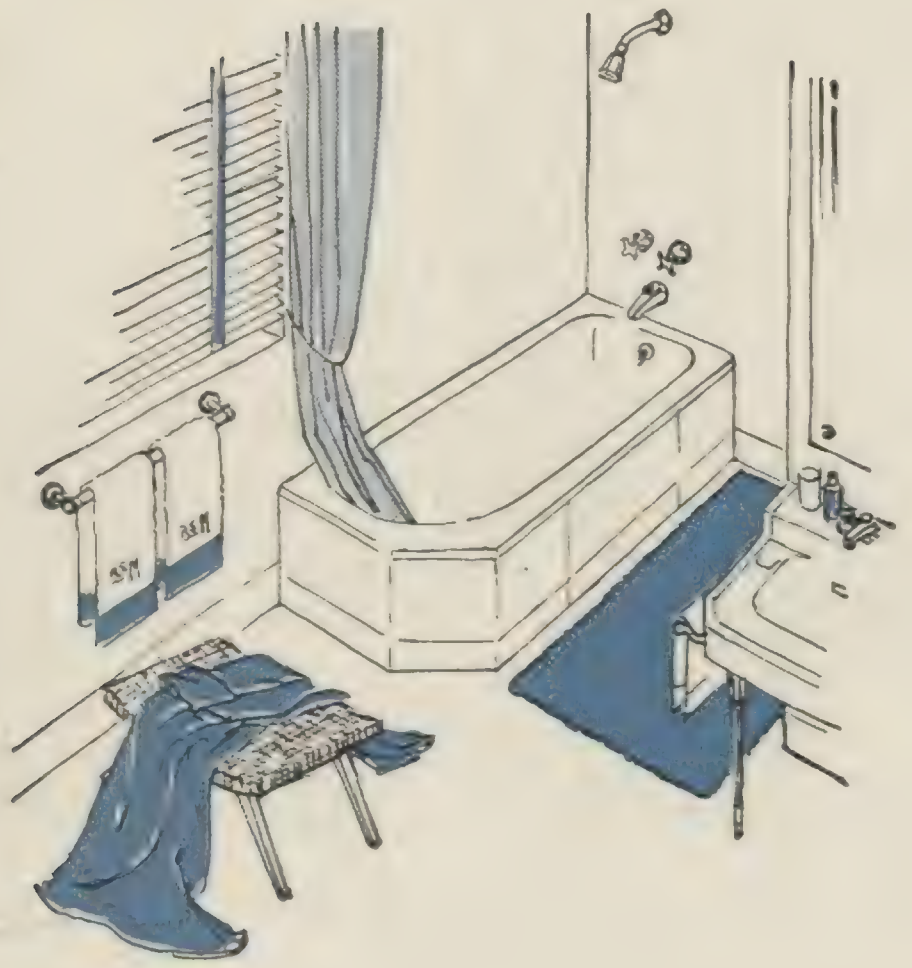

RIGHT OUTLET

OTHER FITTINGS AVAILABLE **WITHOUT SHOWERS**

K-561-P Left Outlet
K-564-P Right Outlet

K-561-I Left Outlet
K-564-I Right Outlet



K-7100 Denton bath fitting.



K-7100 Denton bath fitting.

K-7150 1½" pop-up drain.

K-7180 1½" connected drain and overflow.

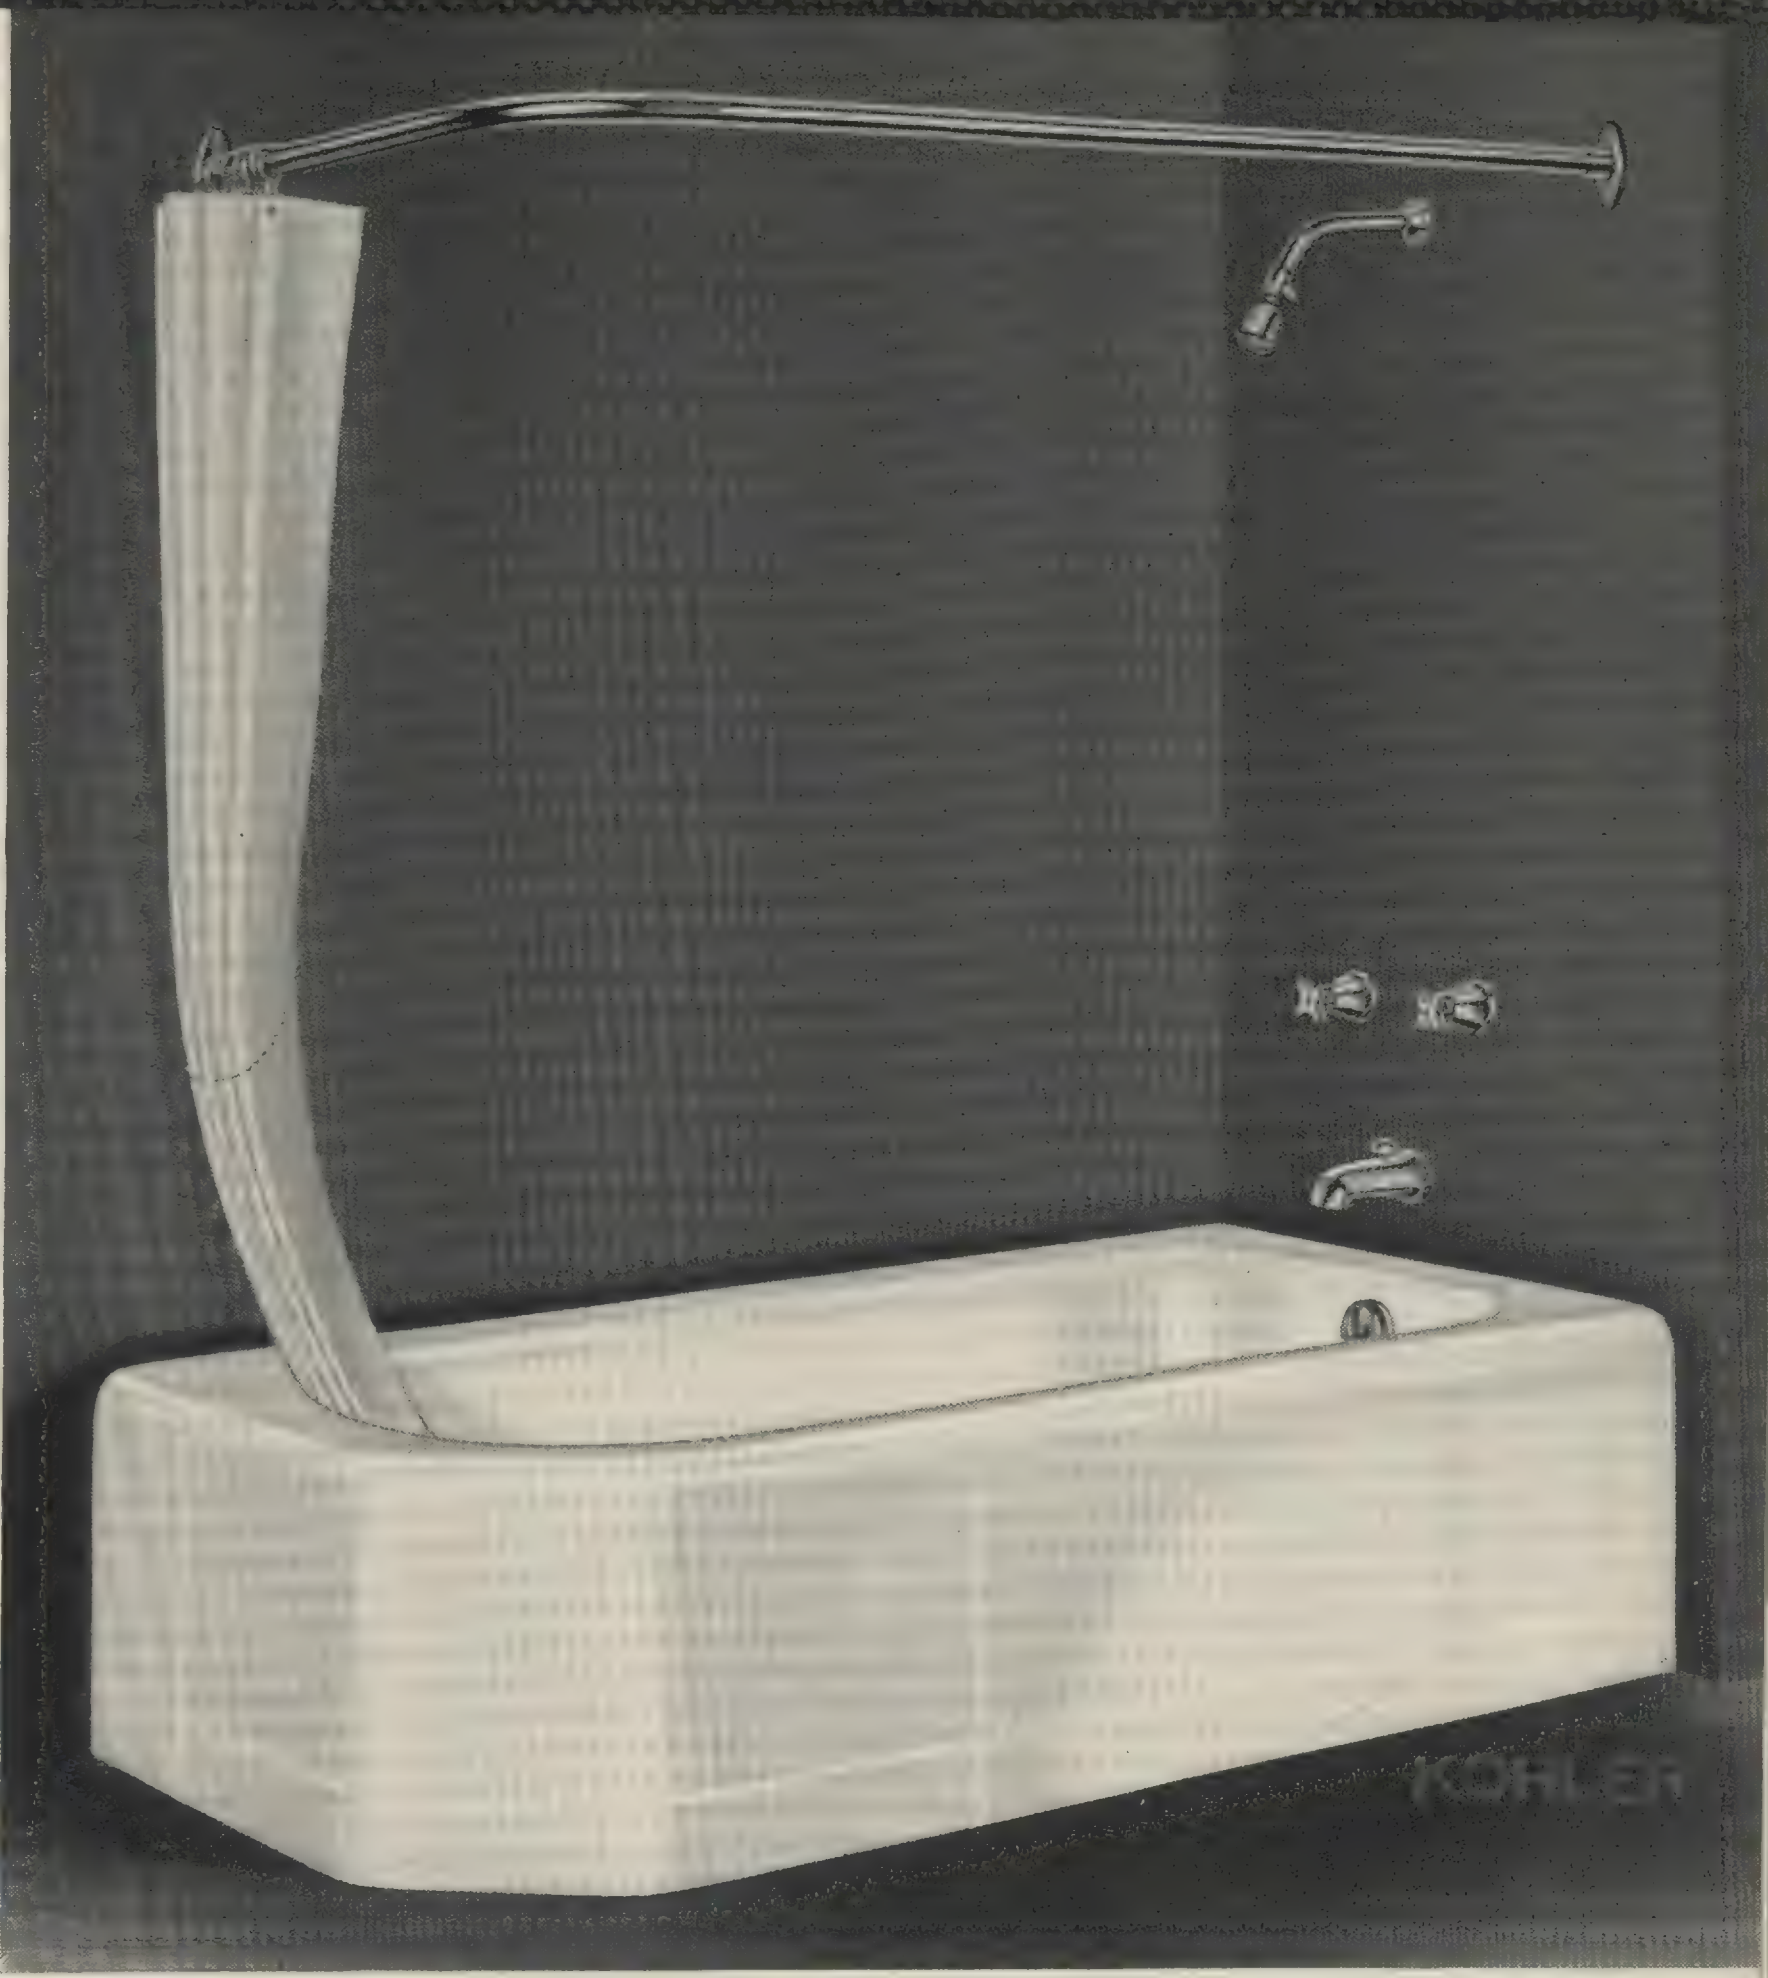

COSMOPOLITAN K-564-A

Sizes 4½', 5'

K-564-A	Bath, right corner, right outlet, with fittings illustrated.
K-564	Bath, right corner, right outlet.
	FITTINGS
K-7032	Dalton shower and bath fitting, Remov Units, union couplings for ½" I.P., ball joint shower head with volume regulator, diverter spout.
K-7150	1½" pop-up drain.
K-9700	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

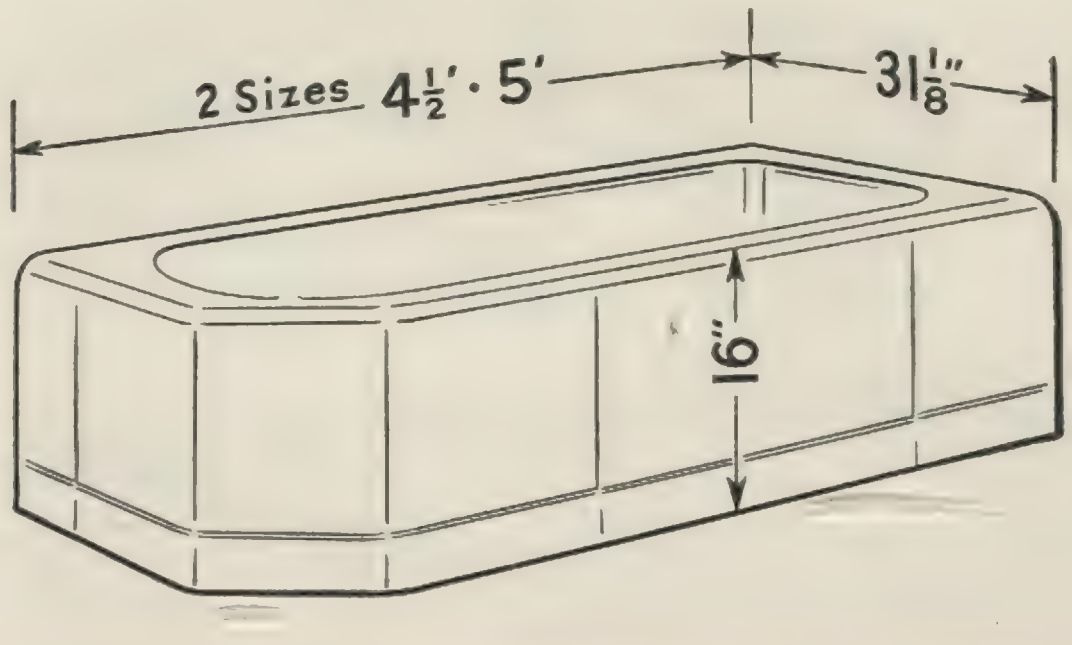

use Kohler Protek paste. See details on page 32.

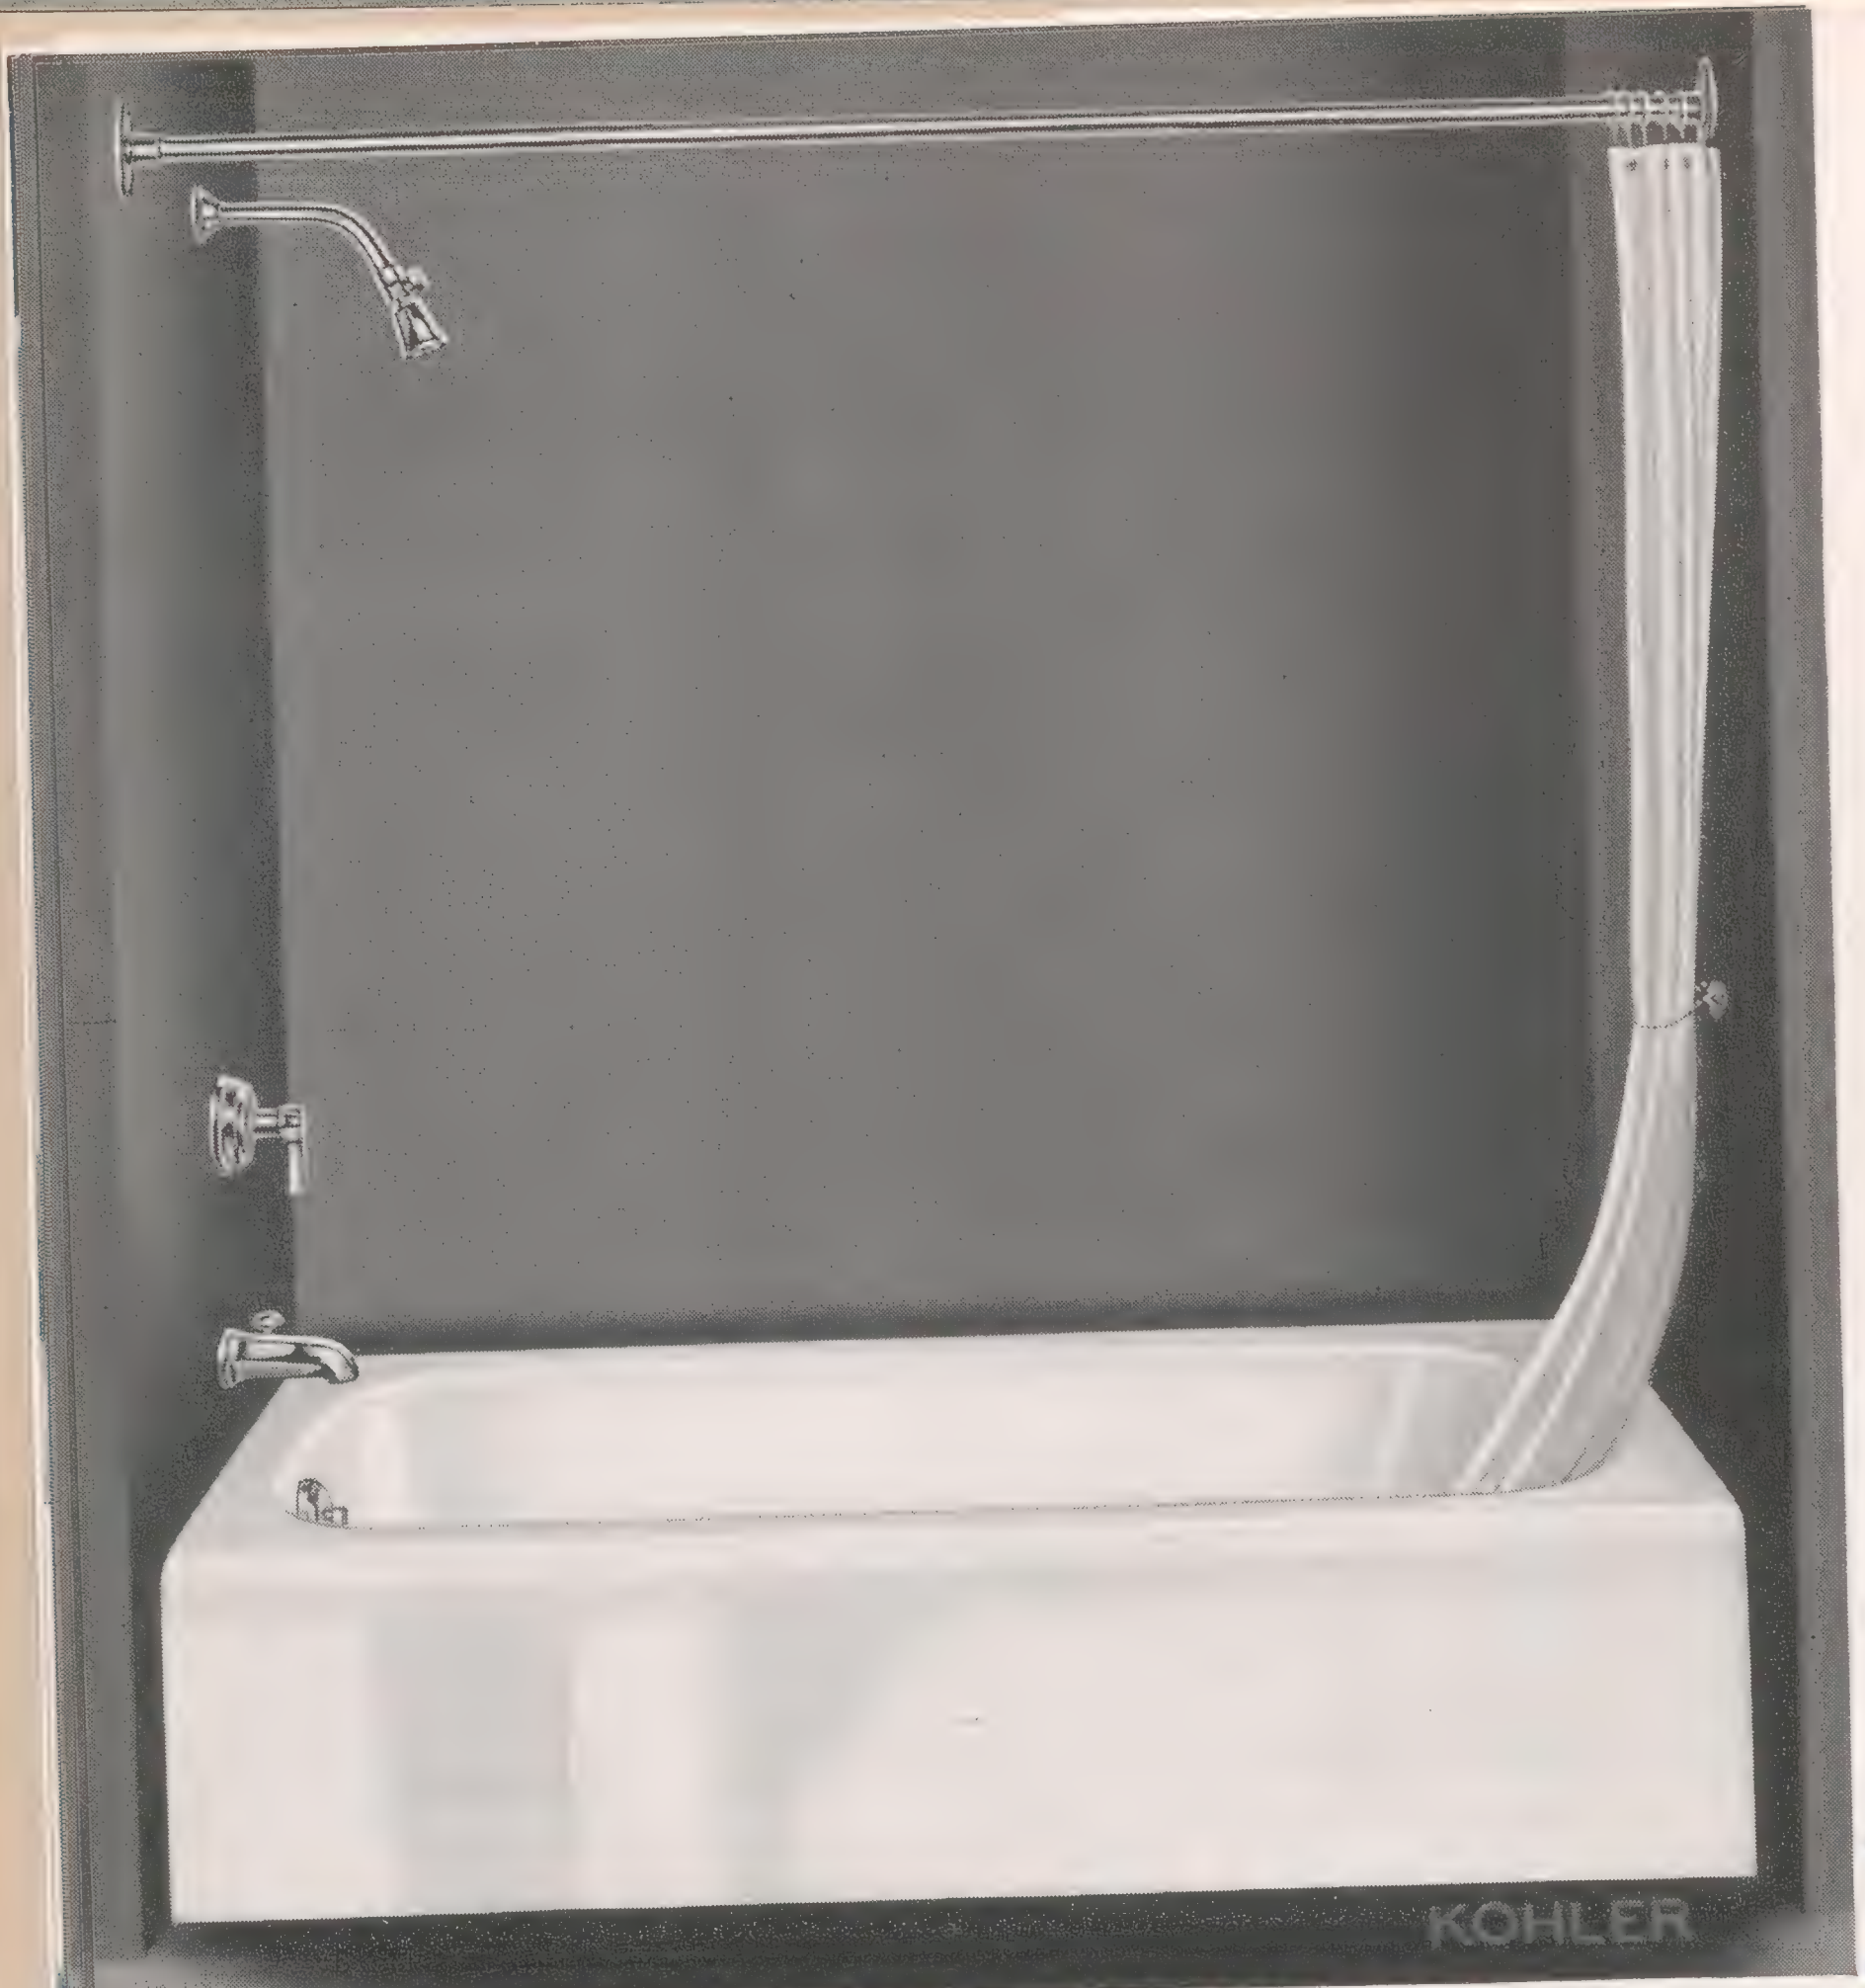

MINOCQUA

A Bath for Low Cost Housing

Full 5-Foot Length

Slope End for Reclining

LEFT OUTLET

MINOCQUA K-735-F Size 5′

K-735-F	Bath, recess, left outlet, with fittings illustrated.
K-735	Bath, recess, left outlet.

FITTINGS

K-7027	Triton shower and bath fitting, Niedecken mixer, ball joint shower head with volume regulator, diverter spout.
K-7172	1½″ pop-up drain.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

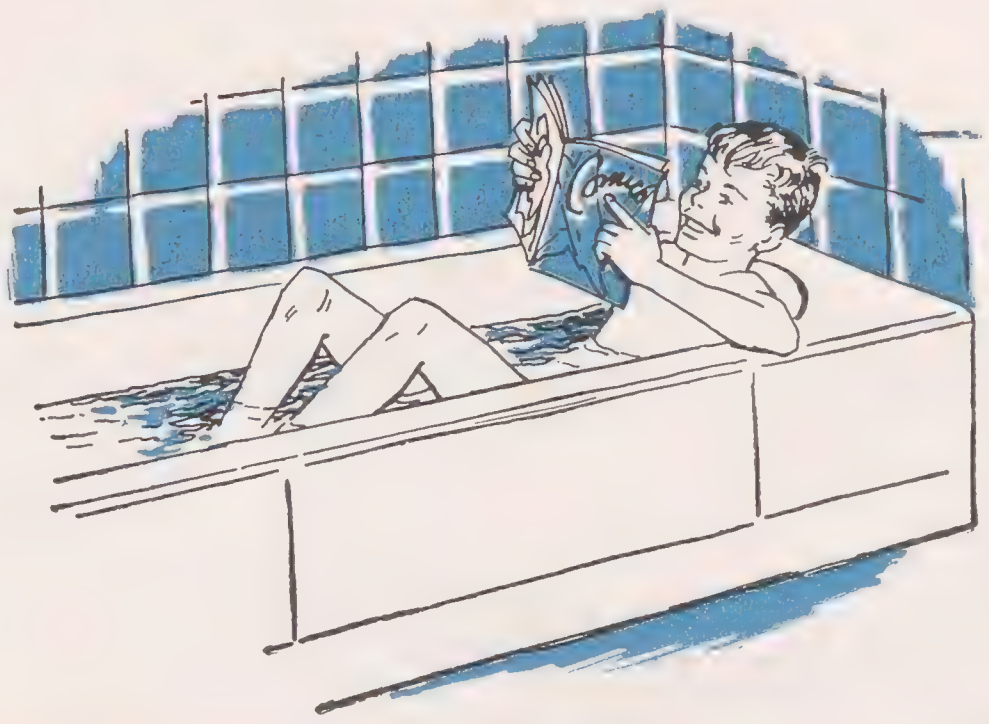

OTHER FITTINGS AVAILABLE WITH SHOWERS

K-735-A Left Outlet
K-736-A Right Outlet



K-7032 Dalton shower and bath fitting with diverter spout.



K-7172 1½″ pop-up drain.

K-735-E Left Outlet
K-736-E Right Outlet



K-7042 Dalney shower and bath fitting with diverter valve.



K-7172 1½″ pop-up drain.

For protection of bath tub during construction,

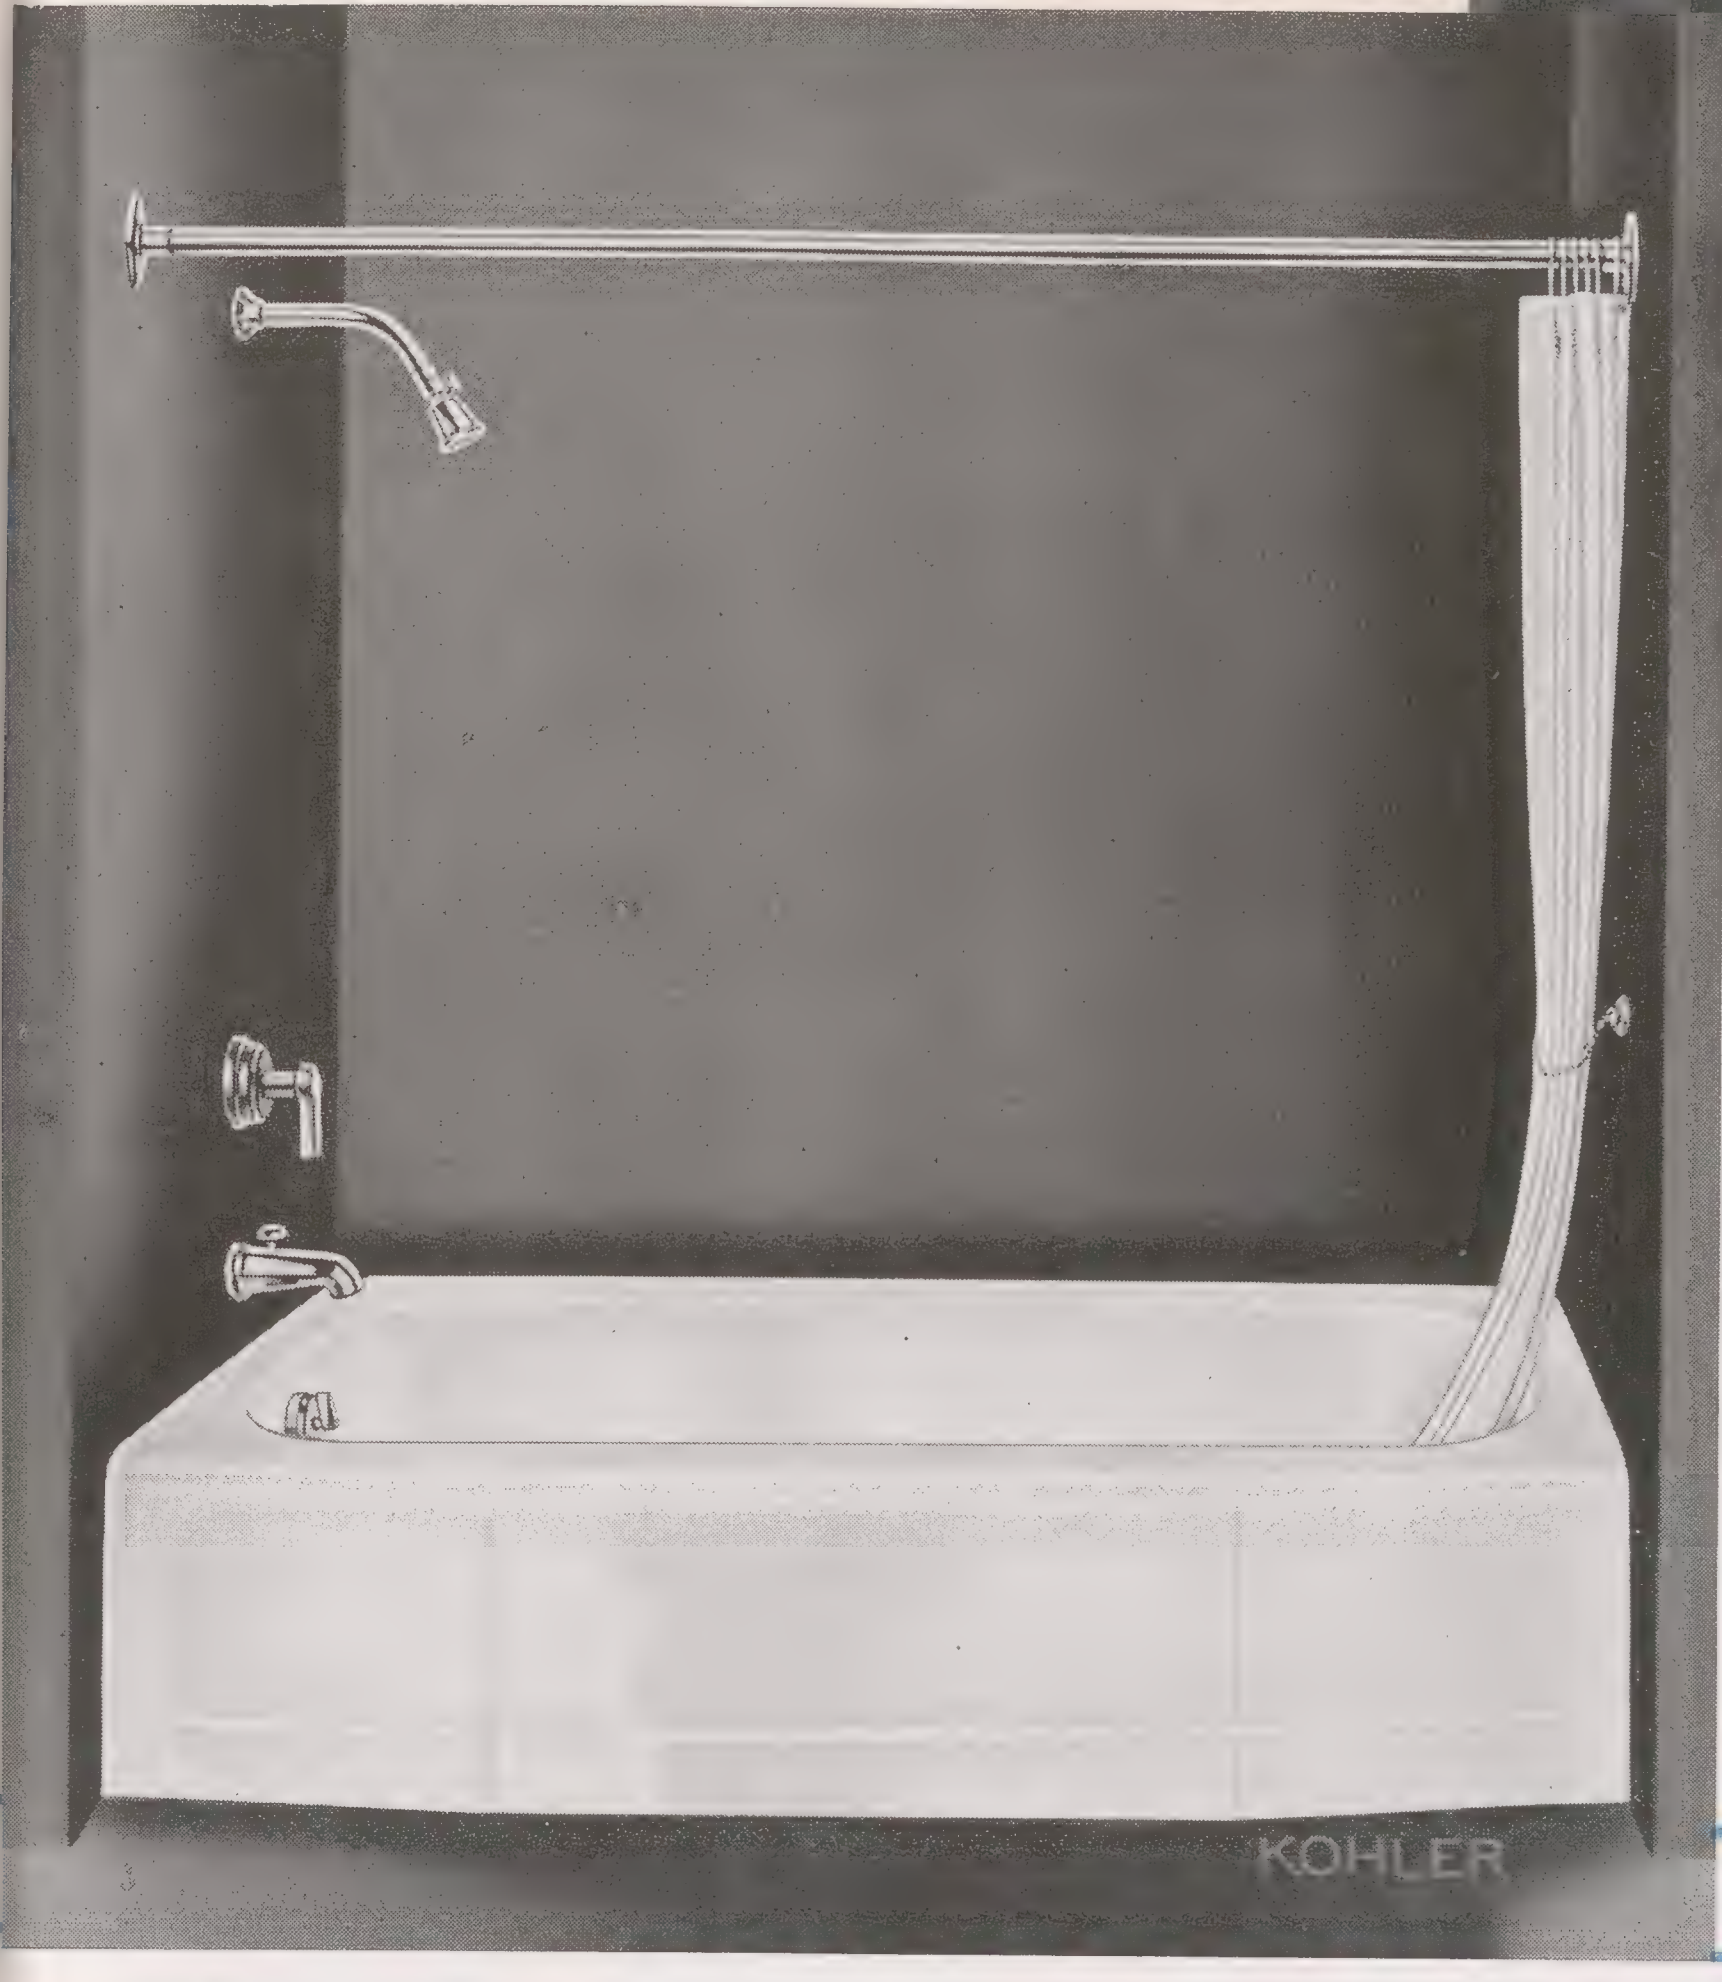

MINOCQUA
ENAMELED CAST IRON
BENCH BATH

Back and End Rims at Right Angles for Easy Installation

Full 5-foot Length

Fast Draining for Easier Cleaning

LEFT OUTLET

OTHER FITTINGS AVAILABLE **WITHOUT SHOWERS**

MINOCQUA K-725-F

Size 5′
Height 14″

K-725-F	Bath, recess, left outlet, with fittings illustrated.
K-725	Bath, recess, left outlet.
	FITTINGS
K-7027	Triton shower and bath fitting, Niedecken mixer, ball joint shower head with volume regulator, diverter spout.
K-7172	1½″ pop-up drain.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

K-726-F	Bath, recess, right outlet, with above fittings.

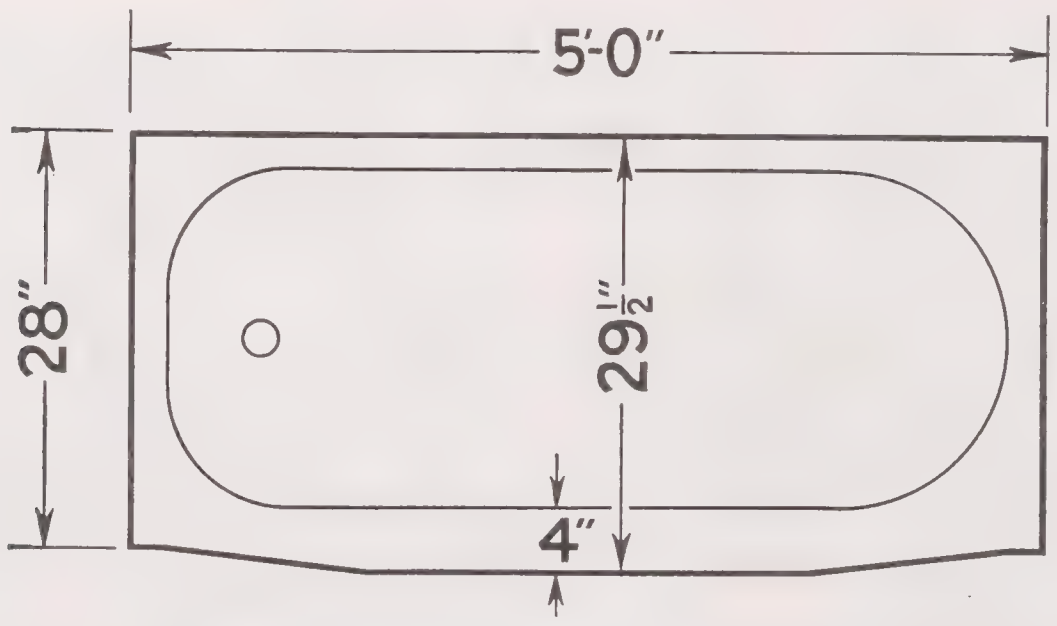

Top View of MINOCQUA Bath

K-725-P Left Outlet
K-726-P Right Outlet



K-7100 Bath fitting.

K-725-I Left Outlet
K-726-I Right Outlet

K-7100 Bath fitting.



K-7172 1½″ pop-up drain.



K-7185 1½″ connected drain and overflow.

118M-1-57 Printed in U. S. A.

For protection of bath tub during construction use Kohler Protek paste. See details on page 32.

MINOCQUA
ENAMELED CAST IRON
BENCH BATH

Convenient 4″ Wide Bench

Slope End for Reclining

Flat, Safe Bottom

RIGHT OUTLET

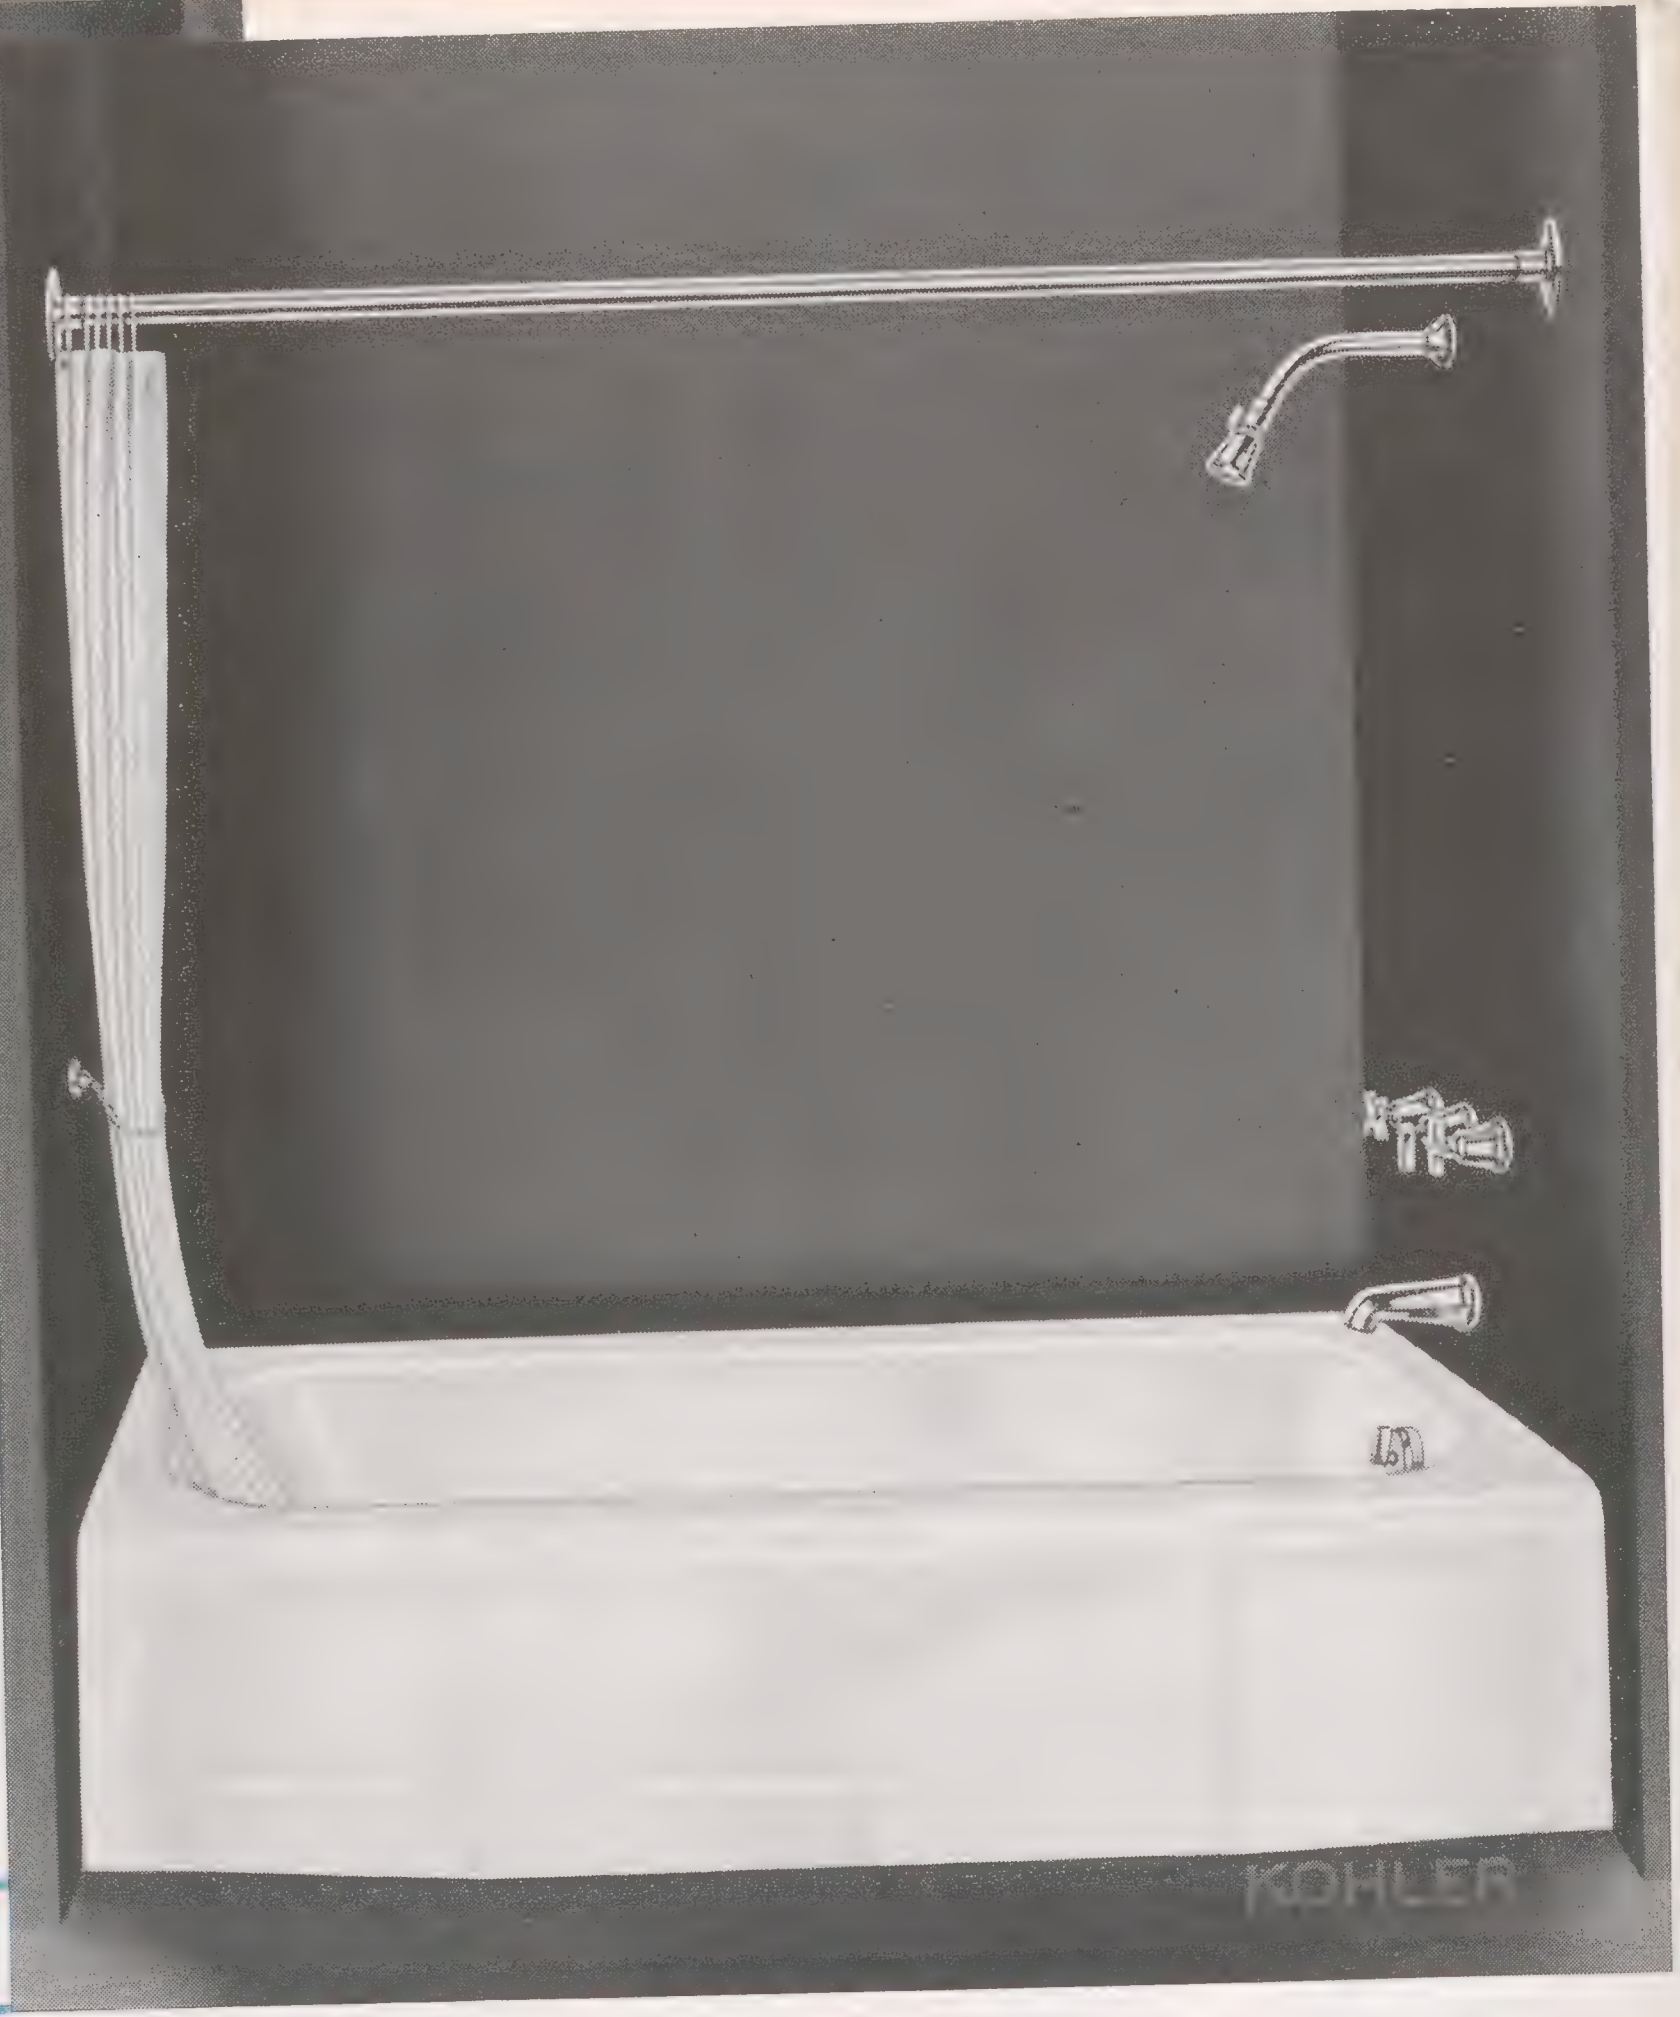

OTHER FITTINGS AVAILABLE WITH SHOWERS

K-725-F Left Outlet
K-726-F Right Outlet



K-7027 Triton shower and bath fitting with mixer and diverter spout



K-7172 1½″ pop-up drain.

K-725-A Left Outlet
K-726-A Right Outlet

K-7032 Shower and bath fitting with diverter spout.



K-7172 1½″ pop-up drain.

MINOCQUA K-726-E

Size 5′
Height 14″

K-726-E	Bath, recess, right outlet, with fittings illustrated.
K-726	Bath, recess, right outlet.
	FITTINGS
K-7042	Dalney shower and bath fitting with diverter valve, ball joint shower head with volume regulator.
K-7172	1½″ pop-up drain.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

K-725-E	Bath, recess, left outlet, with above fittings.

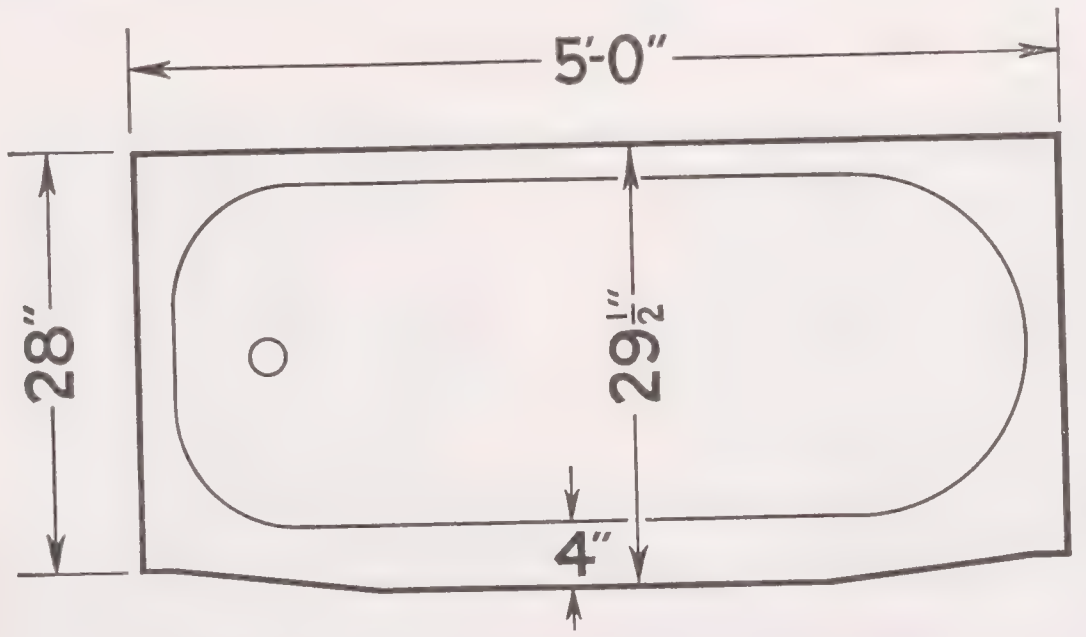

Top View of MINOCQUA Bath

ENAMELED CAST IRON LOW COST RECESS BATH

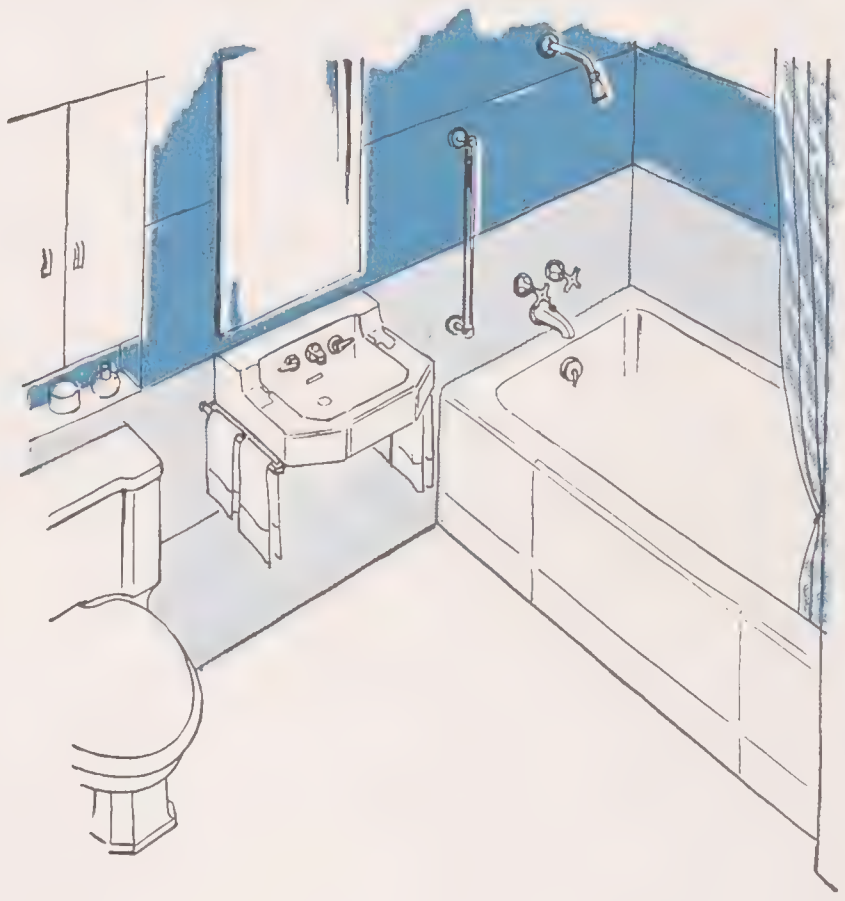

RIGHT OUTLET

OTHER FITTINGS AVAILABLE **WITHOUT SHOWERS**

K-735-P Left Outlet
K-736-P Right Outlet



K-7100 Denton bath fitting.



K-7172 1½″ pop-up drain.

K-735-I Left Outlet
K-736-I Right Outlet



K-7100 Denton bath fitting.



K-7185 1½″ connected drain and overflow.

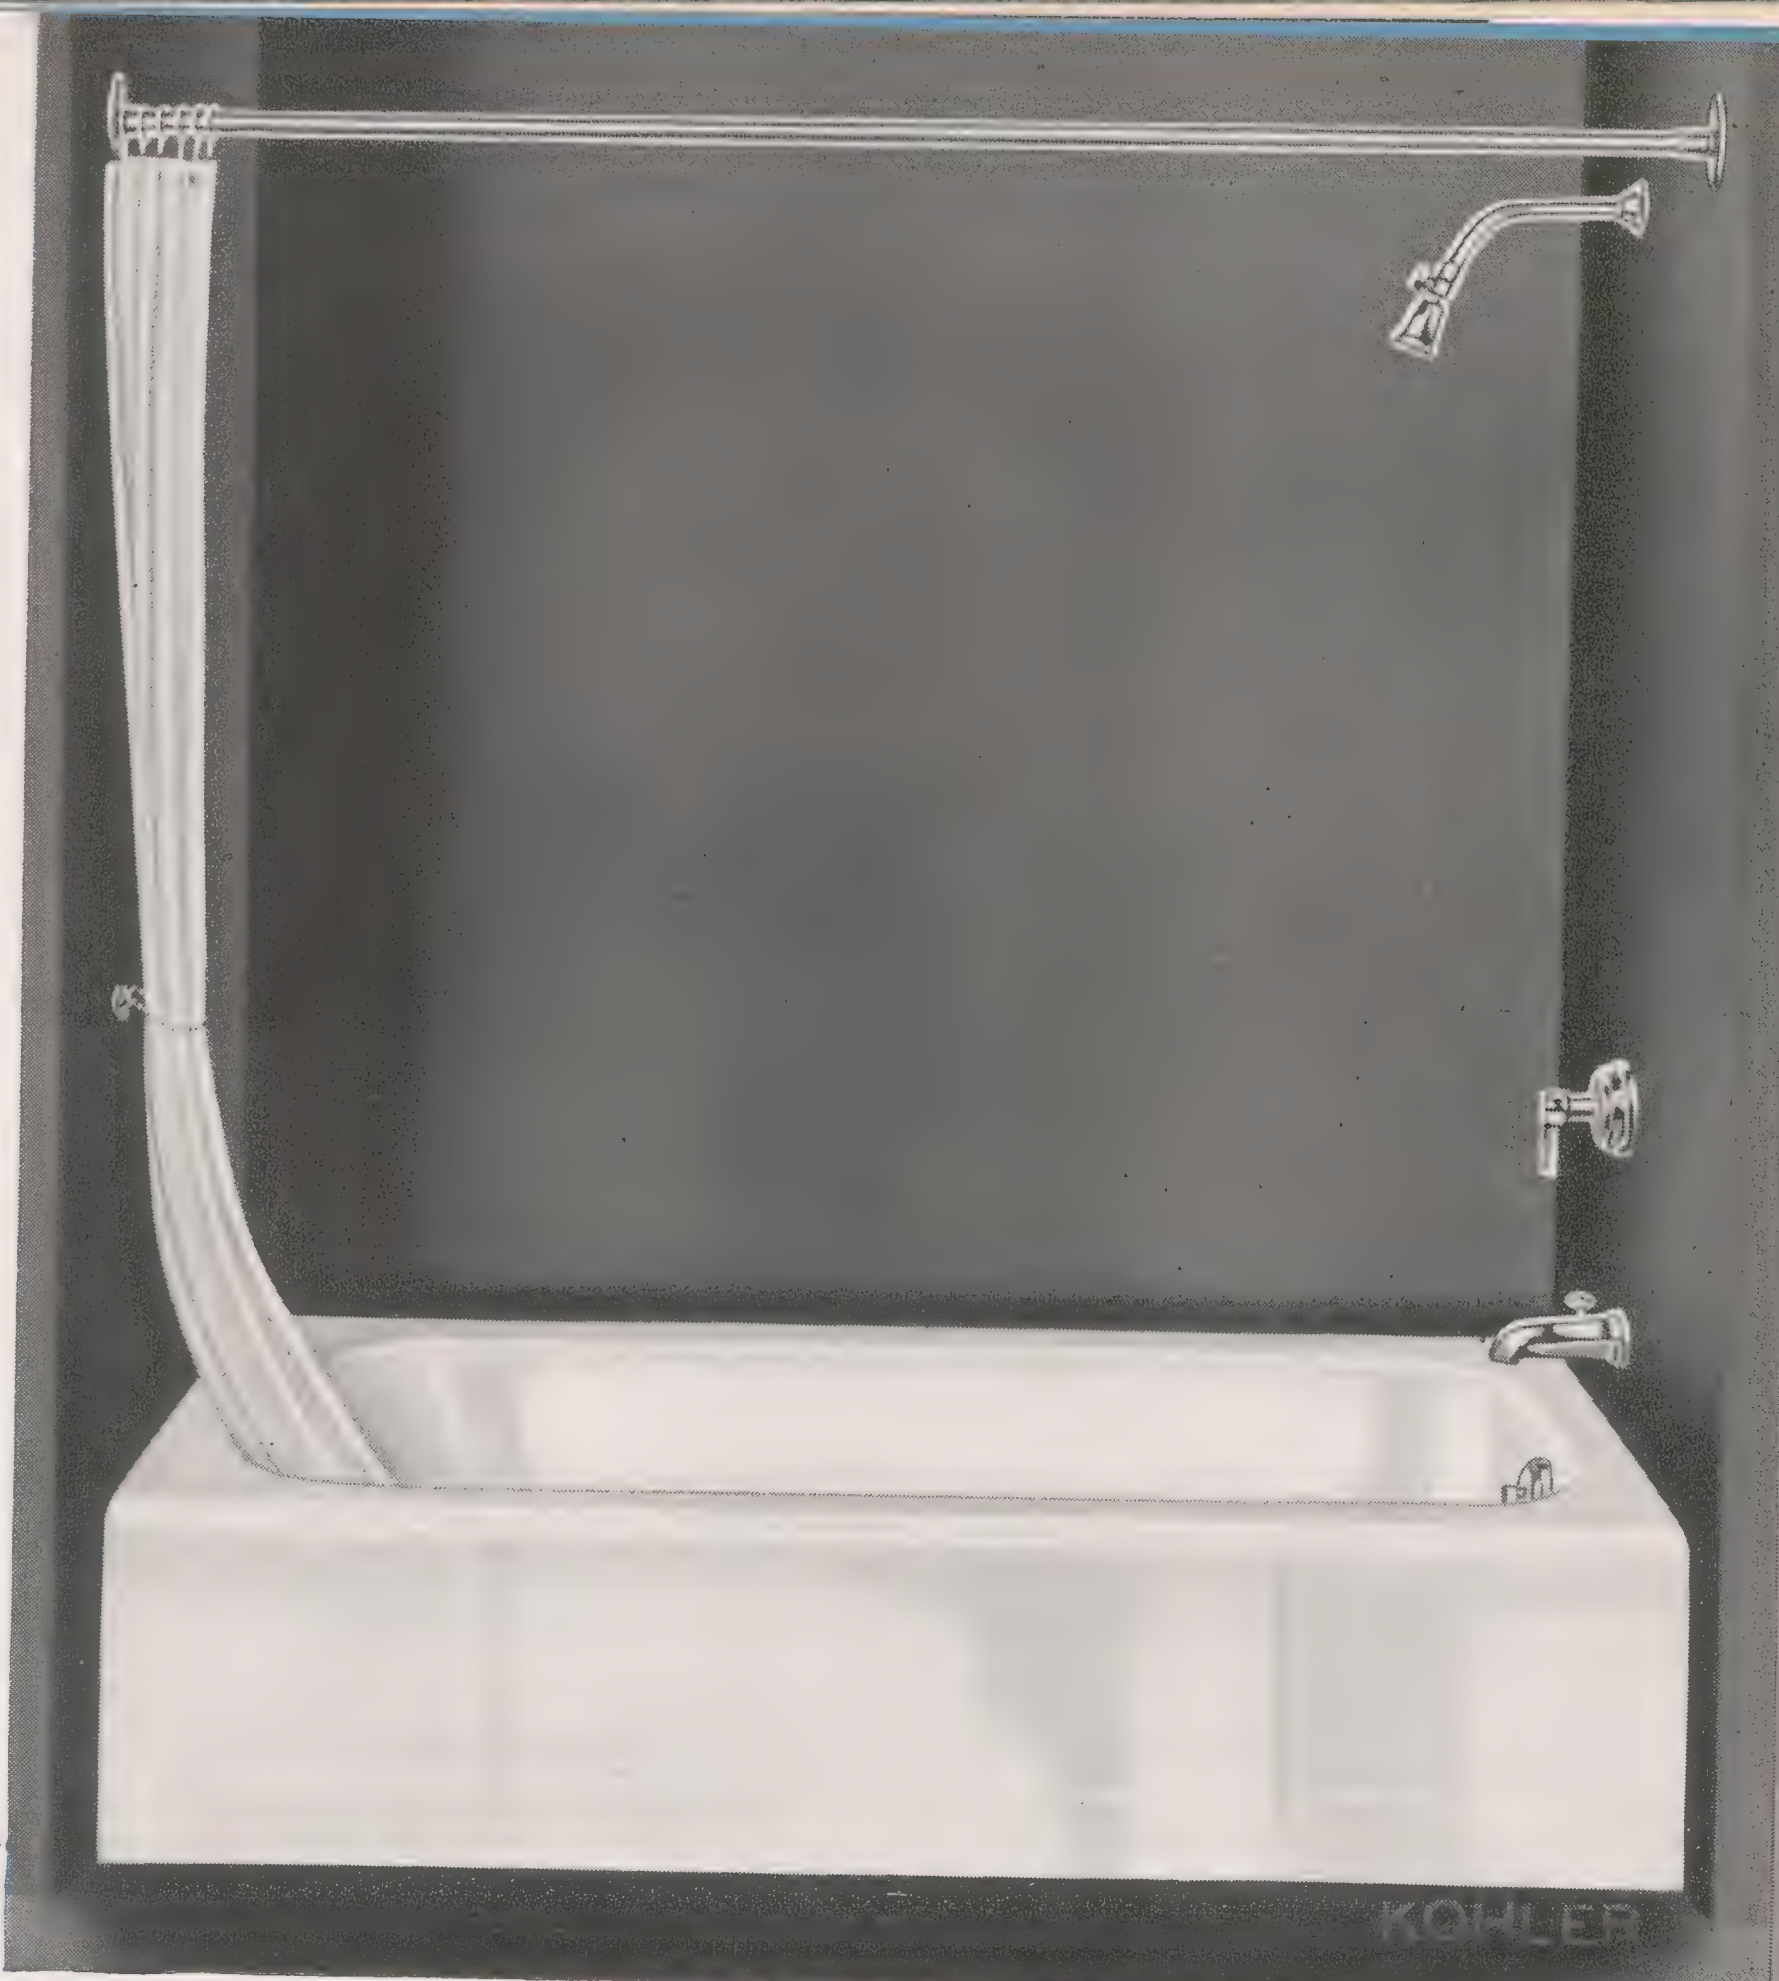

MINOCQUA K-736-F

Size 5′

K-736-F	Bath, recess, right outlet, with fittings illustrated.
K-736	Bath, recess, right outlet.

FITTINGS

K-7027	Triton shower and bath fitting, Niedecken mixer, ball joint shower head with volume regulator, diverter spout.
K-7172	1½″ pop-up drain.
K-9710	Curtain rod.
K-9720	Curtain hook and chain. (Curtain and pins not furnished)

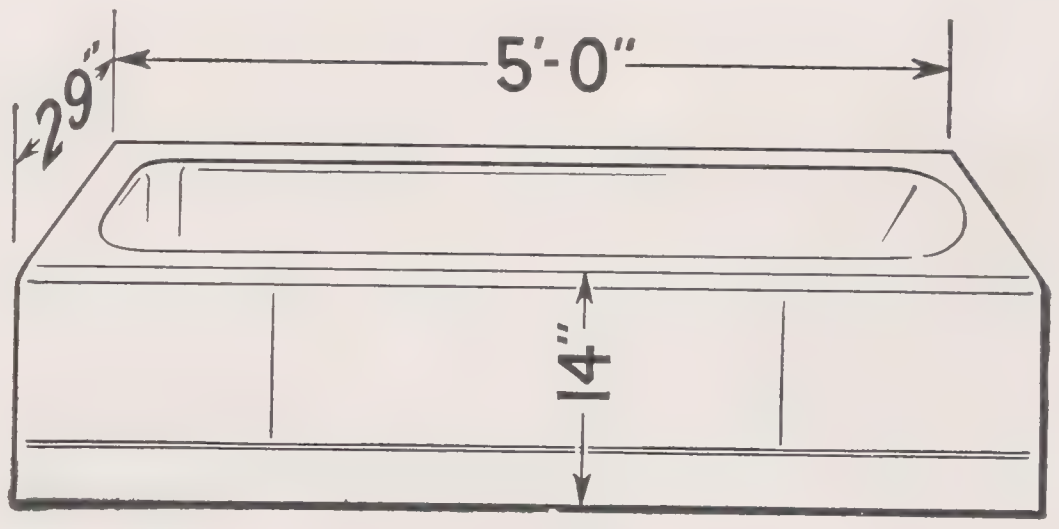

use Kohler Protek paste. See details on page 32.

LIBERTY

FREE STANDING ENAMELED CAST IRON BATH

K-1000-T	Bath with **K-7115** double bath faucet with over rim spout, ½-inch O.D. supply pipes, and connected drain and overflow.
K-1000	Bath only.

LENGTH OVERALL	**4½'**	**5'**
WIDTH OVERALL	**30"**	**30"**
HEIGHT OVERALL	**20"**	**20"**

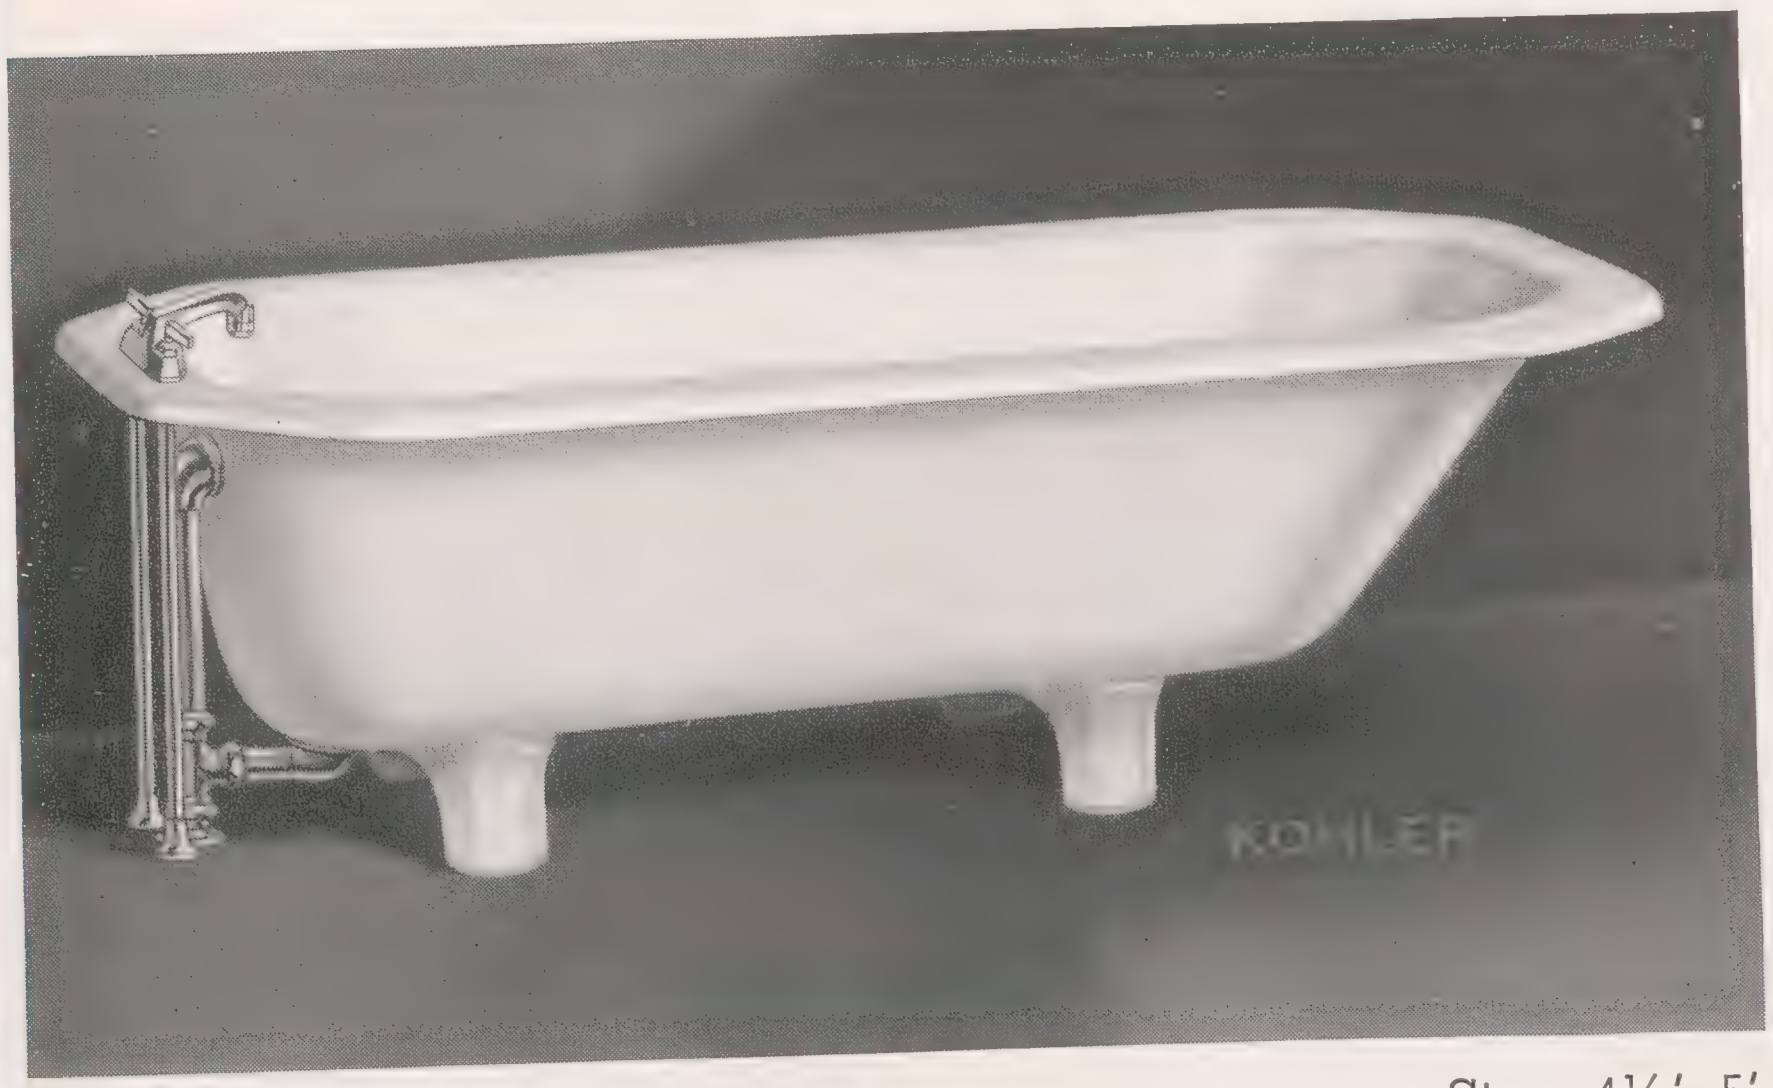

LIBERTY K-1000-T

Sizes 4½', 5'

PROPER INSTALLATION IS IMPORTANT

TIGHT WALL



A Simple, Easy-To-Use Bath Hanger. Anchors Tub Firmly To Studding.

The **K-1170** Kohler Tight-Wall bath hanger is made of metal with an upper and lower shelf. It is practical for use on studding, furring strips and flat walls.

Provides a firm anchorage and is simple and easy to use, holding the bath securely against wall and preventing cracks in the wall.

Four Tight-Wall hangers are used to anchor a recess bath; three for corner baths.



K-1170

PROTEK

To Apply

KOHLER
PROTEK
A powder paste used with newspapers to protect the bath tub from dirt and injury from the time it is installed until ready to be used.
Preserves the high glaze of Kohler enamel. Easily mixed, applied and removed.
Kohler Co., Kohler, Wis.
Directions for mixing, applying and removing are inside of bag.
Read Them Carefully

K-1180

Provides a Safe Covering for Bath During Building Construction and Installation

Protek provides a safe and inexpensive medium for the protection of the lustrous enameled surface of the bath while the bathroom is being built.

It comes in powder form, and when mixed with water forms a paste, which, when applied with several thicknesses of ordinary newspapers, produces, when dry, a tough and strong covering.

Protek will not etch or injure the high glaze of Kohler enamel. To remove, soak the paper with water. It peels off easily.

KOHLER LAVATORIES

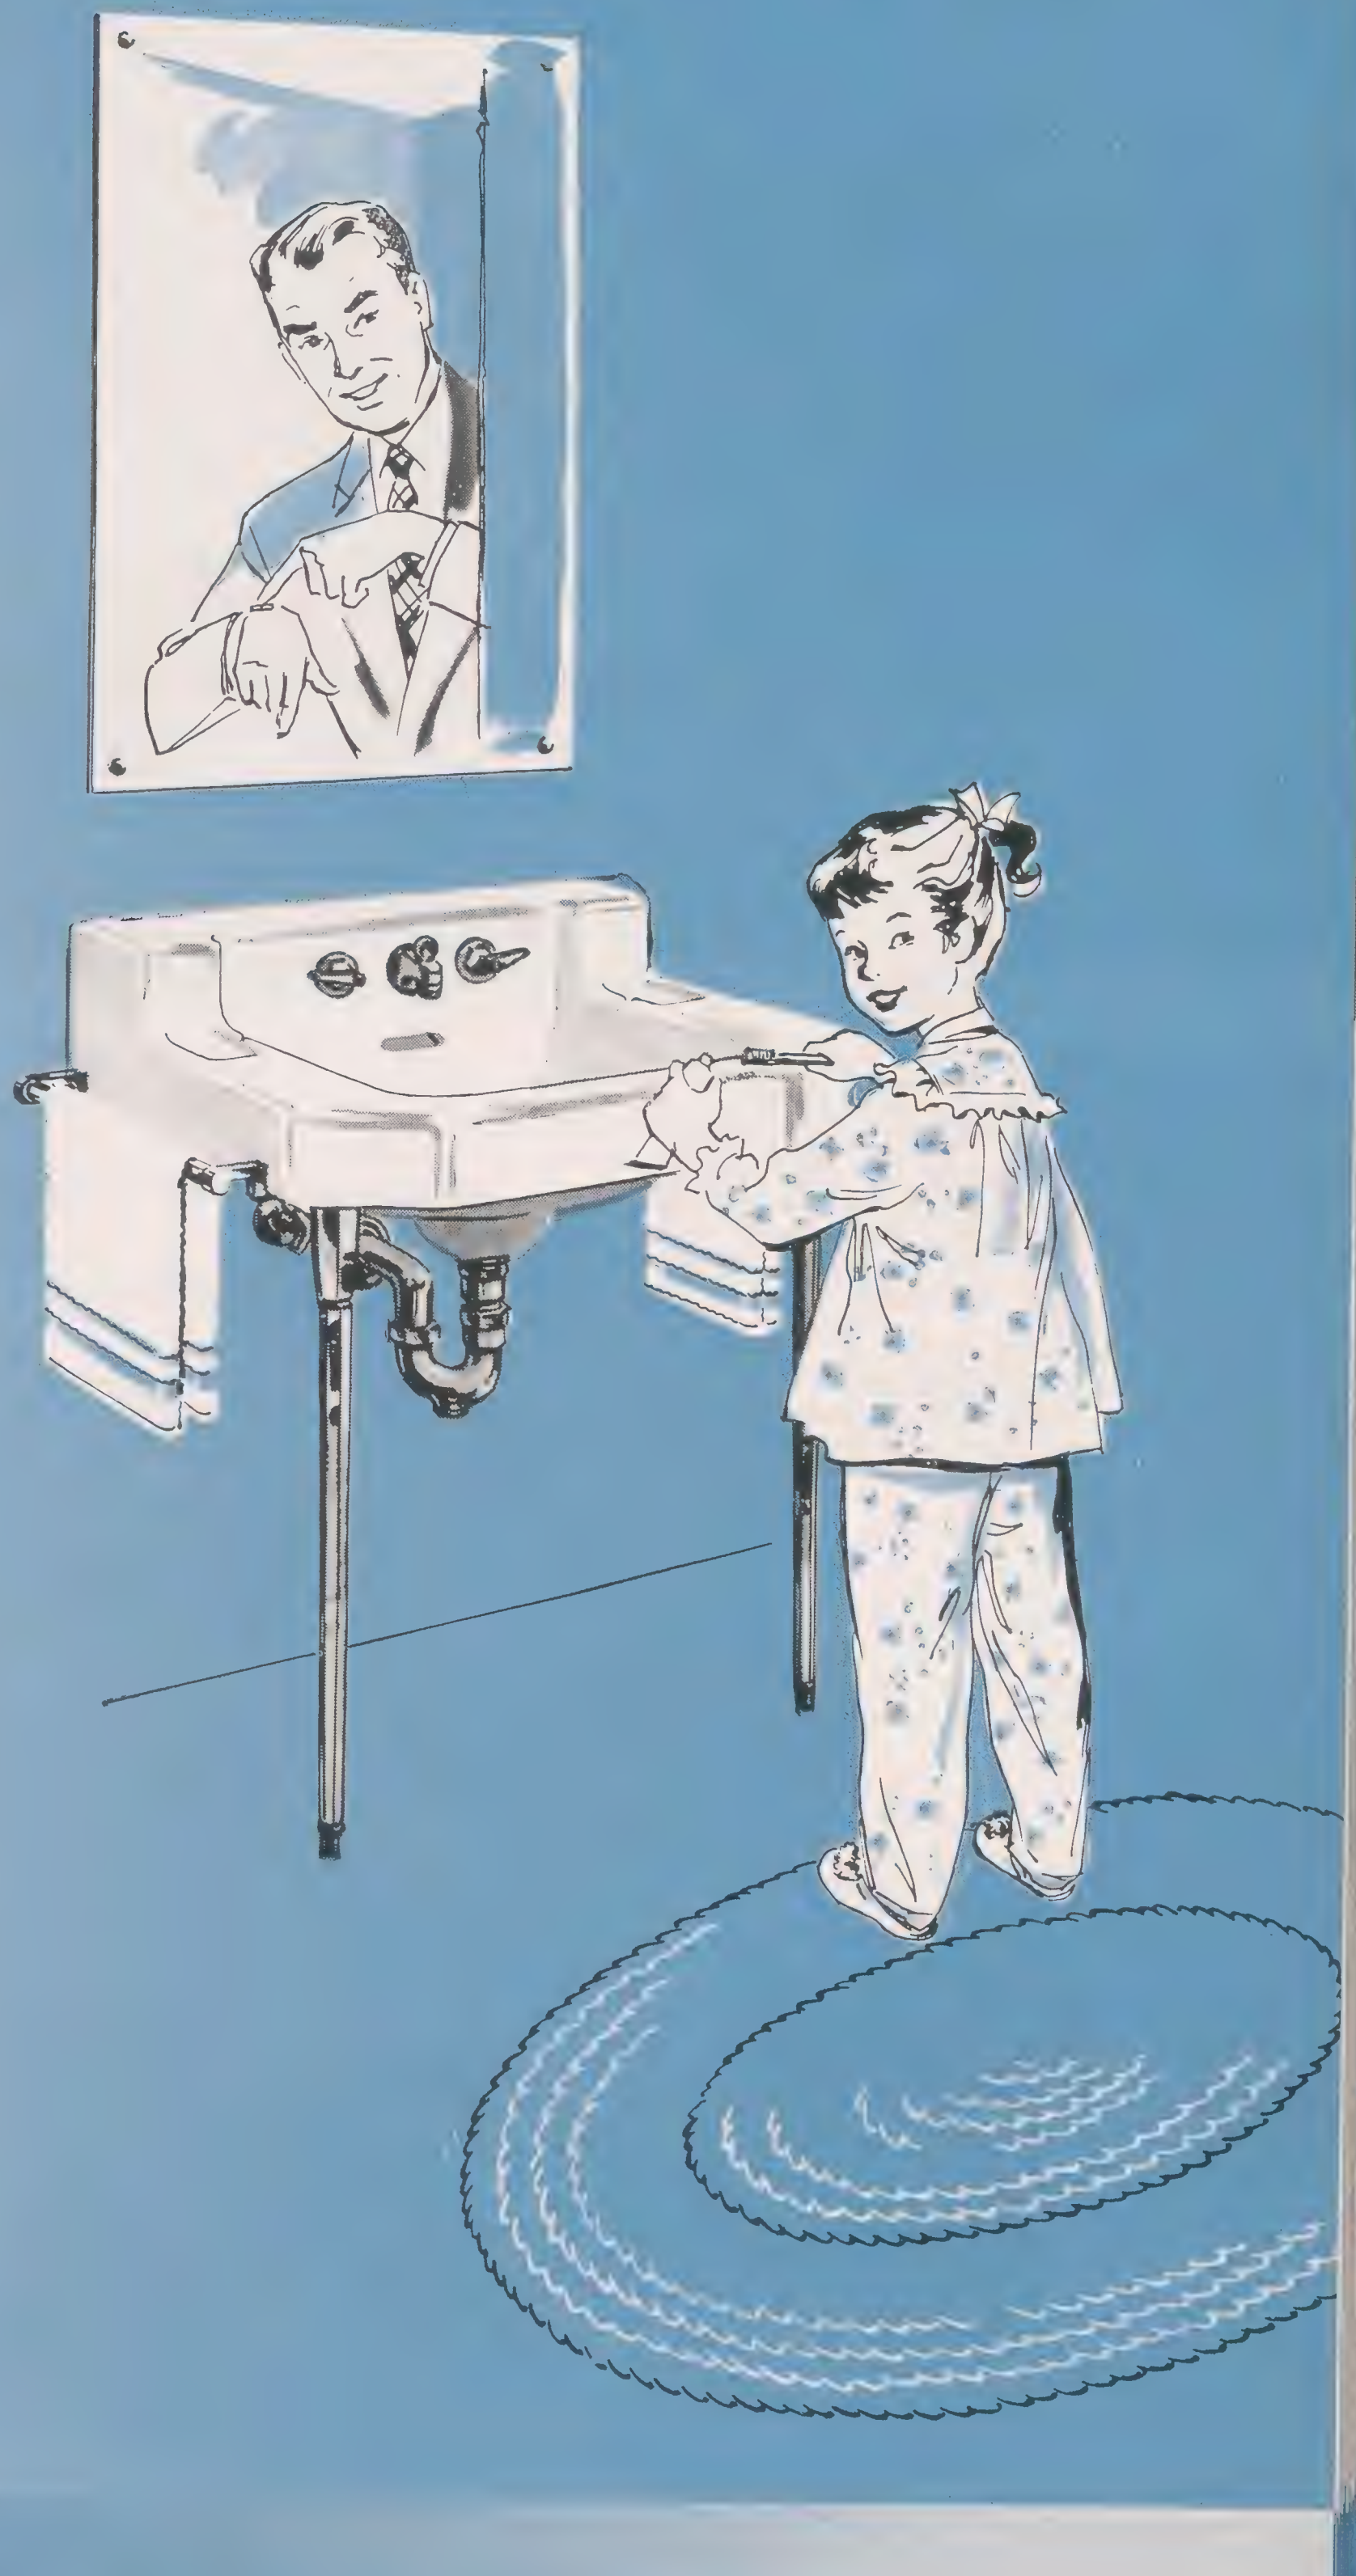

A Kohler lavatory has the graceful, clean-cut beauty of sound basic design which complements other Kohler fixtures. Whether installed in period or modern decoration, a Kohler ensemble is always in good taste.

Durable, smooth, lustrous surfaces that are inviting to use and easy to keep clean, characterize all Kohler lavatories, whether made of enameled cast iron or of vitreous china.

The extensive Kohler line embraces the popular shelf type with built-in fittings, a notable development; lavatories with raised ledge, with back, for corner or dental use, and models for building into counter top or cabinet.

In order to best serve the public and insure undivided responsibility, Kohler Co. recommends that its lavatories be installed with Kohler chromium plated brass fittings, which are designed particularly for Kohler fixtures and complement them in design and quality.

All lavatories bear the mark "Kohler USA" permanently fused in the enamel or vitreous china—guaranteeing the user that the same recognized Kohler quality is present in every fixture.

GRAMERCY

VITREOUS CHINA *Shelf* LAVATORIES

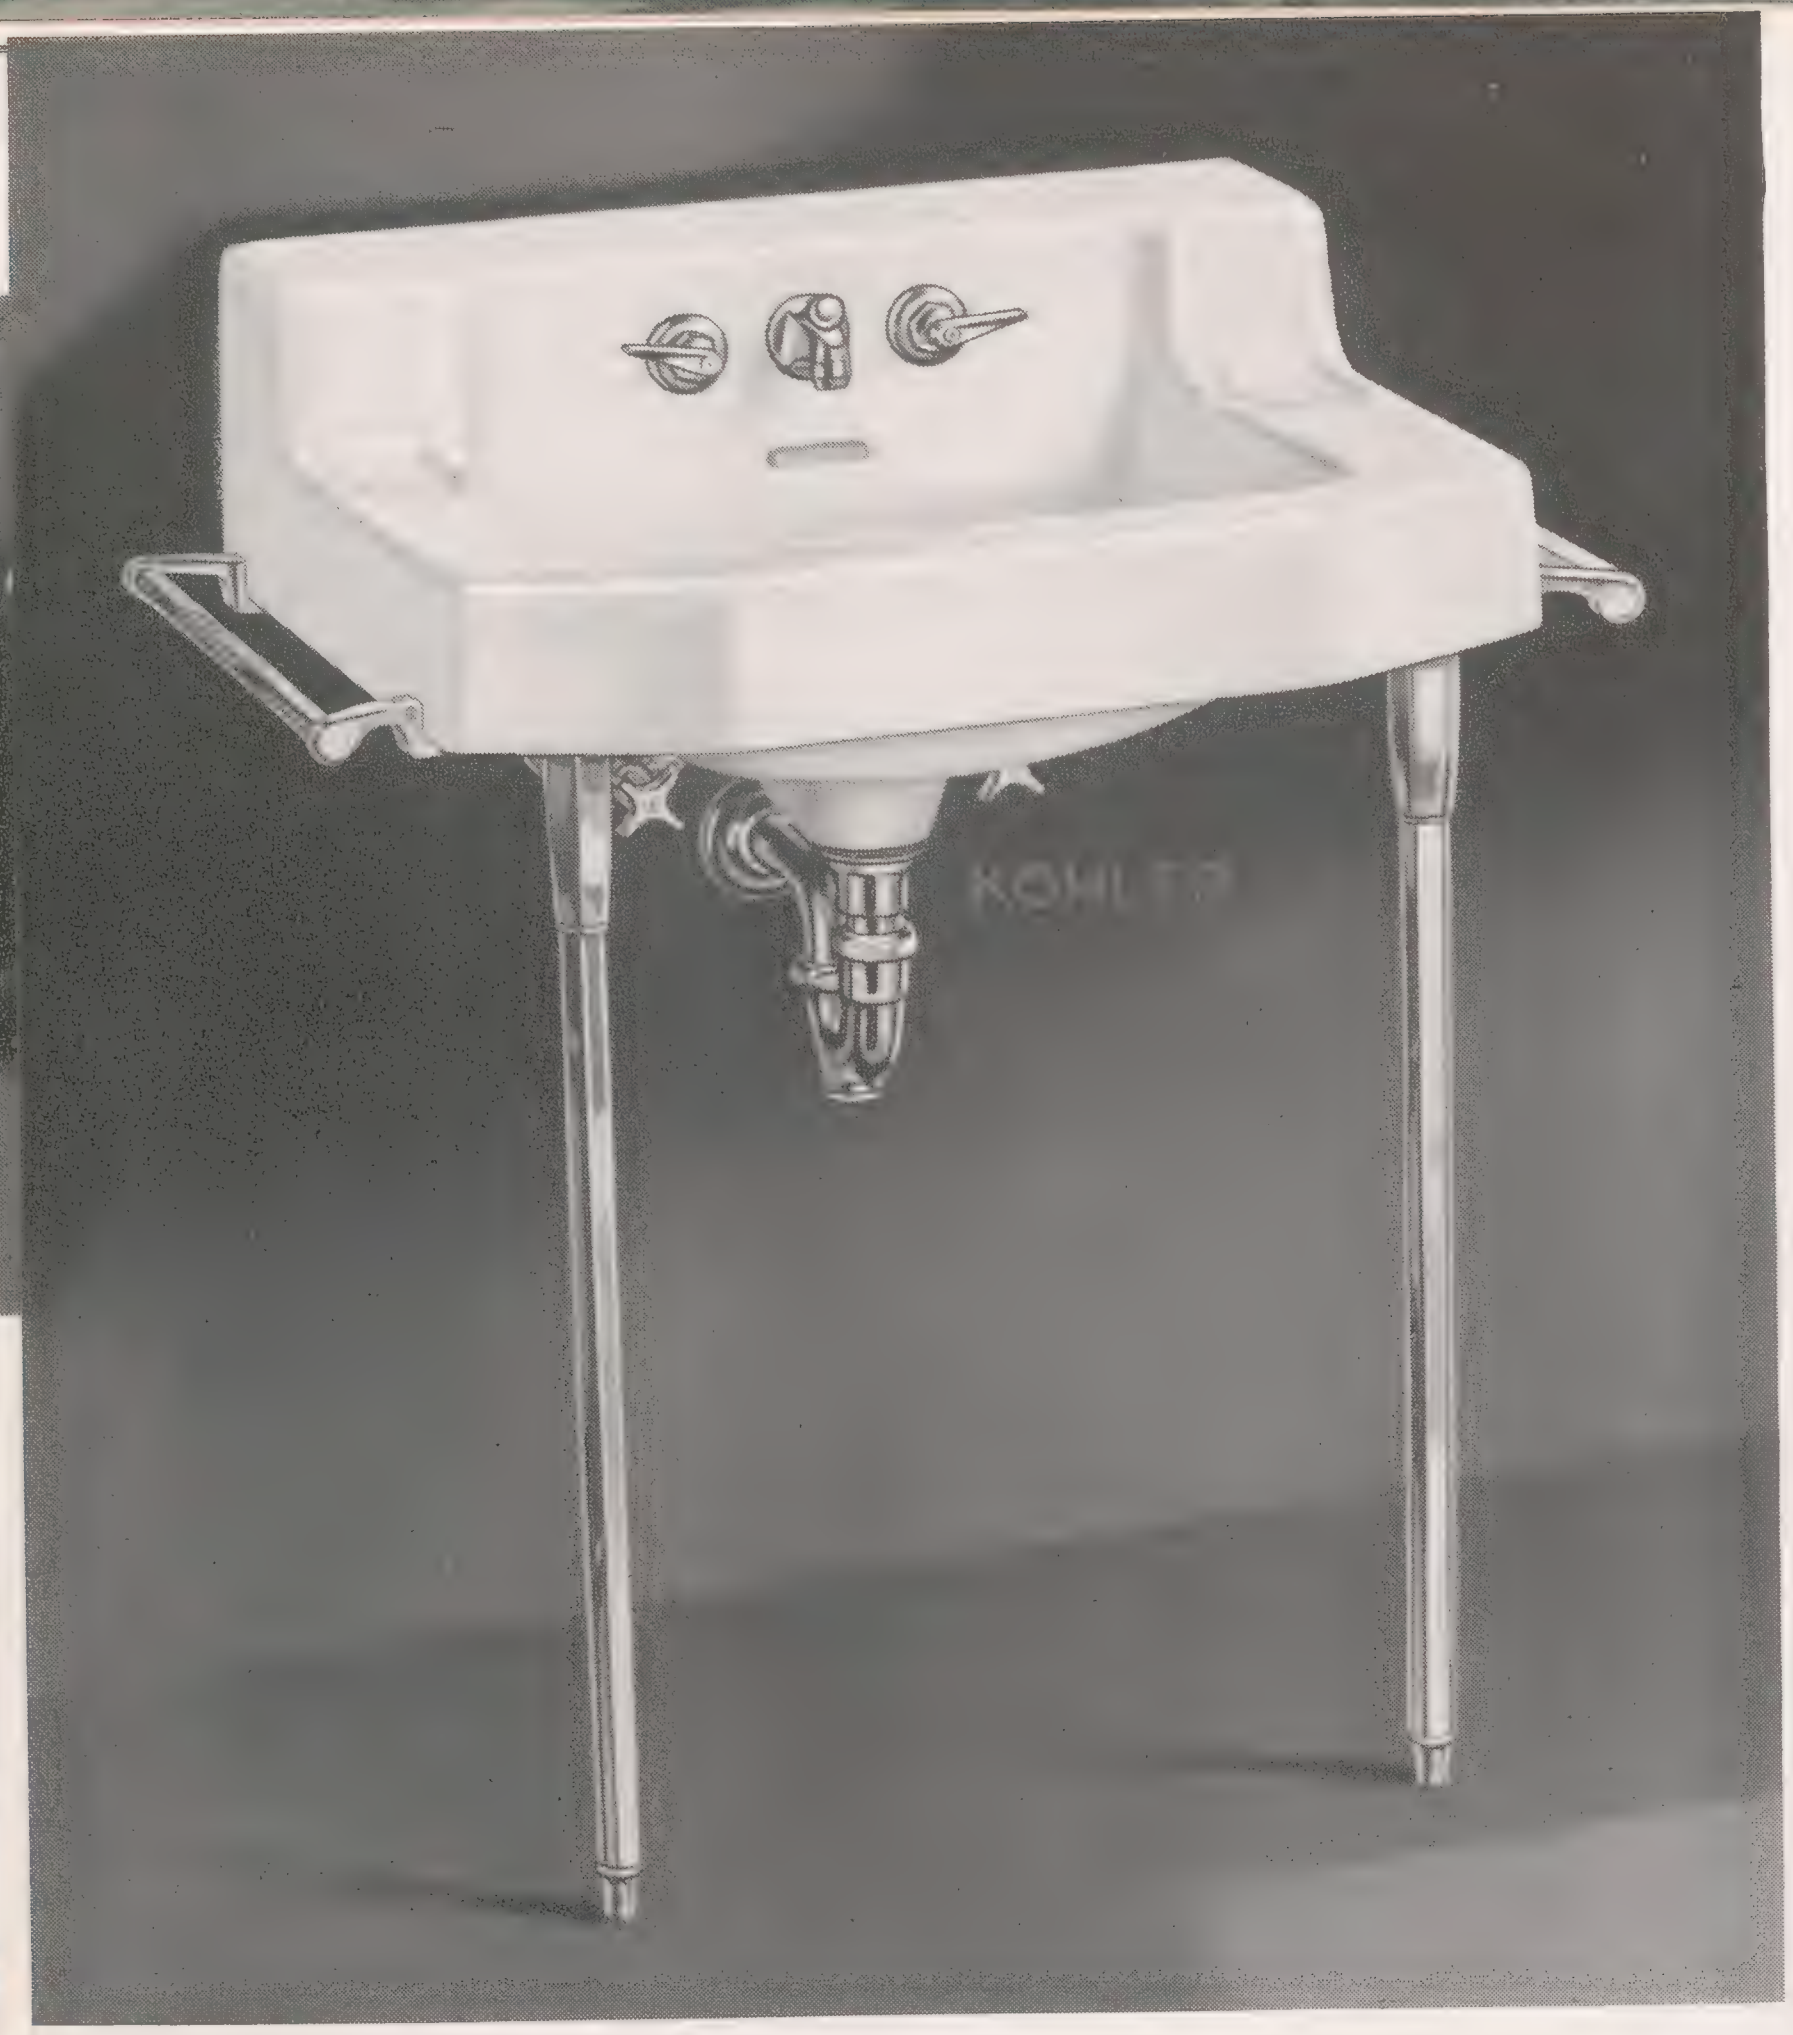

GRAMERCY K-1600-A
Sizes 19x17", 22x18", 24x20", 27x22"

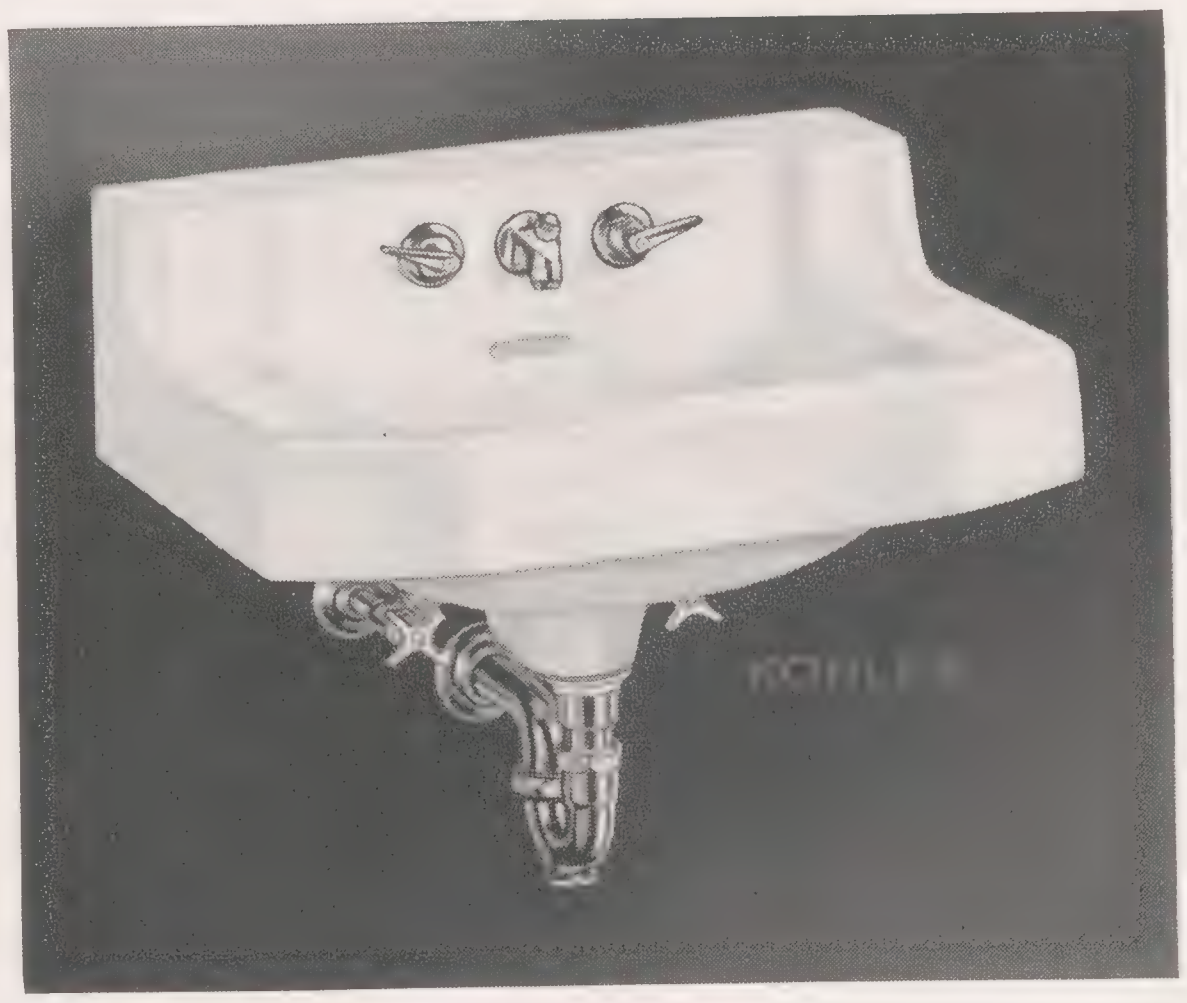

GRAMERCY K-1605-A
Sizes 19x17", 22x18", 24x20"

Lavatory Complete	K-1600-A	K-1605-A
Lavatory with Supply and Drain Fitting, Less Towel Bars, Supply Pipes and Trap	**K-1600-B** with **K-9575** legs	K-1605-B
Supply and Drain Fitting	**K-8115-A** with aerator and Synchro drain	**K-8115-A** with aerator and Synchro drain
Towel Bars	K-9565	Available when specified
Supply Pipes	**K-8258** ⅜" angle with stop	**K-8258** ⅜" angle with stop
Trap	**K-9000** 1¼"	**K-9000** 1¼"

SIZES	19x17"	22x18"	24x20"	27x22"
BASIN	14x11"	15x11½"	16x12¾"	18x14½"
BACK	4"	4"	4"	4"
WIDTH OF SHELF	4¼"	4½"	5"	5¼"
HEIGHT FROM FLOOR	31"	31"	31"	31"

The 19x17" size has no cast-in soap depressions.

Self-Closing Fitting for Public Buildings

The Gramercy and Strand Lavatories are available with **K-8111-A** fitting with self-closing valves if specified.

STRAND

VITREOUS CHINA

Shelf SPACE SAVING LAVATORIES

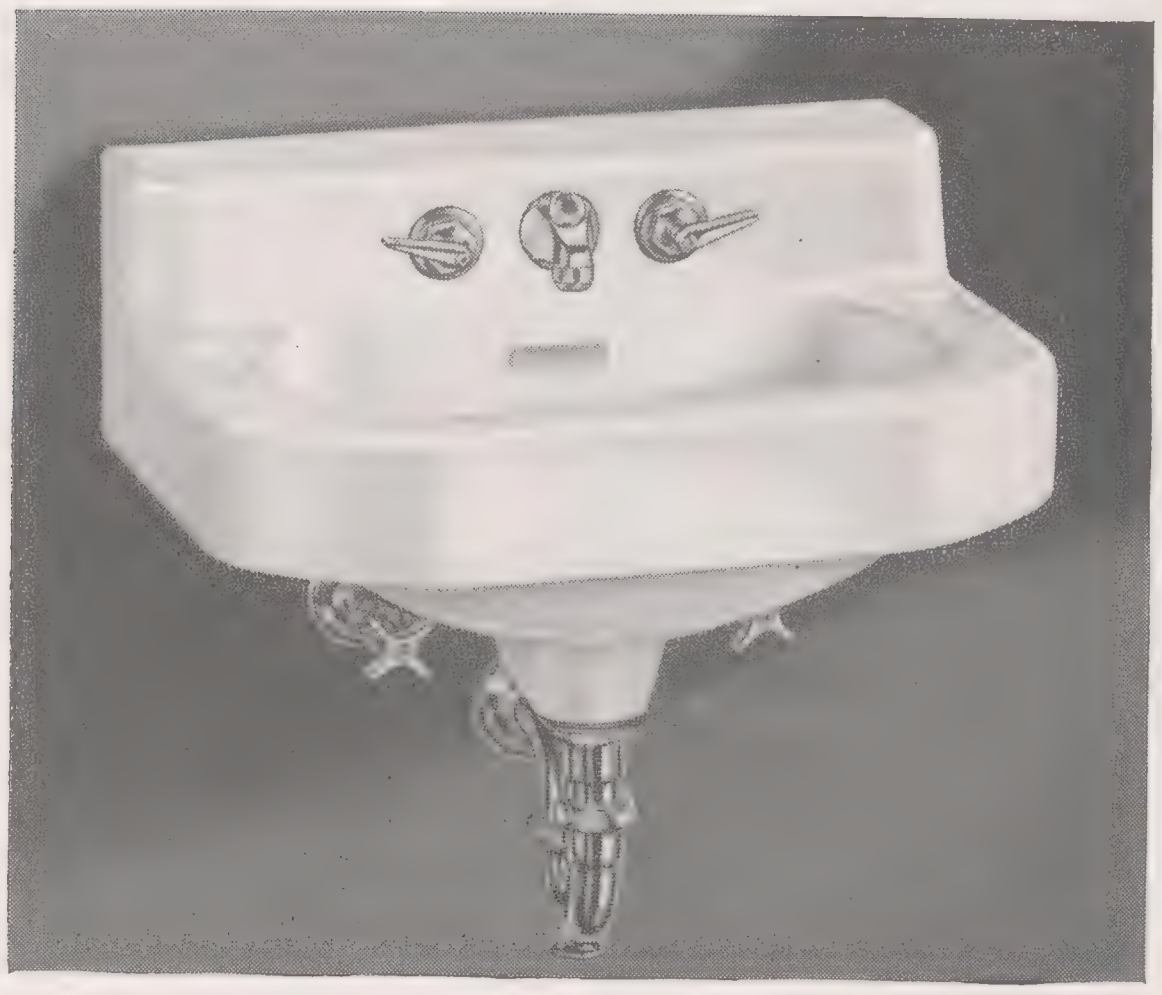

STRAND K-1645-A

Sizes 20x14", 26x15½"

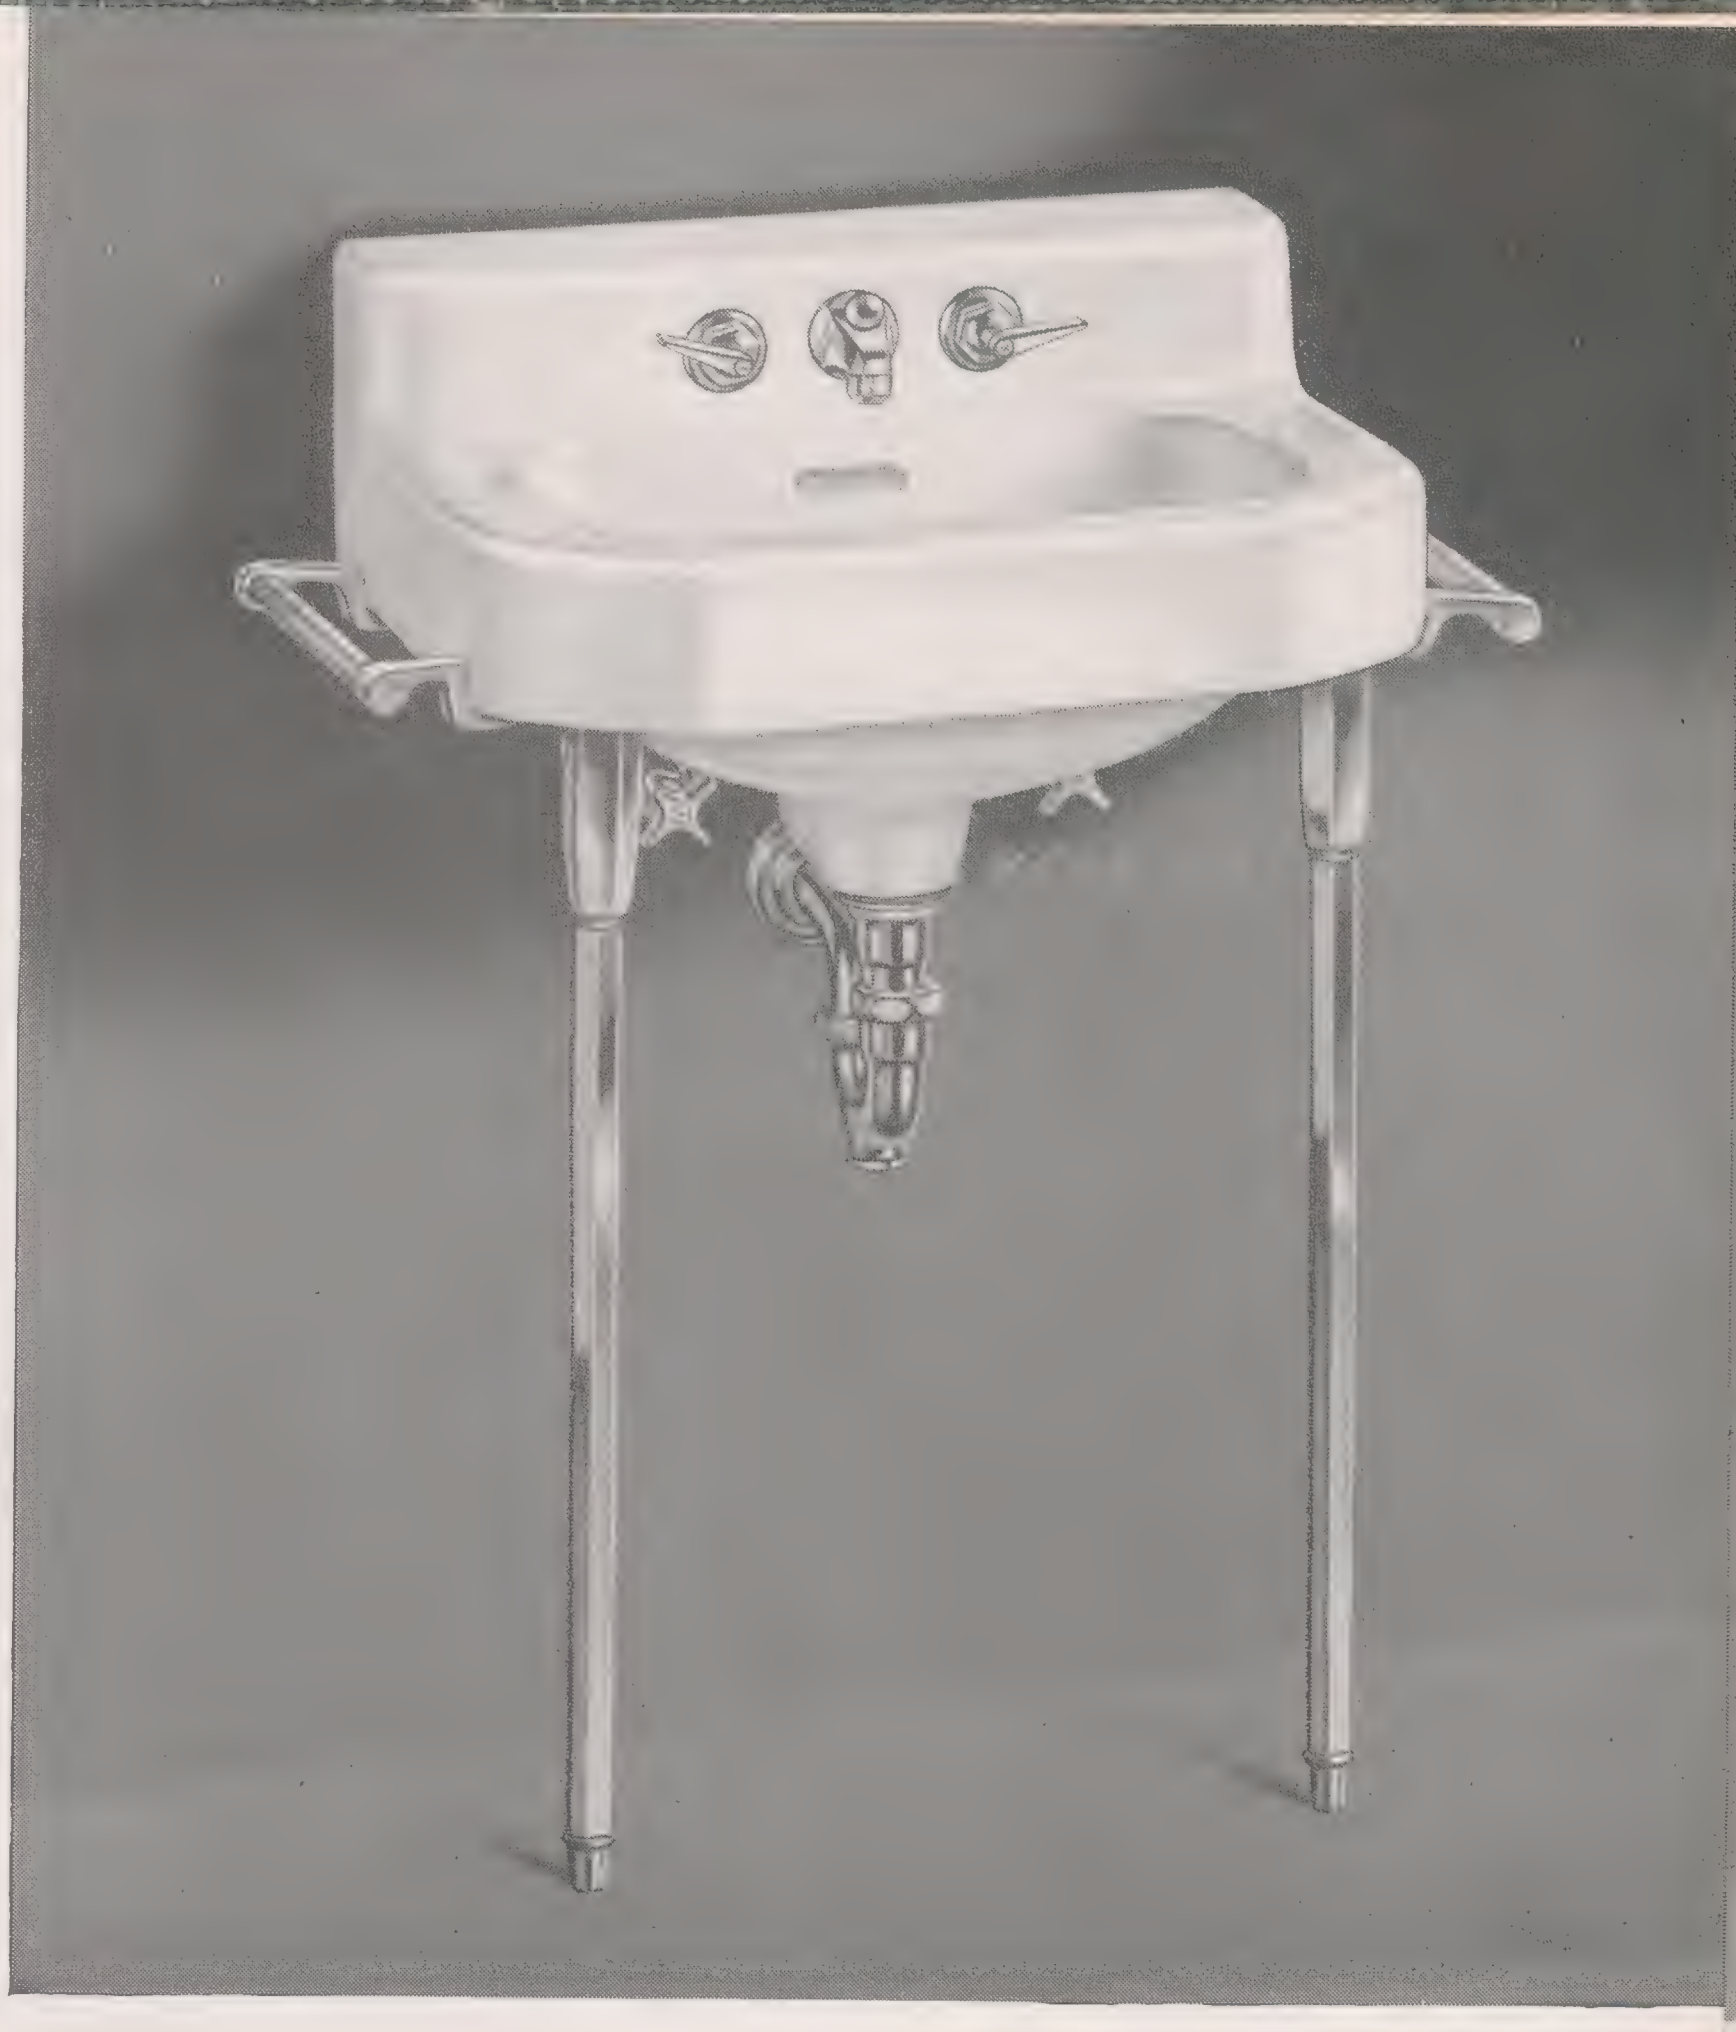

STRAND K-1640-A

Sizes 20x14", 26x15½"

Lavatory Complete	**K-1645-A**	**K-1640-A**
Lavatory with Supply and Drain Fitting, Less Towel Bars, Supply Pipes and Trap	**K-1645-B**	**K-1640-B** with **K-9575** legs
Supply and Drain Fitting	**K-8115-A** with aerator and Synchro drain	**K-8115-A** with aerator and Synchro drain
Towel Bars	Available when specified	**K-9565**
Supply Pipes	**K-8258** ⅜" angle with stops	**K-8258** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"

SIZES	20x14"	26x15½"
BASIN	15x9"	17½x10"
BACK	4"	4"
WIDTH OF SHELF	4"	4¼"
HEIGHT FROM FLOOR	31"	31"



K-8111-A

Fitting with Self-Closing Valves

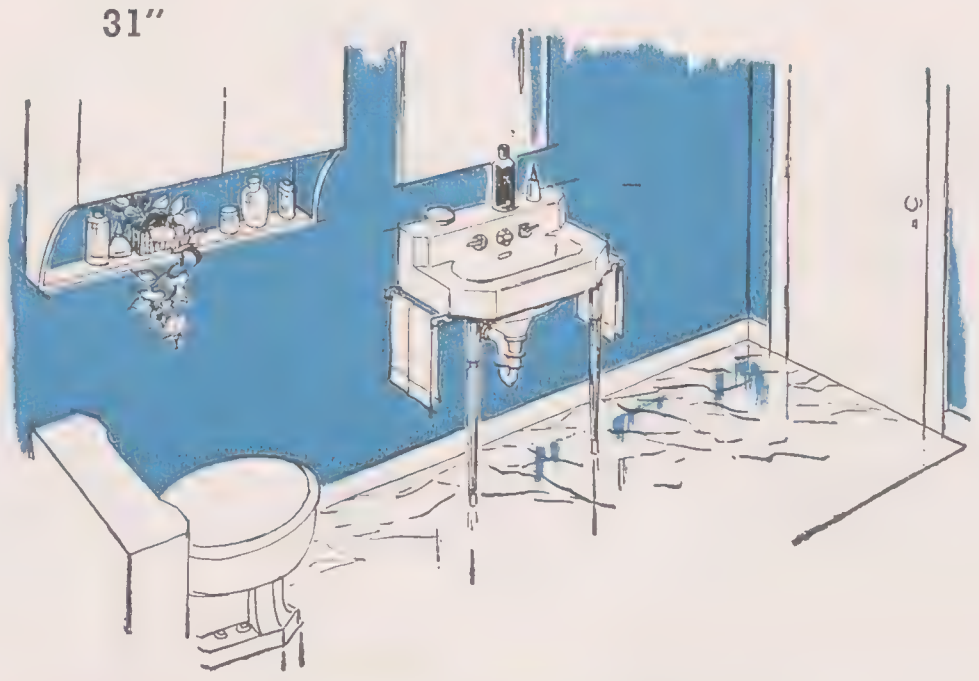

ROCKPORT VITREOUS CHINA *Shelf Corner* LAVATORY

RINSE VITREOUS CHINA *Shelf* DENTAL LAVATORY

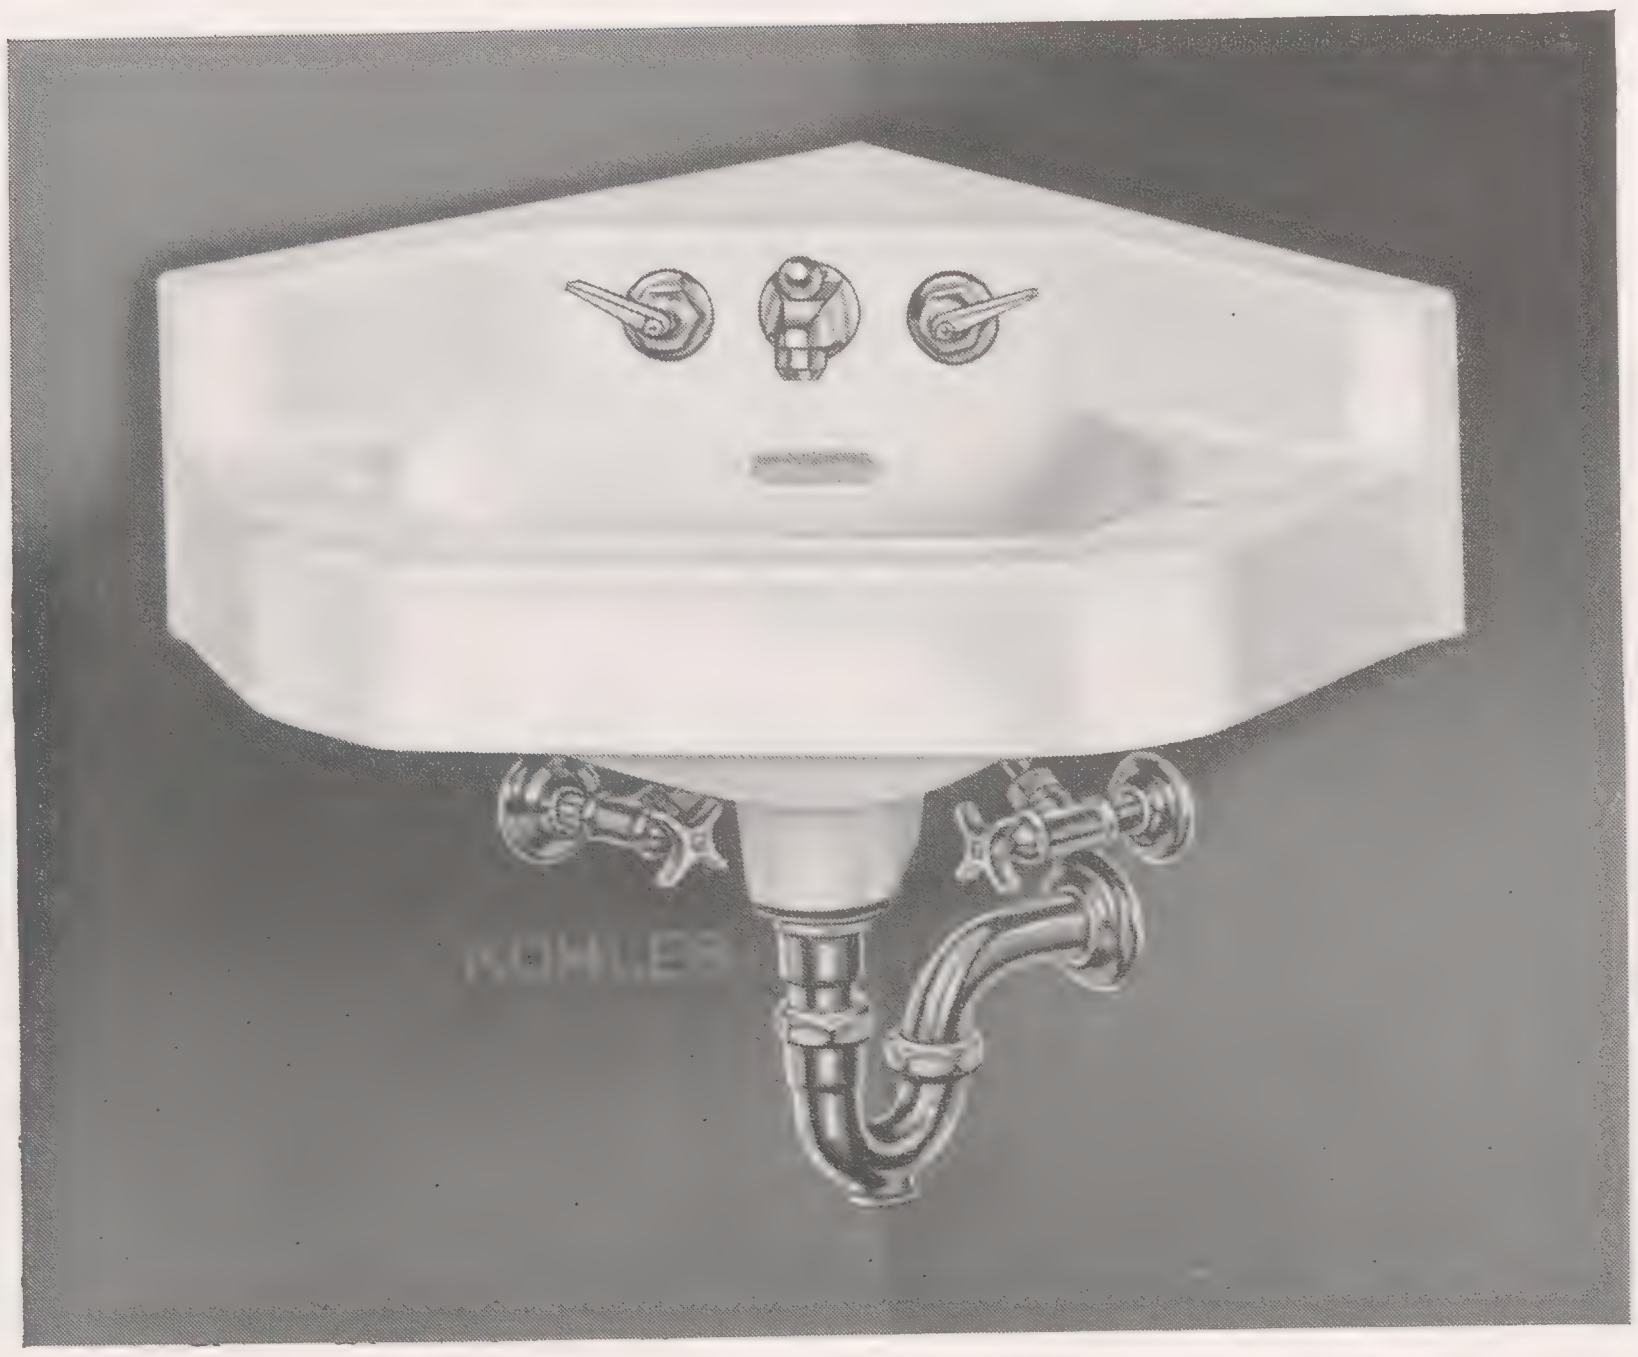

ROCKPORT **K-1680-A** Size 17x17"

WITH FLUSHING RIM

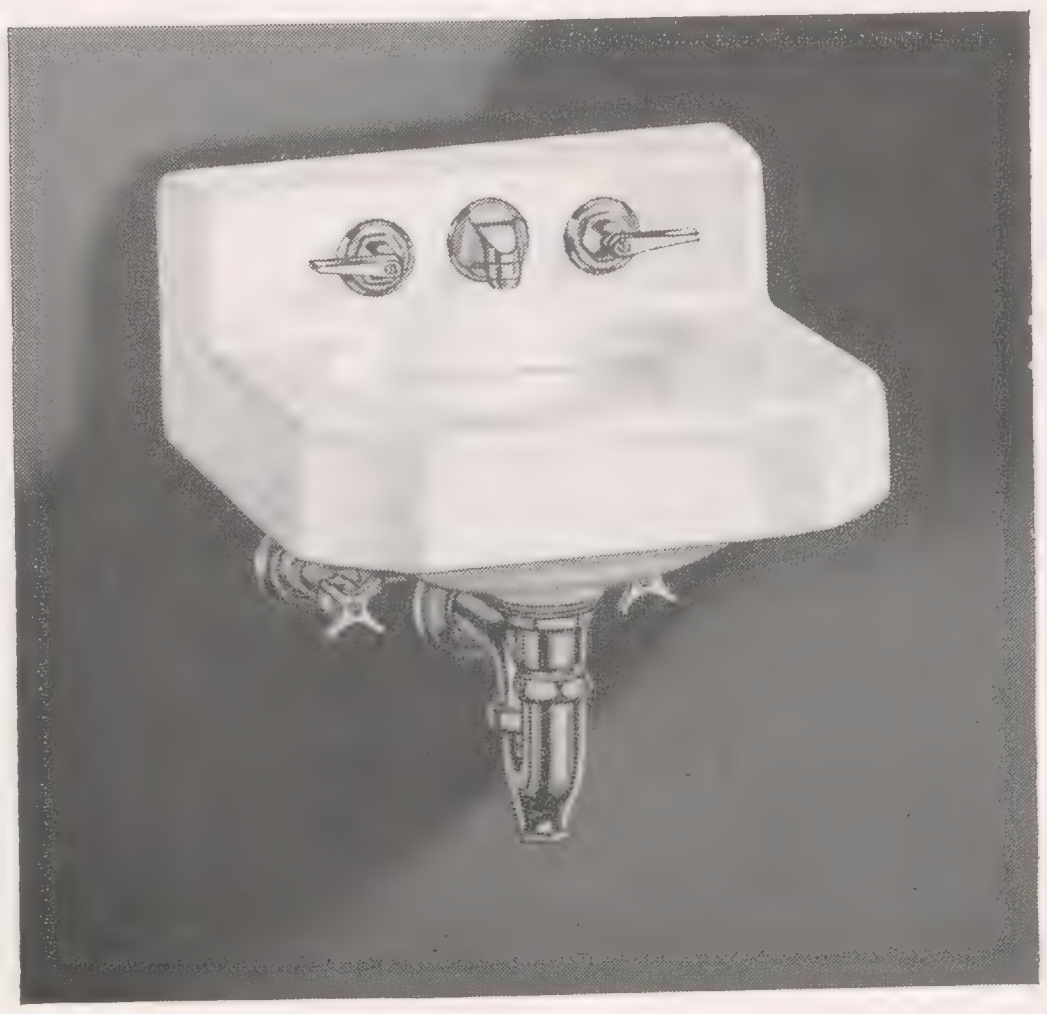

RINSE **K-1700-A** Size 14x14"

Lavatory Complete	**K-1680-A** (Illustrated)	**K-1700-A** (Illustrated)	**K-1710-A** Walcot Same as **K-1700** except less flushing rim
Lavatory Complete, Less Supply Pipes and Trap	**K-1680-B**	**K-1700-B**	**K-1710-B**
Supply and Drain Fitting	**K-8115-A** with aerator and Synchro drain	**K-8131-A** with aerator, vacuum breaker and open strainer	**K-8092-A** with aerator and drain with open strainer
Supply Pipes	**K-8258** ⅜" angle with stops	**K-8260** ⅜" angle with stops	**K-8261** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"	**K-9000** 1¼"

	ROCKPORT
SIZE (sides)	17x17"
BASIN	15x10½"
BACK	4"
CORNER TO FRONT	20¼"

	RINSE	WALCOT
SIZE	14x14"	14x14"
BASIN	9x8"	10½x9"
BACK	3¾"	3¾"
WIDTH OF SHELF	3½"	3¼"

The Rockport is available with **K-8111-A** fitting with self-closing valve, if specified.

Rinse basin is thoroughly flushed by means of jets in rim

CHESAPEAKE

VITREOUS CHINA *Ledge* LAVATORIES

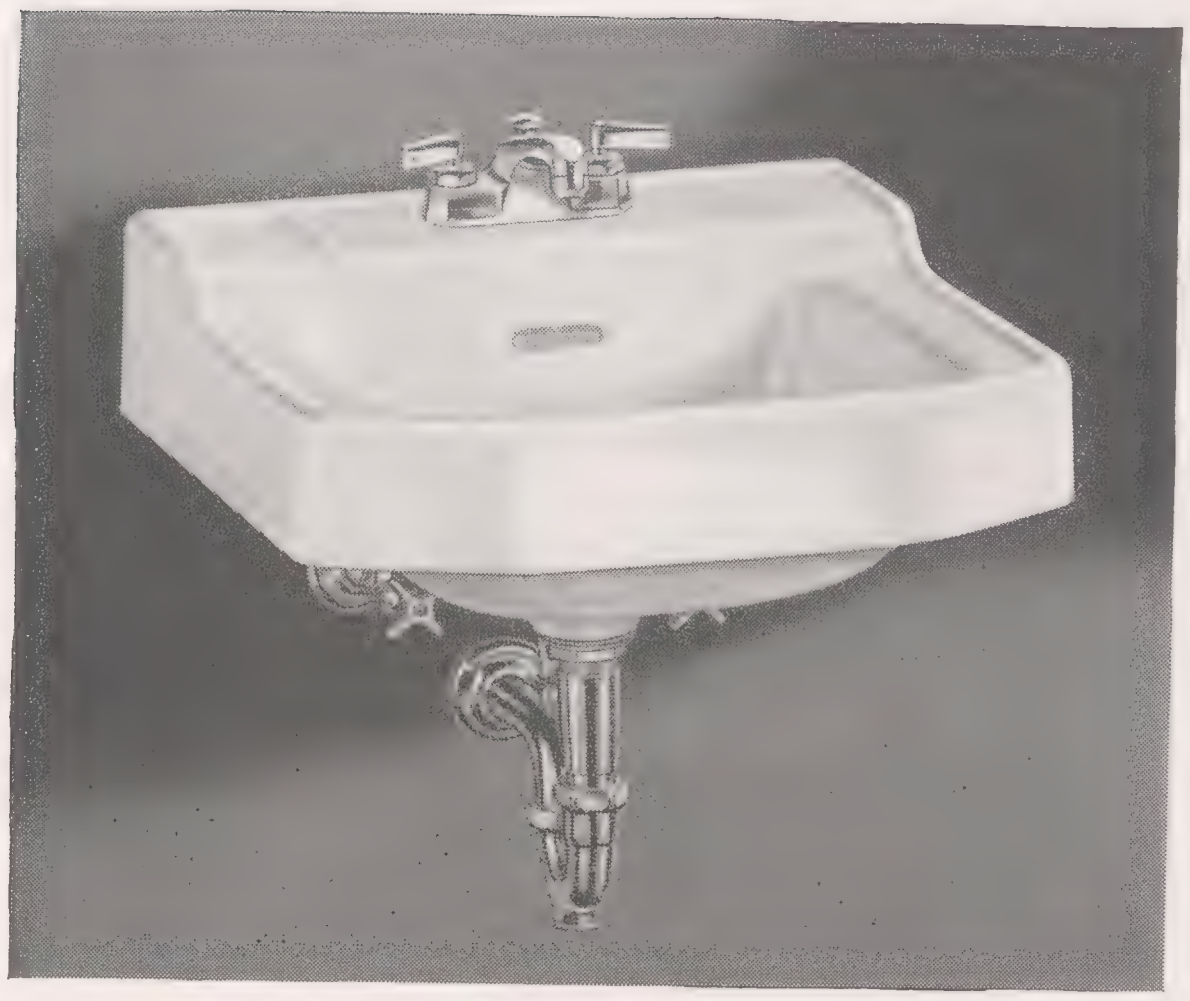

CHESAPEAKE K-1745-C
Sizes 18x15", 20x18"

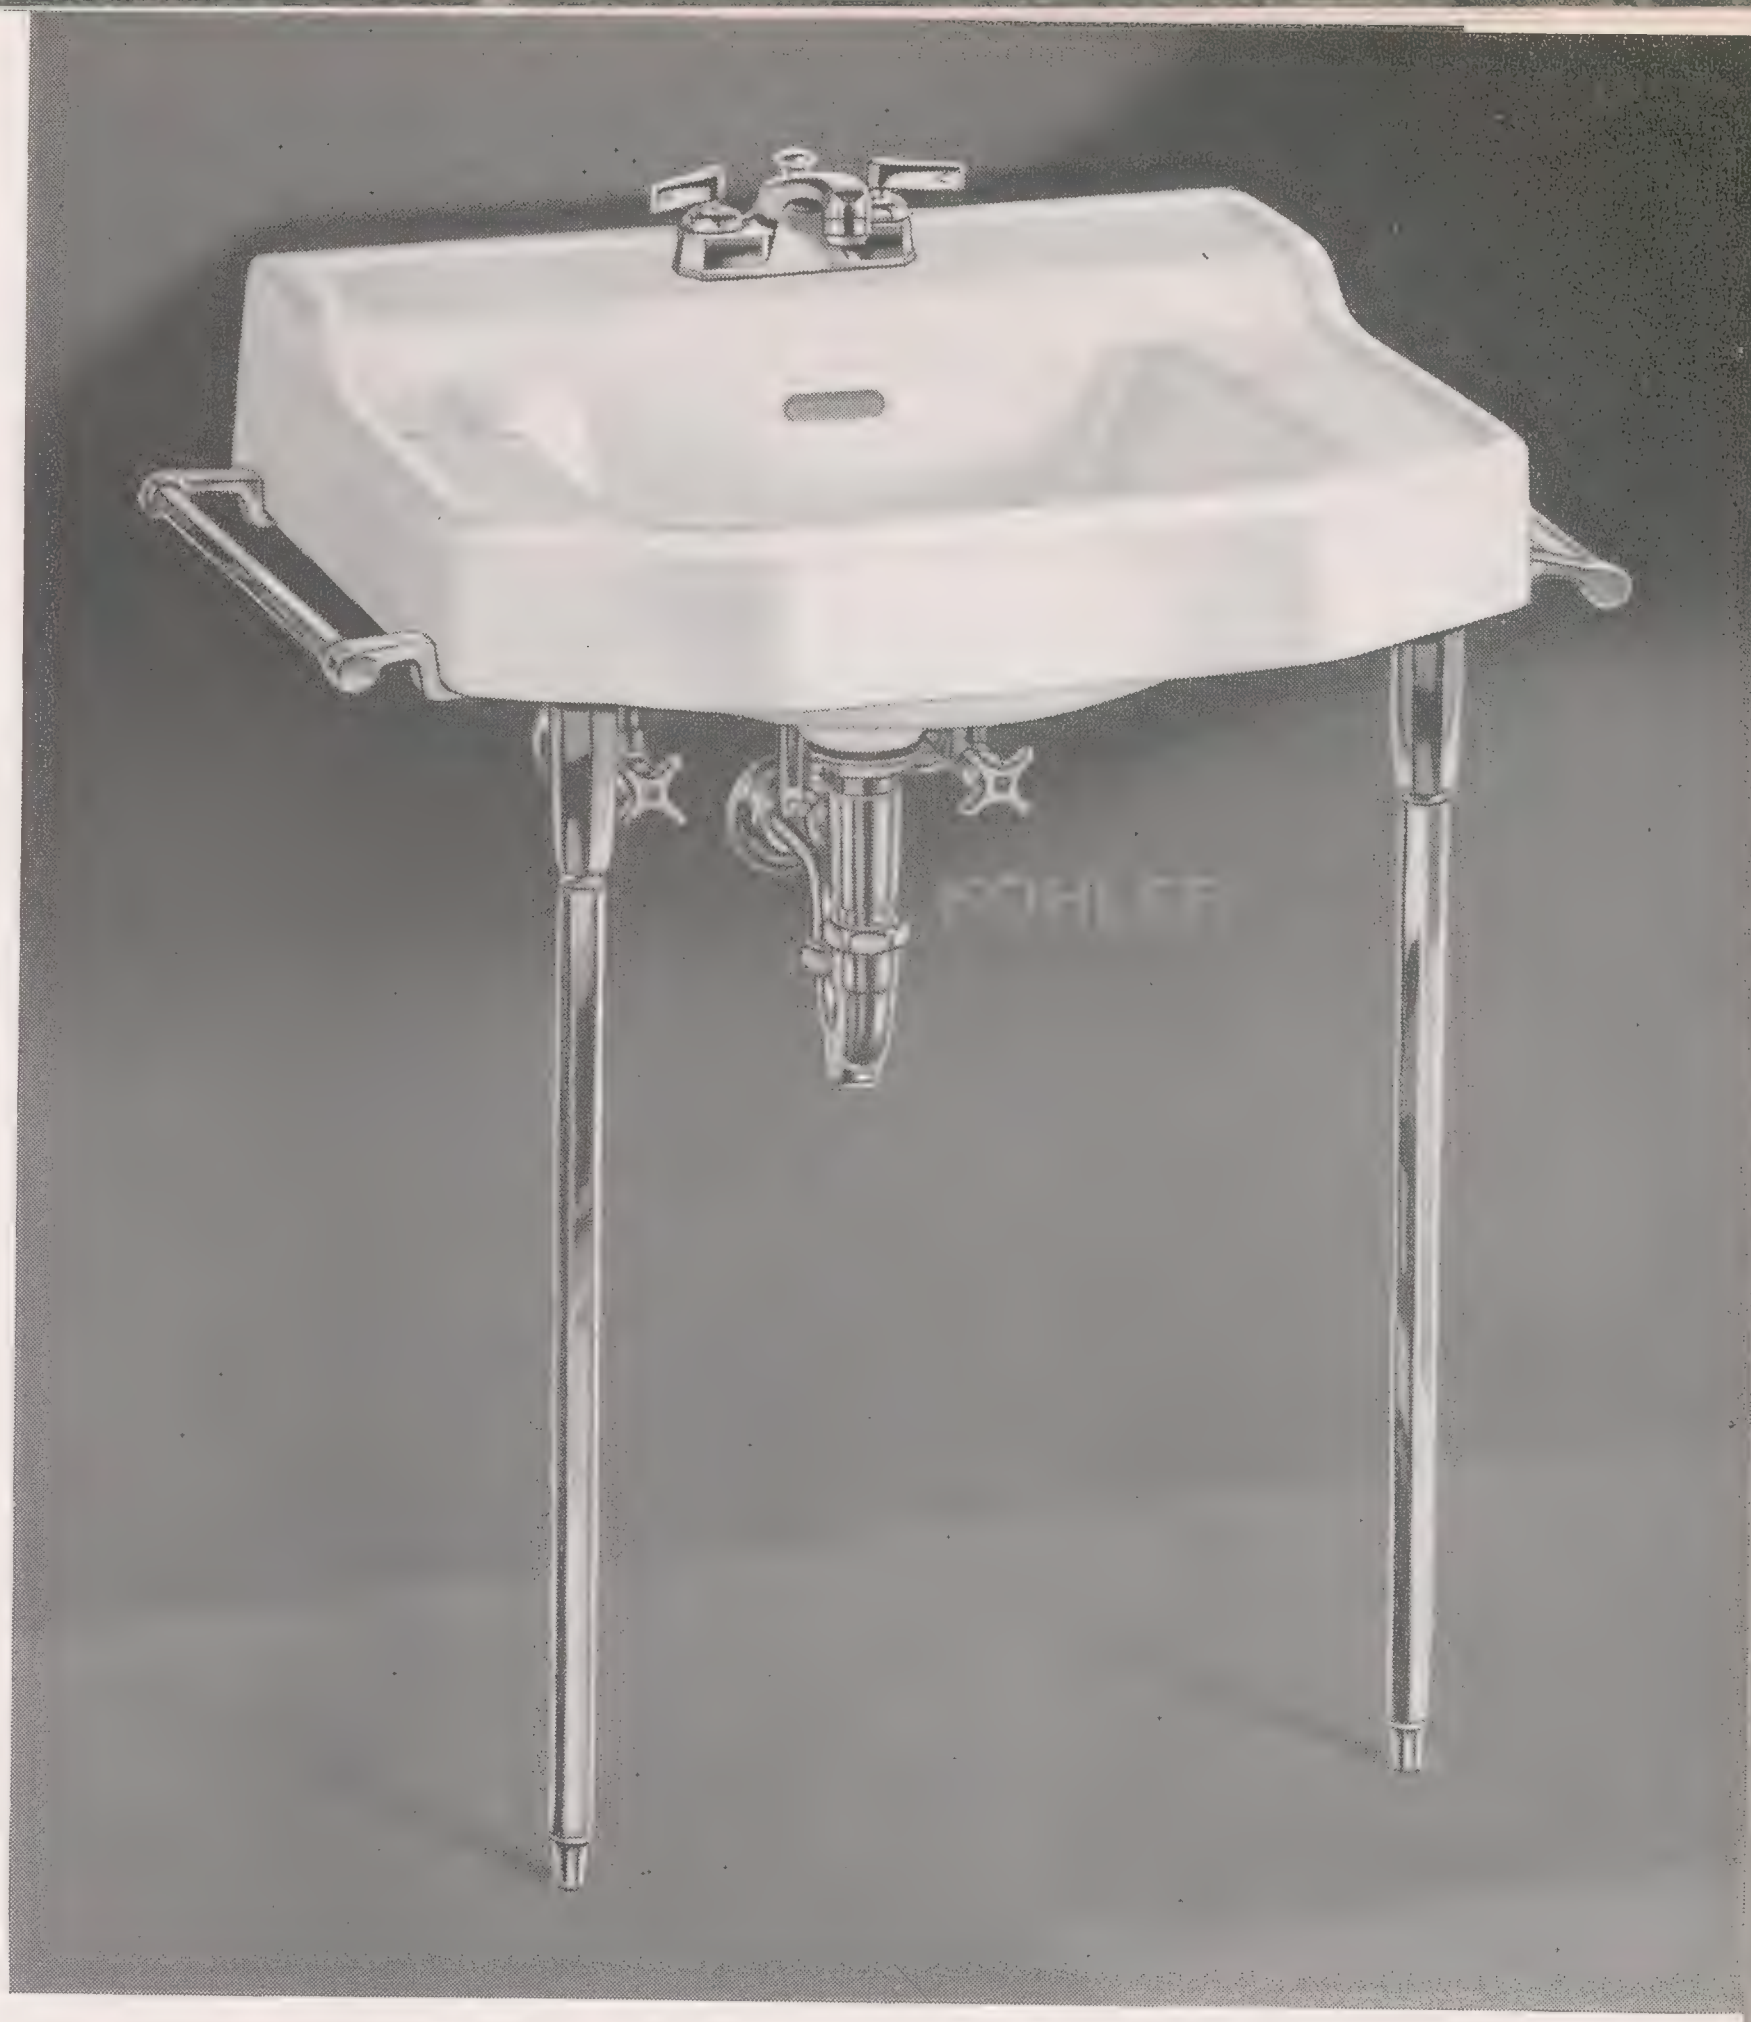

CHESAPEAKE K-1740-C
Sizes 20x18", 24x20", 30x22"

Lavatory Complete	K-1745-C	K-1740-C
Lavatory	**K-1745**	**K-1740** with **K-9575** legs
Supply and Drain Fitting	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**
Towel Bars	Available when specified	**K-9565**
Supply Pipes	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"

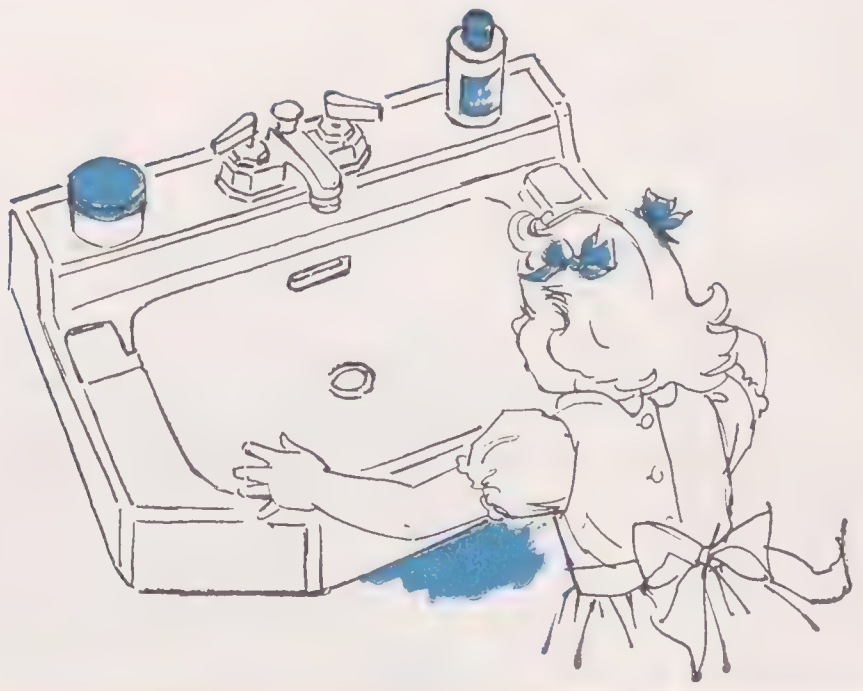

SIZES	18x15"	20x18"	24x20"	30x22"
BASIN	14x9"	14½x10½"	16x12"	18x14"
BACK	1½"	1½"	1½"	1½"
WIDTH OF LEDGE	4"	5¼"	5½"	6"
HEIGHT FROM FLOOR	31"	31"	31"	31"

The 18x15" and 20x18" sizes have one soap depression on ledge; 24x20" and 30x22" sizes have two on slab.

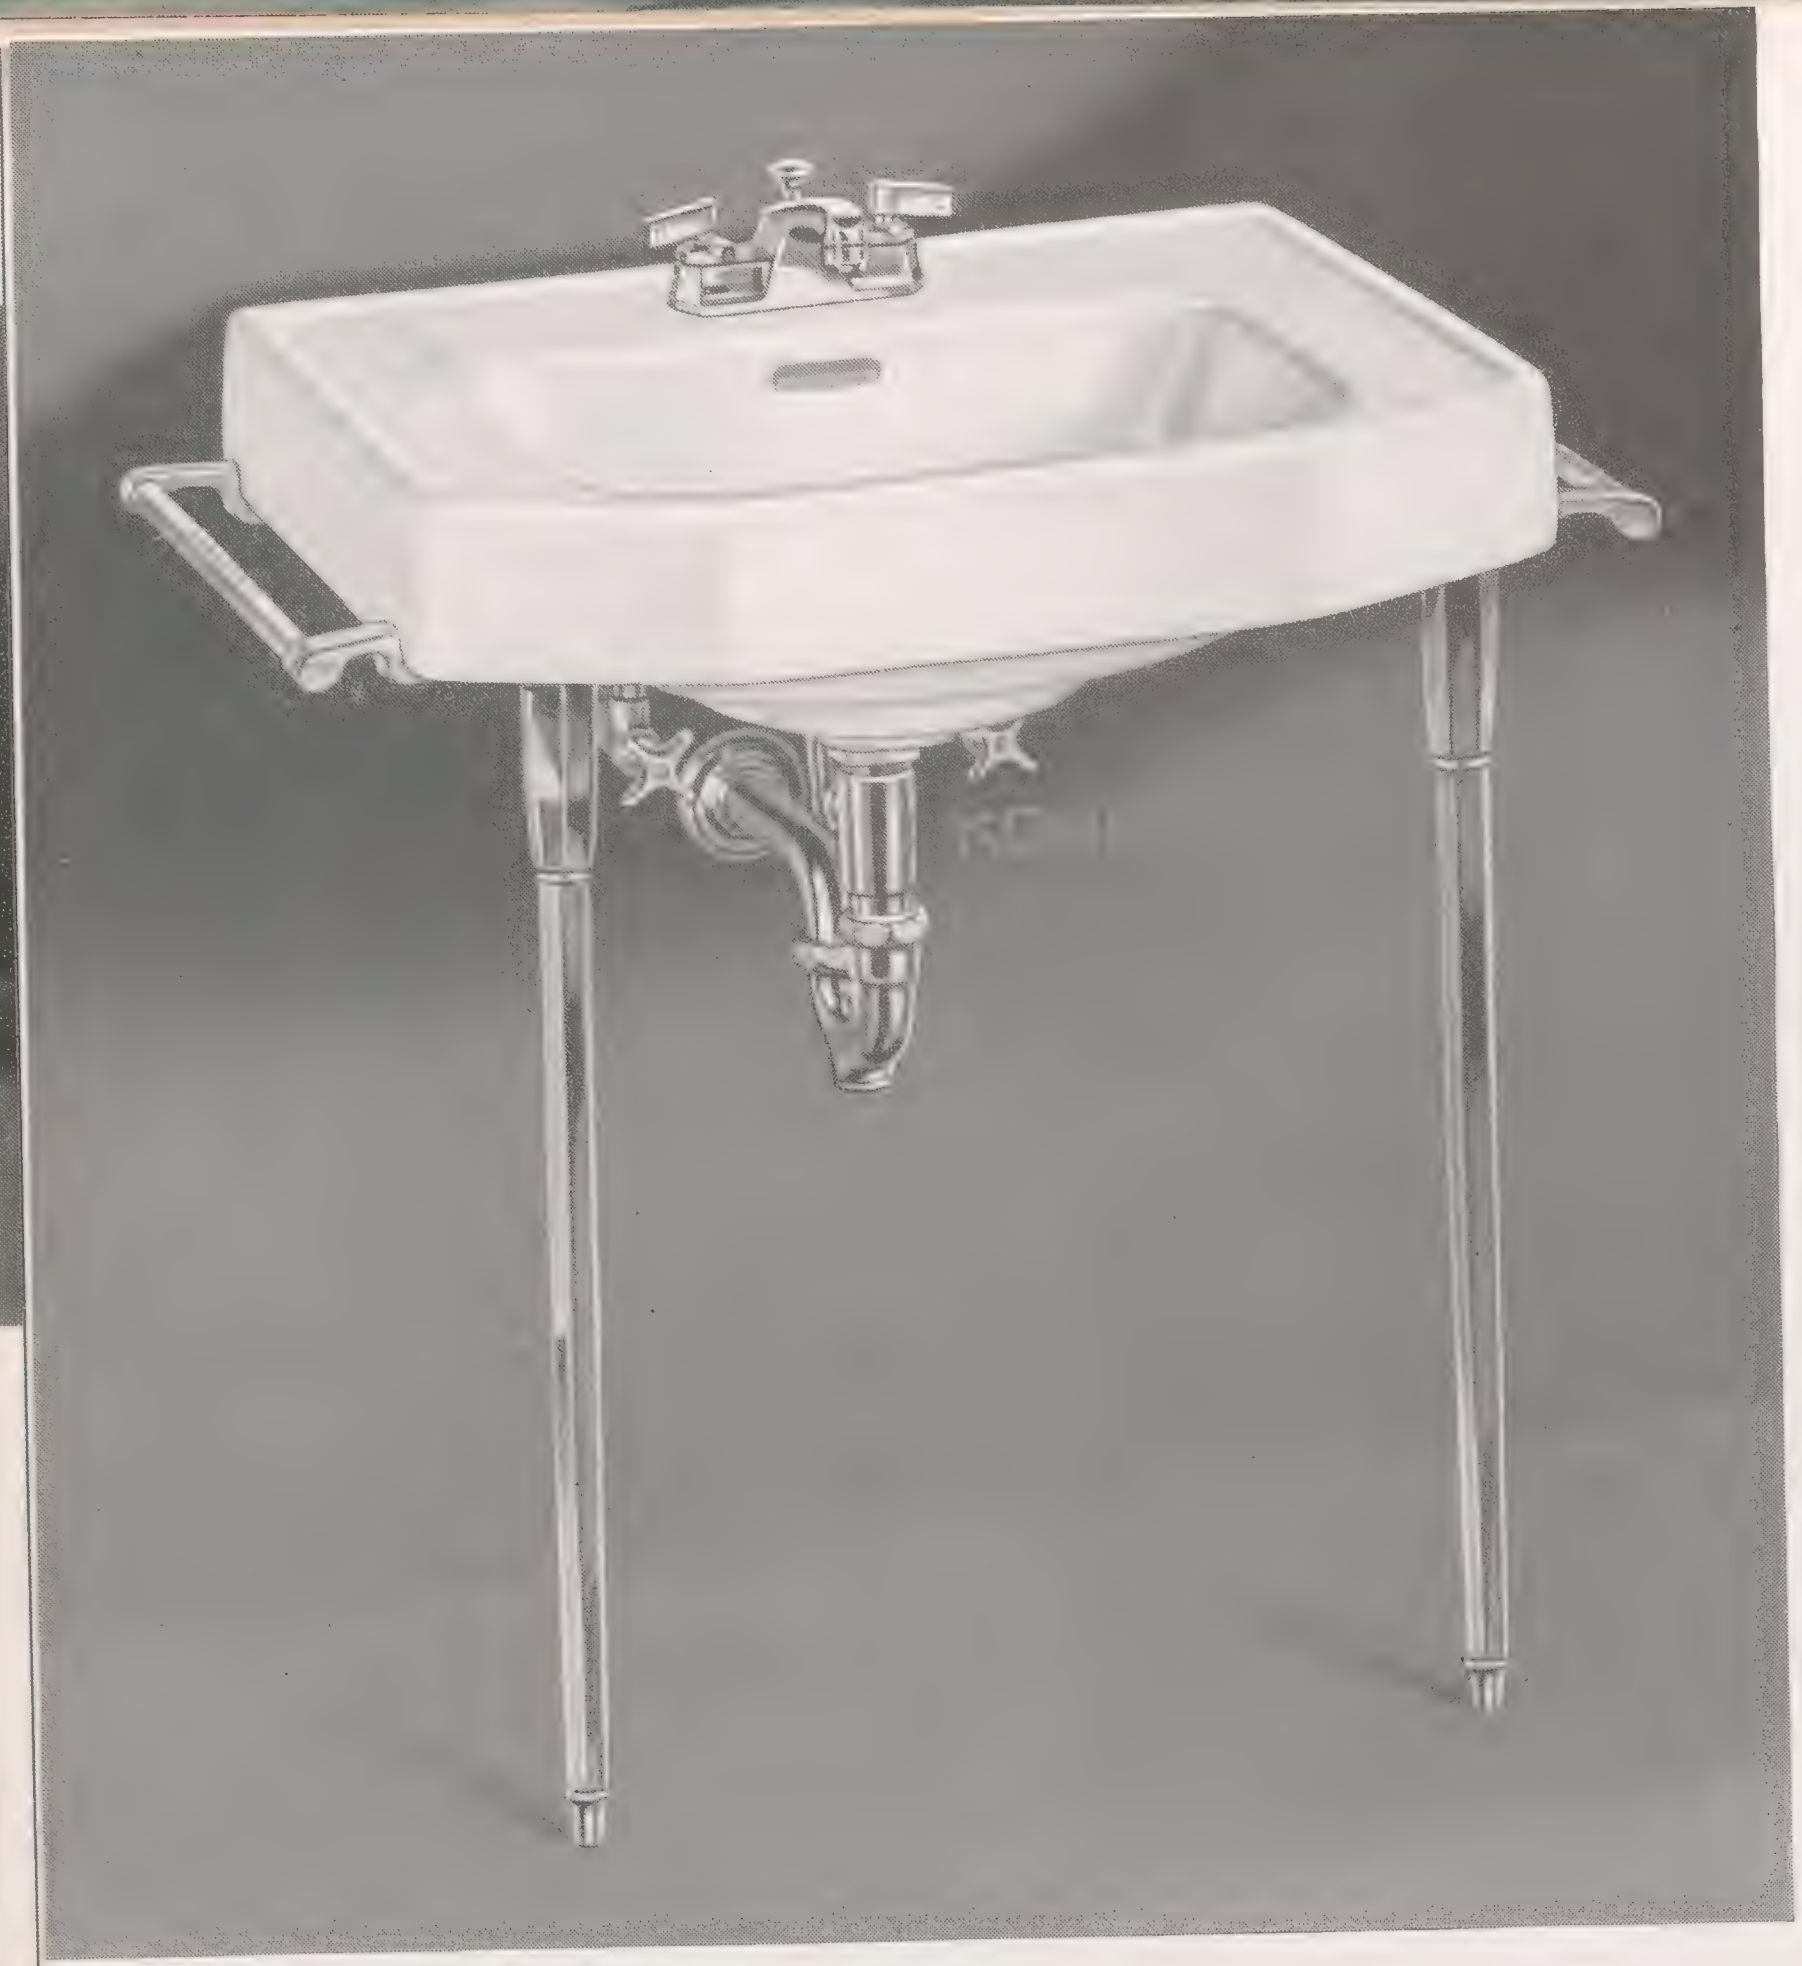

JAMESTOWN

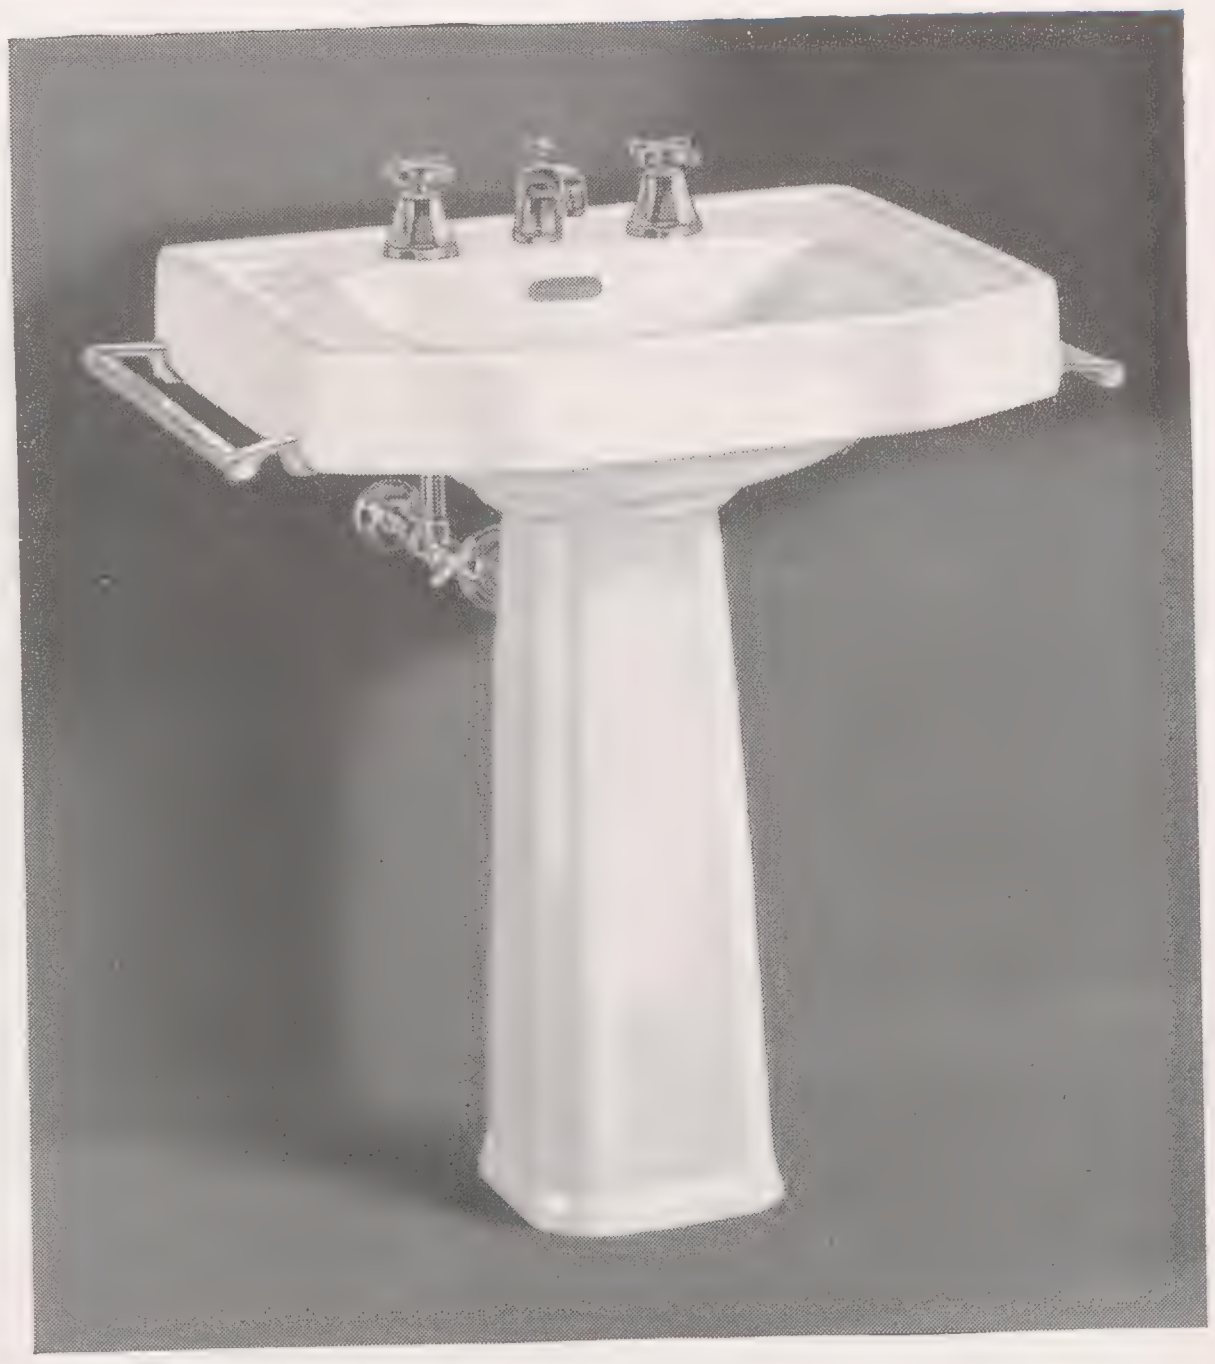

JAMESTOWN K-1775-C
Sizes 20x18", 24x20", 27x22"

JAMESTOWN K-1780-F
Sizes 20x18", 24x20", 27x22"

Lavatory Complete	K-1775-C (Illustrated)	K-1770-F	K-1780-F (Illustrated)	K-1785-C
Lavatory	**K-1775** with **K-9575** legs and **K-2072** brackets	**K-1770** with **K-9575** legs and **K-2072** brackets	**K-1780** with **K-1825** pedestal and **K-2072** brackets	**K-1780** with **K-1825** pedestal and **K-2072** brackets
Supply and Drain Fitting	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**	**K-8010-A** Bancroft with aerator and Synchro drain For Bancroft fitting less aerator, specify **K-8010**	**K-8010-A** Bancroft with aerator and Synchro drain For Bancroft fitting less aerator, specify **K-8010**	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**
Towel Bars	**K-9565**	**K-9565**	**K-9565**	**K-9565**
Supply Pipes	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"	**K-9000** 1¼"	**K-9000** 1¼"

SIZES	20x18"	24x20"	27x22"
BASIN	14½x10½"	16x12"	17x13"
HEIGHT FROM FLOOR	31"	31"	31"



New Yorker K-8200

Ice Water Faucet

K-8200 Push button self-closing ice water faucet. Remov unit, swing spout, flow regulator. Wall to center of spout outlet, 7¾".



K-2072 C. P. Bracket

VITREOUS CHINA SLAB LAVATORIES

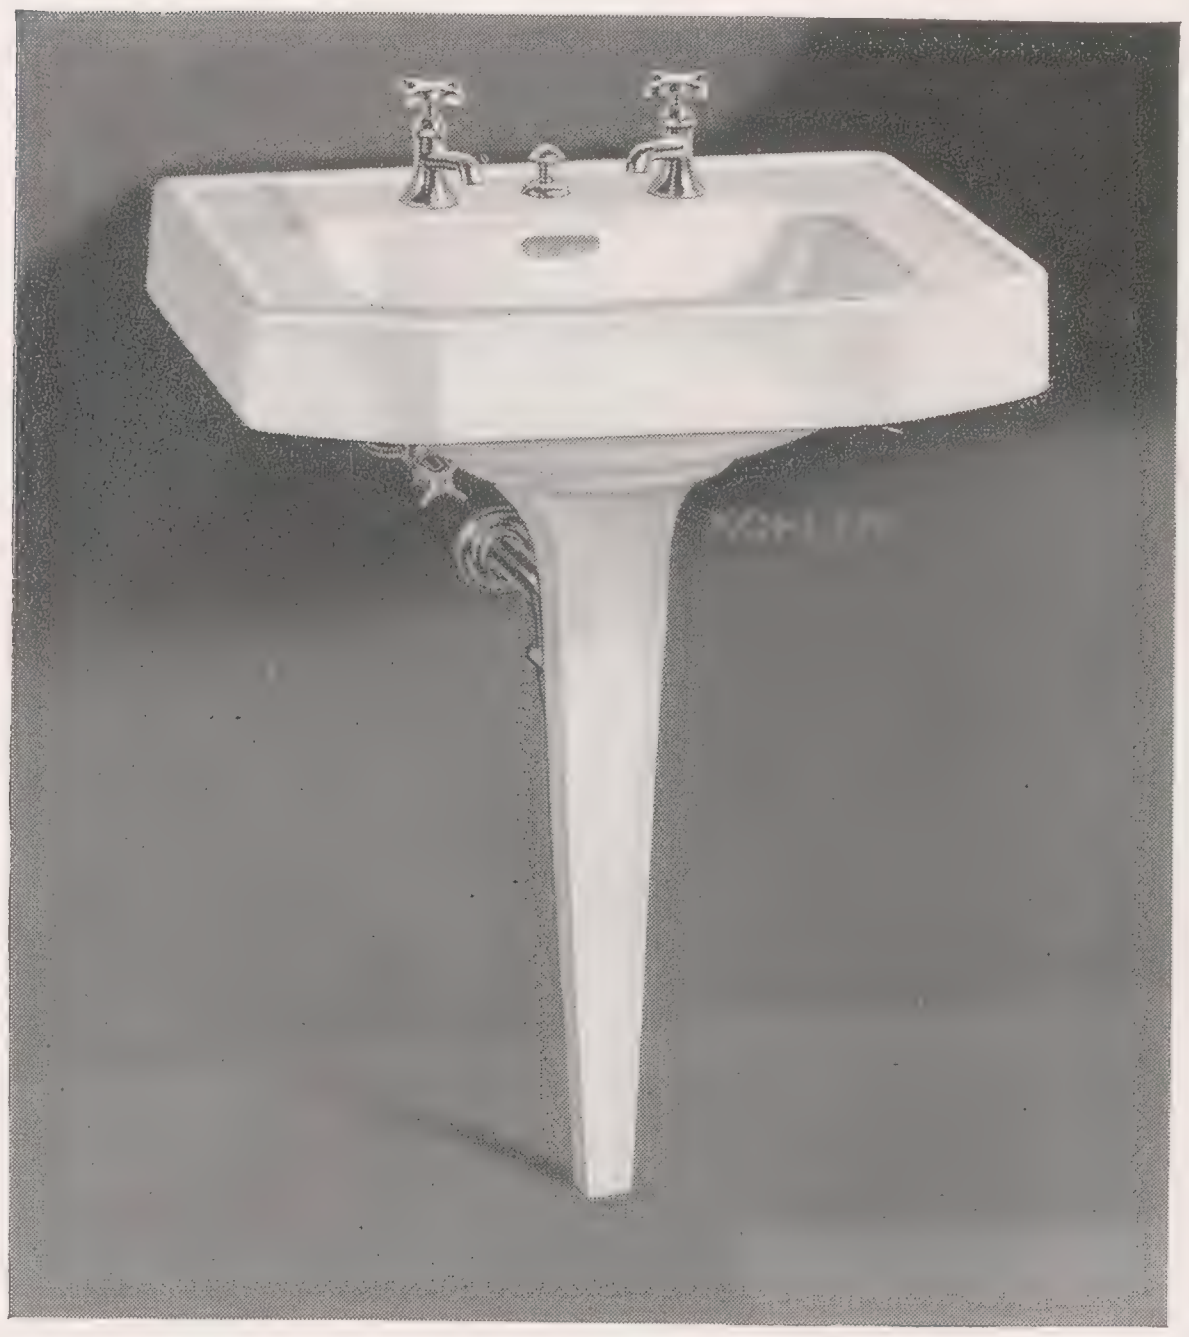

JAMESTOWN K-1790-J
Sizes 20x18", 24x20", 27x22"

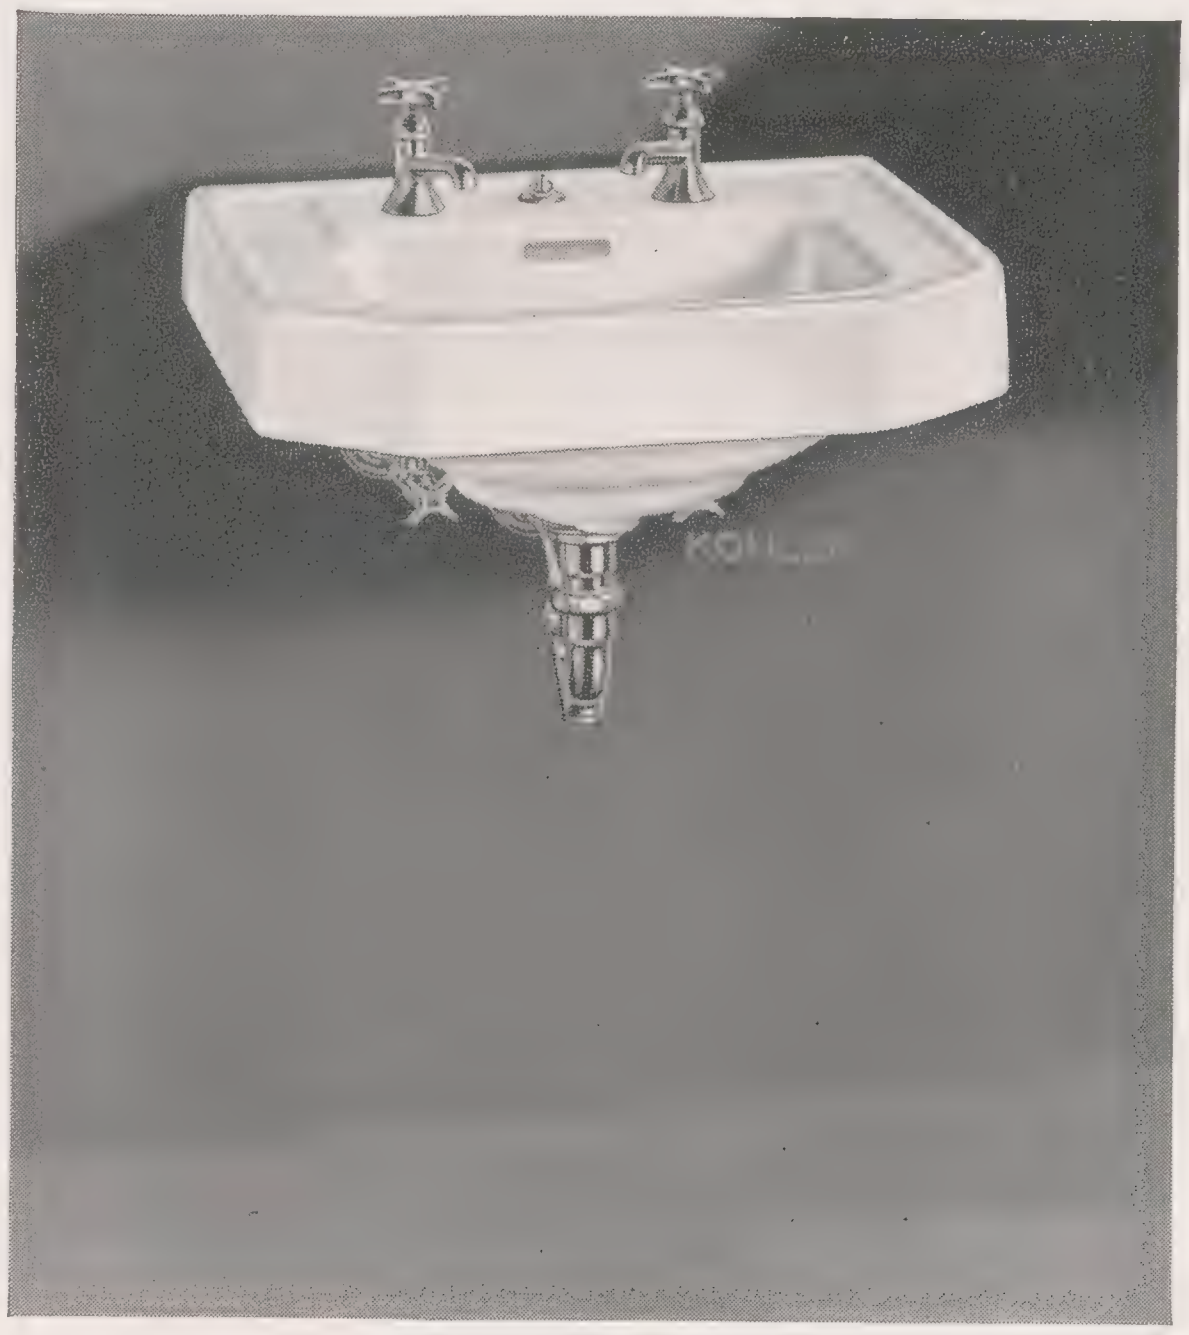

JAMESTOWN K-1795-P
Sizes 20x18", 24x20", 27x22"

Lavatory Complete	K-1790-J (Illustrated)	K-1792-C	K-1795-P (Illustrated)	K-1797-C
Lavatory	**K-1790** with **K-1828** leg and **K-2072** brackets	**K-1792** with **K-1828** leg and **K-2072** brackets	**K-1795** with **Z-1256** Zurn wall carrier	**K-1797** with **Z-1256** Zurn wall carrier
Supply and Drain Fitting	**K-8178** Sentinel faucets **K-8415** Synchro drain	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**	**K-8178** Sentinel faucets **K-8426** drain with chain and stopper	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**
Supply Pipes	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"	**K-9000** 1¼"	**K-9000** 1¼"

SIZES	20x18"	24x20"	27x22"
BASIN	14½x10½"	16x12"	17x13"
HEIGHT FROM FLOOR	31"	31"	31"



Z-1236

ZURN CHAIR CARRIERS AND WALL CARRIERS

For Jamestown and Greenwich Vitreous China Lavatories

Z-1236 Zurn chair carrier with painted exposed arms.

Z-1256 Zurn wall carrier with painted exposed arms.

Specify plate number and size of lavatory when ordering chair or wall carriers.

These chair and wall carriers are furnished with sleeves and bolts for walls up to 1" thickness. When wall thickness exceeds 1", specify distance from face of carrier to face of finished wall.



Z-1256

ARROWHEAD VITREOUS CHINA LAVATORIES FOR CABINETS AND COUNTERS

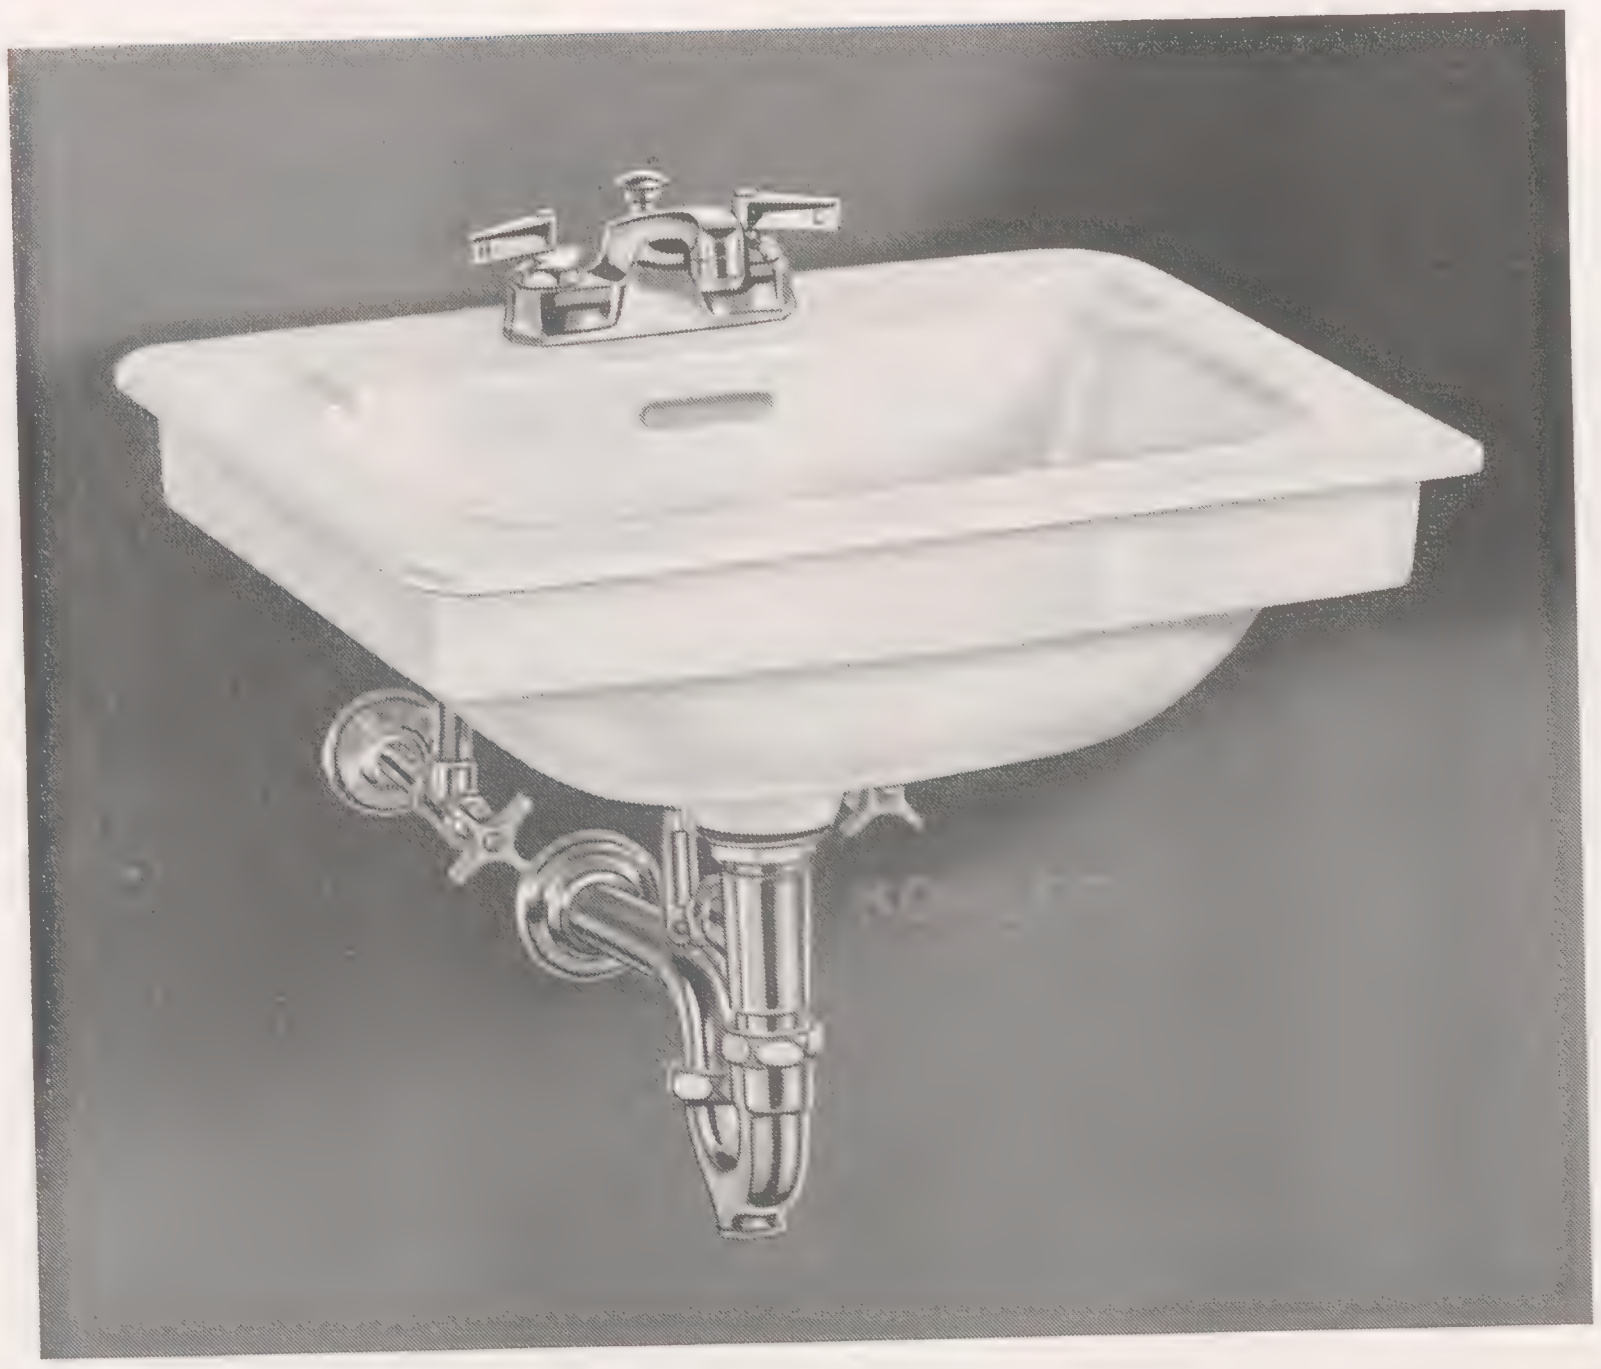

ARROWHEAD K-1890-C Sizes 20x18", 24x18"

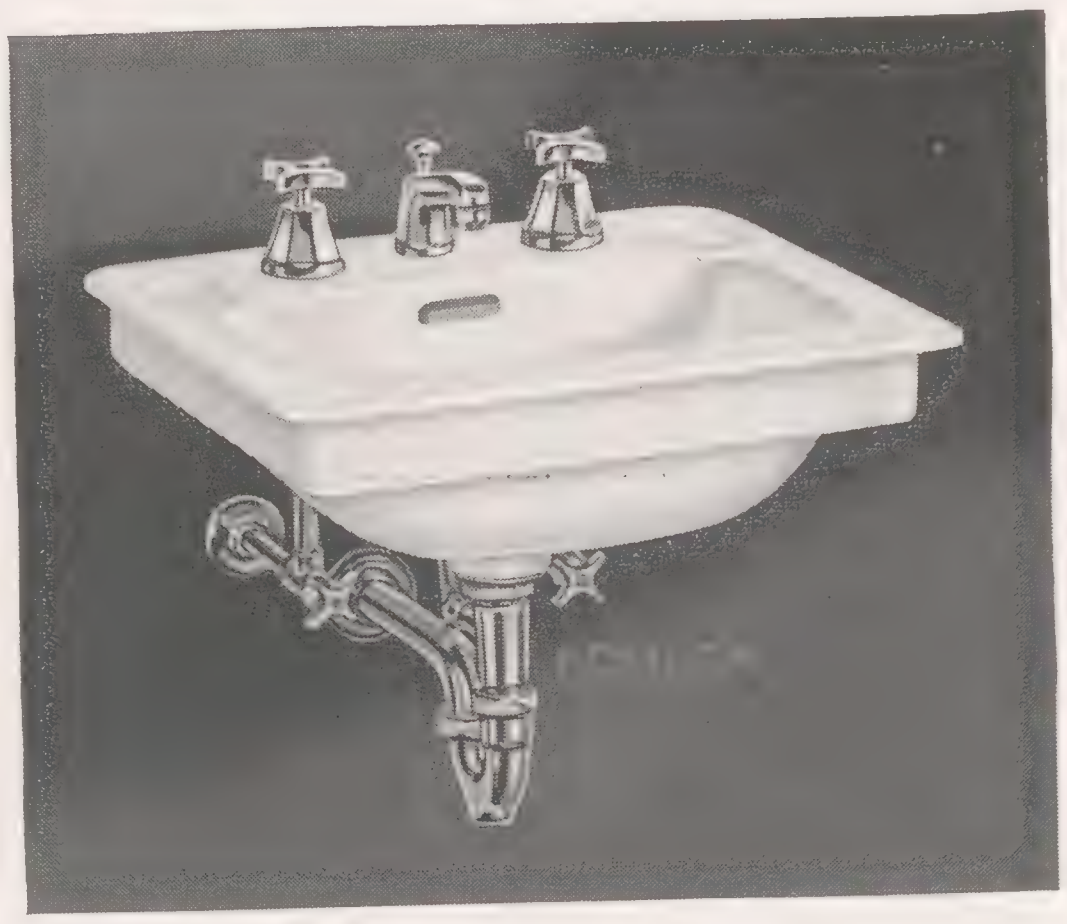

ARROWHEAD K-1892-F Sizes 20x18", 24x18"

Lavatory Complete	K-1890-C	K-1892-F
Lavatory	K-1890	K-1892
Supply and Drain Fitting	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**	**K-8010-A** Bancroft with aerator and Synchro drain For Bancroft fitting less aerator, specify **K-8010**
Supply Pipes	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"
Metal Frame if Specified	**K-6699**	**K-6699**

SIZES	20x18"	24x18"
BASIN	16x10⅞"	18x10⅞"

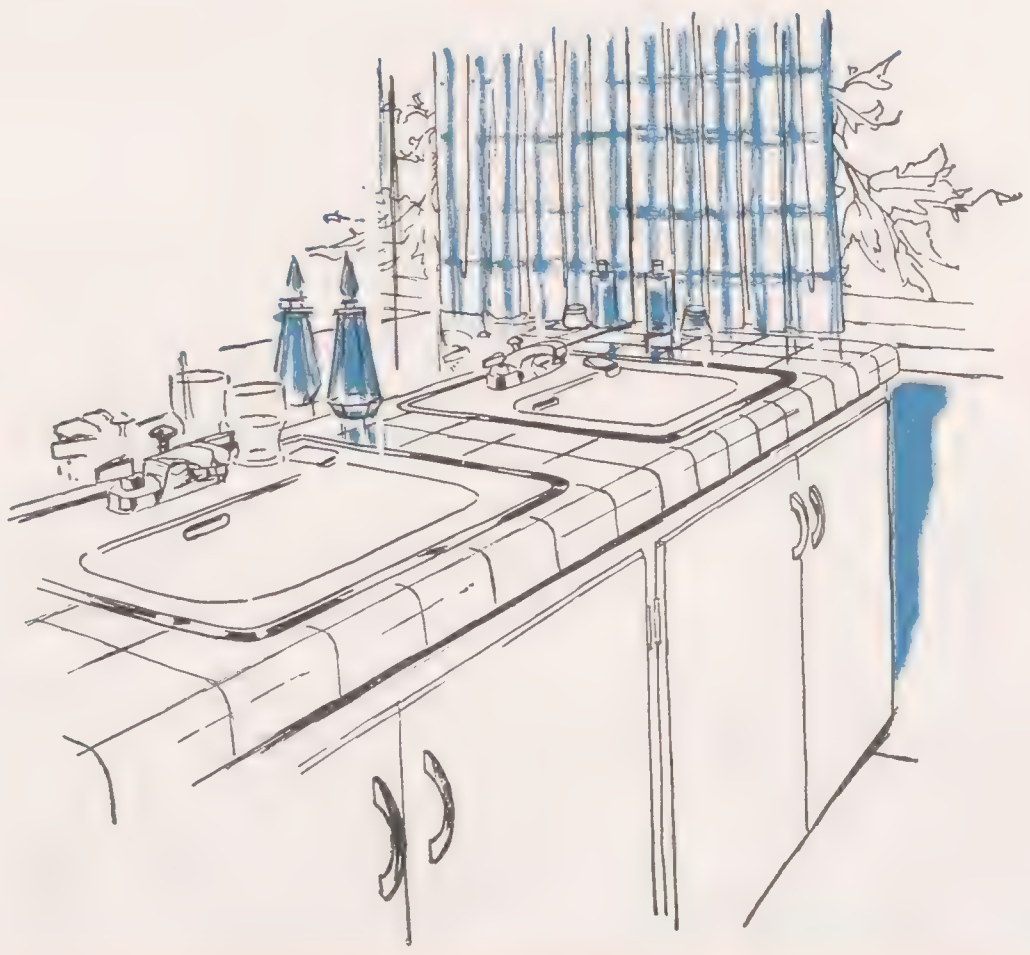

Arrowhead lavatories built-in with tile

LAVATORY CABINETS

FOR BATHROOMS, DRESSING ROOMS, WASHROOMS

These cabinets, with built-in Kohler lavatories, provide storage space for toiletries, towels and other articles. The 42″ size includes a dressing table with a smooth-sliding drawer on roller bearings. Both models are practical, easy-to-clean fixtures for today's bathroom.

Cabinets are made of hardwood plywood in a natural finish. The surface is resistant to water, alcohol and other liquids. Doors have touch latches—no projecting handles—and open without protruding hinges so that cabinets can be placed in recesses. A metal frame around the lavatory insures a water-tight installation.

The one-piece, joint-free top with its exclusive raised back and front helps protect the wall, floor, and front of the cabinet from splashing and overflow. Each model has two storage drawers.

Kohler lavatories for these cabinets are the Arrowhead of vitreous china and the Tahoe of enameled iron. Each is available in Kohler colors. Cabinet tops are furnished in four colors: Soft Green, Chrome Gray, Sand Tone and Coral.

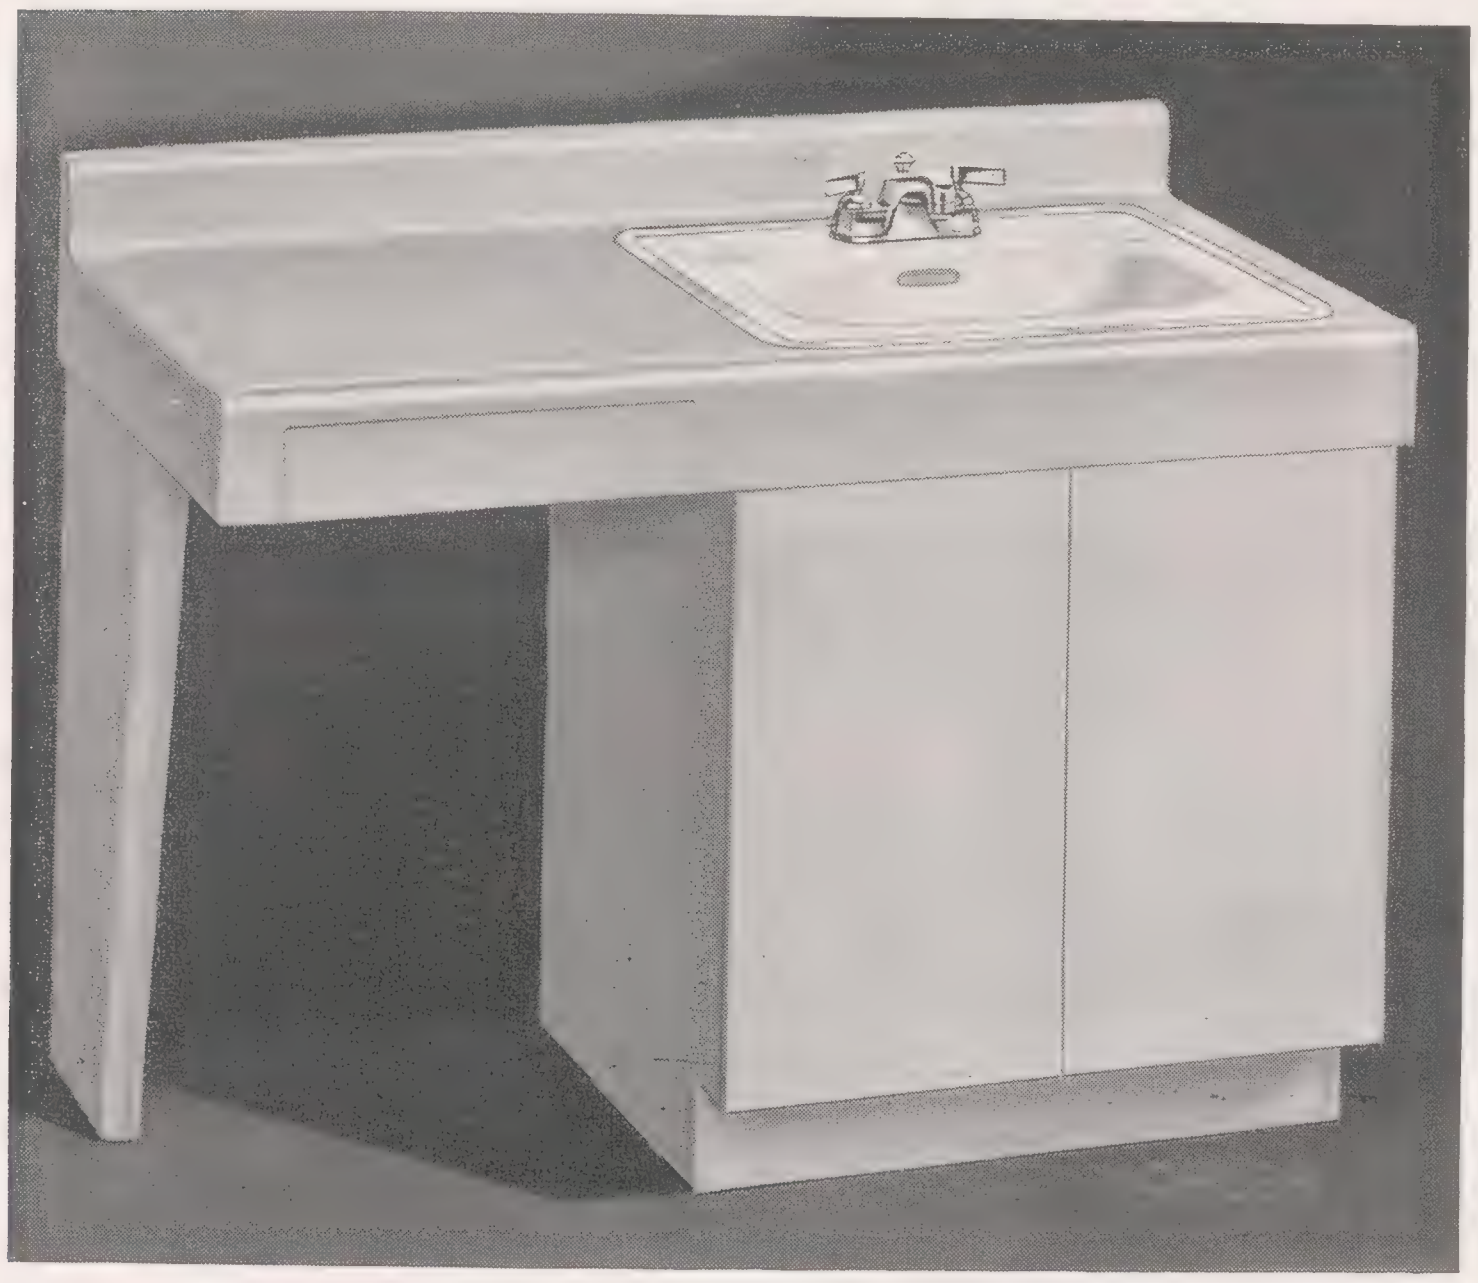

K-5782 CABINET

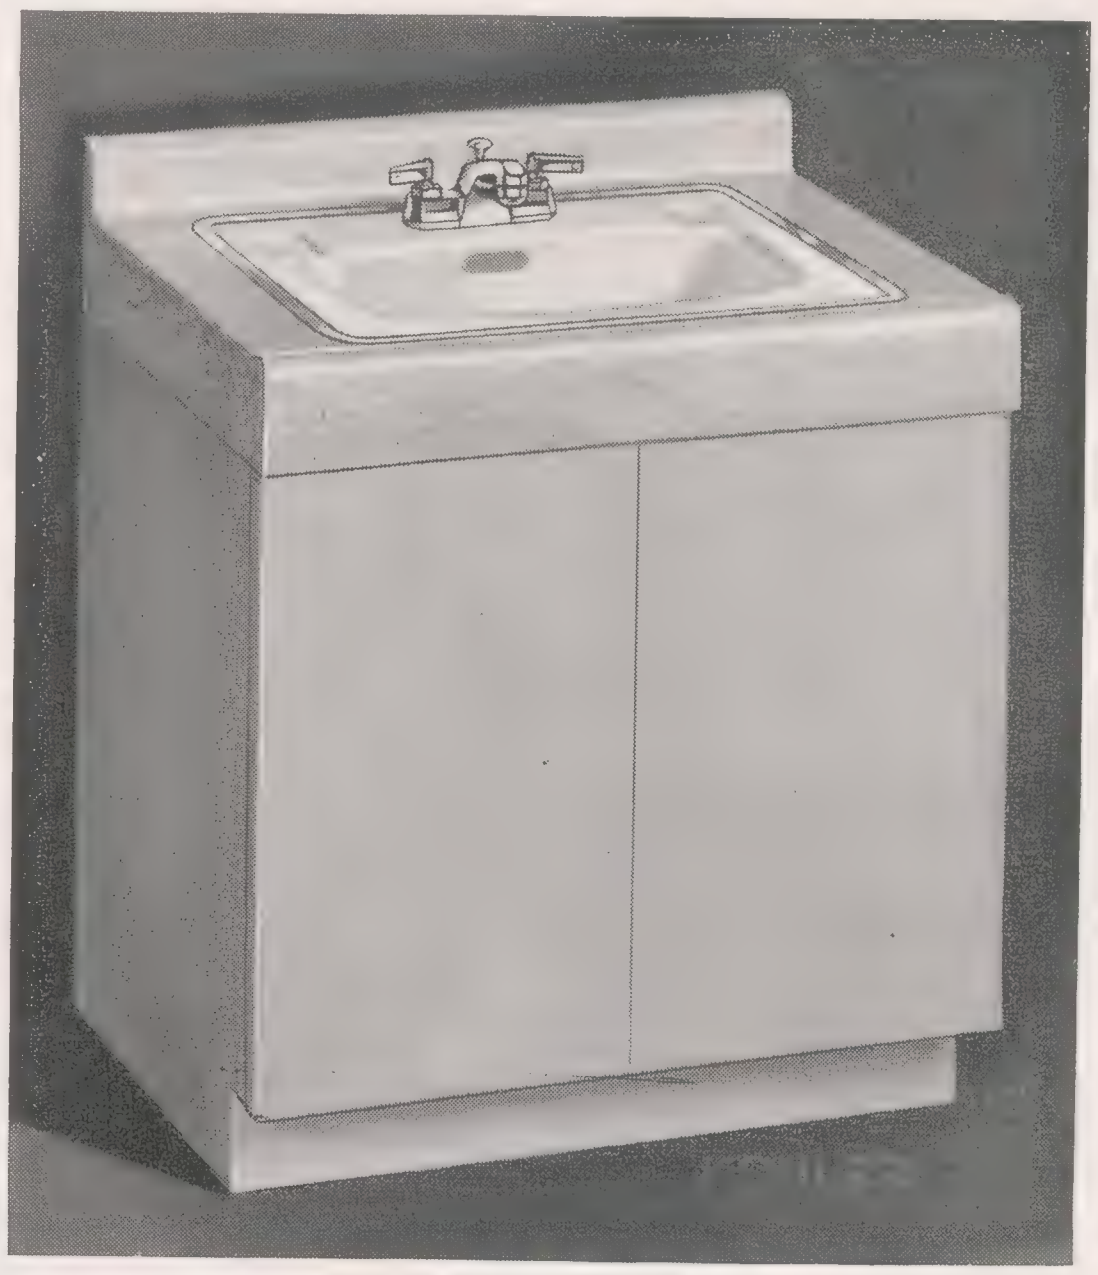

K-5790 CABINET

K-5782	Cabinet with counter at left and end support. (Illustrated.)
K-5781	Cabinet same as **K-5782** with counter at right.
K-5780	Cabinet with counter at left, less end support.
K-5779	Cabinet with counter at right, less end support.

K-5790	Cabinet without counter.

Note: Plate numbers are for cabinets only. Specify if lavatories and metal frames are desired.

	K-5779-80 K-5781-82 WITH COUNTER	K-5790 WITHOUT COUNTER
LENGTH	42″	27″
FRONT TO BACK	22″	22″
HEIGHT TO RIM	31″	31″
HEIGHT OF BACK	4″	4″
DRAWER WIDTH	10″	10″
DRAWER DEPTH	9″	9″
DRAWER FRONT TO BACK	16″	16″

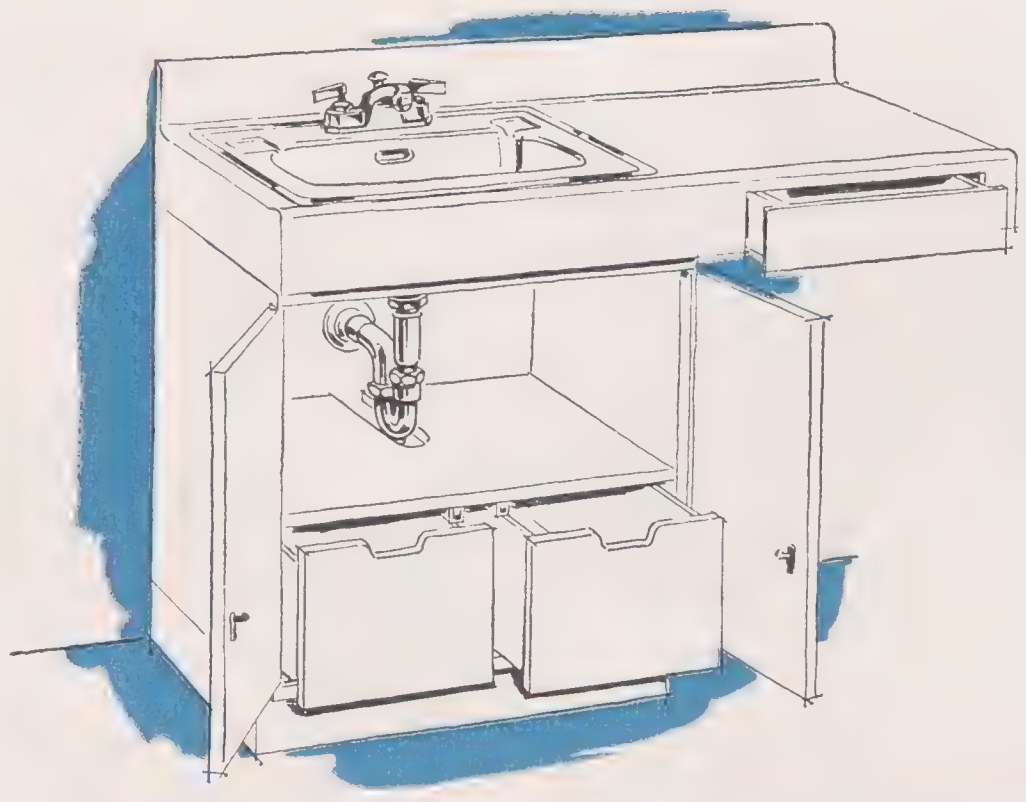

GREENWICH VITREOUS CHINA LAVATORIES WITH BACK

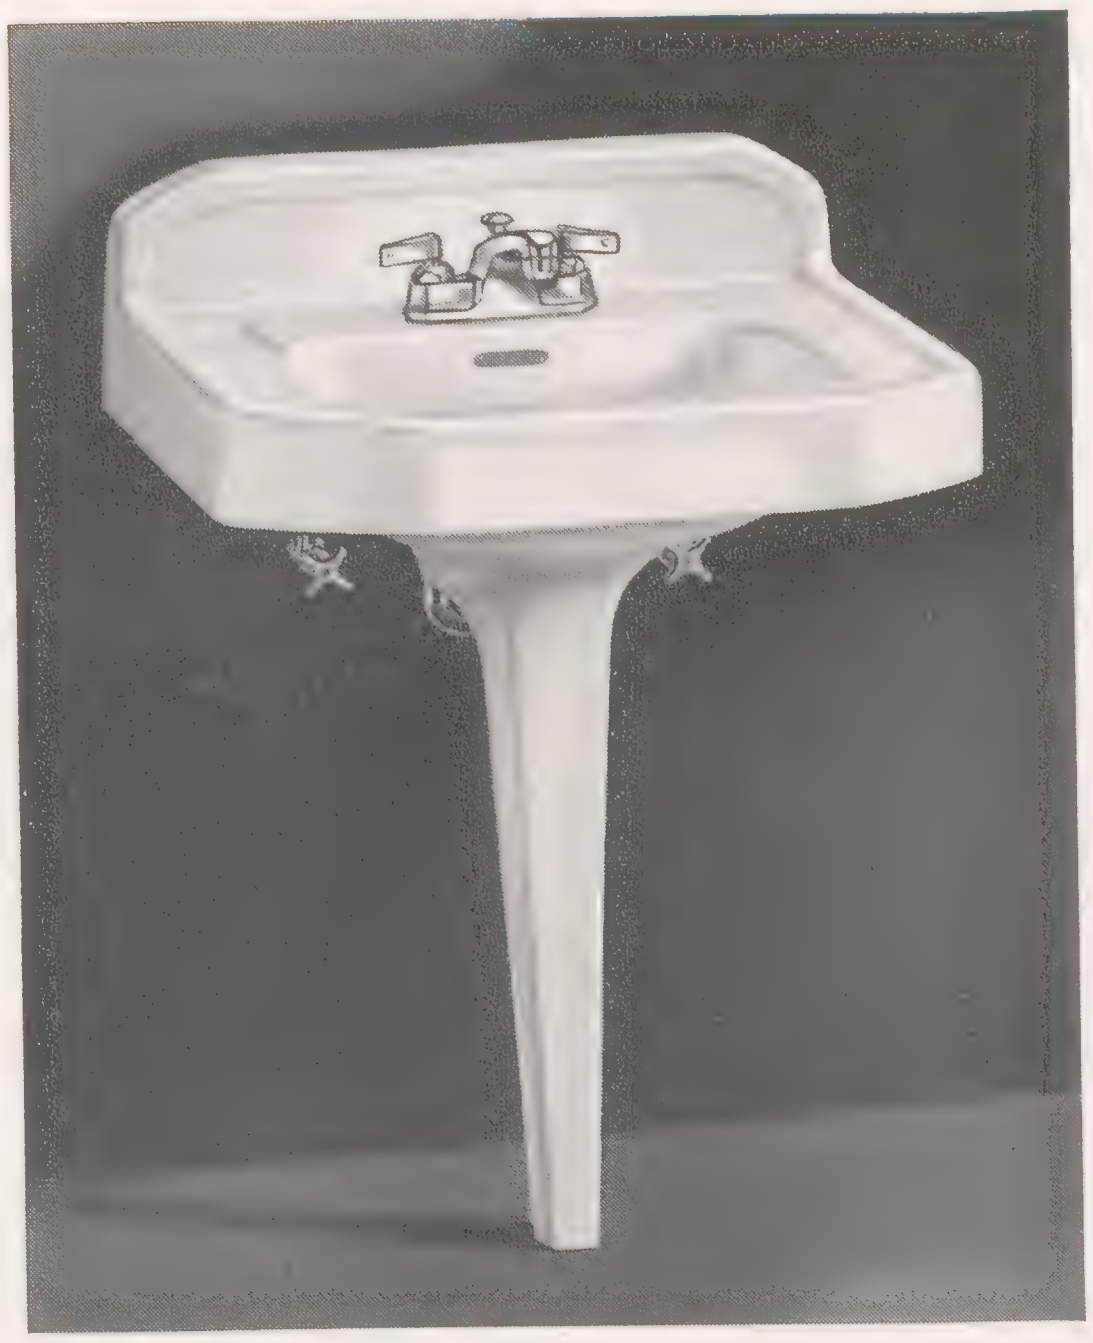

GREENWICH **K-1940-C**
Sizes 20x18", 24x20"

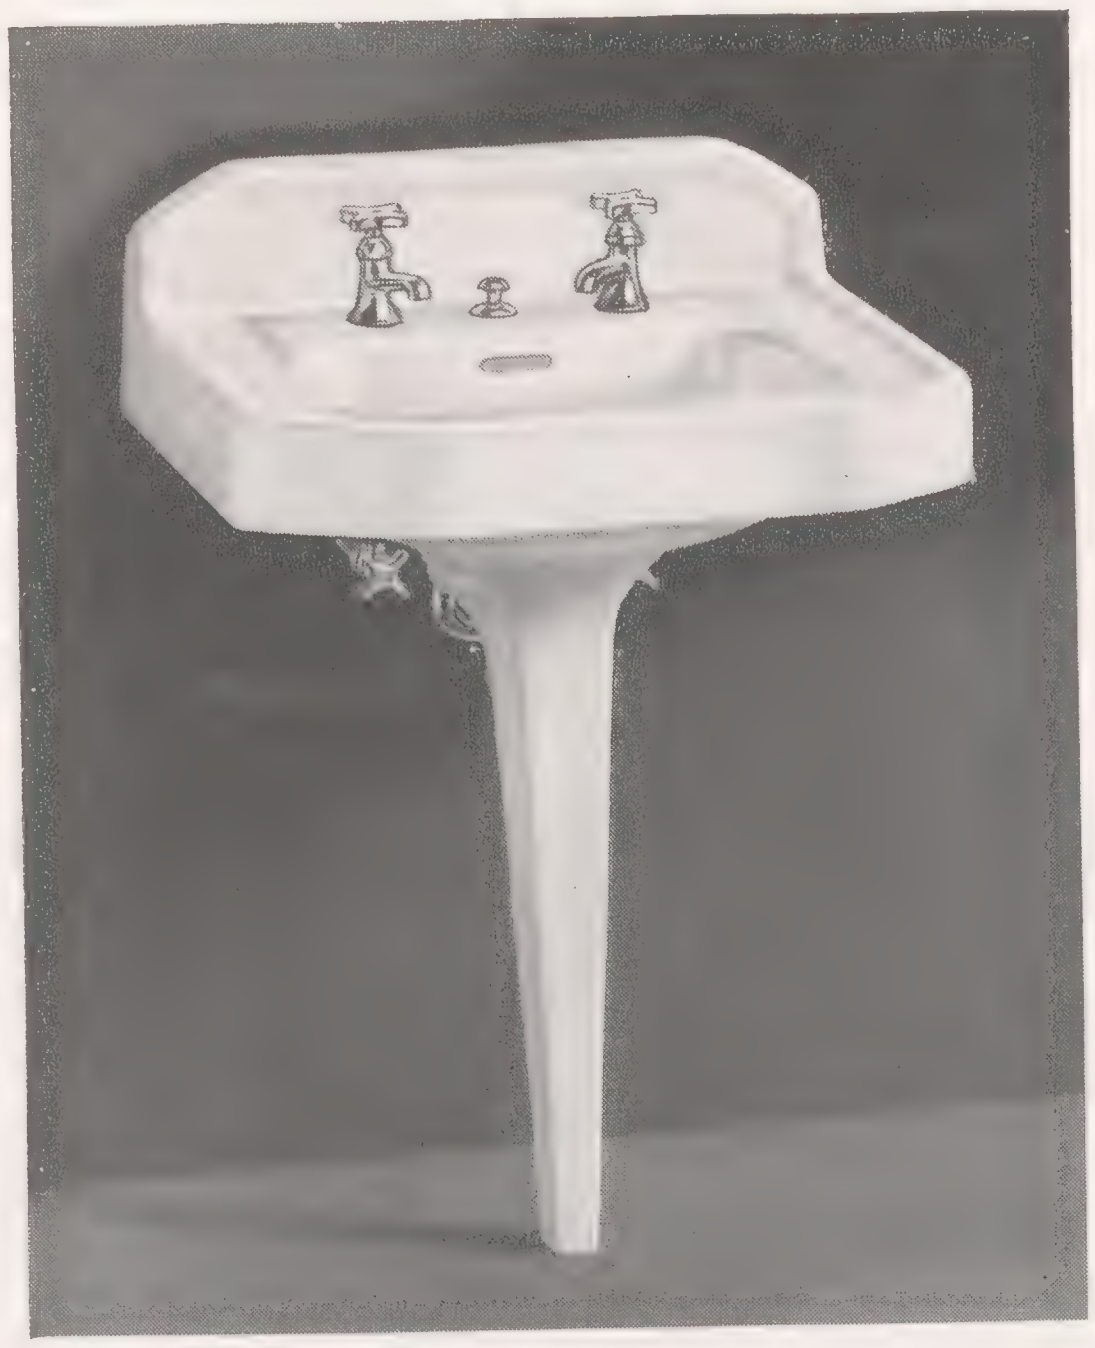

GREENWICH **K-1945-J**
Sizes 20x18", 24x20"

Lavatory Complete	**K-1940-C** (Illustrated)	**K-1945-F**	**K-1945-J** (Illustrated)
Lavatory	**K-1940** with **K-1828** leg	**K-1945** with **K-1828** leg	**K-1945** with **K-1828** leg
Supply and Drain Fitting	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**	**K-8010-A** Bancroft with aerator and Synchro drain For Bancroft fitting less aerator, specify **K-8010**	**K-8178** Sentinel faucets **K-8415** Synchro drain
Supply Pipes	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"	**K-9000** 1¼"

SIZES	20x18"	24x20"
BASIN	14x10"	16x11½"
BACK	5"	5"
HEIGHT FROM FLOOR	31"	31"

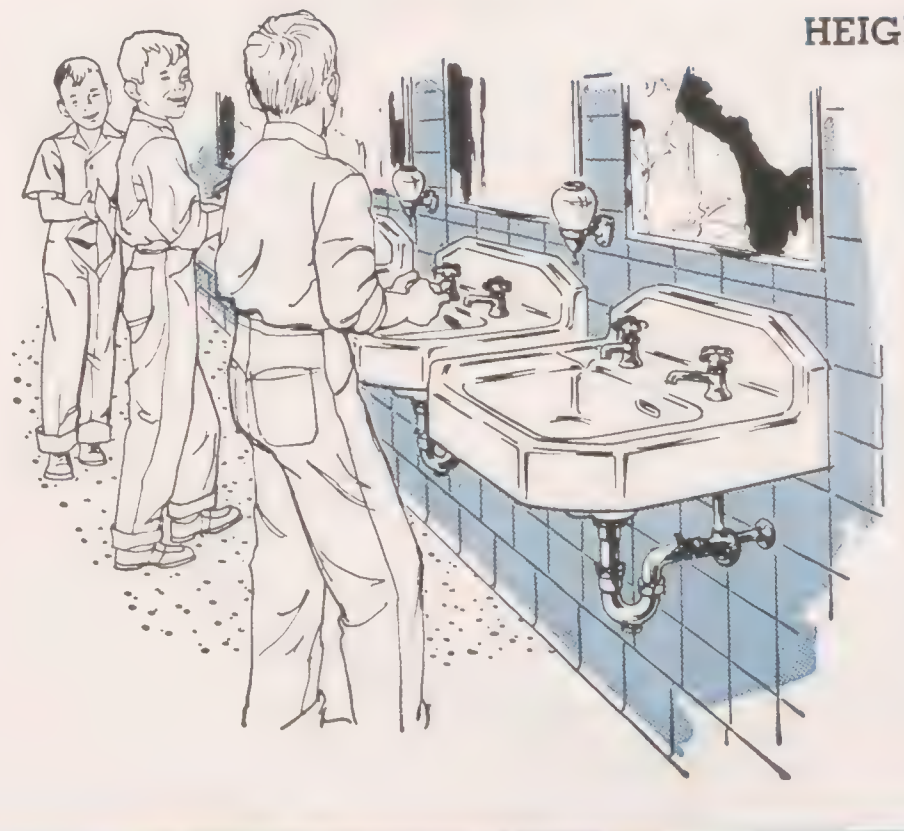

Greenwich Lavatories Are Used Extensively in Schools, Hotels, and Public Buildings



K-8186 Sentry Self-closing Faucet

GREENWICH VITREOUS CHINA LAVATORIES WITH BACK

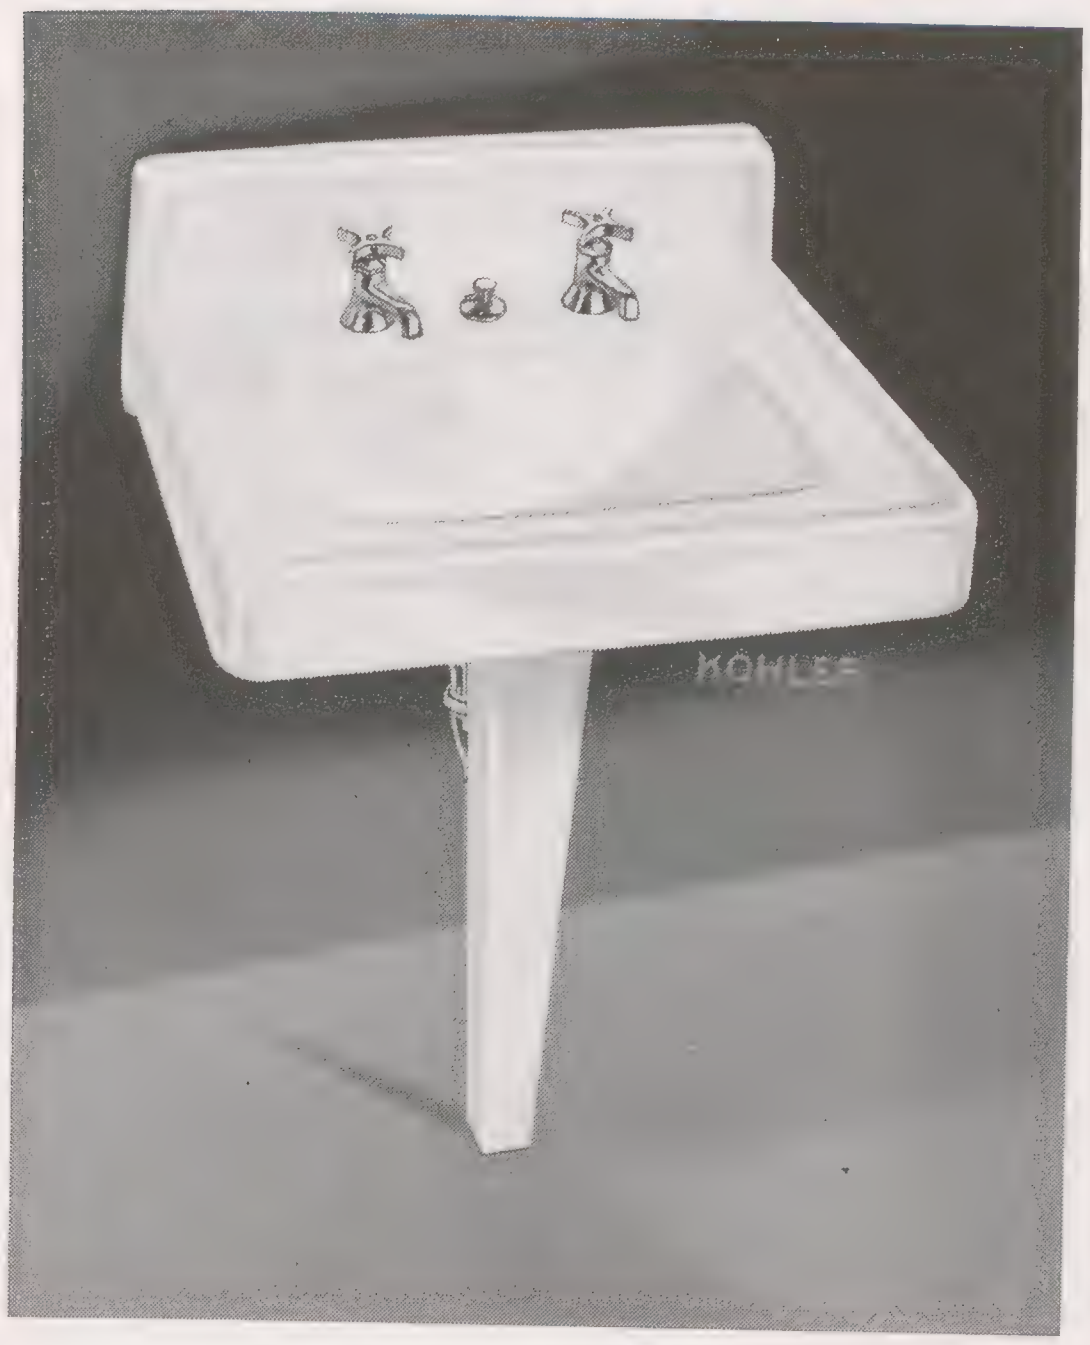

GREENWICH K-1960-J
Sizes 20x18″, 24x20″

HAS
INTEGRAL
WALL
SUPPORT

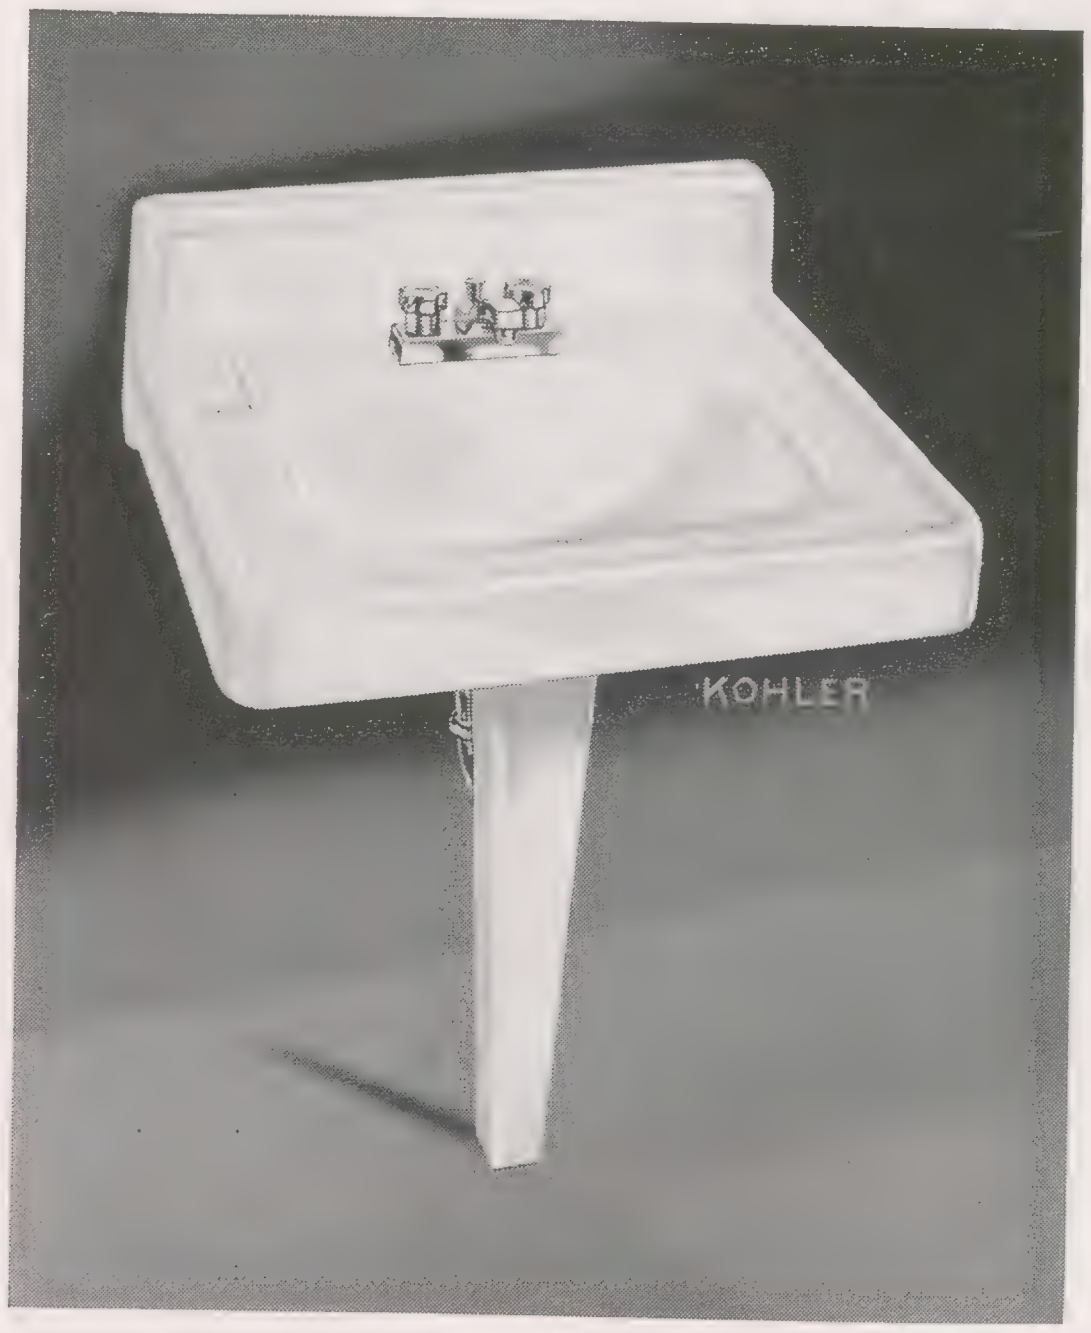

GREENWICH K-1965-C
Sizes 20x18″, 24x20″

Lavatory Complete	**K-1960-J** (Illustrated)	**K-1960-F** Constellation Trim	**K-1965-C** Constellation Trim (Illustrated)
Lavatory	**K-1960** with **K-1828** leg	**K-1960** with **K-1828** leg	**K-1965** with **K-1828** leg
Supply and Drain Fitting	**K-7510** Sentinel faucets with interchangeable units **K-7700** Synchro drain	**K-7416** Bancroft with interchangeable units, aerator, Synchro drain	**K-7400** Centra with interchangeable units, aerator, Synchro drain
Supply Pipes	**K-7606** 3/8″ angle with stops	**K-7606** 3/8″ angle with stops	**K-7606** 3/8″ angle with stops
Trap	**K-9000** 1¼″	**K-9000** 1¼″	**K-9000** 1¼″

For filling stations

SIZES	20x18″	24x20″
BASIN	14x10″	16x11½″
BACK	5″	5″
HEIGHT FROM FLOOR	31″	31″



K-7520 Station Faucet with Bubbler

Greenwich Lavatories Are Used Extensively in Schools, Hotels, and Public Buildings



K-7500 Sentry Self-closing Faucet

Insert between pages 42 and 43 of K-56 catalog.

100M-8 58 Printed in U. S. A.

GREENWICH VITREOUS CHINA LAVATORIES WITH BACK

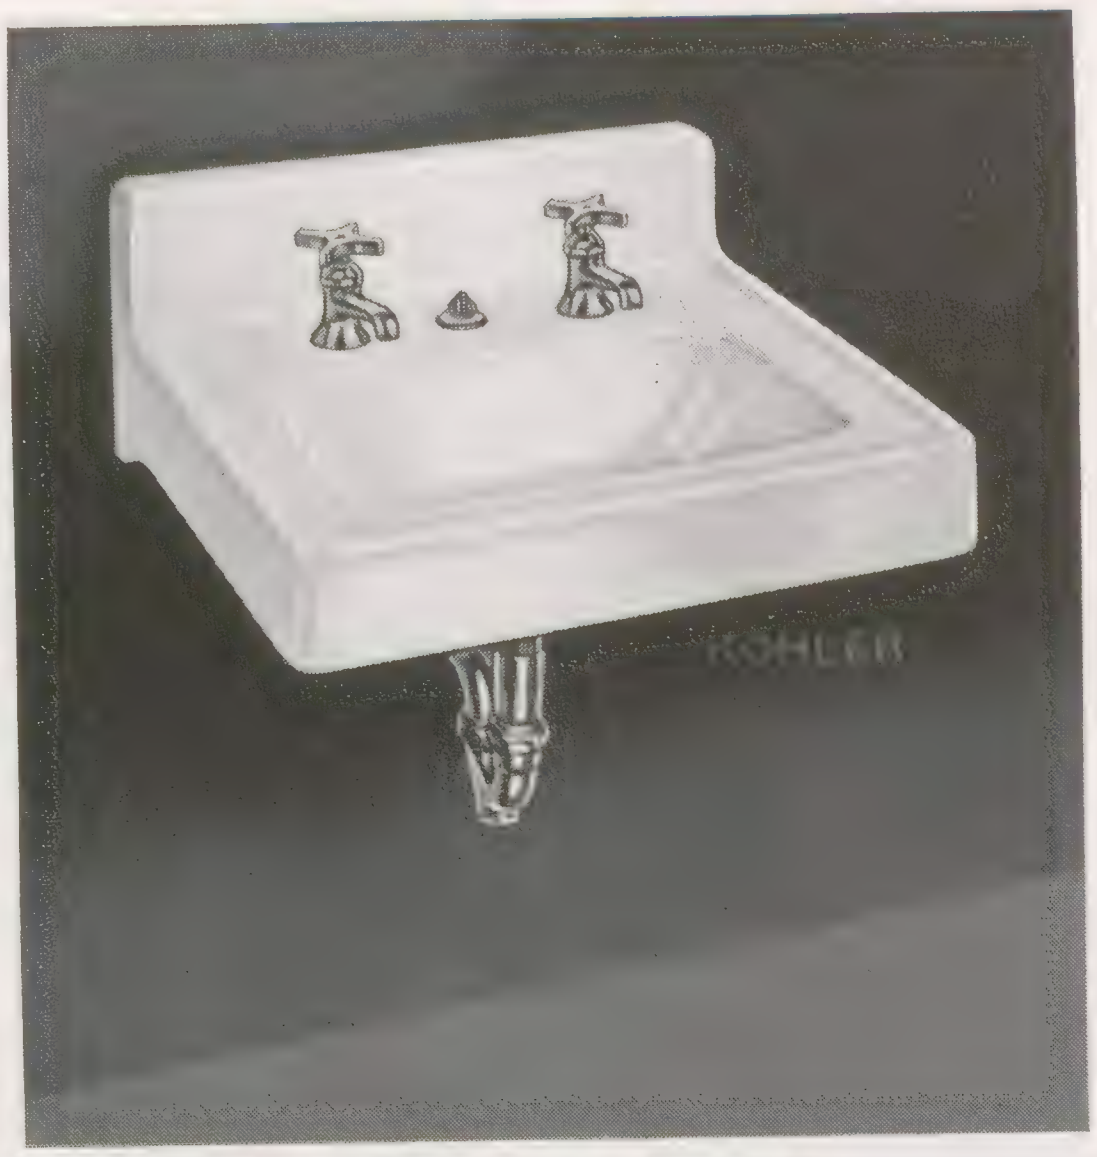

GREENWICH K-1970-P
Sizes 18x15″, 20x18″, 24x20″

HAS
INTEGRAL
WALL
SUPPORT

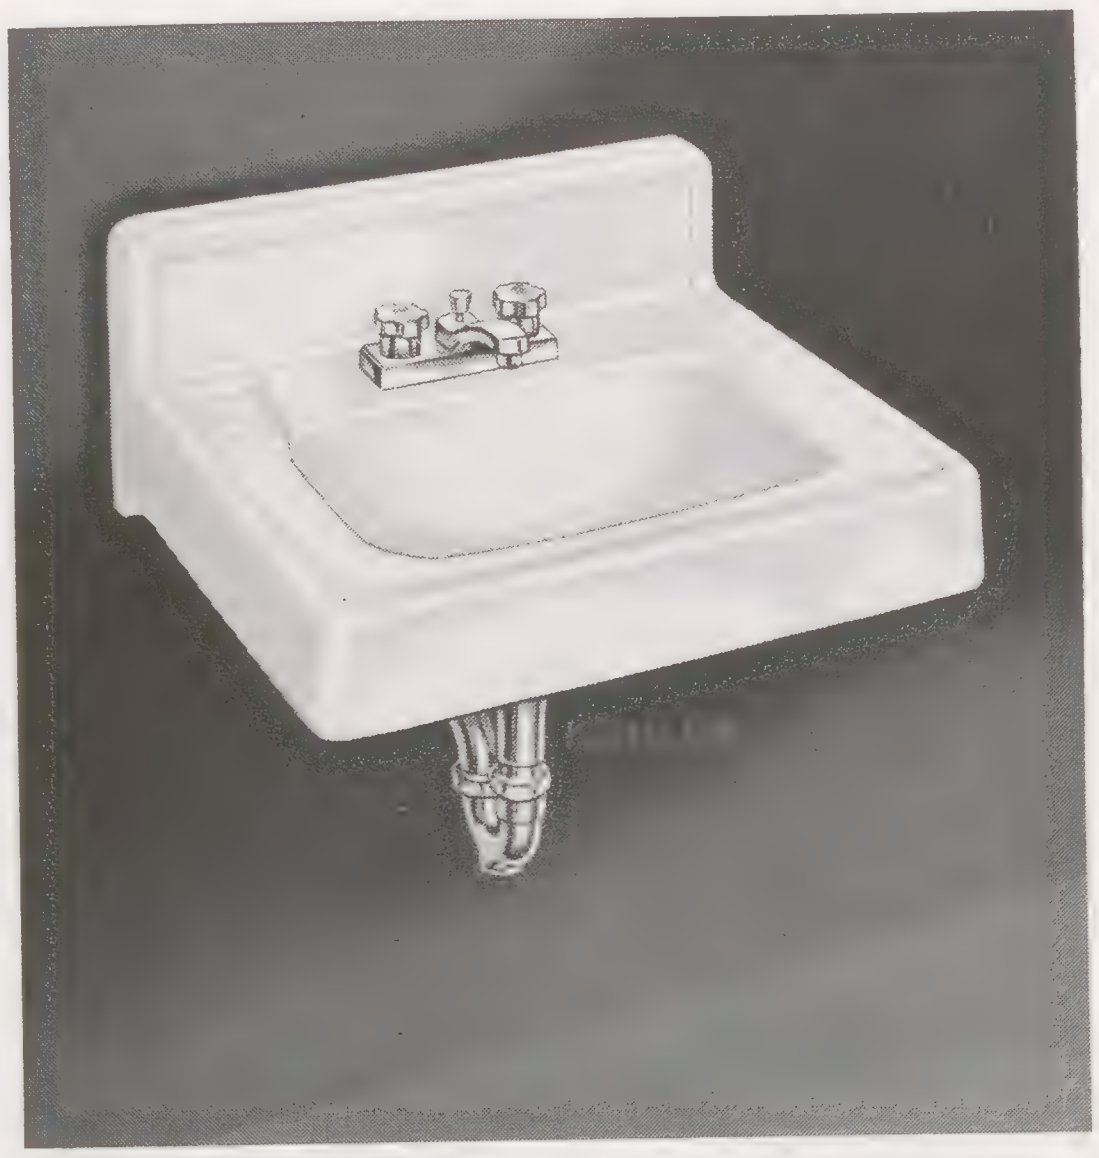

GREENWICH K-1975-C
Sizes 18x15″, 20x18″, 24x20″

Lavatory Complete	**K-1970-P** (Illustrated)	**K-1970-F** Constellation Trim	**K-1975-C** Constellation Trim (Illustrated)
Lavatory	**K-1970**	**K-1970**	**K-1975**
Supply and Drain Fitting	**K-7510** Sentinel faucets with interchangeable units **K-7712** drain with chain and stopper	**K-7416** Bancroft with interchangeable units, aerator, Synchro drain	**K-7400** Centra with interchangeable units, aerator, Synchro drain
Supply Pipes	**K-7606** ⅜″ angle with stops	**K-7606** ⅜″ angle with stops	**K-7606** ⅜″ angle with stops
Trap	**K-9000** 1¼″	**K-9000** 1¼″	**K-9000** 1¼″

SIZES	**18x15″**	**20x18″**	**24x20″**
BASIN	14x9″	14x10″	16x11½″
BACK	5″	5″	5″

For lavatories with drilling for chair carriers with concealed arm brackets: (sizes 20x18″ and 24x20″ only)

Specify **K-1980-F** Greenwich with K-7416 combination lavatory fitting; K-1980 less fittings.
Specify **K-1980-J** Greenwich with K-7510 faucets and pop-up drain; K-1980 less fittings.
Specify **K-1985-C** Greenwich with K-7400 Centra lavatory fitting; K-1985 less fittings.

The **K-1819** 14″ bracket is used on the Gramercy 24x20″ and 27x22″ sizes; the Chesapeake 24x20″ size; the Jamestown, all sizes; and the Greenwich 24x20″ size.

The **K-1818** 12″ bracket is used on the Gramercy 22x18″ size; the Chesapeake 18x15″ and 20x18″ sizes; and the Greenwich 18x15″ sizes.



K-1819 14″ Exposed Painted Bracket for Vitreous China Lavatories

GREENWICH VITREOUS CHINA LAVATORIES WITH BACK

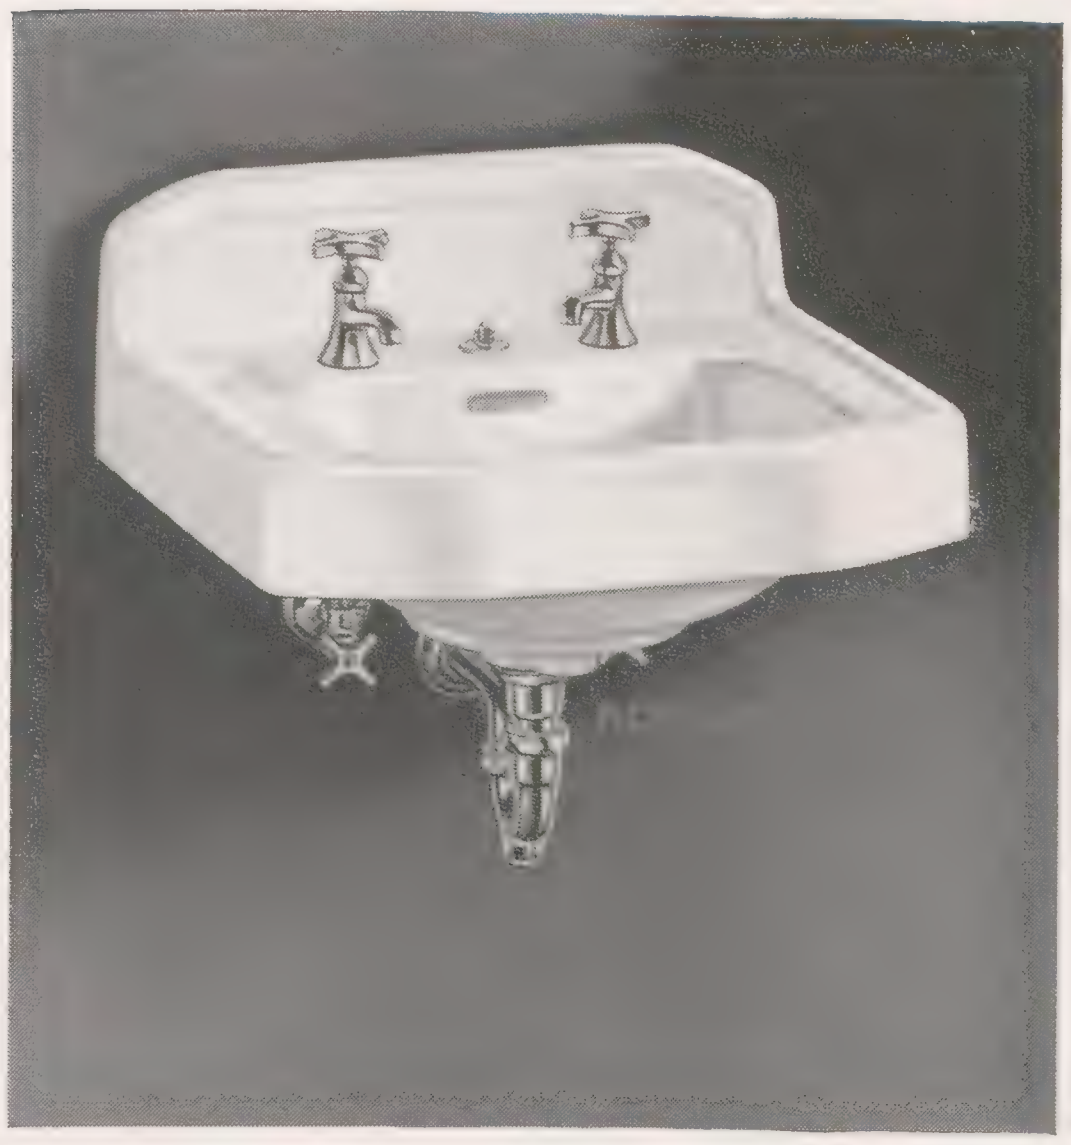

GREENWICH K-1950-P
Sizes 18x15", 20x18", 24x20"

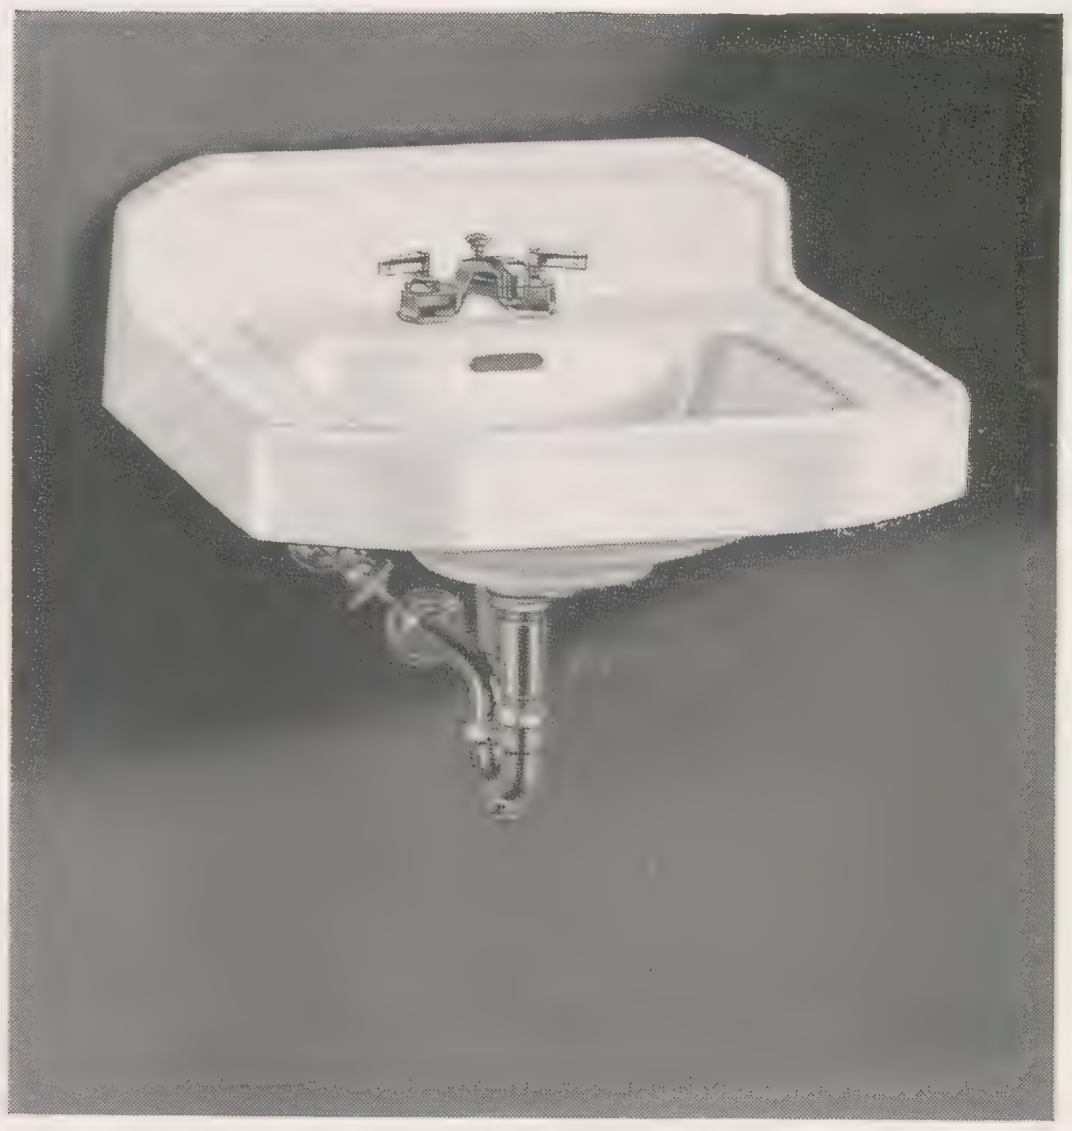

GREENWICH K-1955-C
Sizes 18x15", 20x18", 24x20"

Lavatory Complete	**K-1950-P** (Illustrated)	**K-1950-F**	**K-1955-C** (Illustrated)
Lavatory	**K-1950**	**K-1950**	**K-1955**
Supply and Drain Fitting	**K-8178** Sentinel faucets **K-8426** drain with chain and stopper	**K-8010-A** Bancroft with aerator and Synchro drain For Bancroft fitting less aerator, specify **K-8010**	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**
Supply Pipes	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"	**K-9000** 1¼"

SIZES	18x15"	20x18"	24x20"
BASIN	14x9"	14x10"	16x11½"
BACK	5"	5"	5"

We recommend 24x20" size be furnished with **K-1819** under-slab brackets for additional support.

For filling stations



K-8194 Station Faucet with Bubbler

The **K-1819** 14" bracket is used on the Gramercy 24x20" and 27x22" sizes; the Chesapeake 24x20" size; the Jamestown, all sizes; and the Greenwich 24x20" size.

The **K-1818** 12" bracket is used on the Gramercy 22x18" size; the Chesapeake 18x15" and 20x18" sizes; and the Greenwich 18x15" and 20x18" sizes.



K-1819 14" Exposed Painted Bracket for Vitreous China Lavatories

MILAN VITREOUS CHINA LAVATORY WITH WALL OUTLET

For Institutions

SIZE	20x14"
BASIN	15x9"
BACK	3½"
WIDTH OF SHELF	4"

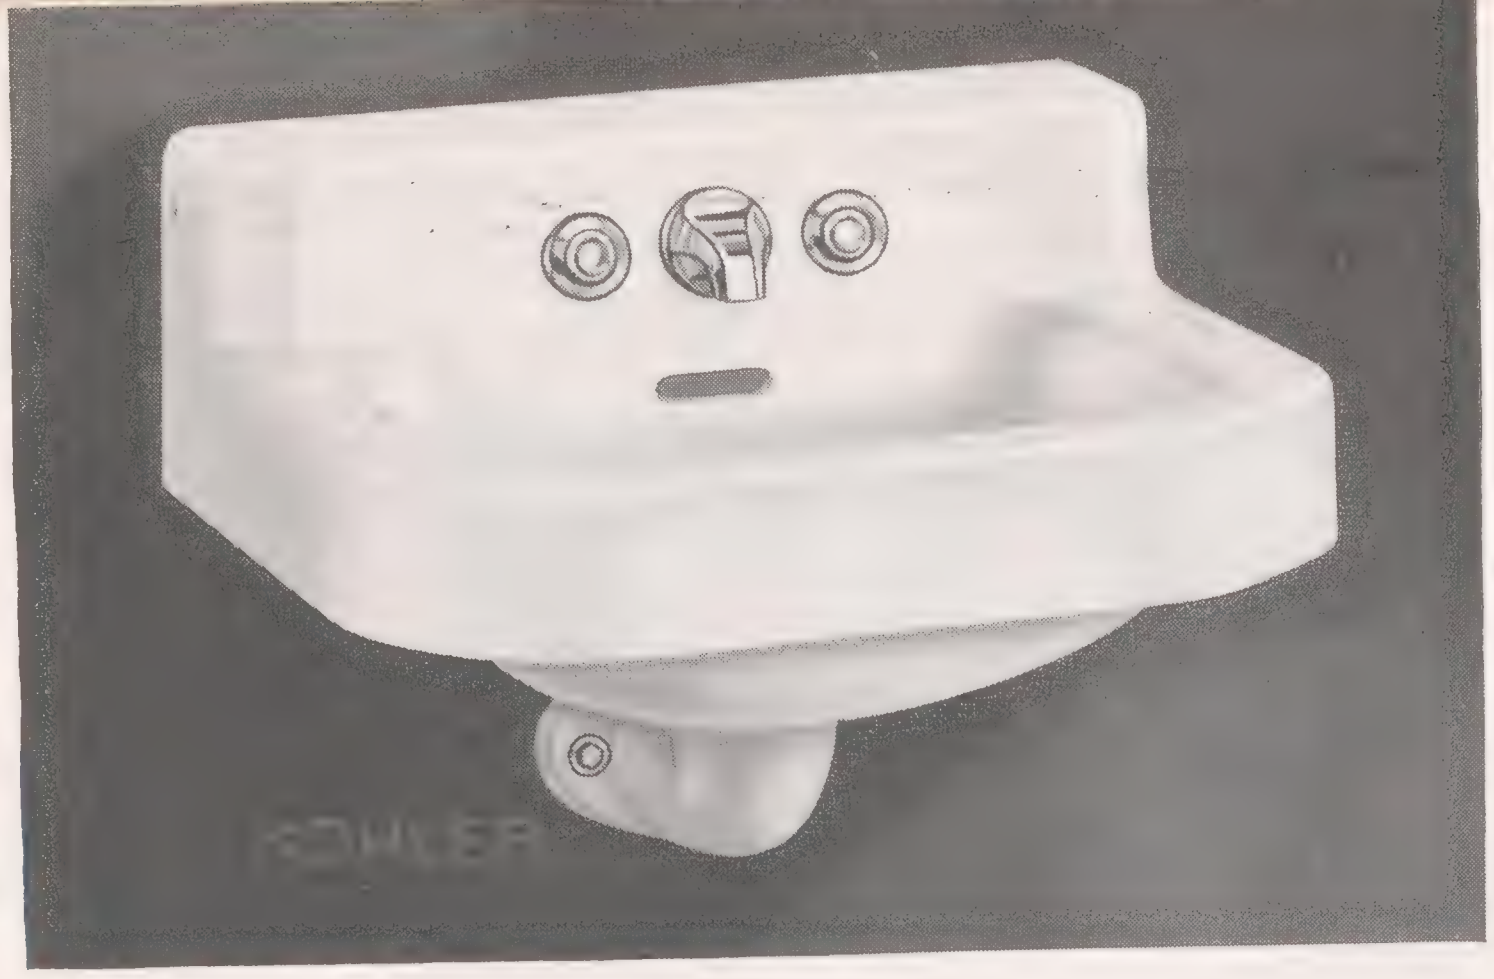

MILAN K-2365-A Size 20x14"

Lavatory Complete	**K-2365-A** (Illustrated)	**K-2366-A** For cold water only
Supply and Drain Fitting	**K-8148** concealed self-closing fitting with indexed push buttons for hot and cold water, drain plug with non-removable metal stopper, 1½" outlet spud.	**K-8149** concealed self-closing fitting with indexed push button for cold water only with supporting bolt through left faucet hole, drain plug with non-removable metal stopper. 1½" outlet spud.

Fittings regularly furnished for these lavatories are for wall 1" thick. Specify if walls exceed 1" thickness. Stop valve should be installed in supplies. Trap behind wall not included.

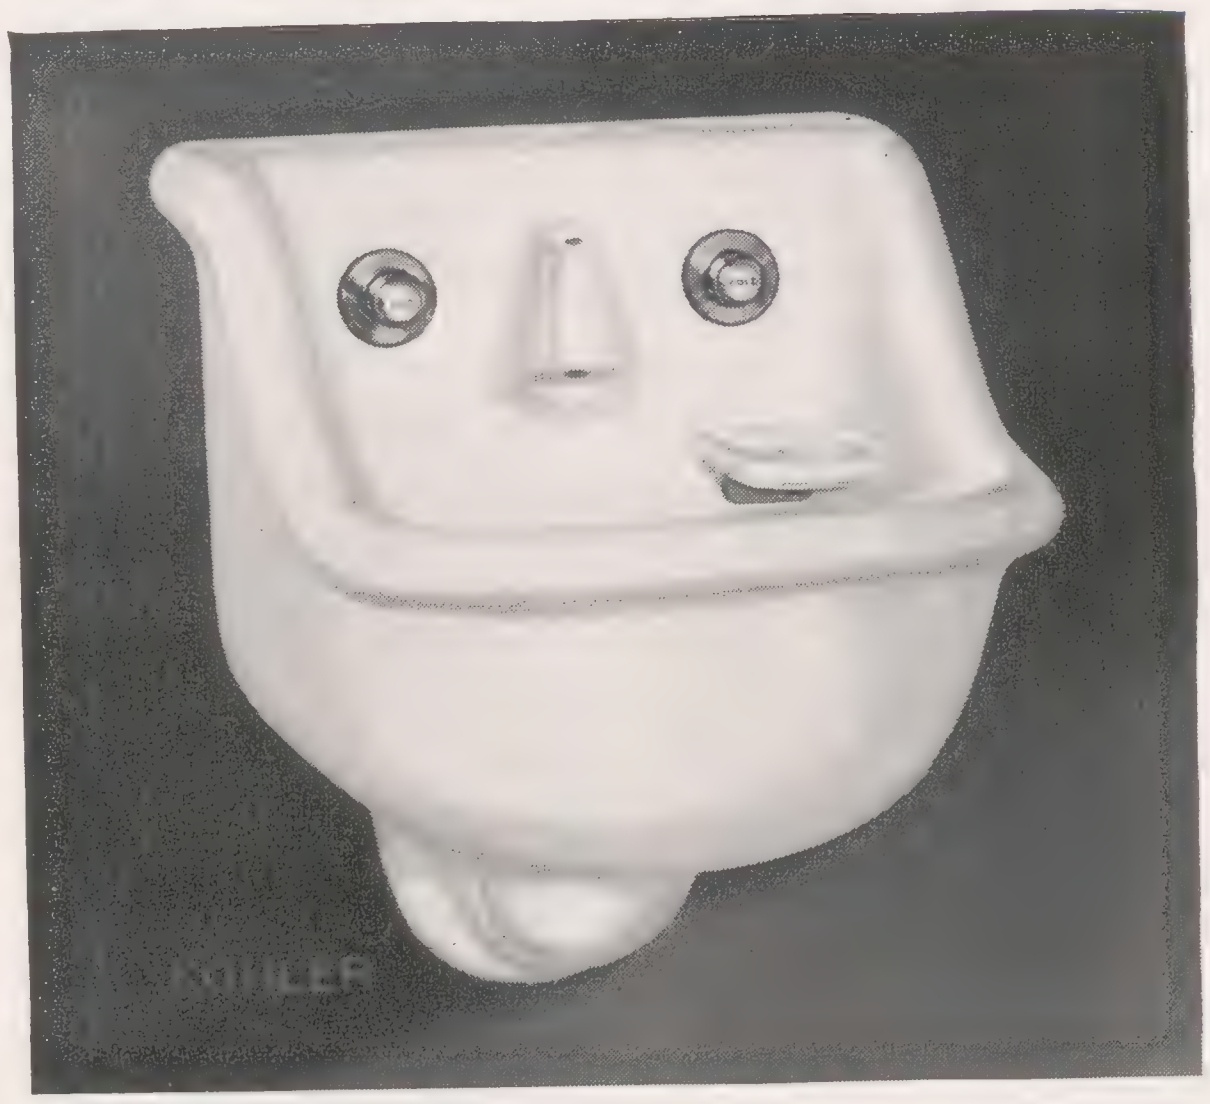

CHARDON K-2375-A Size 14x12"

CHARDON VITREOUS CHINA LAVATORY WITH BUILT-IN ANTI-SQUIRT SUPPLY AND BUBBLER

For Institutions

SIZE	14"x12"
DEPTH OF BASIN	8"
BACK	5"

Lavatory Complete	**K-2375-A** (Illustrated)	**K-2376-A** For cold water only
Supply and Drain Fitting	**K-8154** concealed self-closing fitting with indexed push buttons for hot and cold water, 1½" outlet spud, integral, slow draining outlet.	**K-8155** concealed self-closing fitting with indexed push button for cold water only and supporting bolt through left faucet hole, 1½" outlet spud.

HAMPTON
ENAMELED CAST IRON
Shelf LAVATORIES

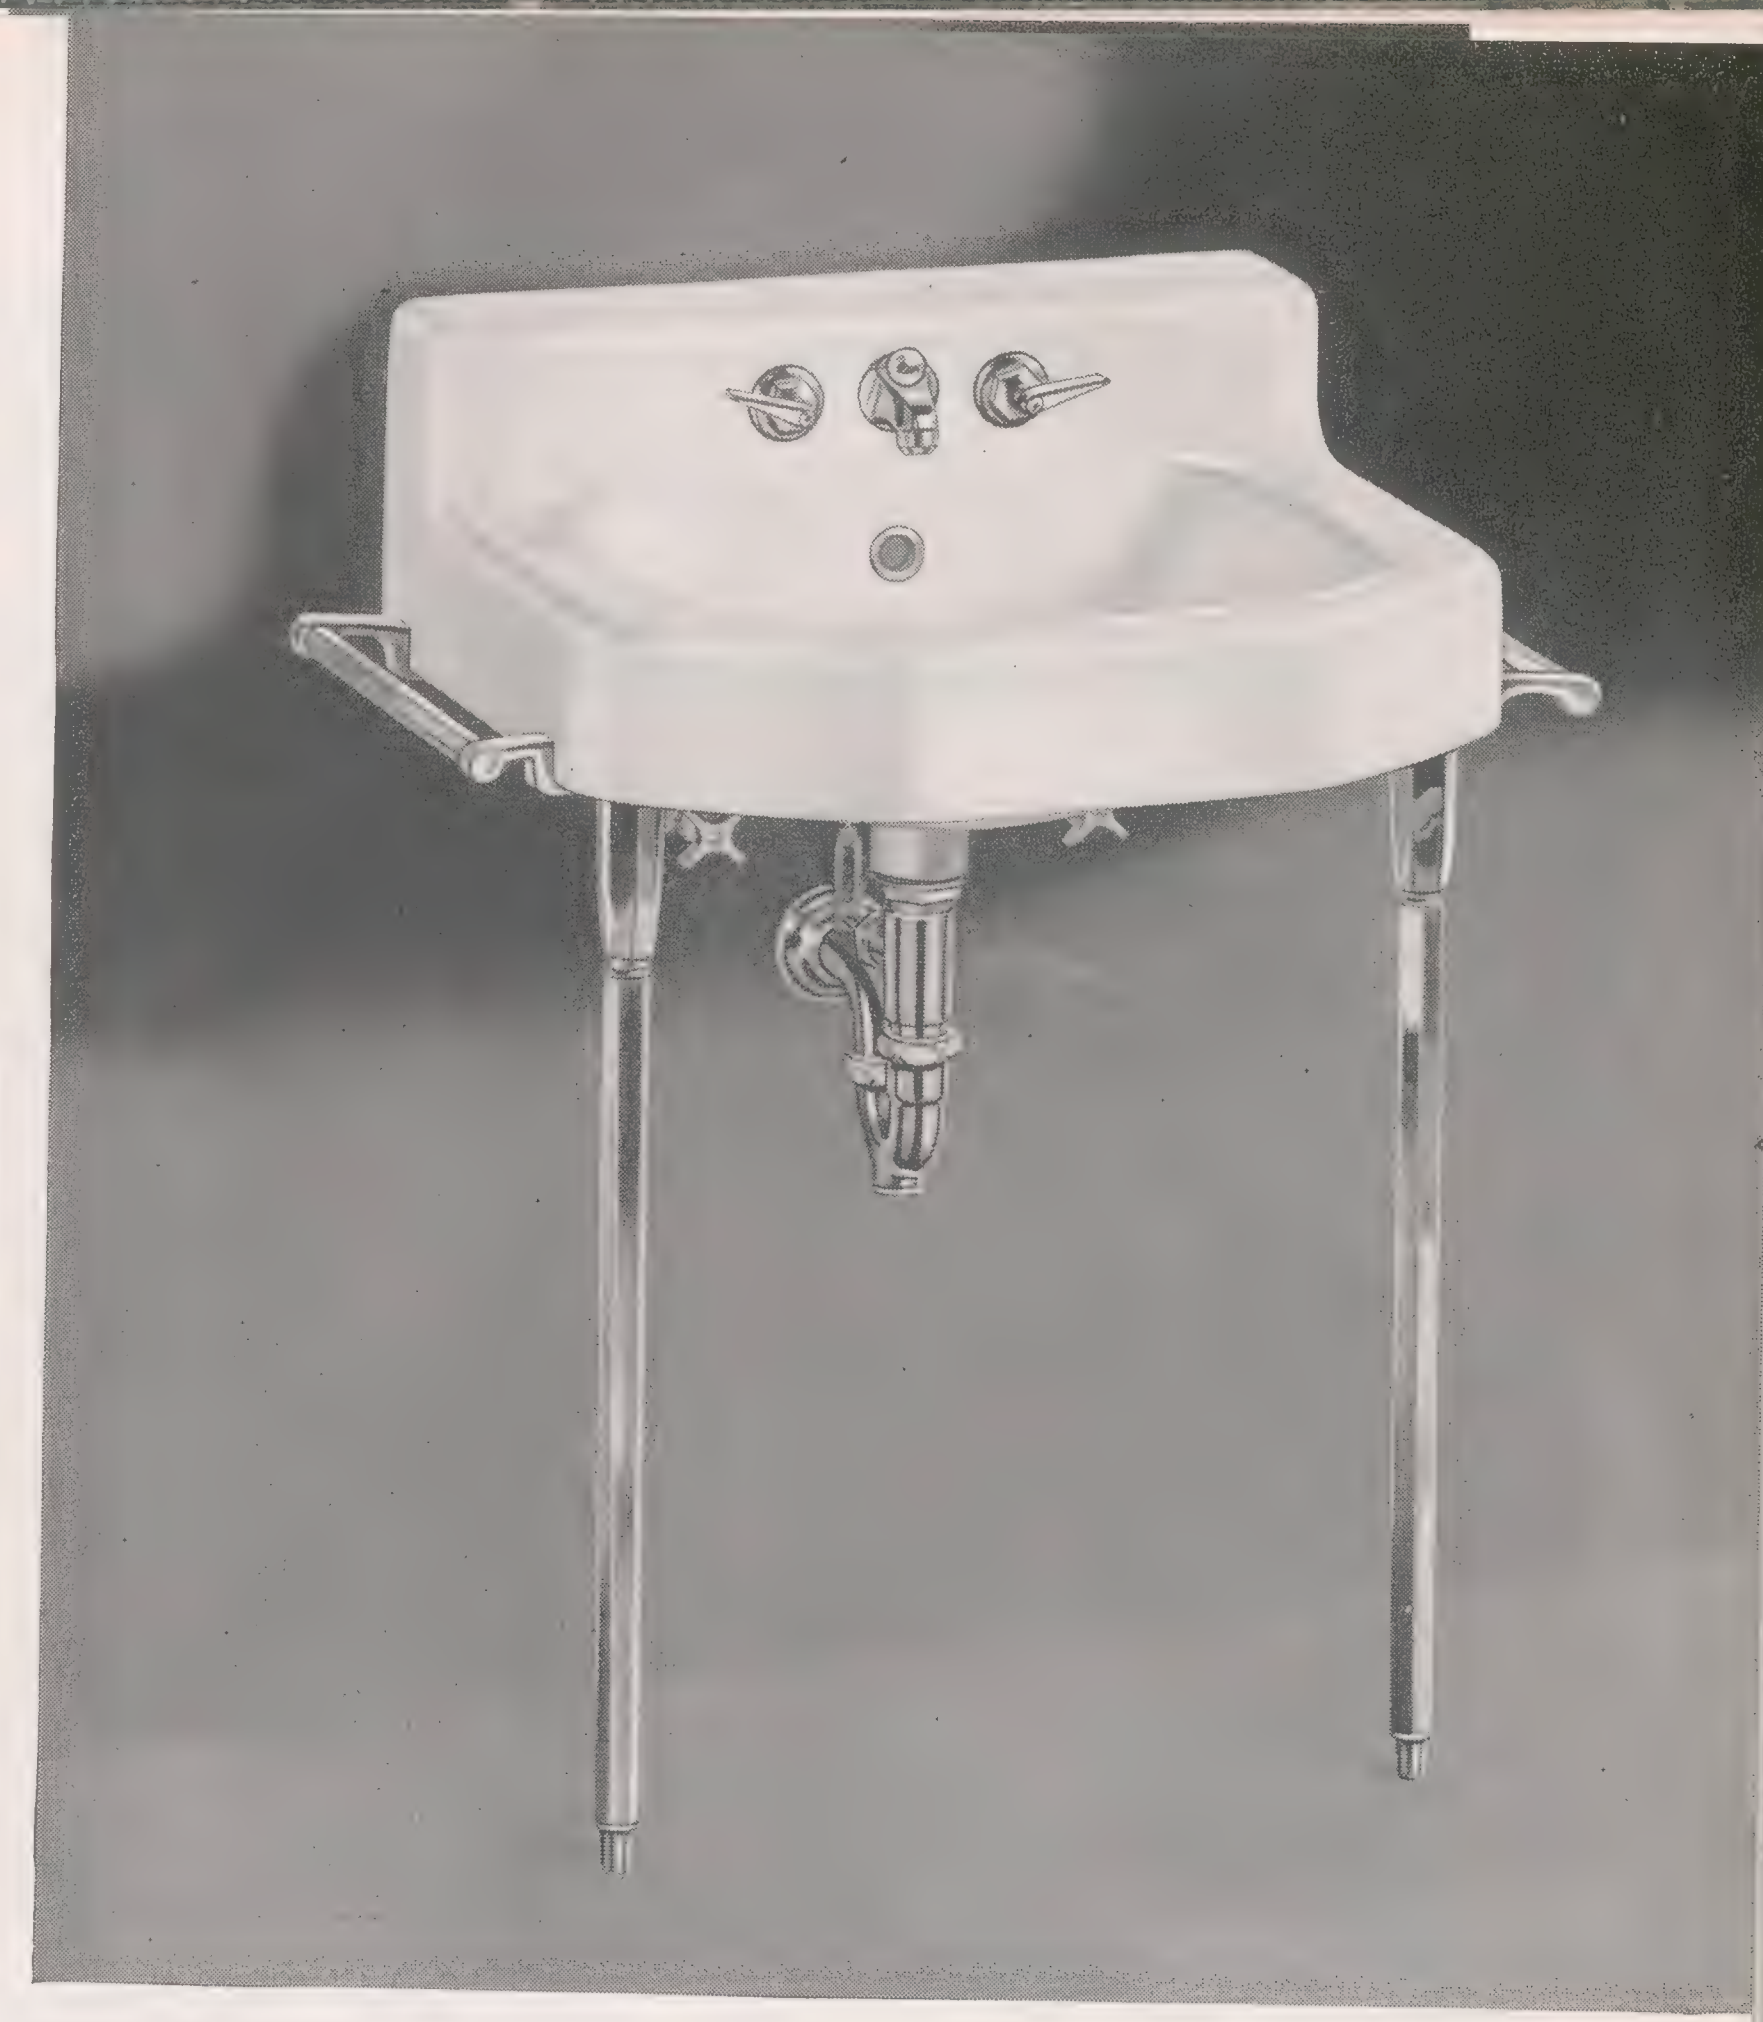

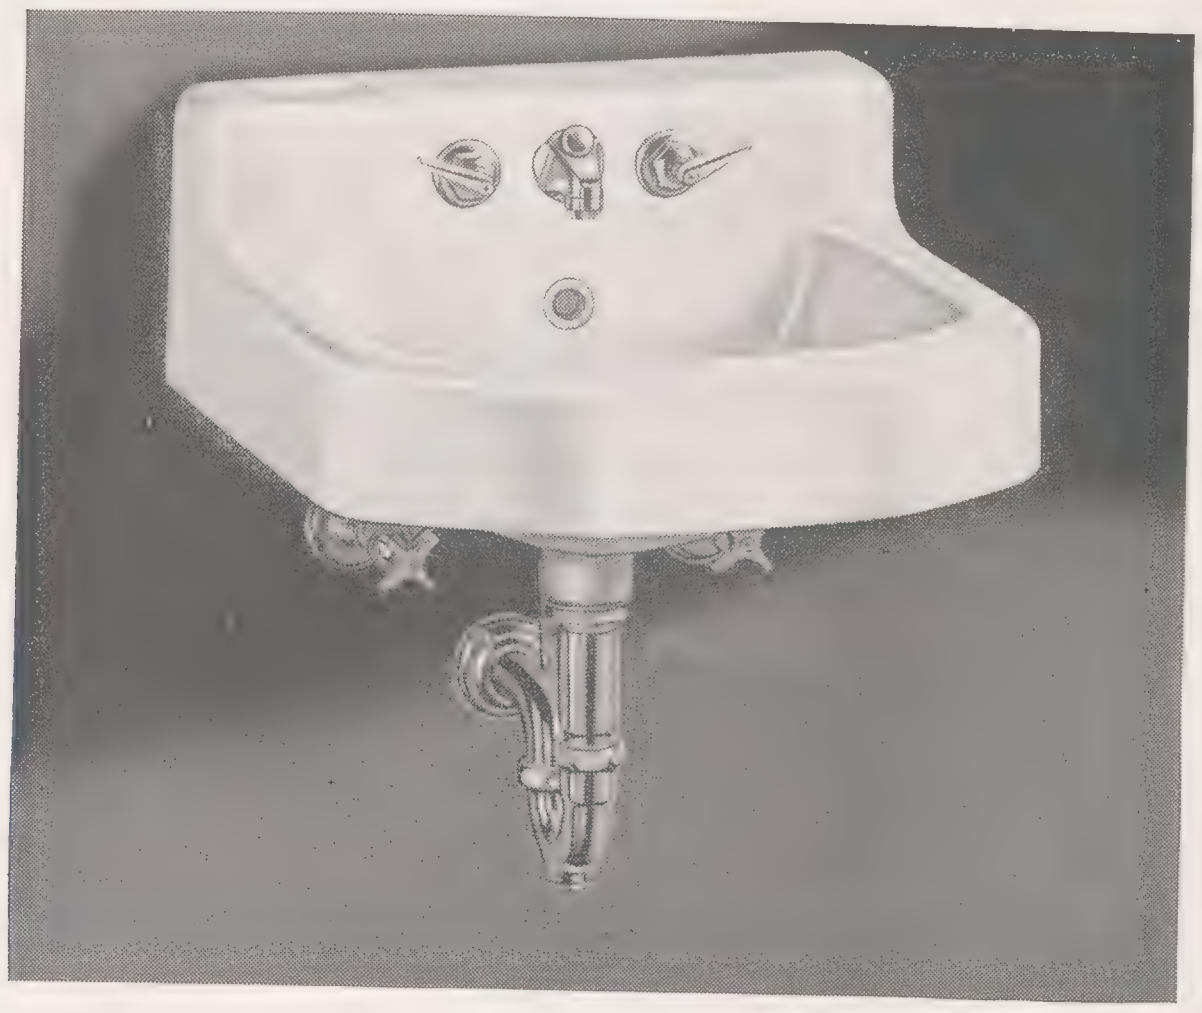

HAMPTON K-2701-A Sizes 19x17", 22x19"

HAMPTON K-2707-A Sizes 19x17", 22x19"

Lavatory Complete	**K-2701-A**	**K-2707-A**
Lavatory with Supply and Drain Fitting, Less Towel Bars, Supply Pipes and Trap	**K-2701-B**	**K-2707-B** with **K-9580** legs
Supply and Drain Fitting	**K-8081-A** with aerator and Synchro drain For fitting less aerator, specify **K-8081**	**K-8081-A** with aerator and Synchro drain For fitting less aerator, specify **K-8081**
Towel Bars	Available when specified	**K-9565**
Supply Pipes	**K-8258** ⅜" angle with stops	**K-8258** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"

SIZES	19x17"	22x19"
BASIN	14¾x11"	16x12½"
BACK	4"	4"
WIDTH OF SHELF	4"	4½"
HEIGHT FROM FLOOR	31"	31"

The 19x17" size has one soap depression on shelf; the 22x19" size has two on slab.



K-8082-A Fitting with self-closing valves

The Hampton lavatory is available with **K-8082-A** self-closing fitting, if specified.

TAUNTON ENAMELED CAST IRON

Space-Saving Shelf LAVATORIES

For Narrow Rooms

For Institutions

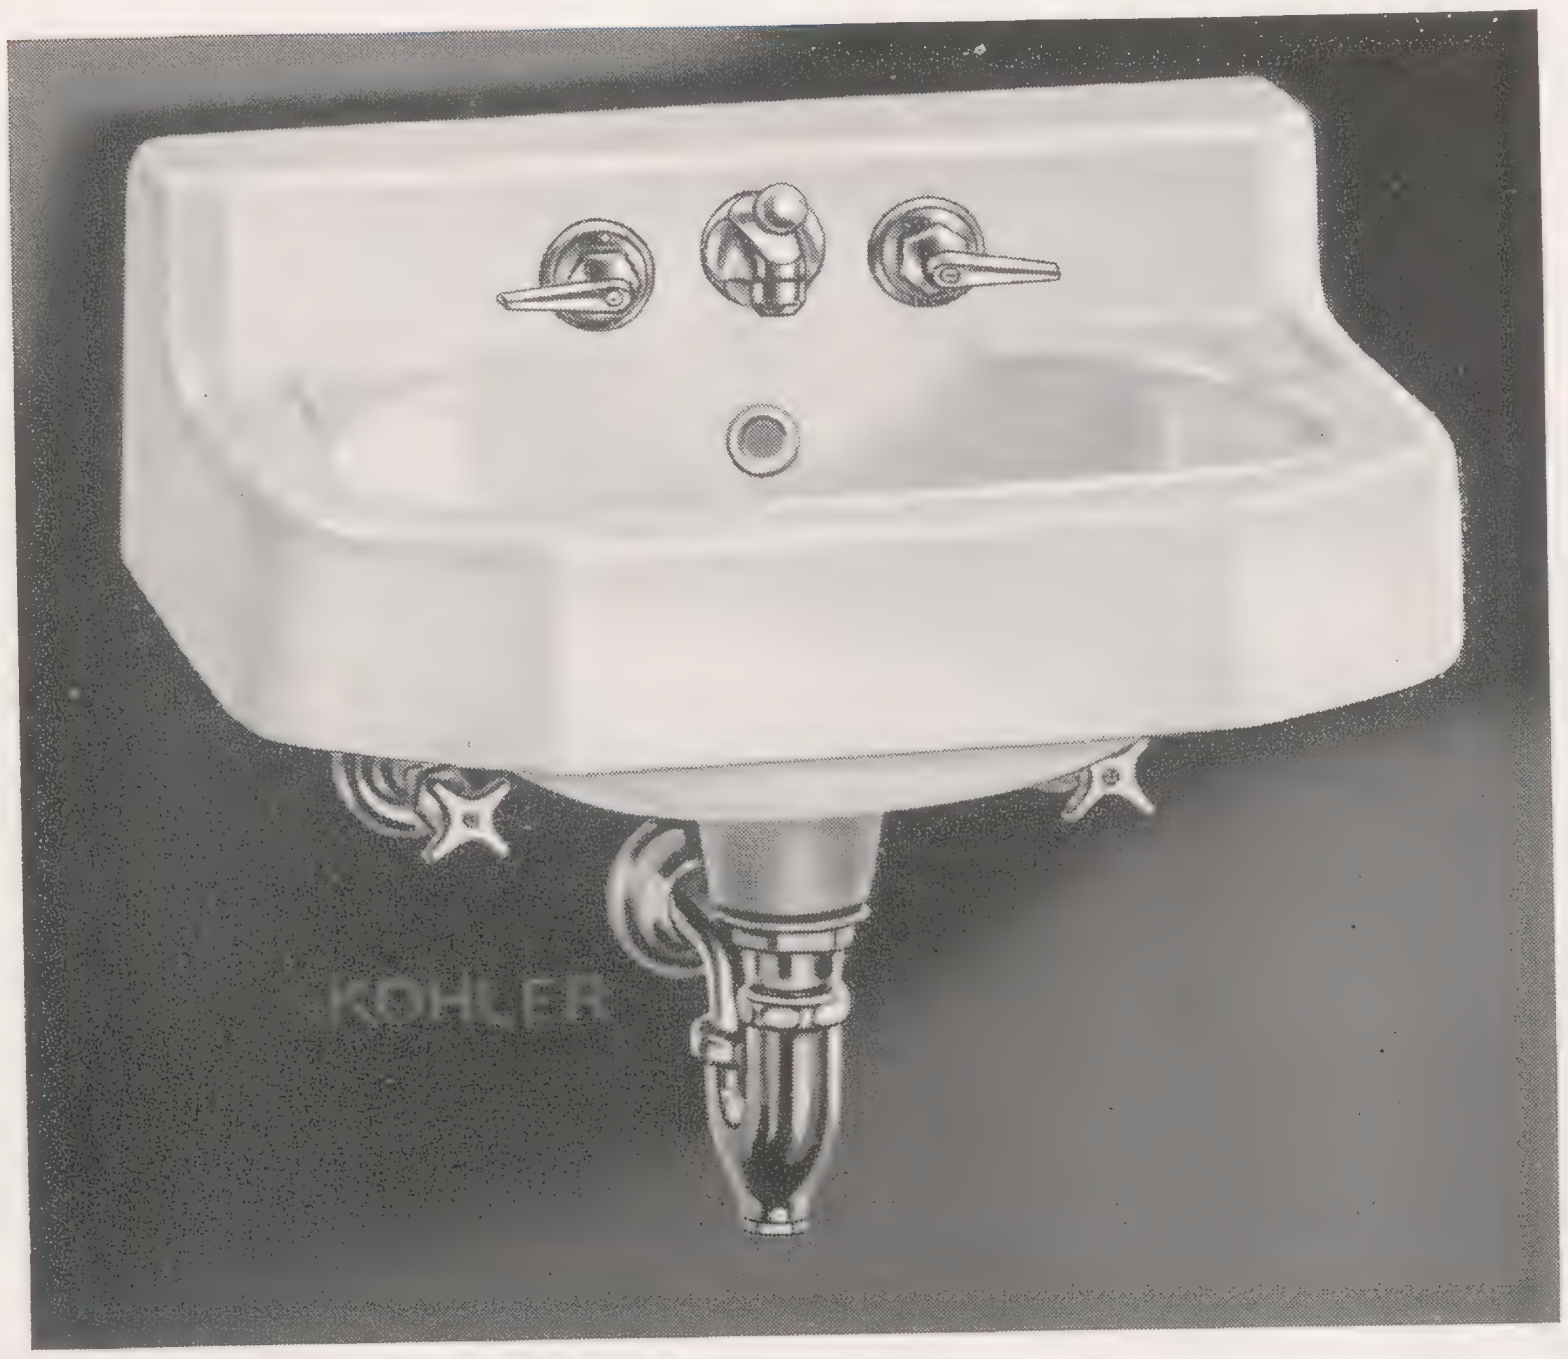

TAUNTON K-2731-A Sizes 16x14", 20x14", 24x14"

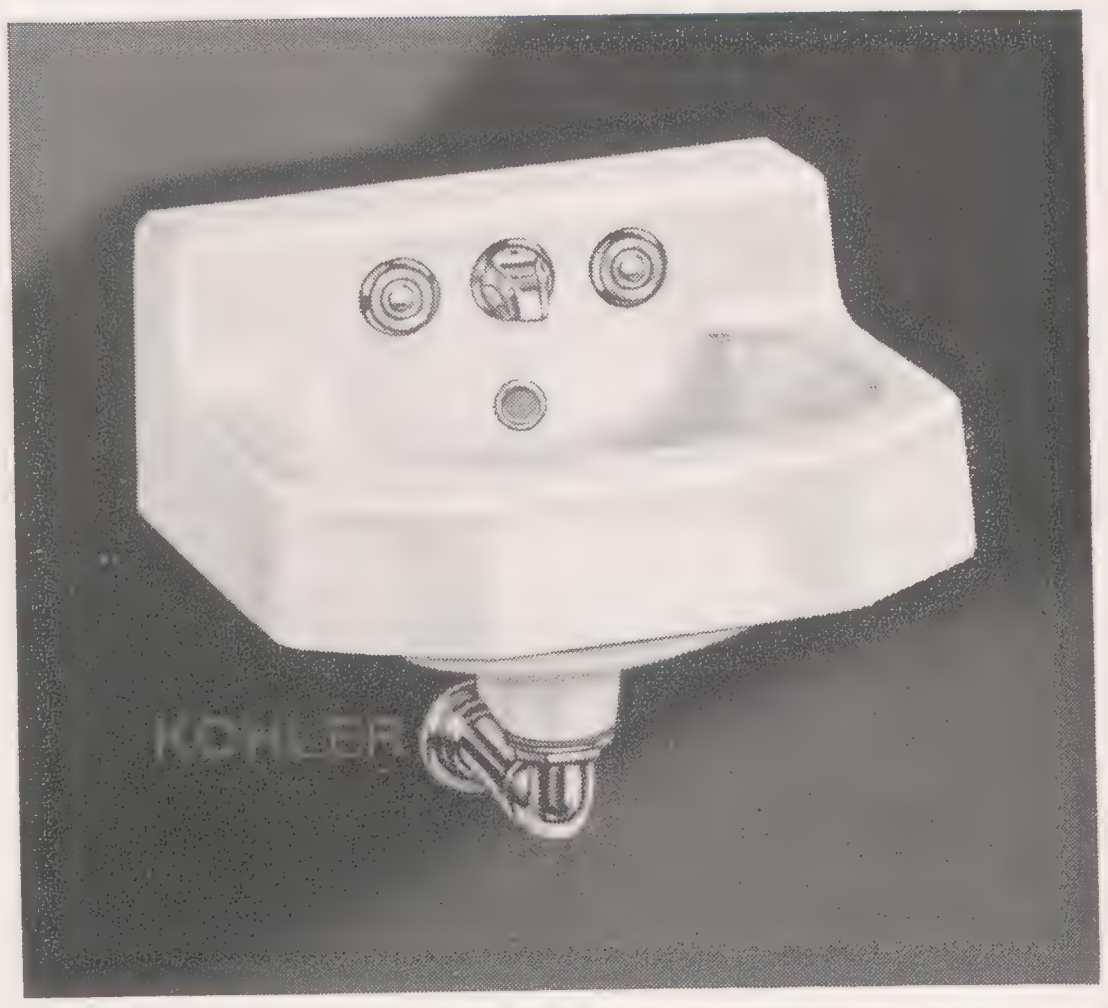

TAUNTON K-2733-A Size 16x14"

Lavatory Complete	**K-2731-A** (Illustrated)	**K-2733-A** (Illustrated)	**K-2734-A** For cold water only
Lavatory with Supply and Drain Fitting, Less Supply Pipes and Trap	**K-2731-B**	—	—
Supply and Drain Fitting	**K-8081-A** with aerator and Synchro drain For fitting less aerator, specify **K-8081**	**K-8158** concealed self-closing fitting with indexed push buttons for hot and cold water, drain with non-removable metal stopper, outlet connection to wall.	**K-8159** concealed self-closing fitting with indexed push button for cold water only, supporting bolt through left faucet hole, drain with non-removable metal stopper, outlet connection to wall.
Supply Pipes	**K-8258** ⅜" angle with stops	—	—
Trap	**K-9000** 1¼"	—	—

K-2731-A Taunton lavatories are available with **K-8082-A** self-closing valve if specified.

SIZES	16x14"	20x14"	24x14"
BASIN	12x8½"	16x8½"	18x8½"
BACK	4"	4"	4"
WIDTH OF SHELF	3¾"	3¾"	3¾"

DELTON AND TRAILER ENAMELED CAST IRON *Shelf* LAVATORIES

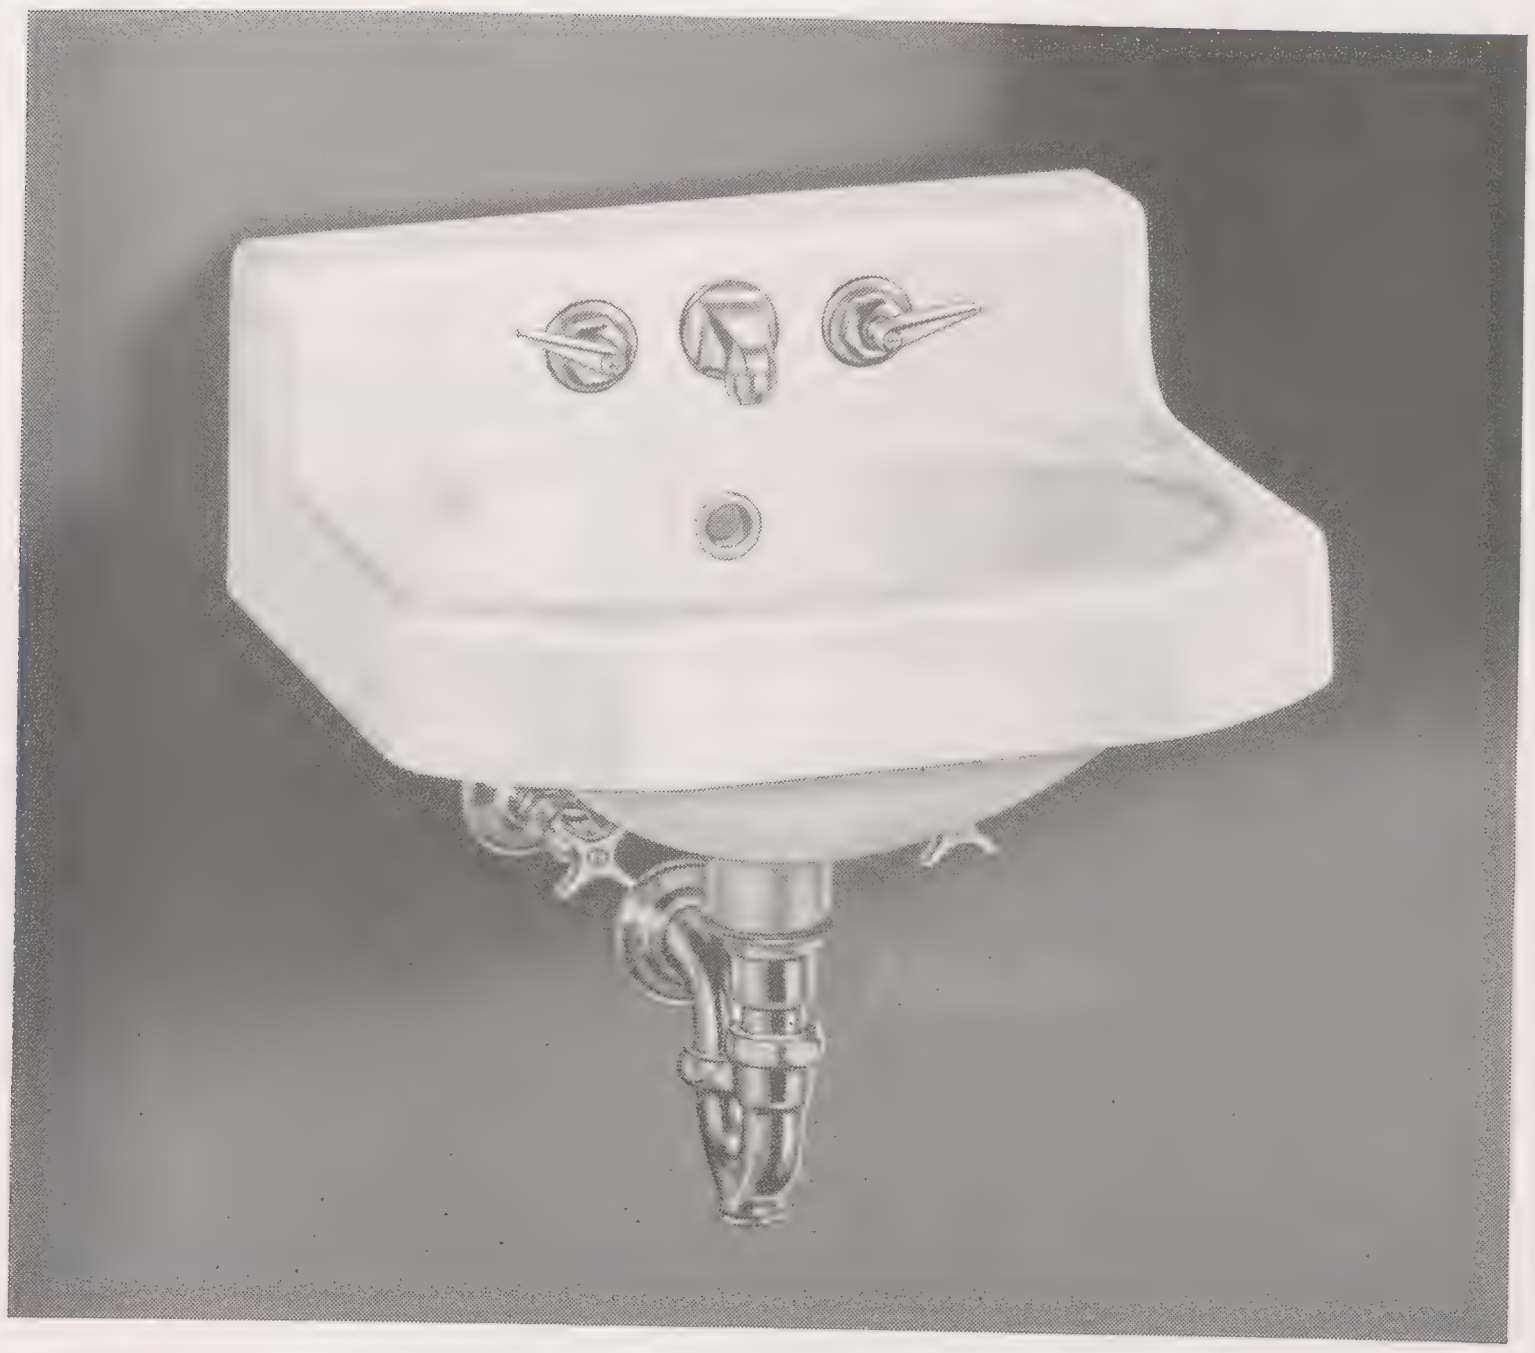

DELTON K-2736-A Size 18x15"

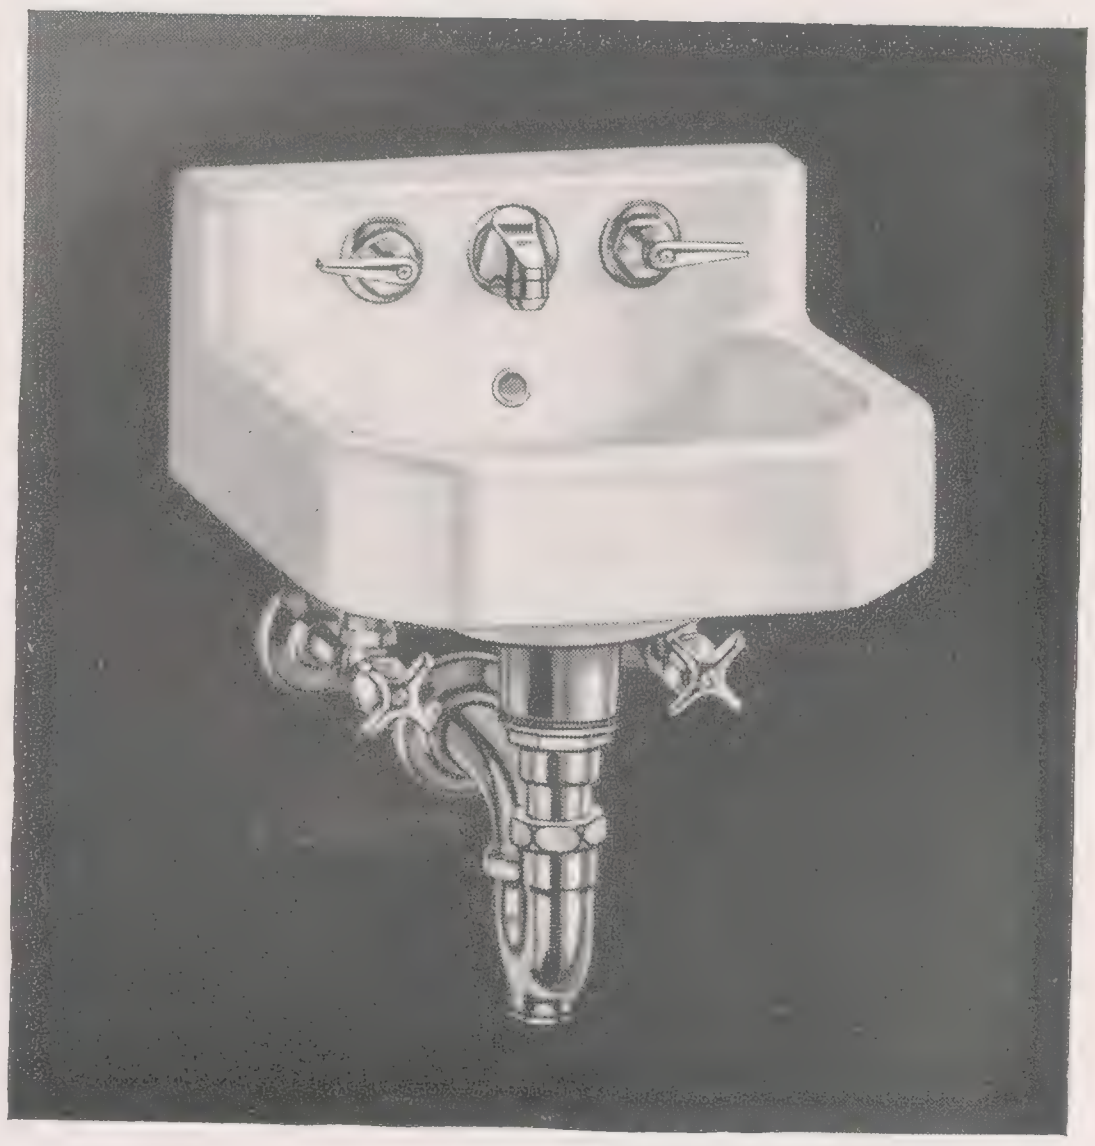

TRAILER K-2753-A Size 13x13"

Lavatory Complete	**K-2736-A**	**K-2753-A**
Lavatory with Supply and Drain Fitting, Less Supply Pipes and Trap	**K-2736-B**	**K-2753-B**
Supply and Drain Fitting	**K-8086-A** with aerator and chain and stopper For fitting less aerator, specify **K-8086**	**K-8091-A** with aerator and chain and stopper For fitting less aerator, specify **K-8091**
Supply Pipes	**K-8258** 3/8" angle with stops	**K-8261** 3/8" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"

The Delton and Trailer lavatories are not available with pop-up drain.

	DELTON	TRAILER
SIZE	18x15"	13x13"
BASIN	14x10"	9⅝x8¼"
BACK	4"	3½"
WIDTH OF SHELF	3"	3"

The Delton and Trailer Lavatories are in wide Use in Motor Courts, Gas Stations, Trailers

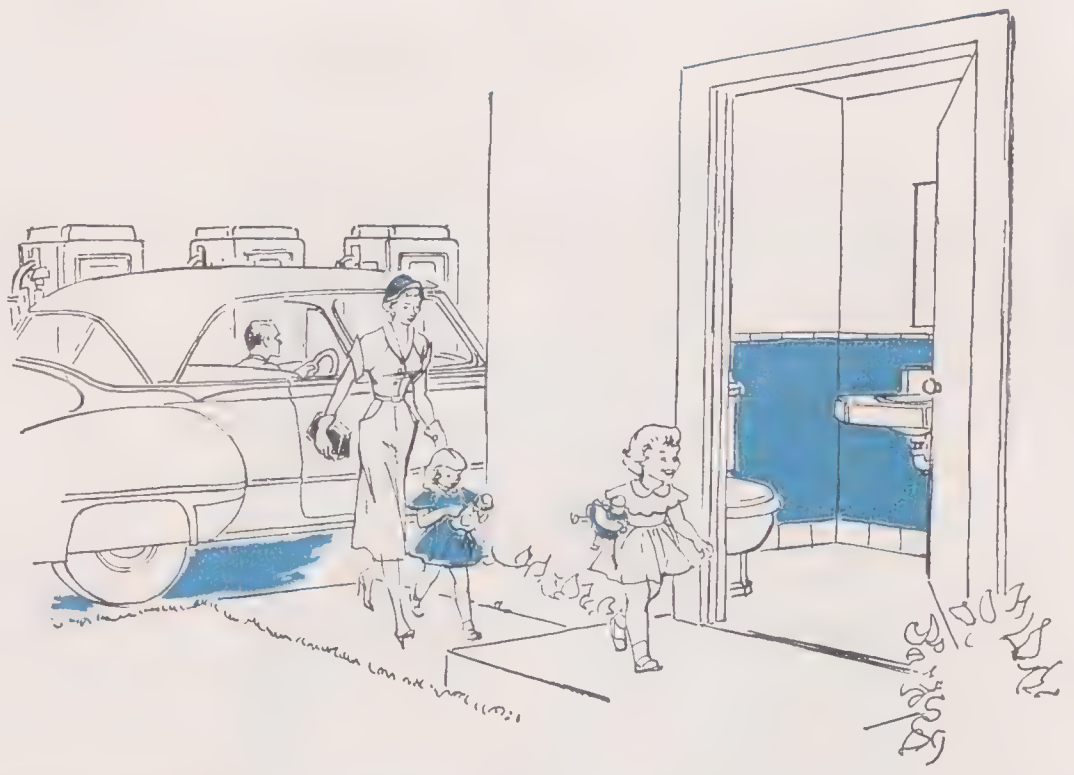

MARSTON AND MARFIELD ENAMELED CAST IRON *Corner Shelf* LAVATORIES

For Special Purposes

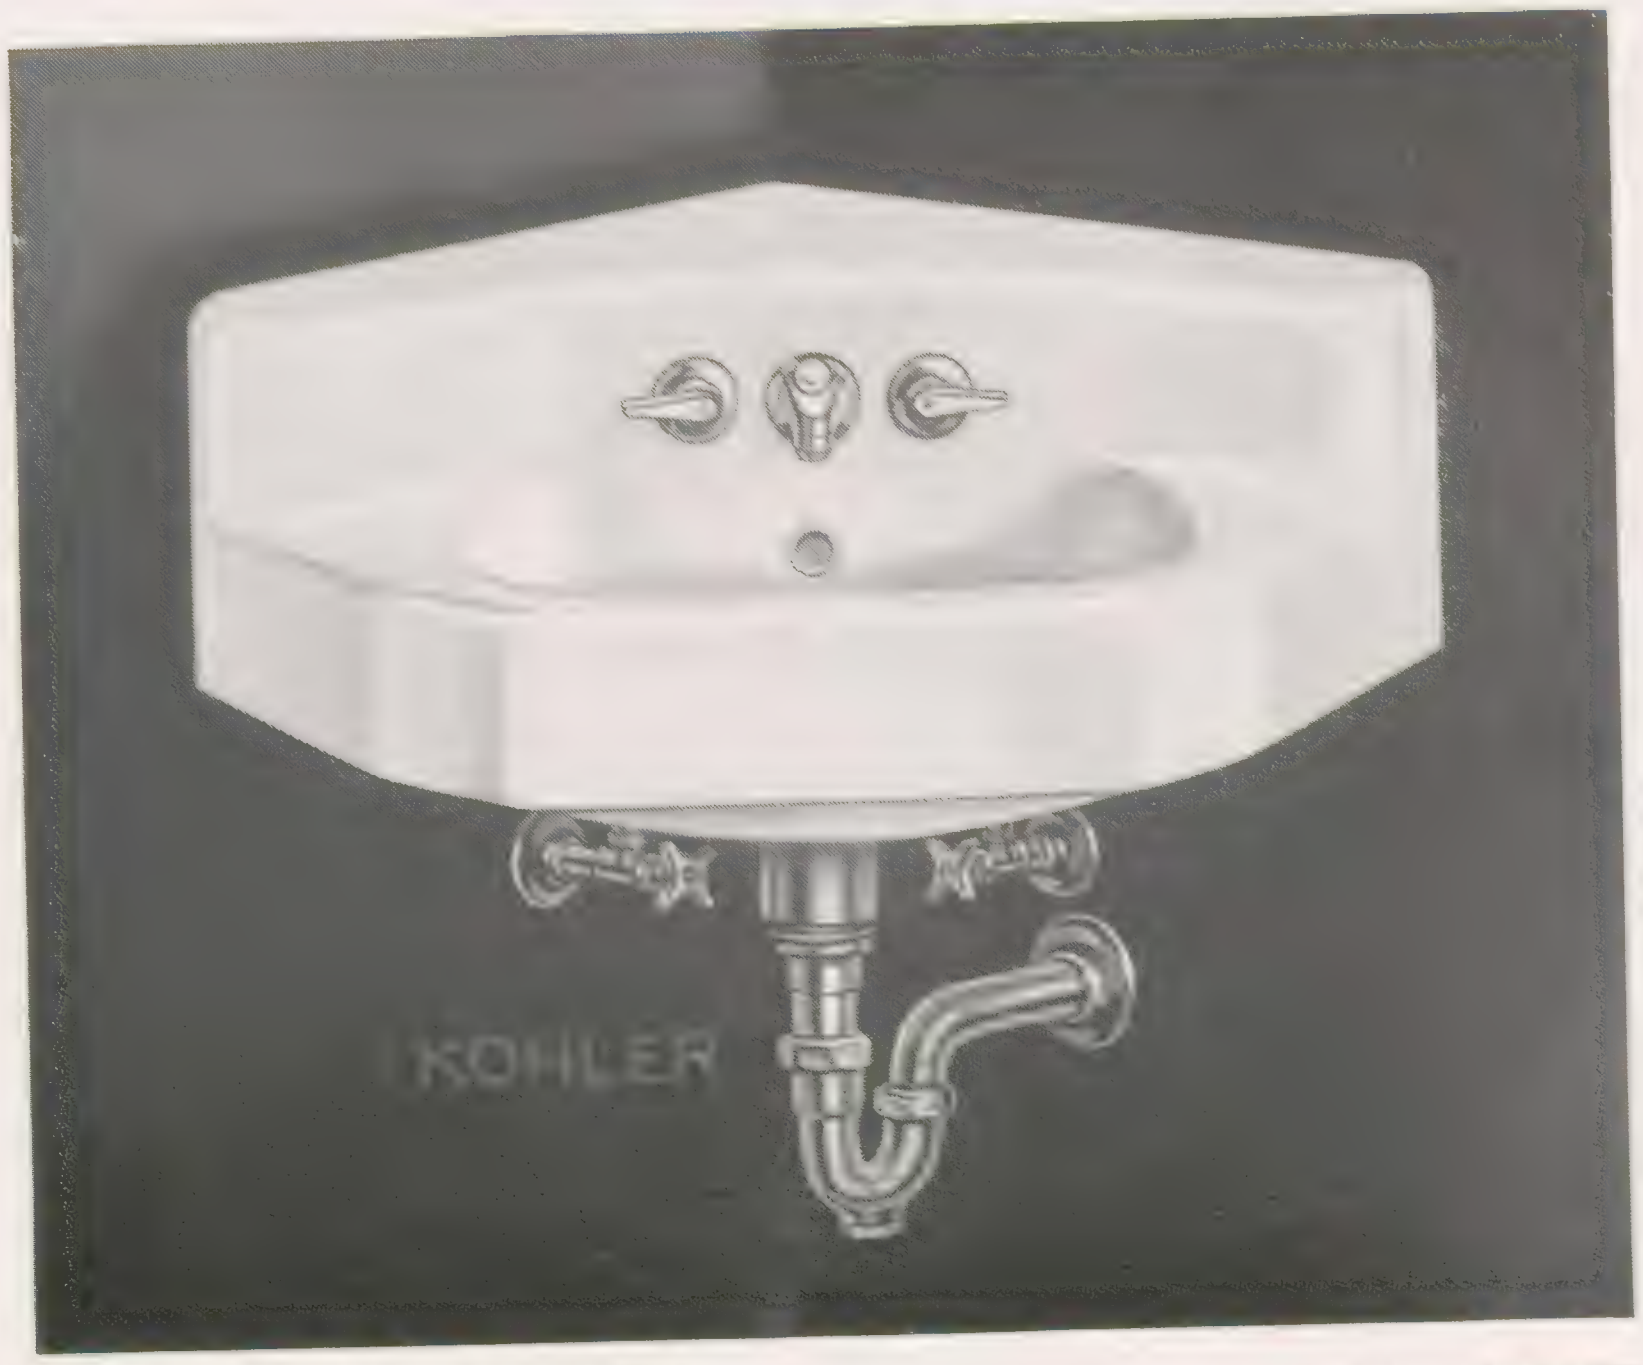

MARSTON K-2766-A Size 16x16"

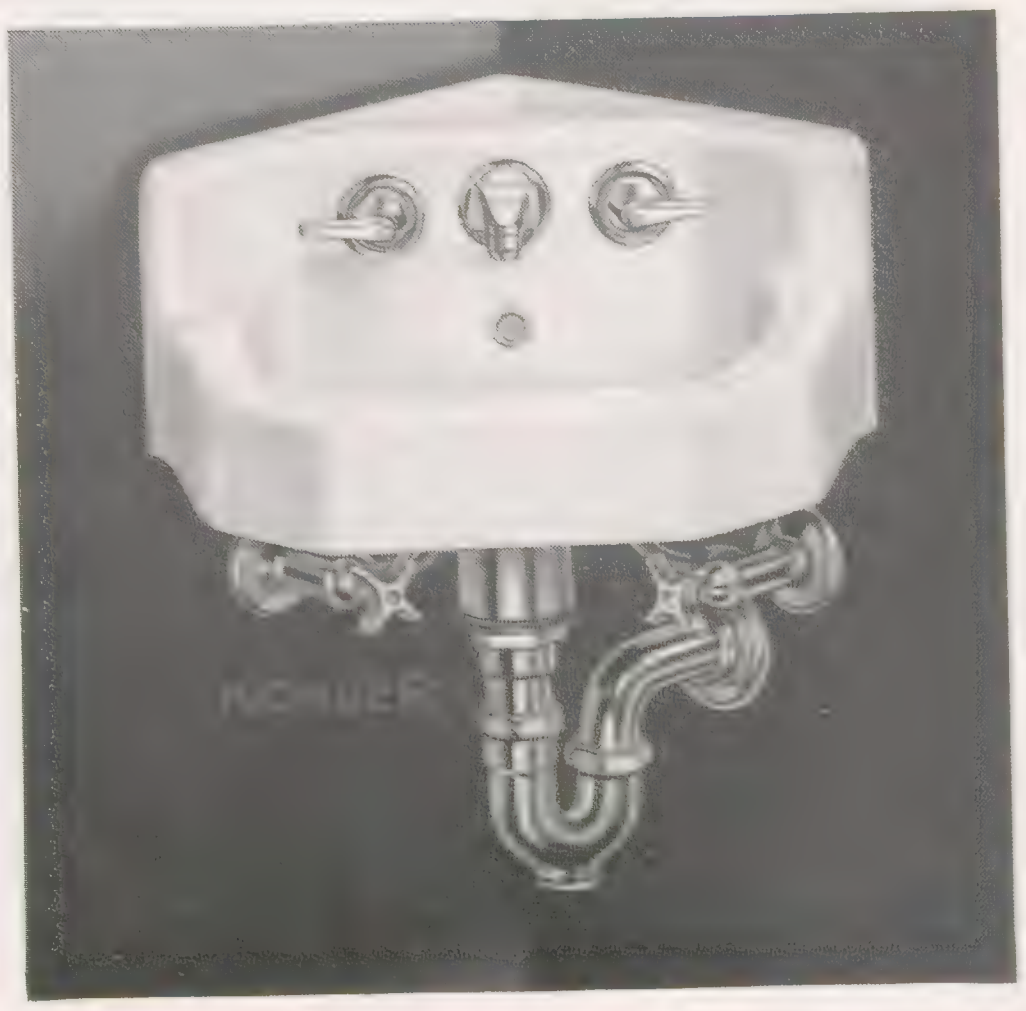

MARFIELD K-2776-A Size 11x11"

Lavatory Complete	**K-2766-A**	**K-2776-A**
Lavatory with Supply and Drain Fitting, Less Supply Pipes and Trap	**K-2766-B**	**K-2776-B**
Supply and Drain Fitting	**K-8081-A** with aerator and Synchro drain For fitting less aerator, specify **K-8081**	**K-8091-A** with aerator and chain and stopper For fitting less aerator, specify **K-8091**
Supply Pipes	**K-8258** ⅜" angle with stops	**K-8261** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"

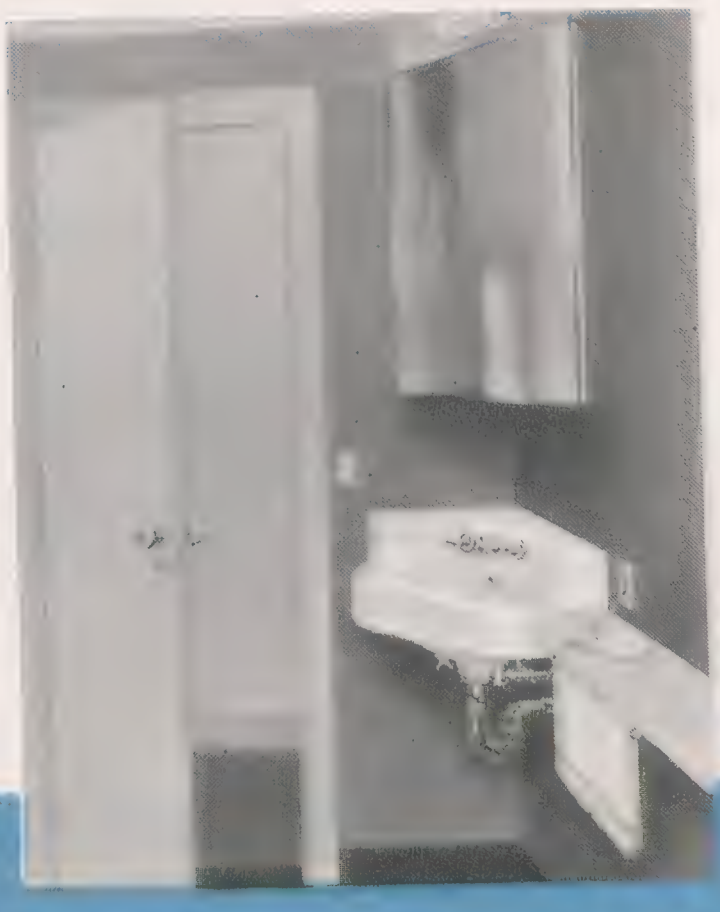

The Marfield lavatory is not available with pop-up drain.

	MARSTON	MARFIELD
SIZE (sides)	16x16"	11x11"
BASIN	15x11"	11x8"
BACK	4"	3½"
CORNER TO FRONT	20⅜"	15¾"

The Marston and Marfield lavatories conserve space by utilizing the corner of a room. Popular for rest rooms, motor courts as well as home washrooms.

VILAS

ENAMELED CAST IRON
LAVATORY

For Building Into

Cabinets and Counters

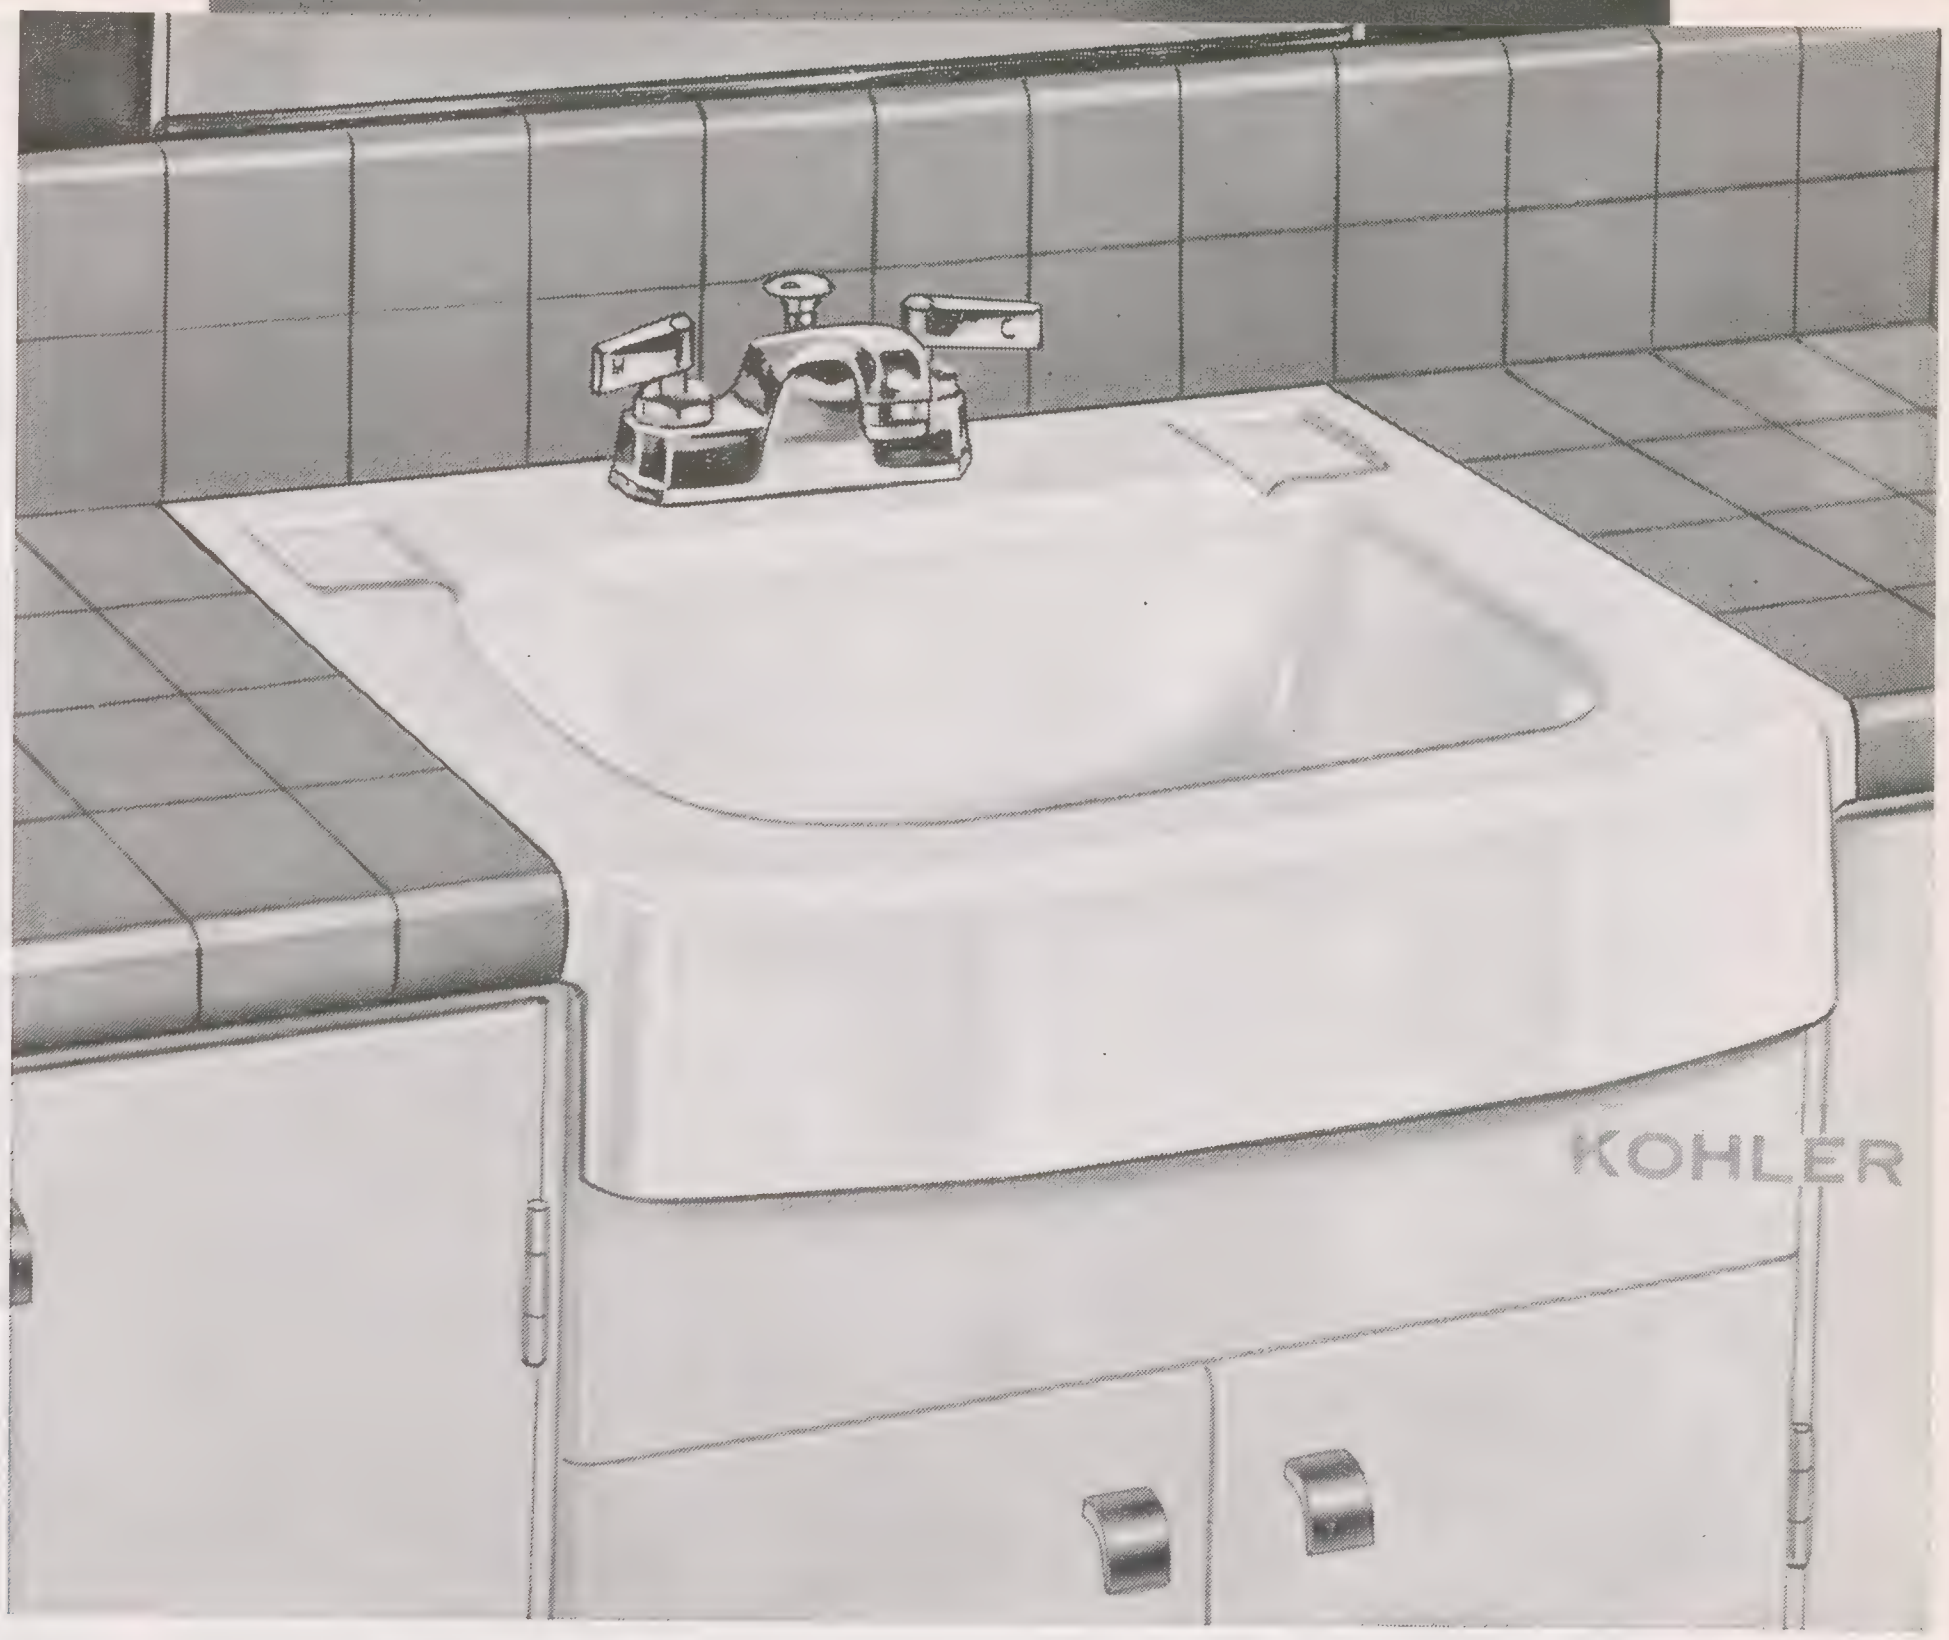

VILAS K-2835-C Size 20x18"

Lavatory Complete	**K-2835-C** (Illustrated)	**K-2837-F**
Lavatory	**K-2835**	**K-2837**
Supply and Drain Fitting	**K-8005-A** Centra with aerator and Synchro drain	**K-8010-A** Bancroft with aerator and Synchro drain
Supply Pipes	**K-8264** ⅜" angle with stops	**K-8264** ⅜" angle with stops
Trap	**K-9000** 1¼"	**K-9000** 1¼"
Metal Frame if Specified	**K-6701** "U"-shaped	**K-6701** "U"-shaped
Metal Strips if Specified	**K-6702** for installation at right; **K-6703** for at left	**K-6702** for installation at right; **K-6703** for at left



Lavatory Installation with Counter Back of Lavatory, using **K-6701** U-shaped metal frame.



K-6701 U-Shaped Metal Frame

SIZE	**20x18"**
BASIN	**14½x11½"**

See page 38-B for Bath Maid cabinets for Vilas and Piedmont lavatories



Lavatory Installation with Back to Wall, using **K-6702** and **K-6703** metal strips at sides of lavatory.



K-6702 and **K-6703** Metal Strips

Insert between pages 48 and 49 of K-56 catalog.

118M-2-57 Printed in U. S. A.

WESTCHESTER

ENAMELED CAST IRON SLAB LAVATORIES

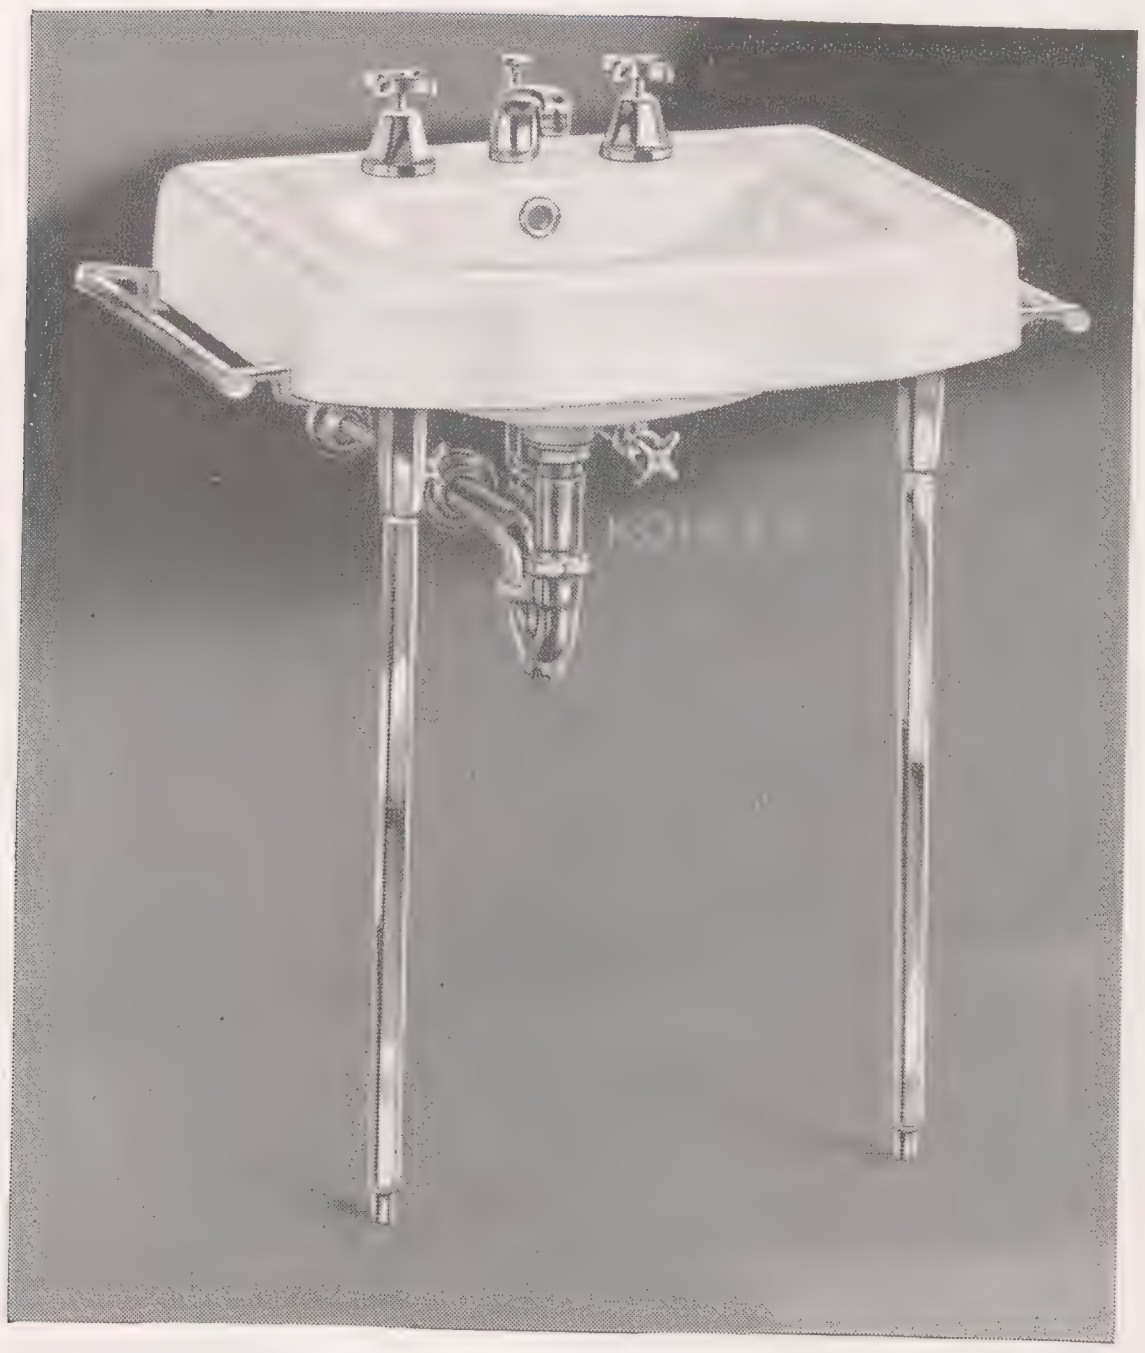

WESTCHESTER K-2813-F Size 24x20″

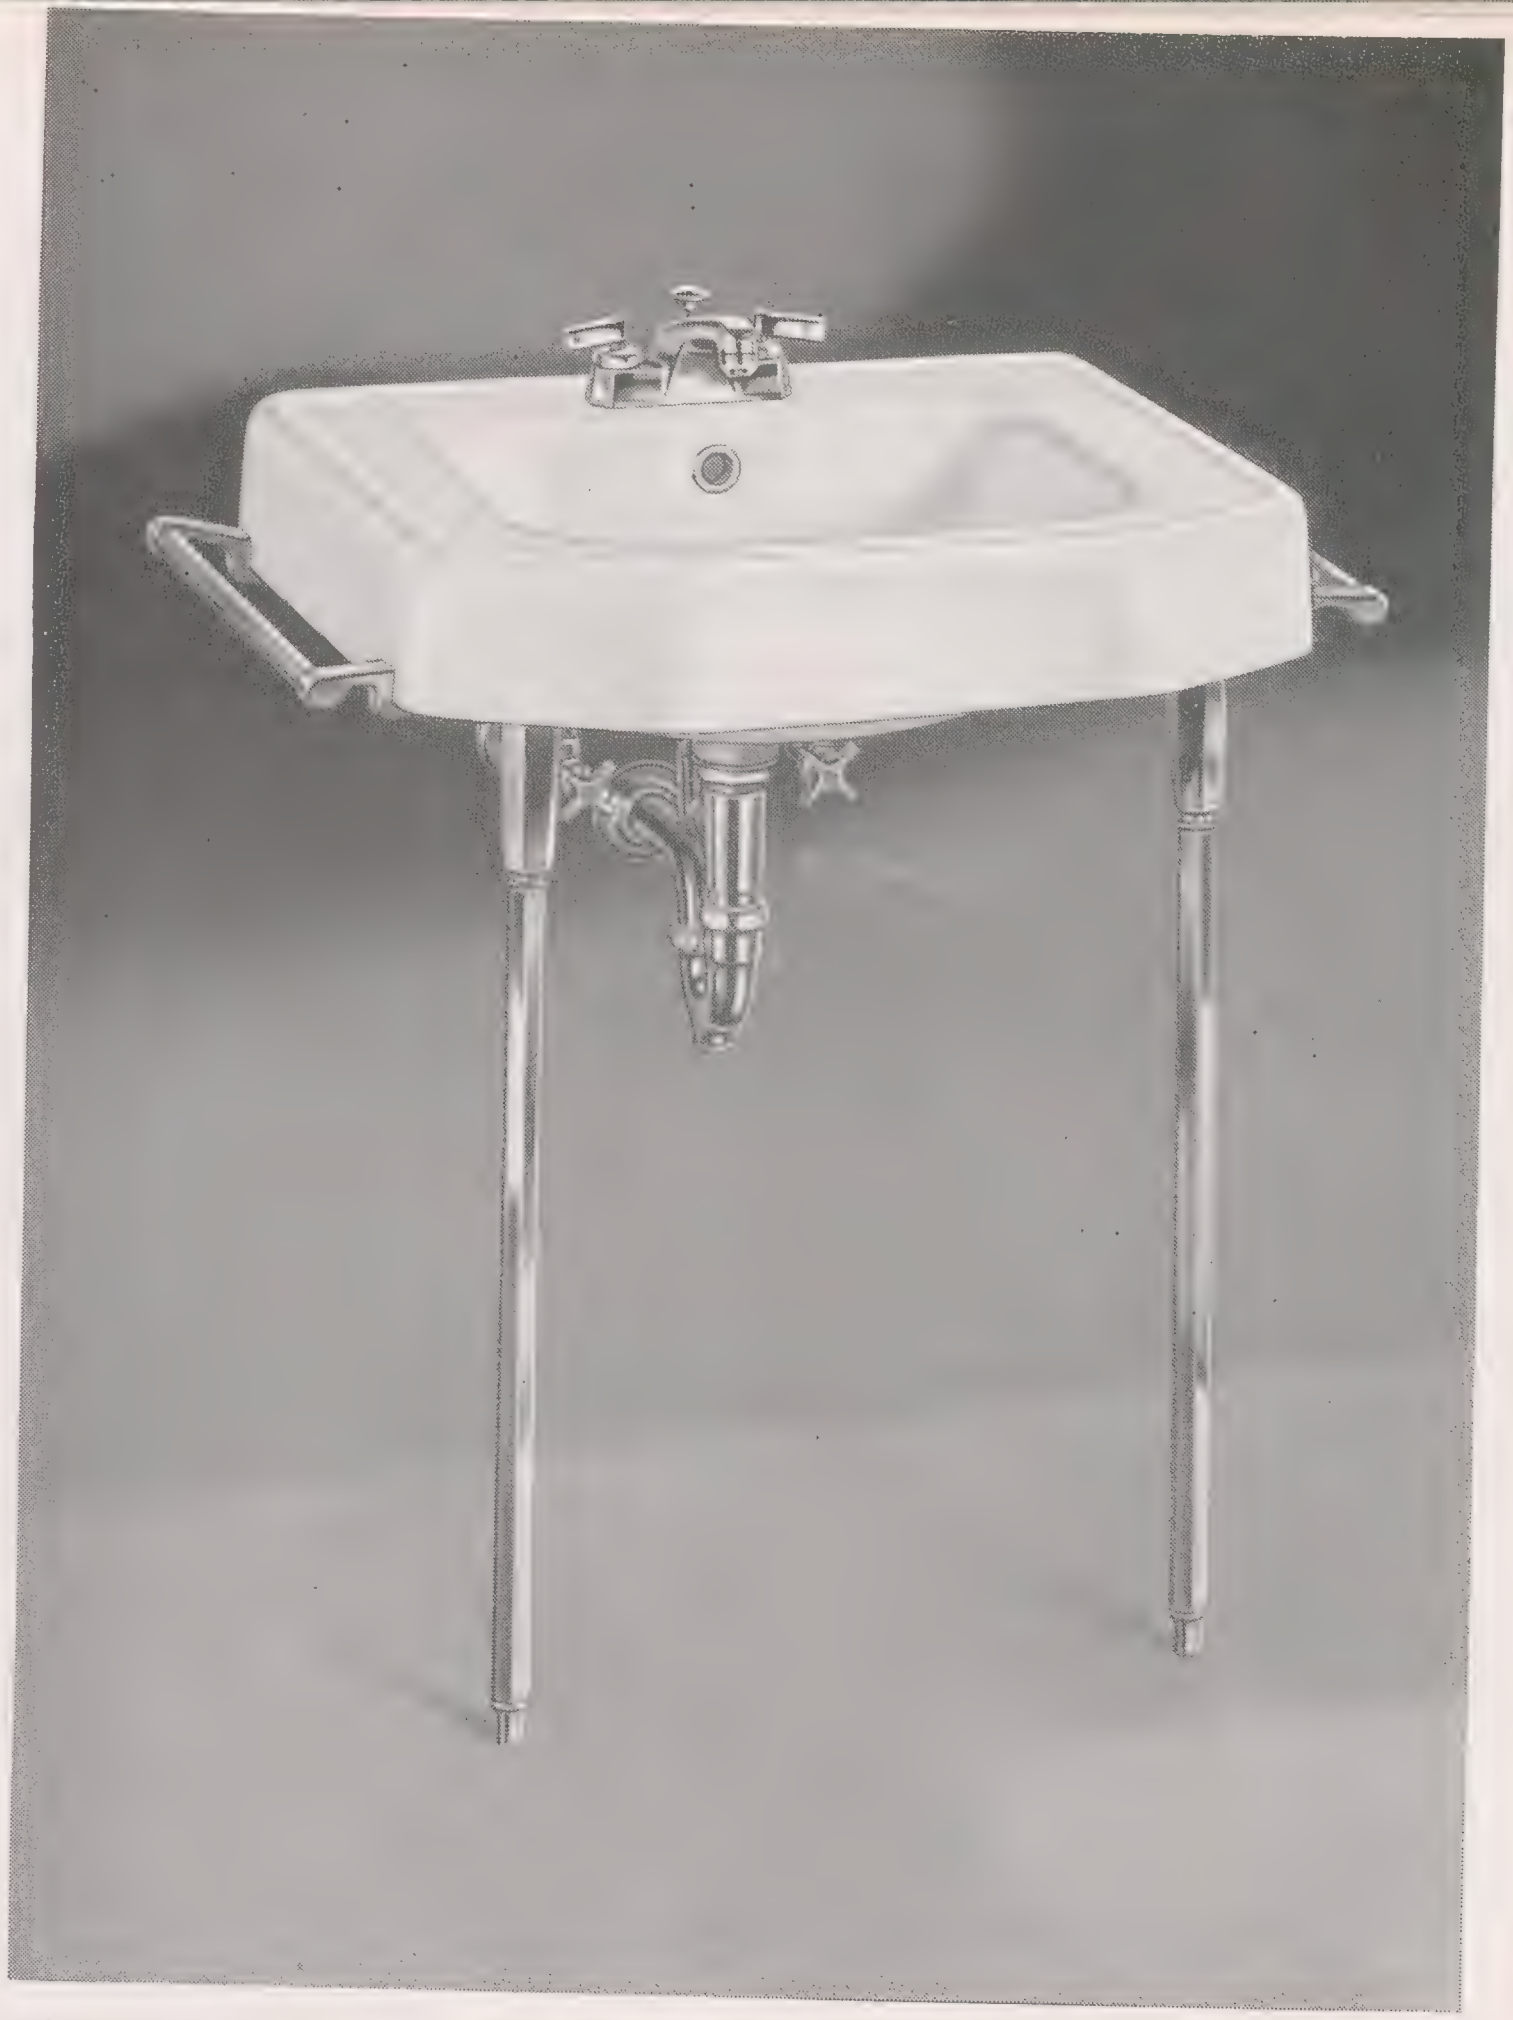

WESTCHESTER K-2811-C Size 24x20″

Lavatory Complete	K-2813-F	K-2811-C
Lavatory	**K-2813** with **K-9580** legs and **K-3162** brackets	**K-2811** with **K-9580** legs and **K-3162** brackets
Supply and Drain Fitting	**K-8010-A** Bancroft with aerator and Synchro drain For Bancroft fitting less aerator, specify **K-8010**	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**
Towel Bars	**K-9565-B**	**K-9565-B**
Supply Pipes	**K-8264** ⅜″ angle with stops	**K-8264** ⅜″ angle with stops
Trap	**K-9000** 1¼″	**K-9000** 1¼″

SIZE	24x20″
BASIN	16½x12″
HEIGHT FROM FLOOR	31″



K-8190

Fittings for Special Purposes

For hotels, schools and public buildings

K-8190 Slow self-closing faucet.

K-8200 Push button self-closing ice water faucet.



New Yorker K-8200

HUDSON ENAMELED CAST IRON LAVATORIES WITH BACK

For Use in Hotels, Schools and Public Buildings

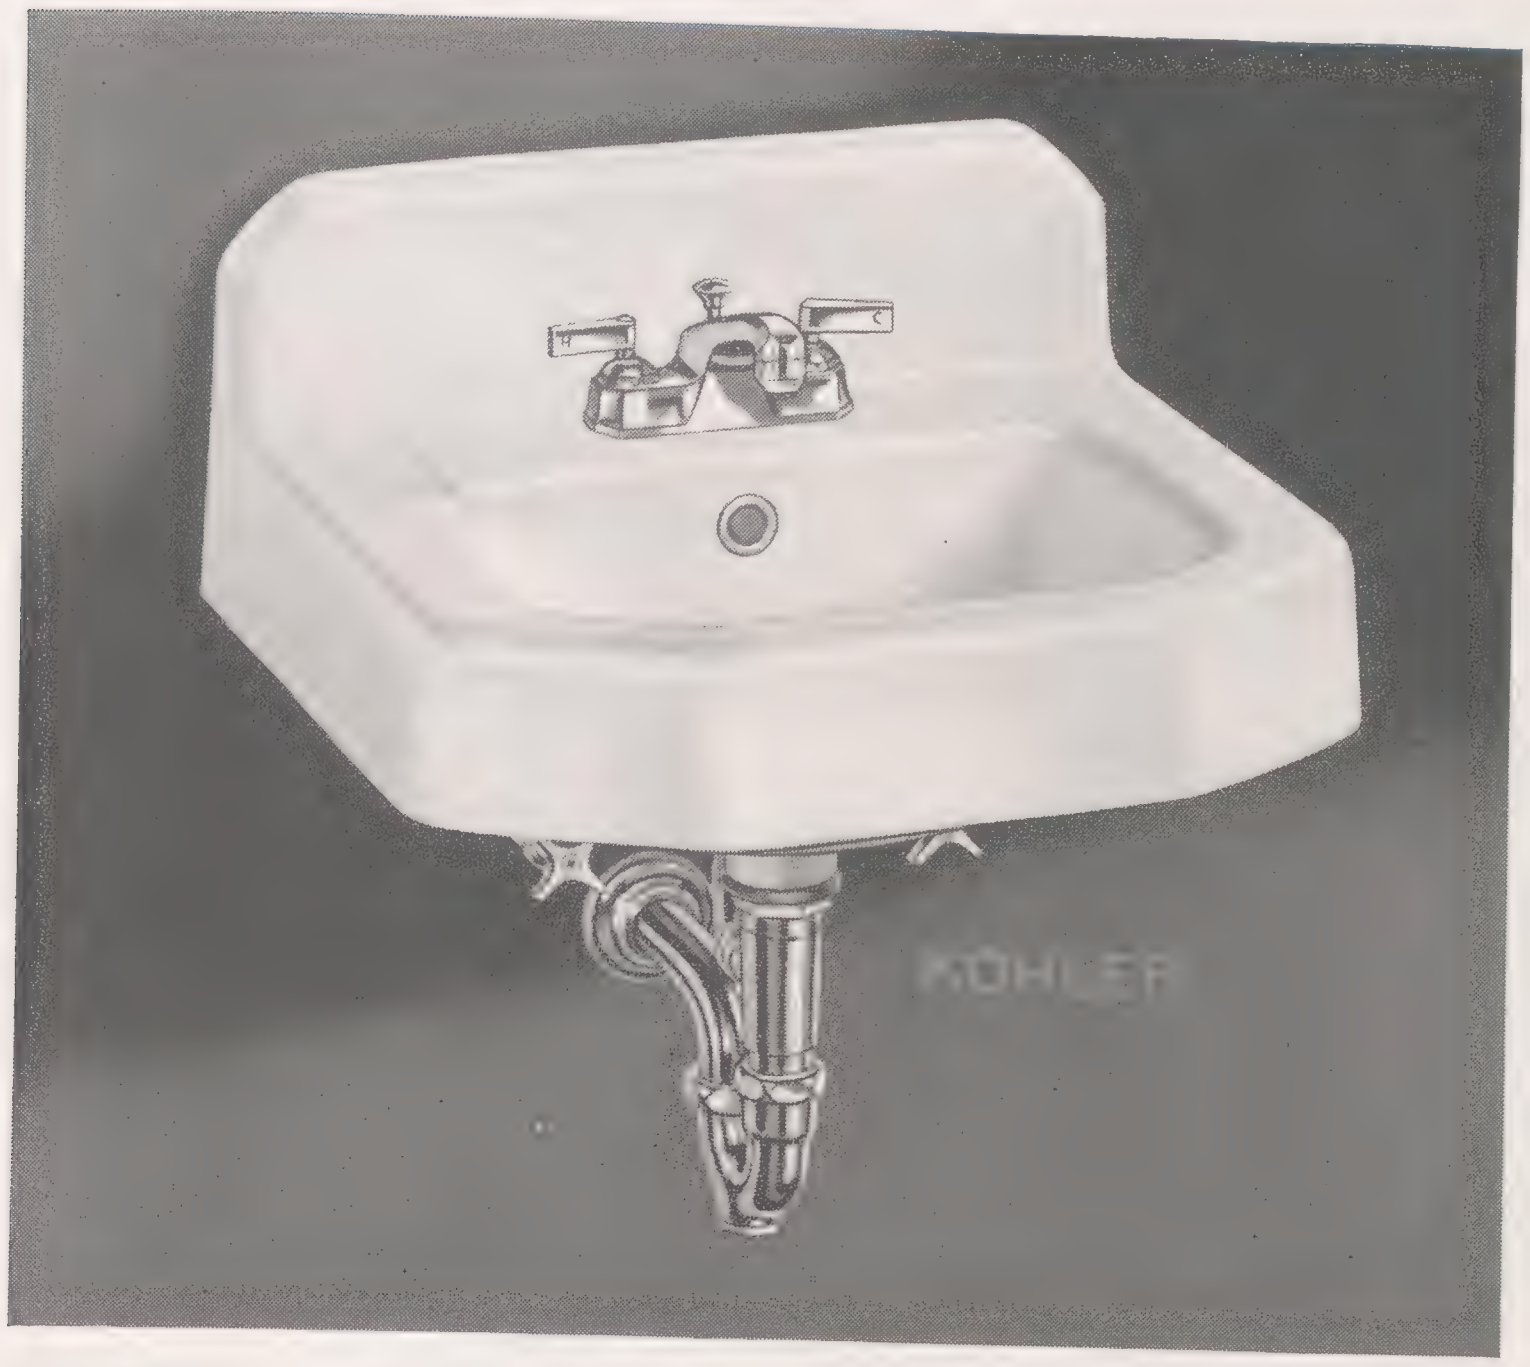

HUDSON K-2851-C Sizes 19x17", 20x18", 22x19"

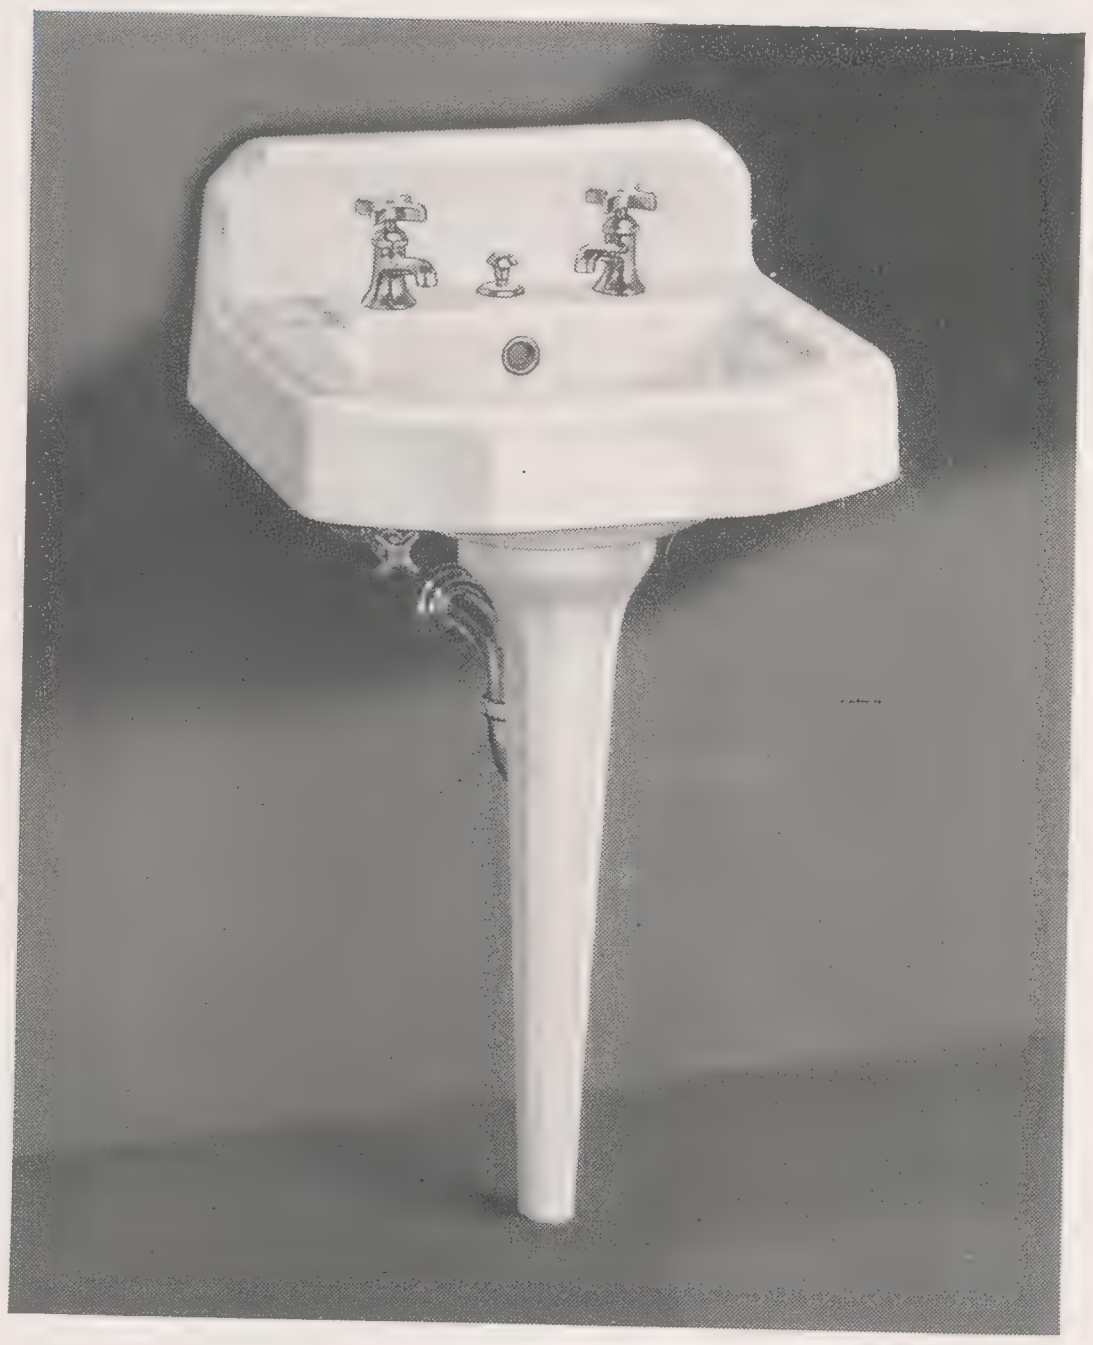

HUDSON K-2855-J Size 20x18"

Lavatory Complete	K-2851-C (Illustrated)	K-2853-J	K-2855-J (Illustrated)	K-2856-C
Lavatory	K-2851	K-2853	K-2855 with K-2857 leg	K-2856 with K-2857 leg
Supply and Drain Fitting	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**	**K-8178** Sentinel faucets **K-8415** Synchro drain	**K-8178** Sentinel faucets **K-8415** Synchro drain	**K-8005-A** Centra with aerator and Synchro drain For Centra fitting less aerator, specify **K-8005**
Supply Pipes	**K-8264** ⅜'' angle with stops	**K-8264** ⅜'' angle with stops	**K-8264** ⅜'' angle with stops	**K-8264** ⅜'' angle with stops
Trap	K-9000 1¼"	K-9000 1¼"	K-9000 1¼"	K-9000 1¼"

SIZES	19x17"	20x18"	22x19"
BASIN	14½x10"	14½x10"	16x11"
BACK	5"	5"	5"
HEIGHT FROM FLOOR	31"	31"	31"

The **K-2855-J** and **K-2856-C** are available on leg in the 20x18" size only.



Sentry **K-8186**
self-closing faucet

Fittings for Filling Stations, Public Washrooms

The Sentry self-closing faucet conserves water. Popular for public washrooms. Closes automatically after a short interval of use.

The Station combination lavatory faucet and bubbler is used in public washrooms, offices, schools and filling stations. Very practical.



Station **K-8194**
faucet with bubbler

BROCKWAY ACID-RESISTING ENAMELED CAST IRON WASH SINK

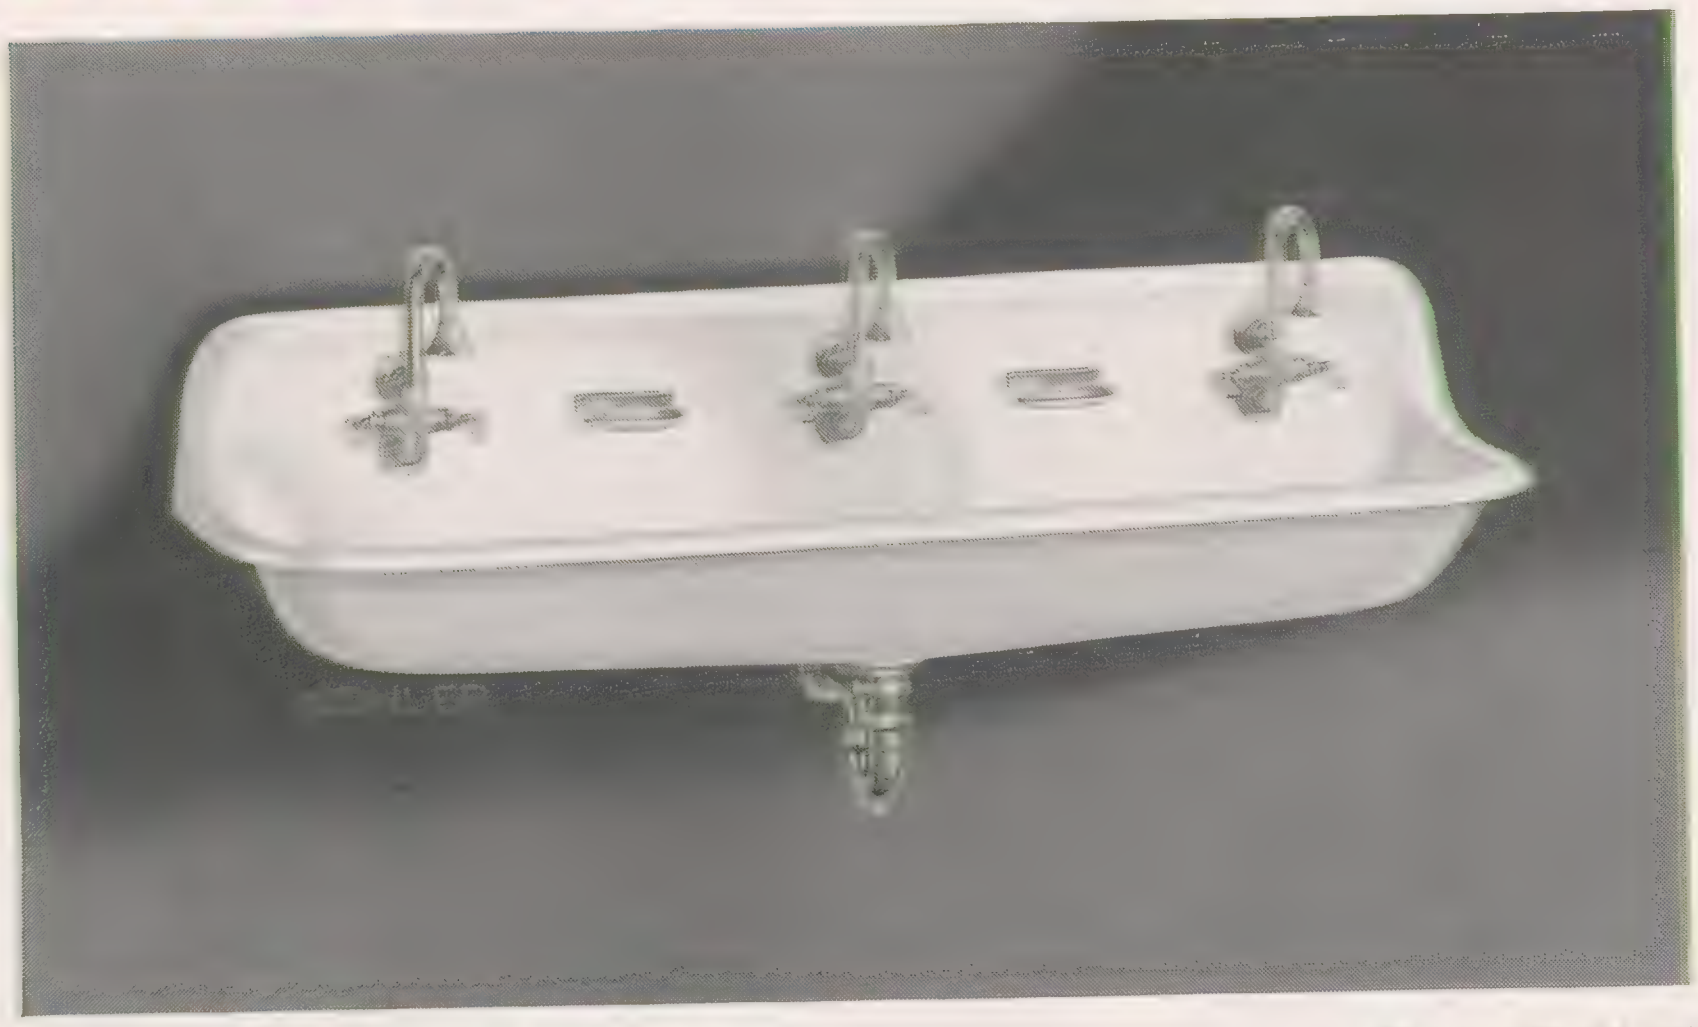

BROCKWAY K-3200-A

Sizes 4', 5', 6'

Fixture Complete	K-3200-A
Fixture with Hangers	K-3200
Supply Fittings	K-8890 mixing faucet
Soap Dish	K-8880
Strainer	K-8820
Trap	K-9000 1½"

Adjustable pedestals are available for 5' and 6' sizes.

SIZES, LENGTH	4'	5'	6'
NUMBER OF FAUCETS	2	3	3
NUMBER OF SOAP DISHES	1	2	2
WALL TO FRONT	17½"	17½"	17½"
DEPTH AT OUTLET	7½"	7½"	7½"
BACK	8"	8"	8"

For Use in Factories, Schools and Public Buildings

BELDEN ACID-RESISTING ENAMELED CAST IRON WASH SINK

Fixture Complete	K-3220-A
Fixture with Pedestals and Supply Pipe Supports	K-3220
Supply Fittings	K-8885 mixing faucet (6)
Soap Dish	K-8878 (6)
Strainer	K-8820
Trap	K-9004 1½"

Supply pipes not furnished.

SIZE, LENGTH	5'
NUMBER OF FAUCETS	6
NUMBER OF SOAP DISHES	6
WIDTH OVER RIM	30"
DEPTH AT OUTLET	8"
FLOOR TO TOP OF RIM	25 to 31"

Long pedestals are available to set sink 31" to 36" high.

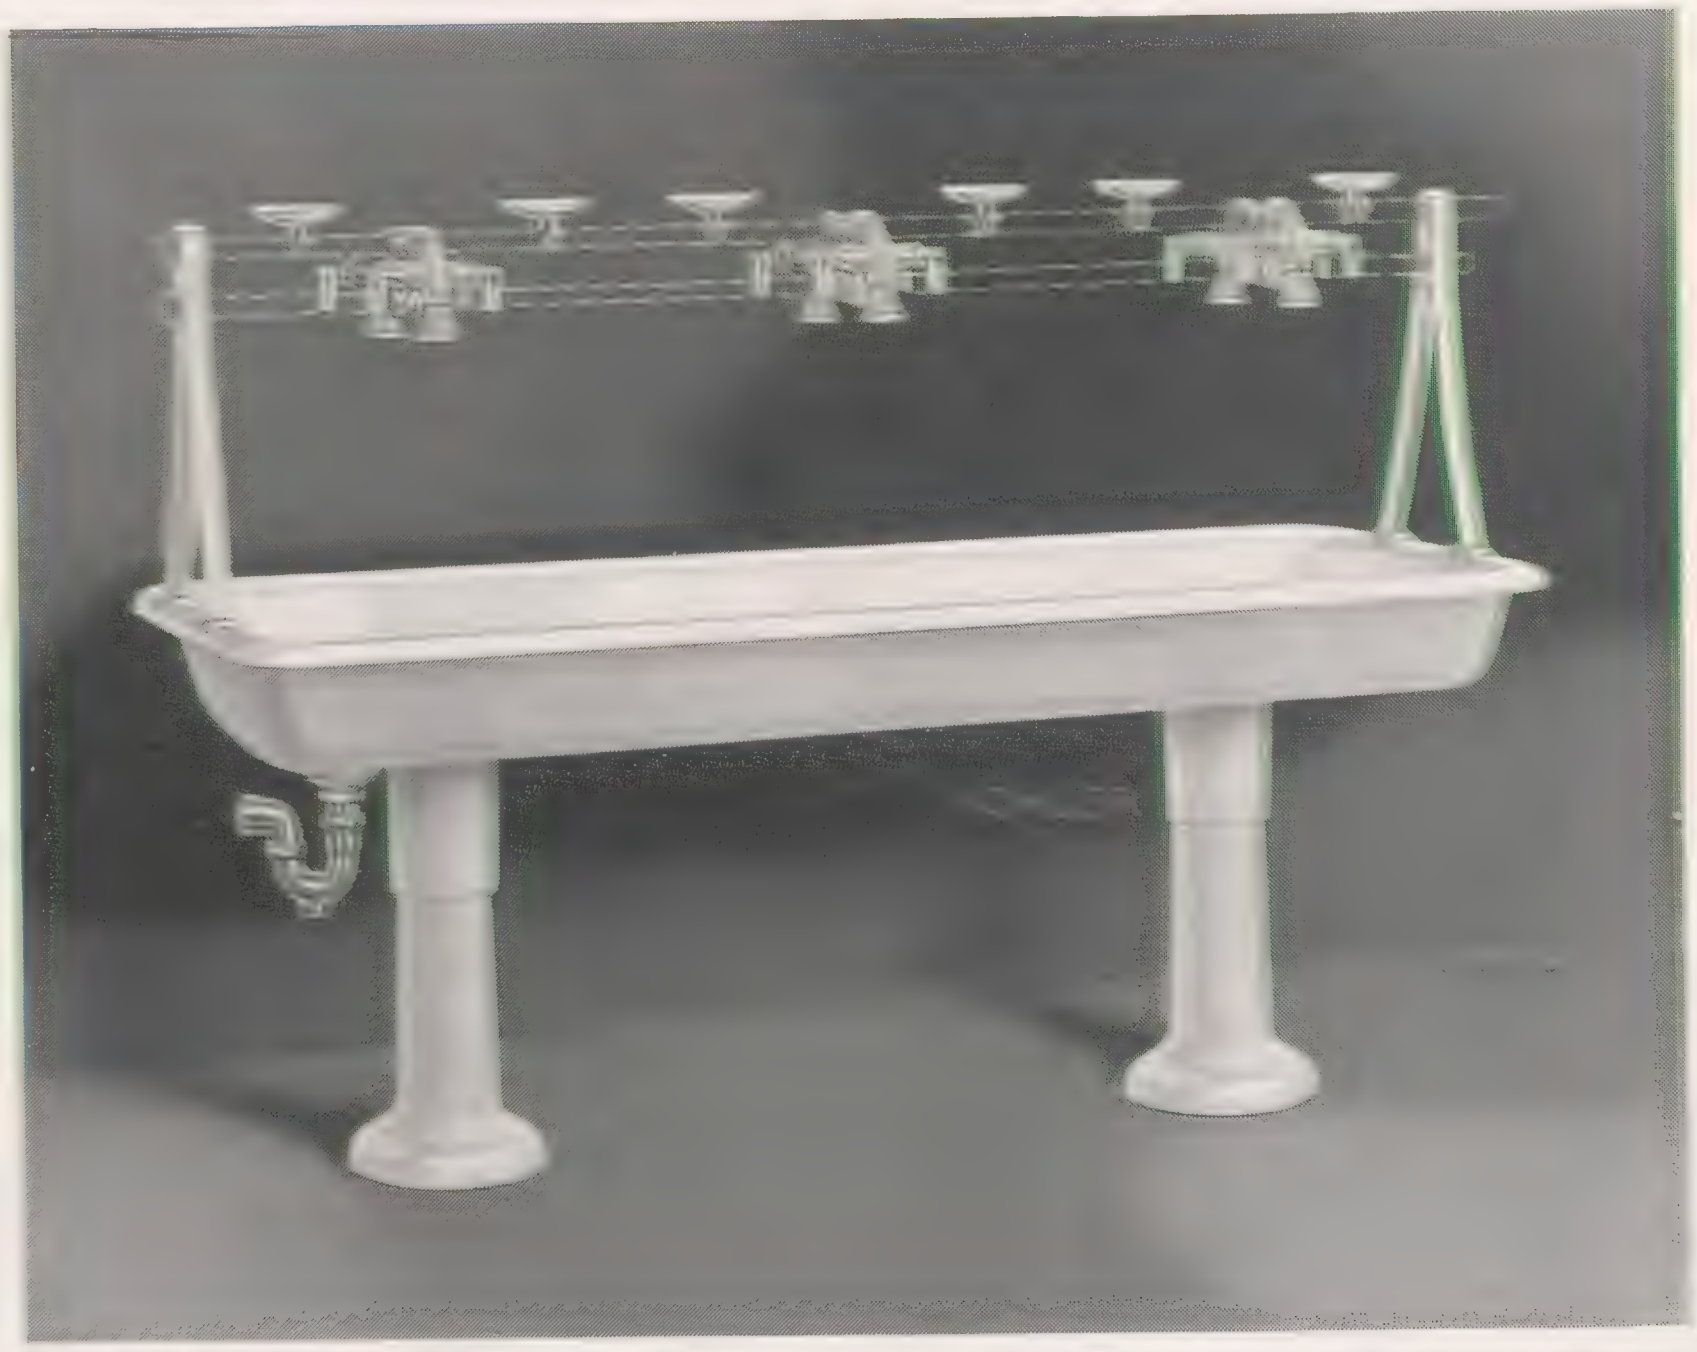

BELDEN K-3220-A

Size 5'

FLAMBEAU ACID-RESISTING ENAMELED CAST IRON OCTAGONAL WASH SINK

For Use in Factories, Schools and Public Buildings

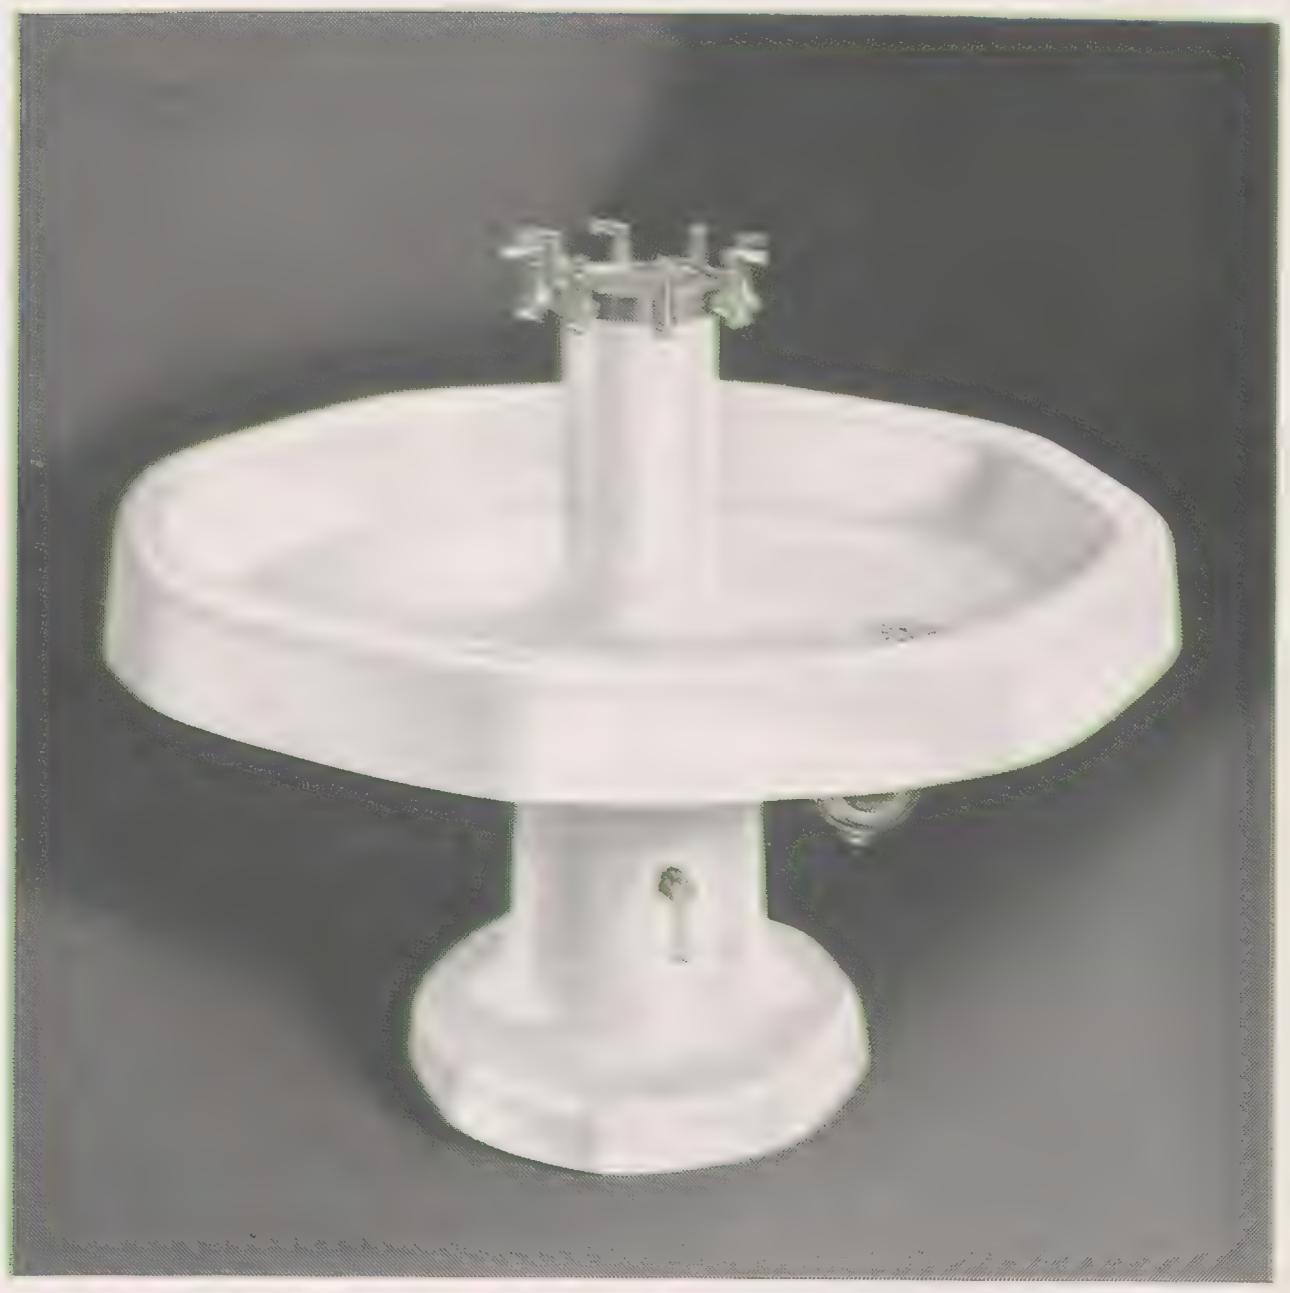

FLAMBEAU K-3250-A Size 48"

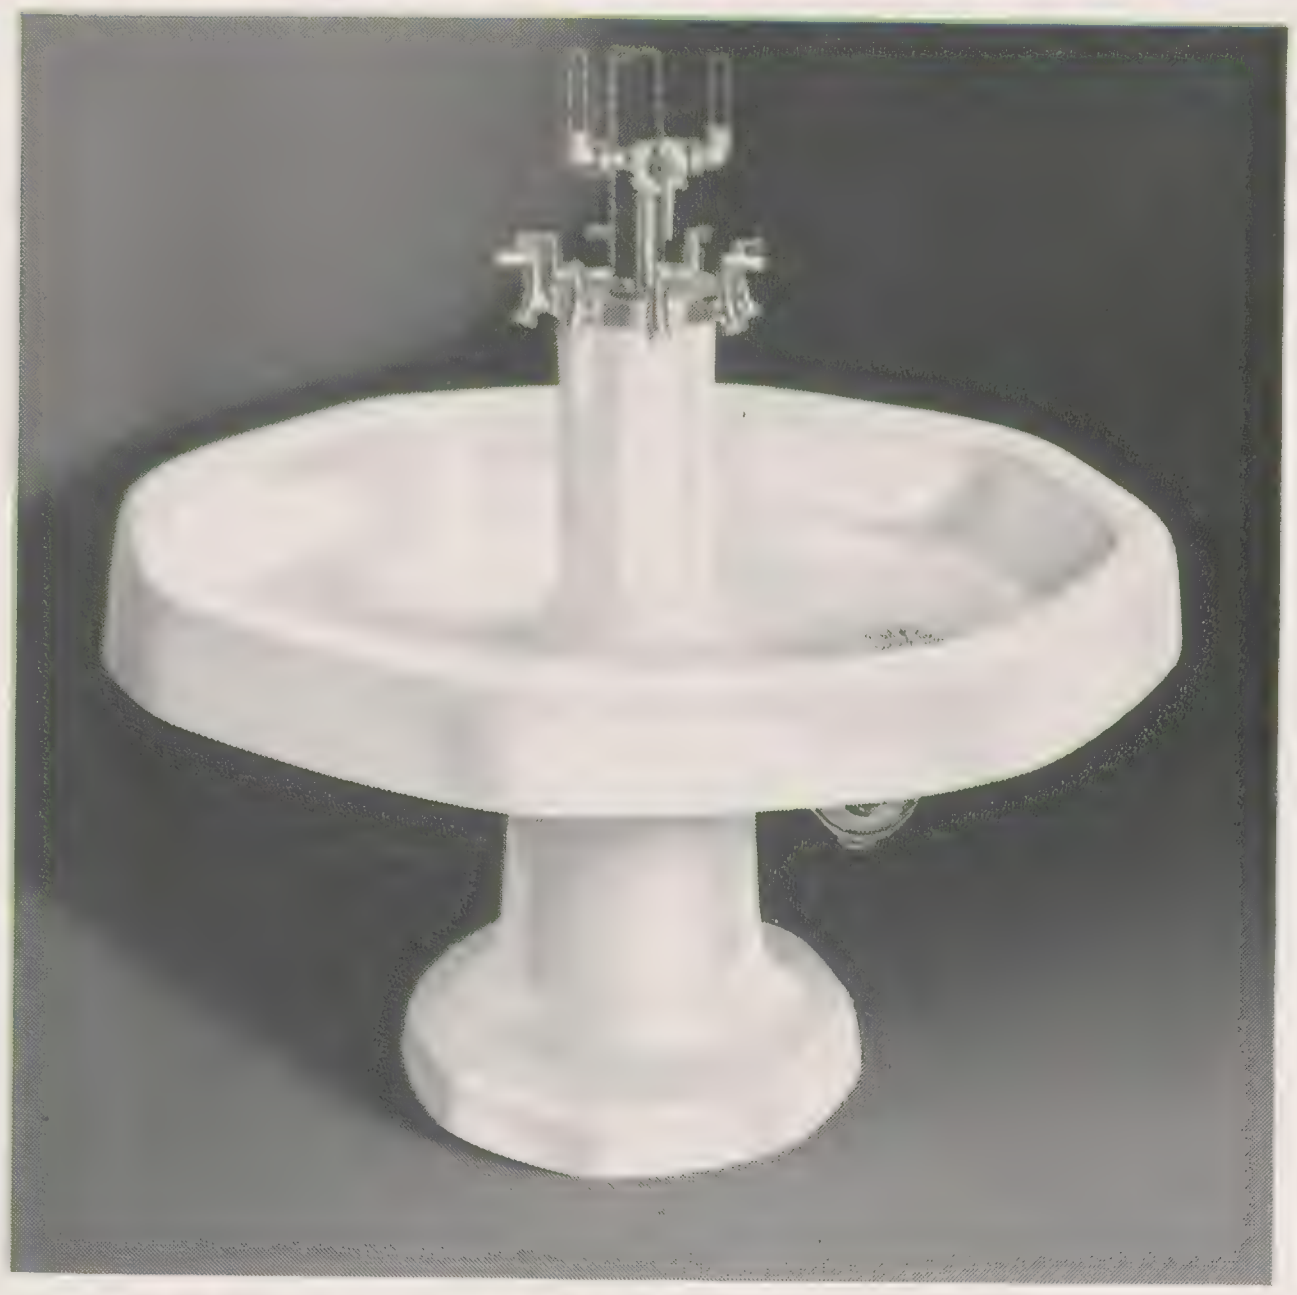

FLAMBEAU K-3252-A Size 48"

Fixture Complete	**K-3250-A** (Illustrated)	**K-3251-A**	**K-3252-A** (Illustrated)	**K-3253-A**
Fixture Complete Less Trap	**K-3250**	**K-3251**	**K-3252**	**K-3253**
Supply Fitting	**K-8865** bottom supply with mixing valve, manifold and eight faucets	**K-8865-T** bottom supply with mixing valve, manifold and eight faucets	**K-8860-T** top supply mixing valve, manifold and eight faucets	**K-8860** top supply mixing valve, manifold and eight faucets
Strainer	**K-9144**	**K-9144**	**K-9144**	**K-9144**
Trap	**K-9024** 2"	**K-9024** 2"	**K-9024** 2"	**K-9024** 2"
Arranged for Vent	Bottom	Top	Top	Bottom

Vent pipes not furnished. Check valves must be installed in supplies to mixing valves.

WIDTH FROM SIDE TO SIDE	48"	FLOOR TO TOP OF RIM	26"
DEPTH OF BASIN	8"	FLOOR TO TOP OF TOWER	38"

Flambeau Wash Sinks

Easy to Keep Clean and Sanitary

Individual Faucet for Each User

Temperature Control Adjustable to Meet Requirements

Conserves Water



Soap Dispenser K-8868
Available for attaching to vent pipe, if specified.

K OF K CLOSETS

Regardless of model, price or type of flushing action, the primary function of all K of K closets is to carry away waste by thorough, quiet flushing without excessive use of water. Concealed priming jets accelerate action. Closets are water-tested to check passageways and action.

All closets bearing the K of K trademarks are made of vitreous china from the finest clays available. Thoroughly vitrified and glazed by lengthy firings, each fixture is impervious, sanitary and easy to clean.

Ranging from the modern, low, one-piece Placid to the popular close-coupled combination, K of K closets meet every requirement and budget of homes and institutions. Each unit harmonizes in matching group design with other Kohler bathroom fixtures, exemplifying the overall significant proportion and straight-forward design.

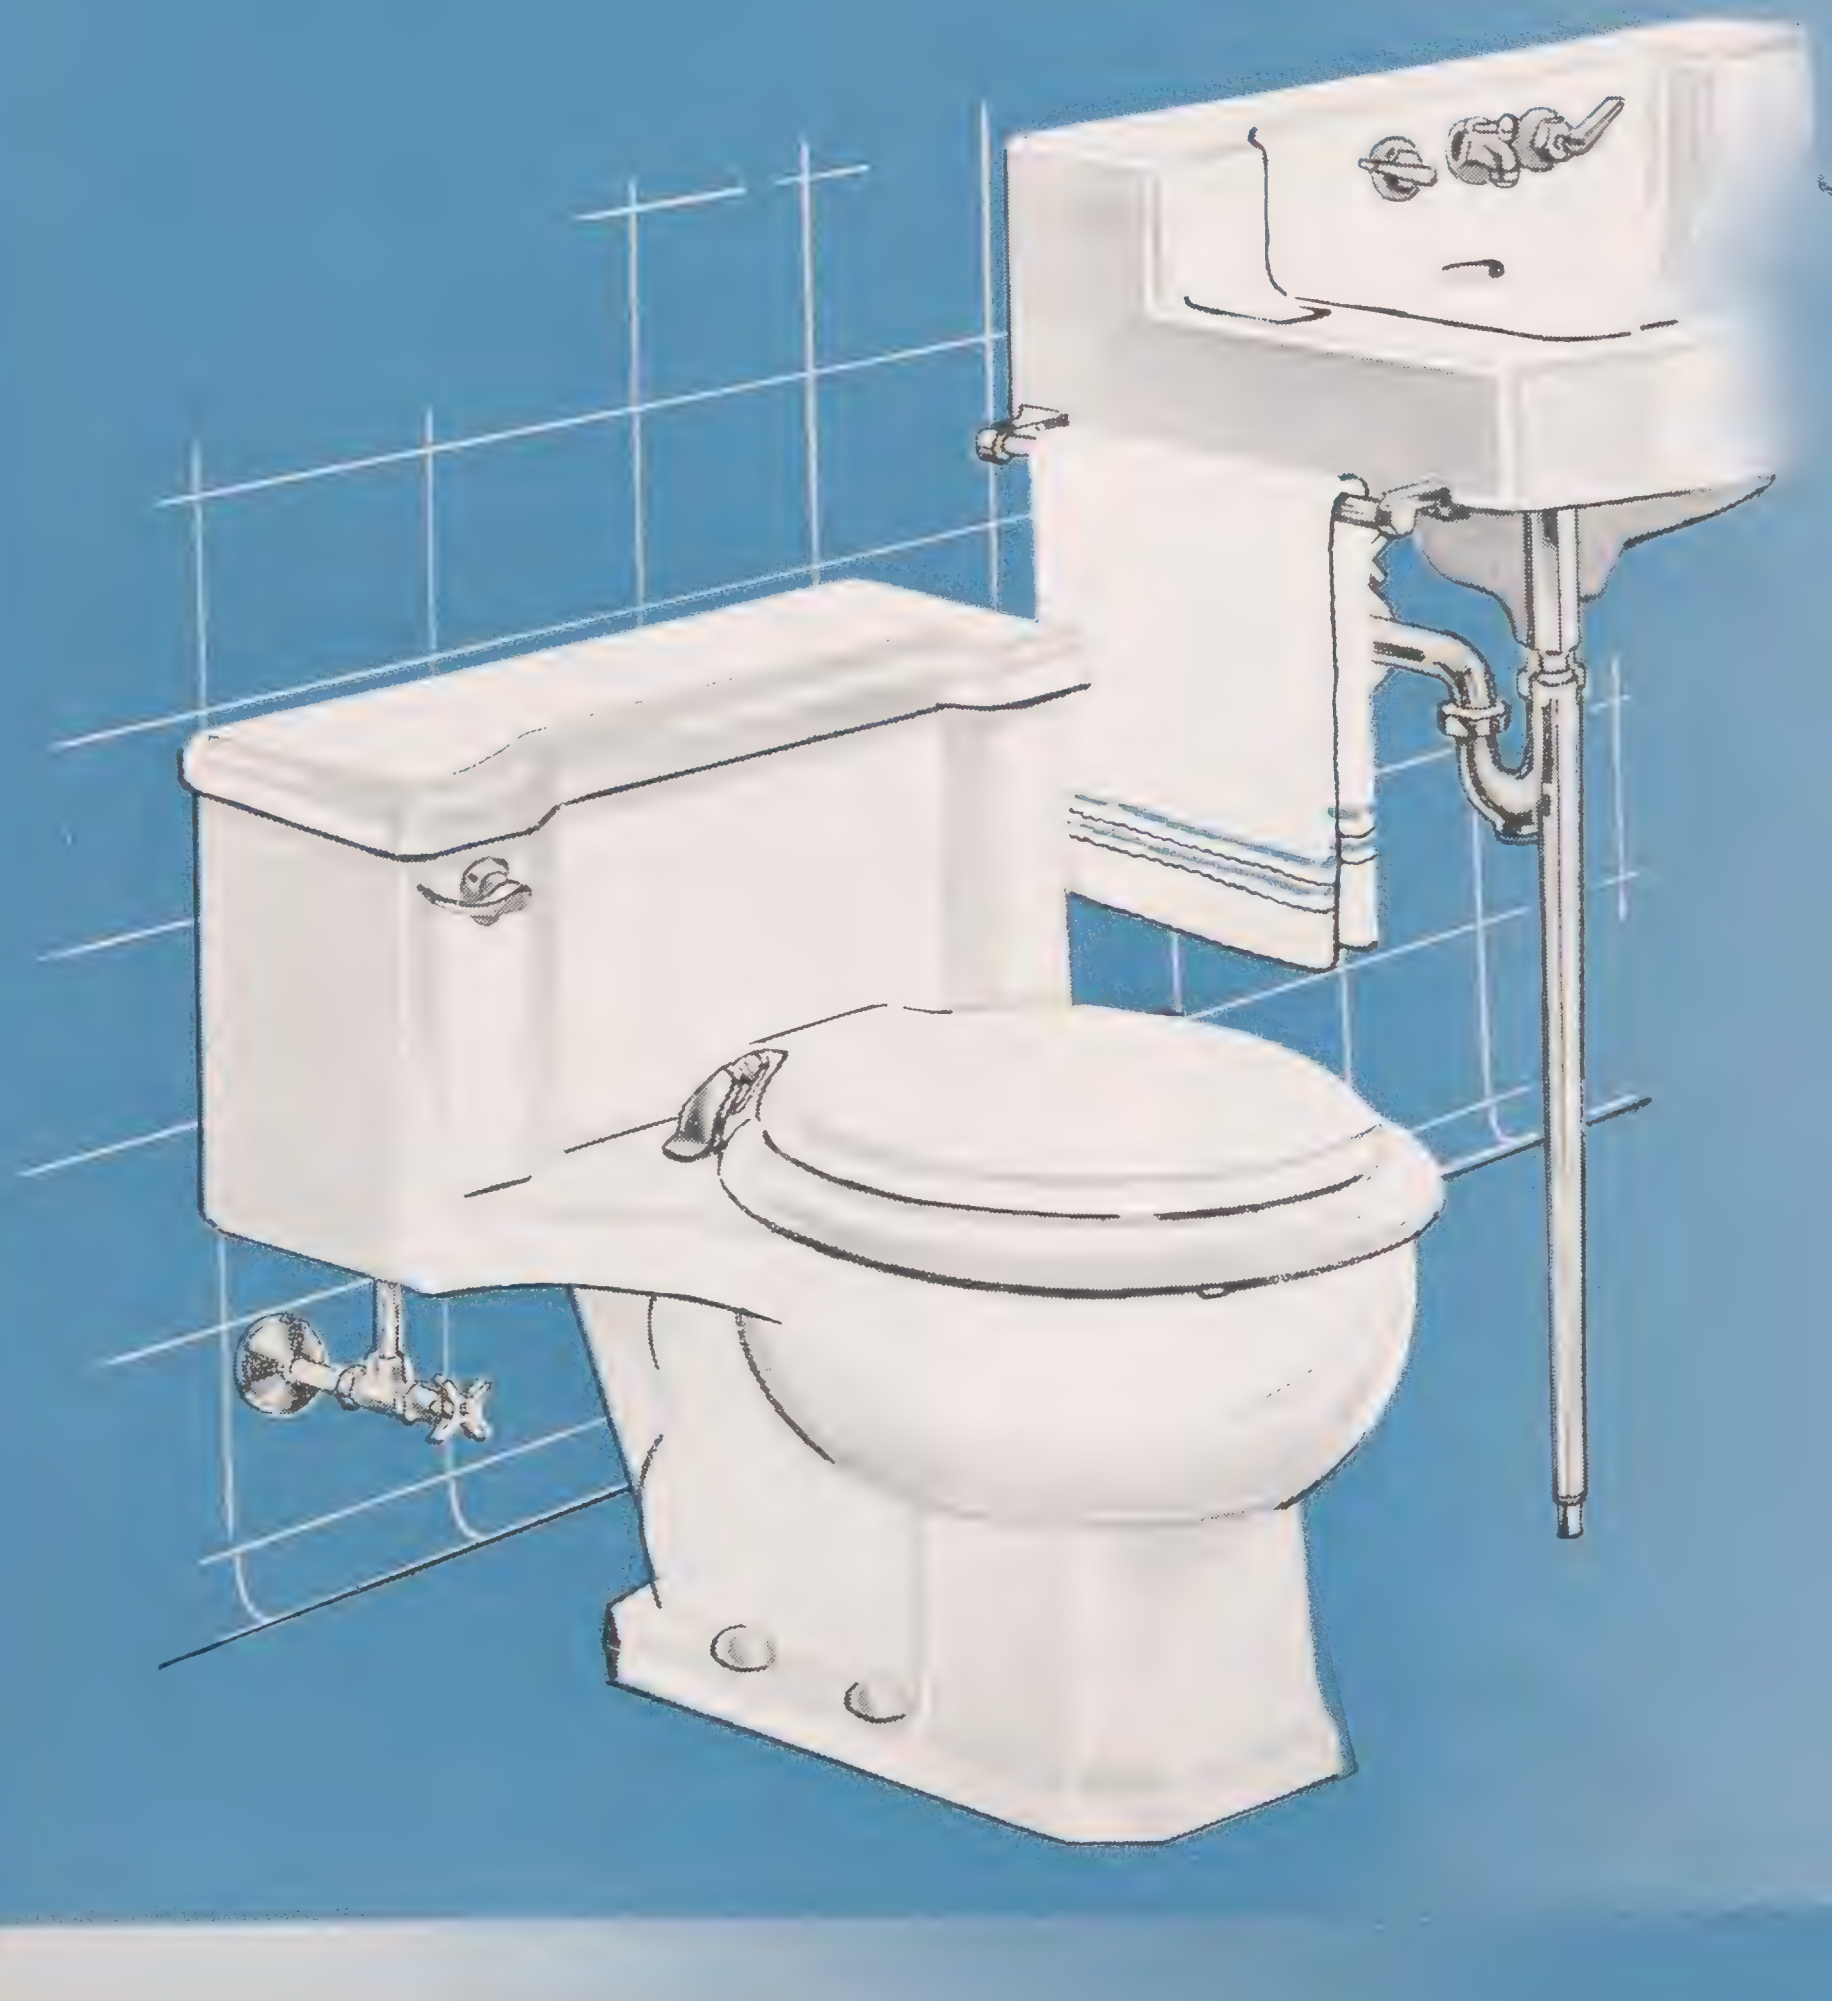

Builders, contractors, architects, plumbing contractors, and home owners can choose from these three types:

SIPHON JET—Has extra large passageway, large water area for extra cleanliness and deep water seal.

REVERSE TRAP—Has same efficient siphonic action as the siphon jet, but with slightly smaller passageway and water area and seal.

WASHDOWN—Has somewhat smaller passageway located in the front of the bowl instead of the rear. Water area and water seal are also smaller. Used largely where cost is a primary consideration.

PLACID

ONE-PIECE
VITREOUS CHINA
SIPHON JET CLOSET

Low—Top of Tank Only 25″ From Floor—Free Standing

Siphonic Action Is Thorough, Quiet and Water-conserving

Elongated Bowl, Large Water Area, Efficient Rim Flush for Maximum Cleanliness

Deep Water Seal and Large Trapway Assure Complete Sanitation

Anti-Siphon Float Valve Safeguards the Water Supply

Adequate Back-tilt for Closet Seat. Flat Tank Cover Is a Handy Shelf.

Lustrous Glass-like, Easy-to-Clean Surface

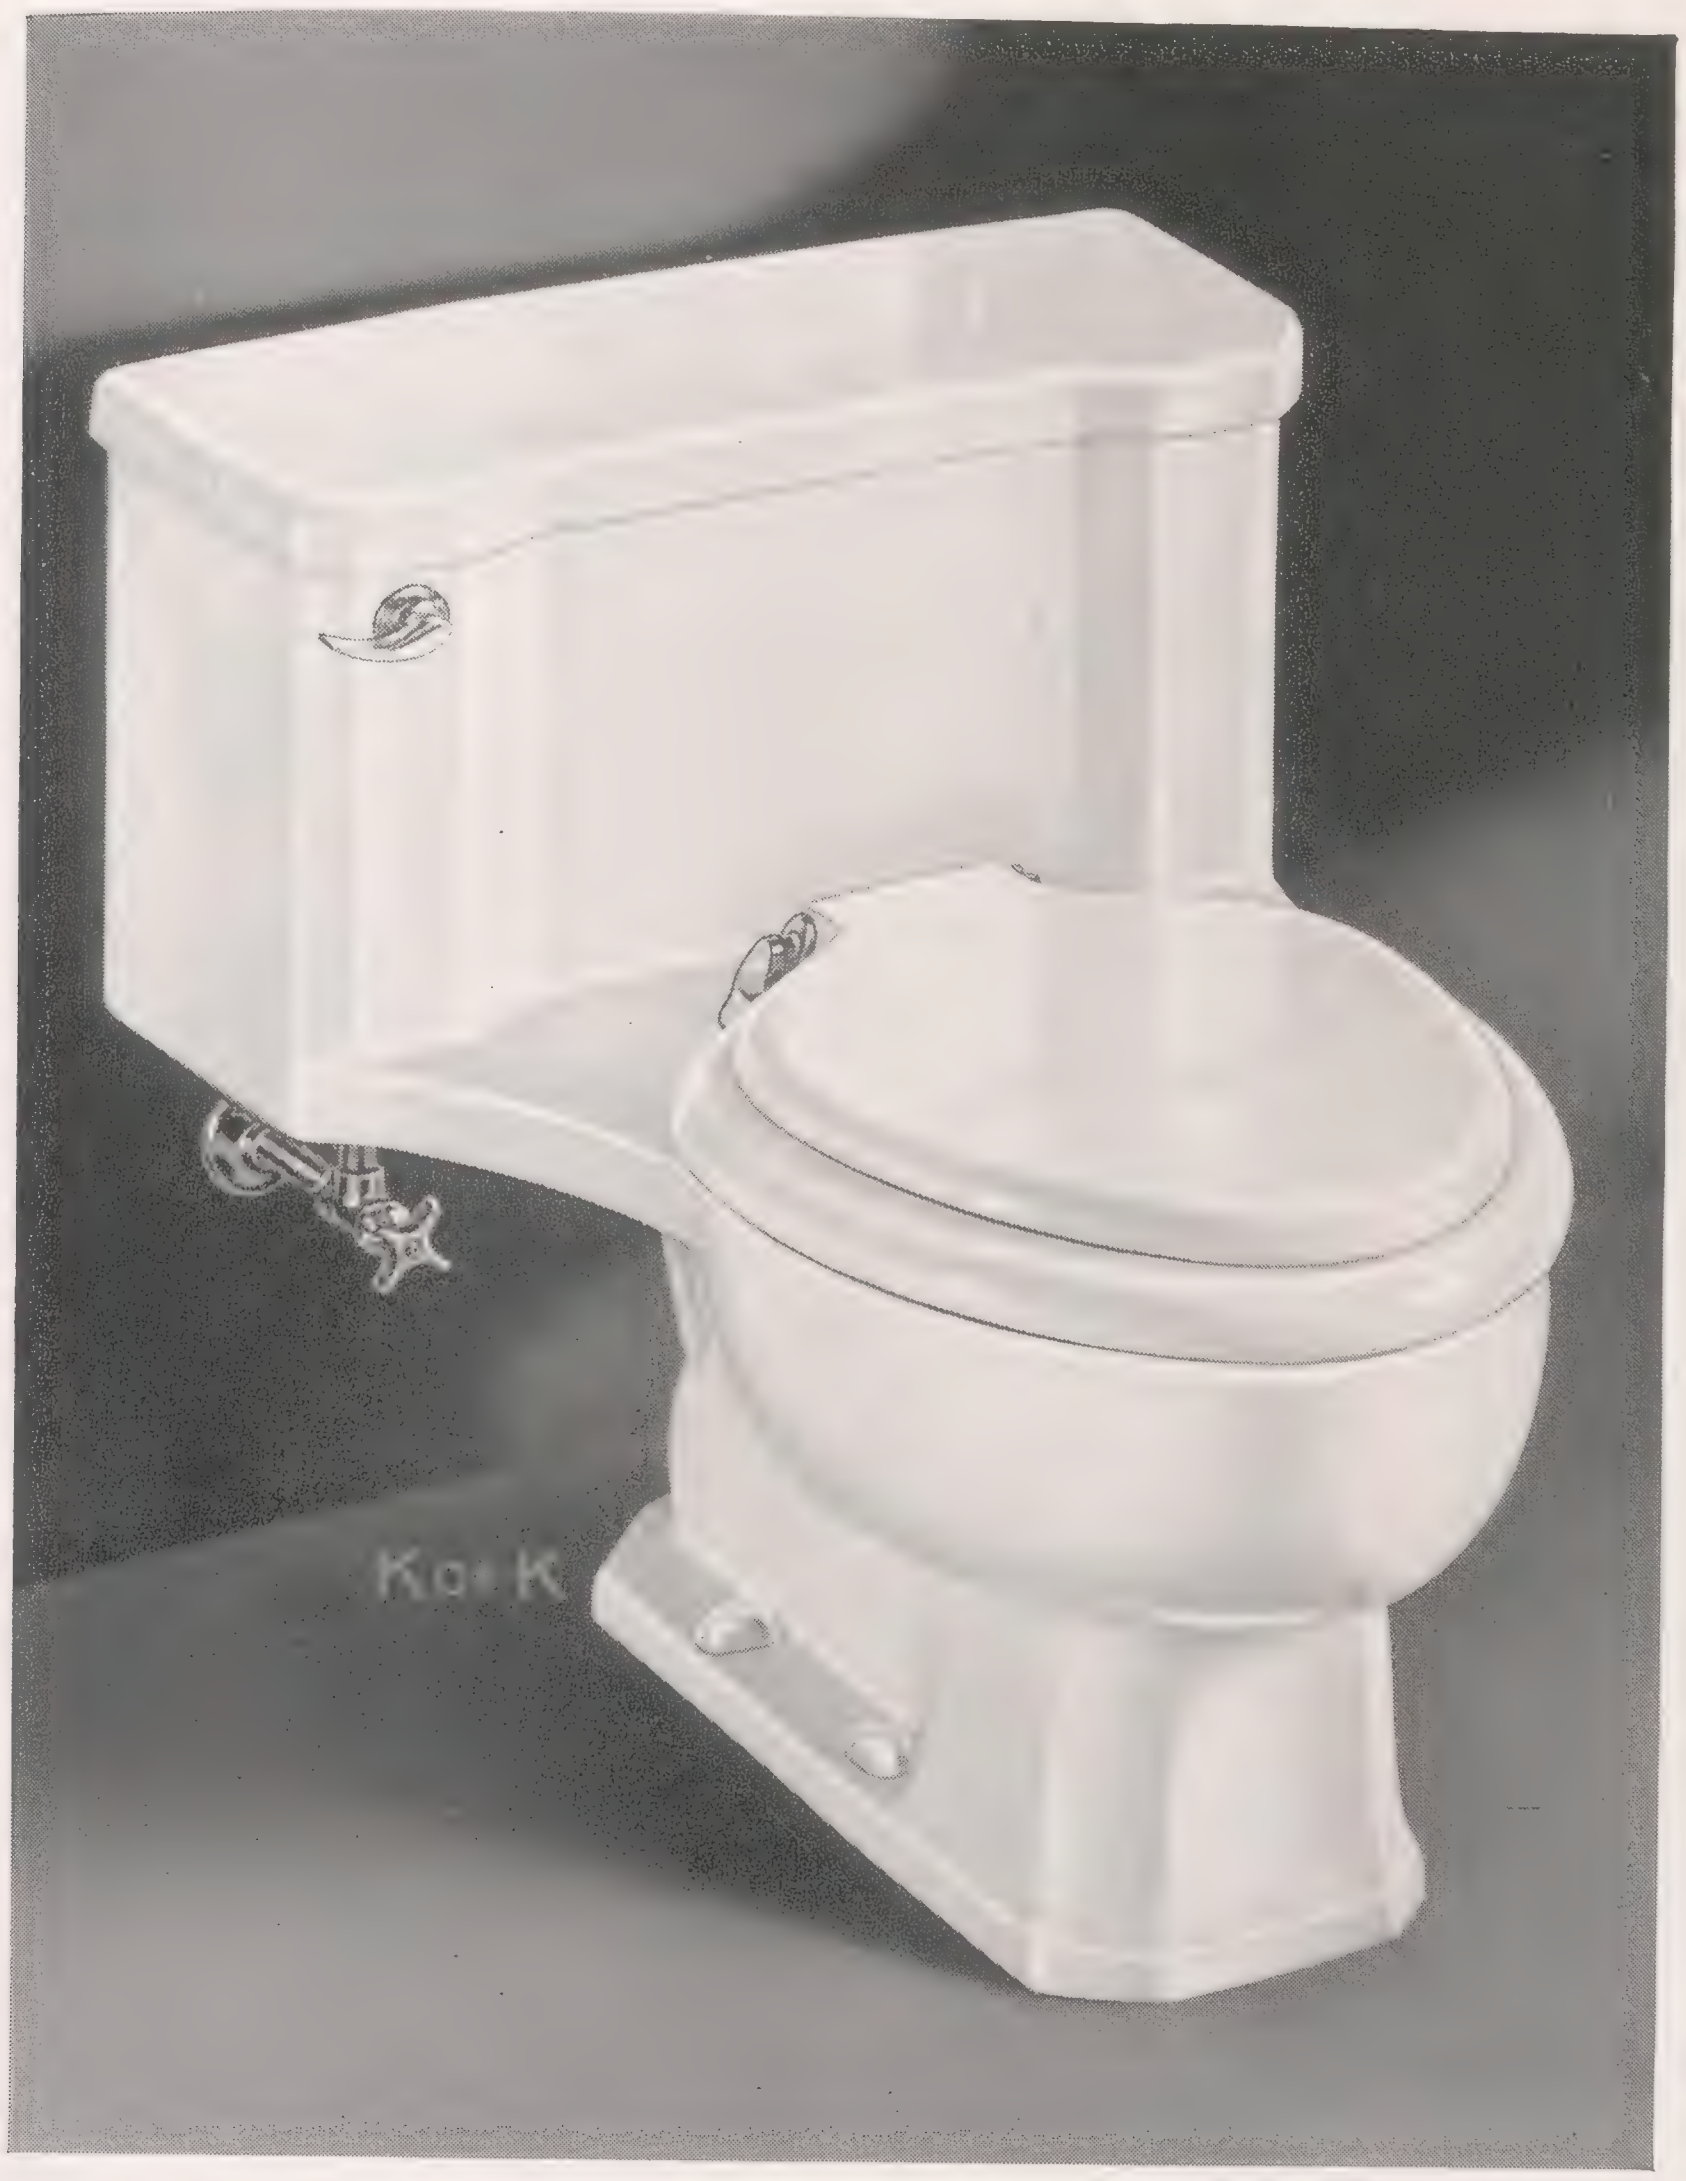

PLACID K-3605-EB

Plate No.	**K-3605-EB**
Type	Siphon jet, elongated
Roughing-In	12½″
Seat	**K-4702** Hygienic
⅜″ Angle Supply	**K-8334** with stop
Accessories	Bolt caps (4) Floor screws (2)

Placid closets are equipped with **K-9248** anti-siphon float valves. They are also available with **K-8342** straight supply pipes with stops, if specified.

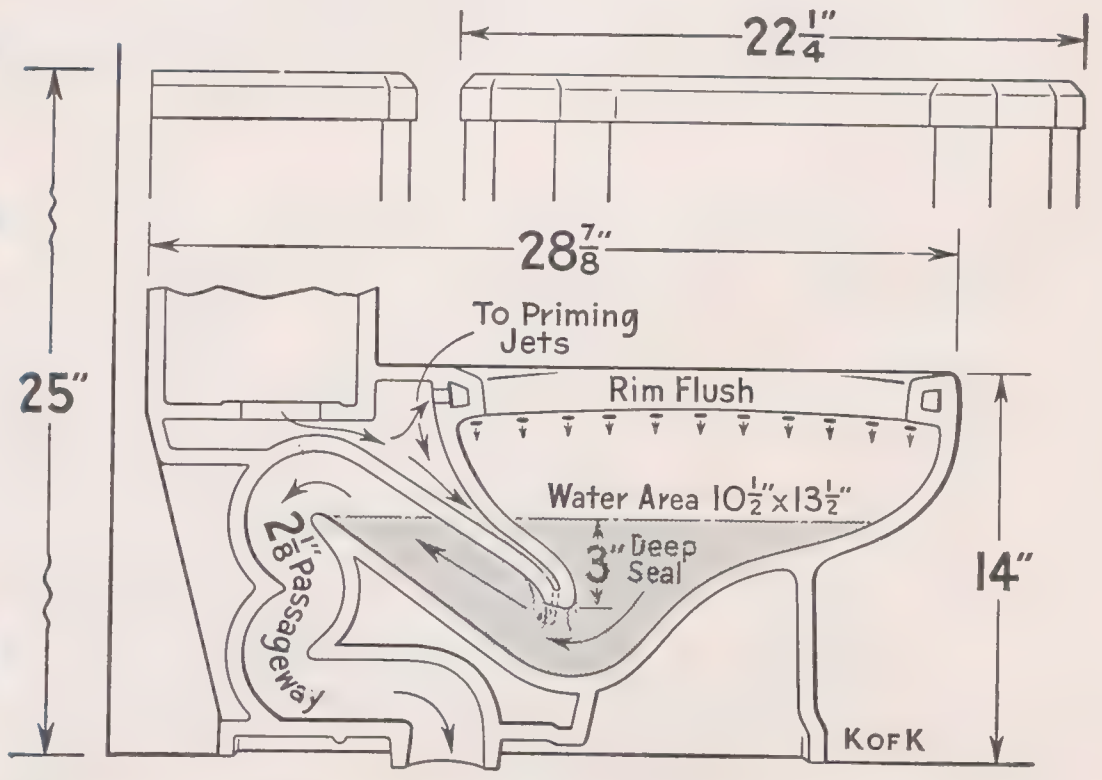
22¼″
28⅞″
To Priming Jets
Rim Flush
Water Area 10½″x13½″
3″ Deep Seal
2⅛″ Passageway
25″
14″
KofK

Cross Section of Placid Closet

CHANNEL

CLOSE-COUPLED VITREOUS CHINA SIPHON JET CLOSET

BOLTON

CLOSE-COUPLED VITREOUS CHINA REVERSE TRAP CLOSET

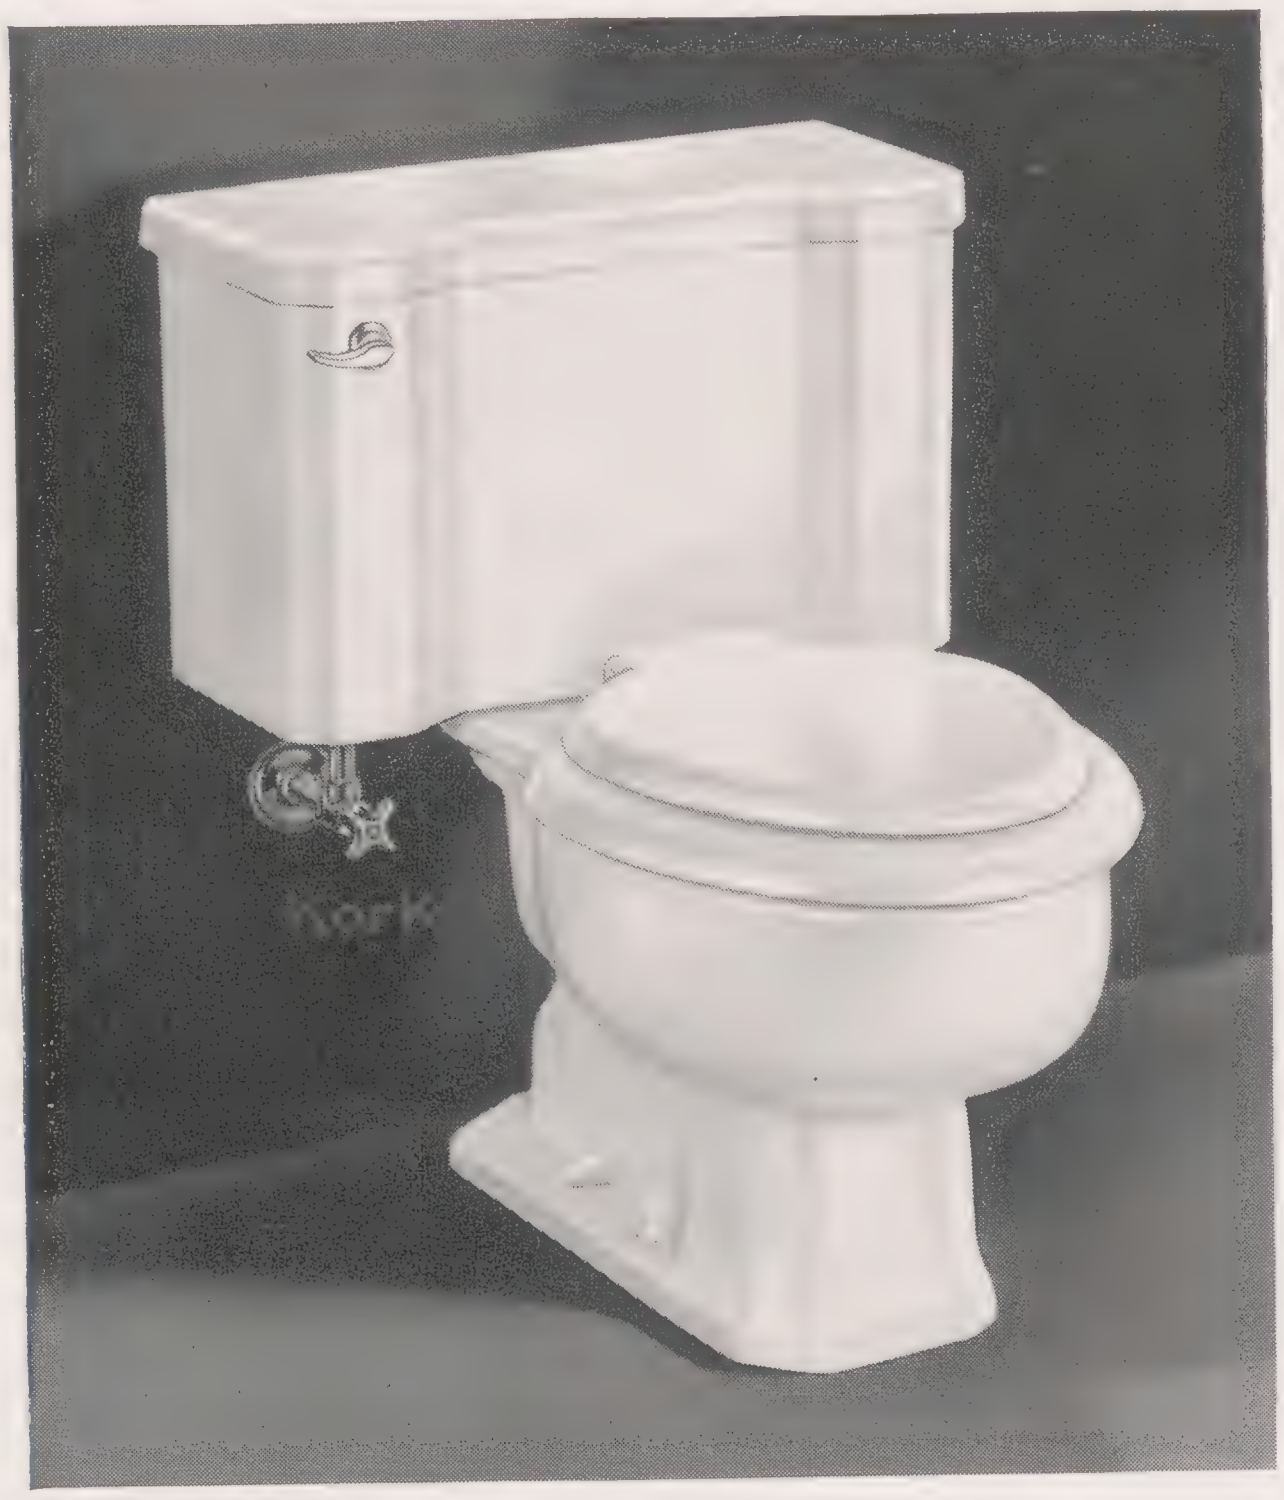

CHANNEL K-3655-EB

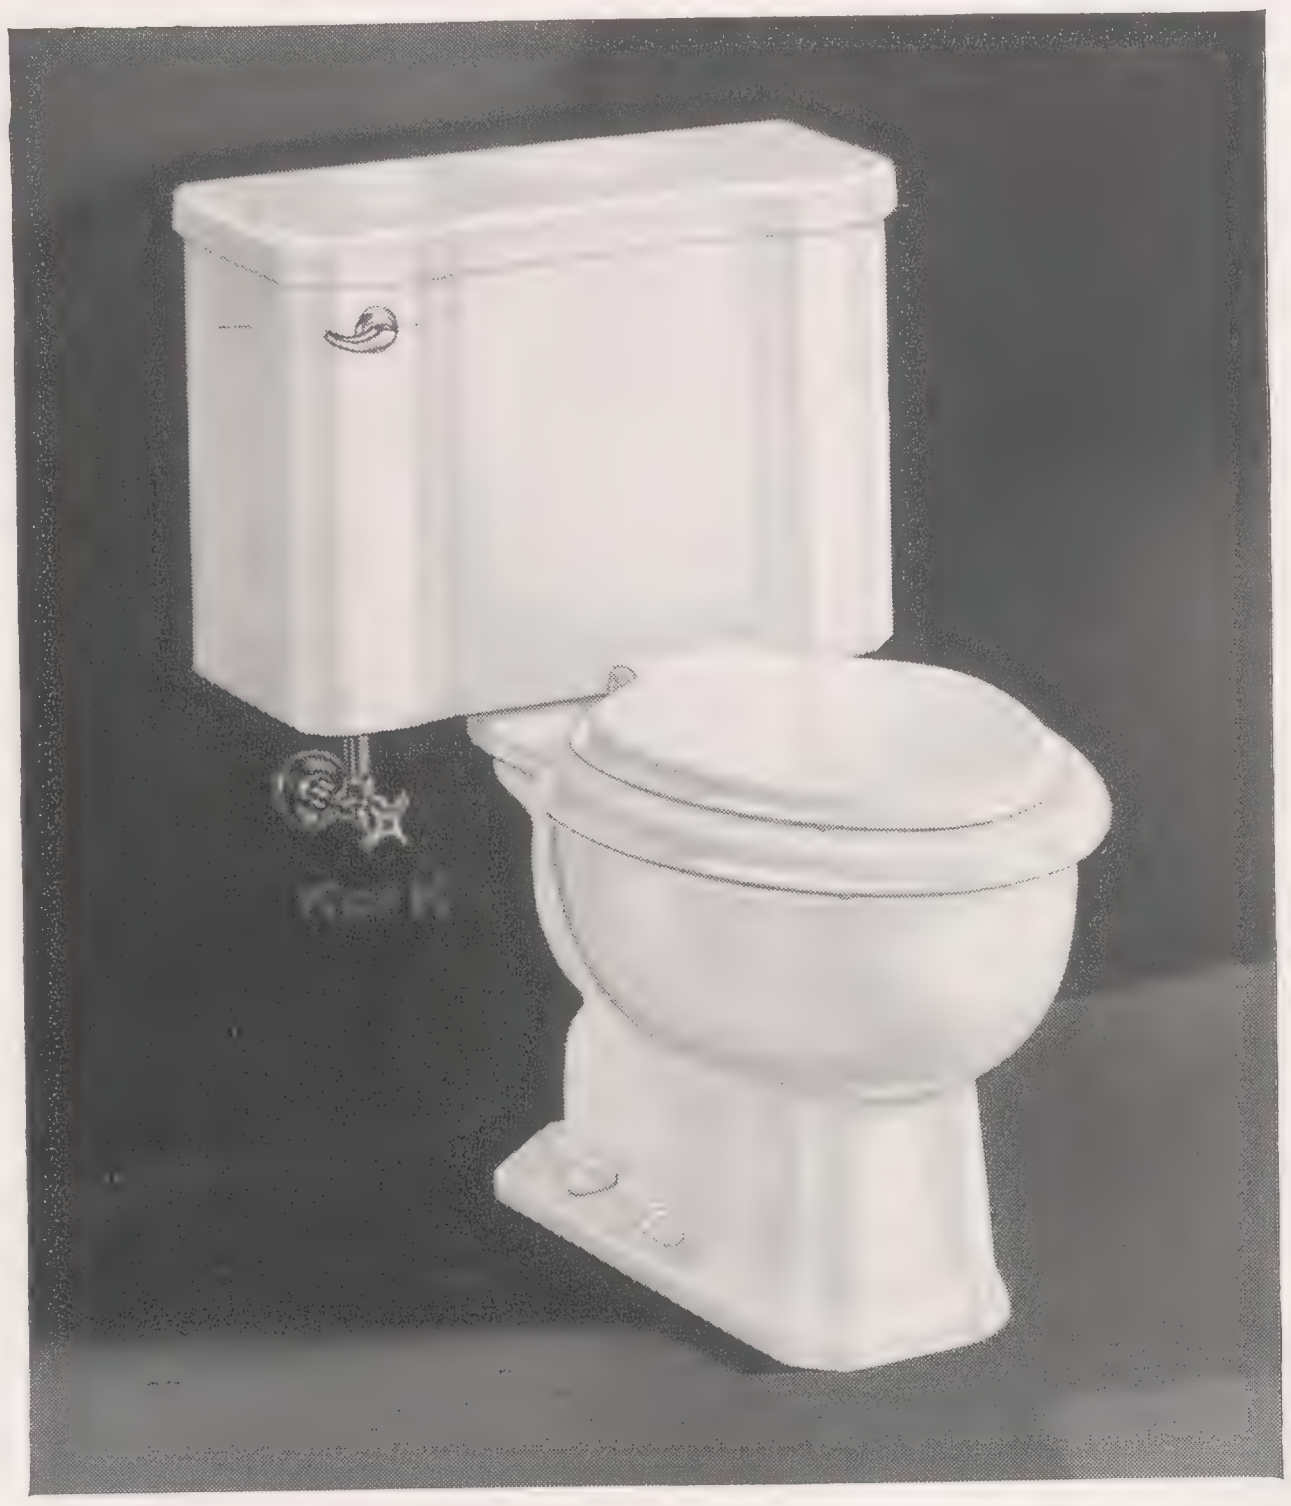

BOLTON K-3670-EB

Plate No.	**K-3655-EB** (Illustrated)	**K-3670-EB** (Illustrated)	**K-3670-PB**
Type	Siphon jet, elongated	Reverse trap, elongated	Reverse trap, round front
Roughing-In	12″	12½″	12½″
Seat	**K-4702** Hygienic	**K-4702** Hygienic	**K-4706** Hygienic
⅜″ Angle Supply	**K-8334** with stop	**K-8334** with stop	**K-8334** with stop
Accessories	Bolt caps (4) Floor screws (2)	Bolt caps (4) Floor screws (2)	Bolt caps (4) Floor screws (2)

Channel and Bolton closets are equipped with **K-9252** anti-siphon float valves. They are also available with **K-8342** straight supply pipes with stops, if specified.

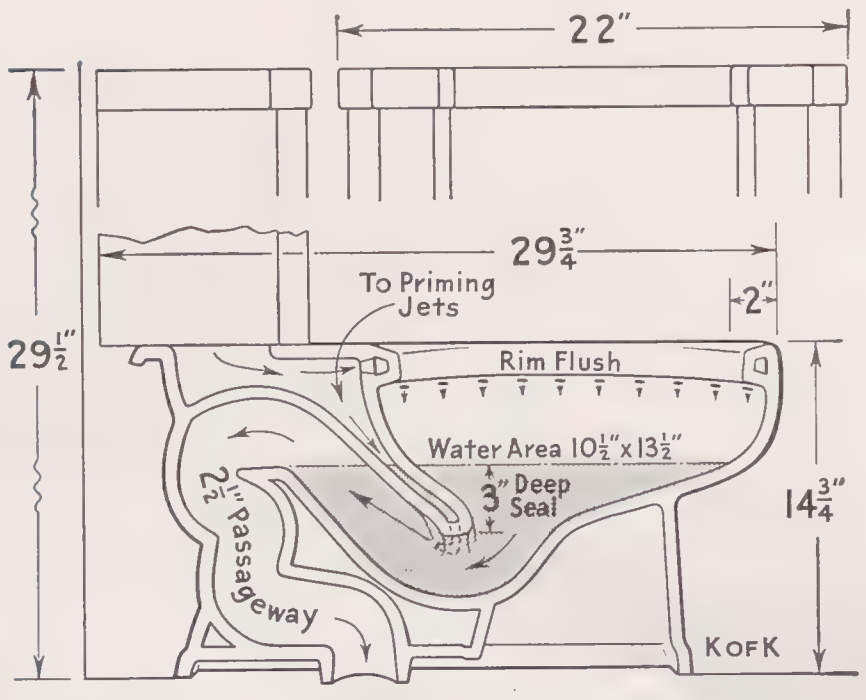
22″
29¾″
To Priming Jets
2″
29½″
Rim Flush
Water Area 10½″x13½″
3″ Deep Seal
14¾″
2½″ Passageway
KofK

Cross Section
of
Channel Closet

Cross Section
of
Bolton Closet

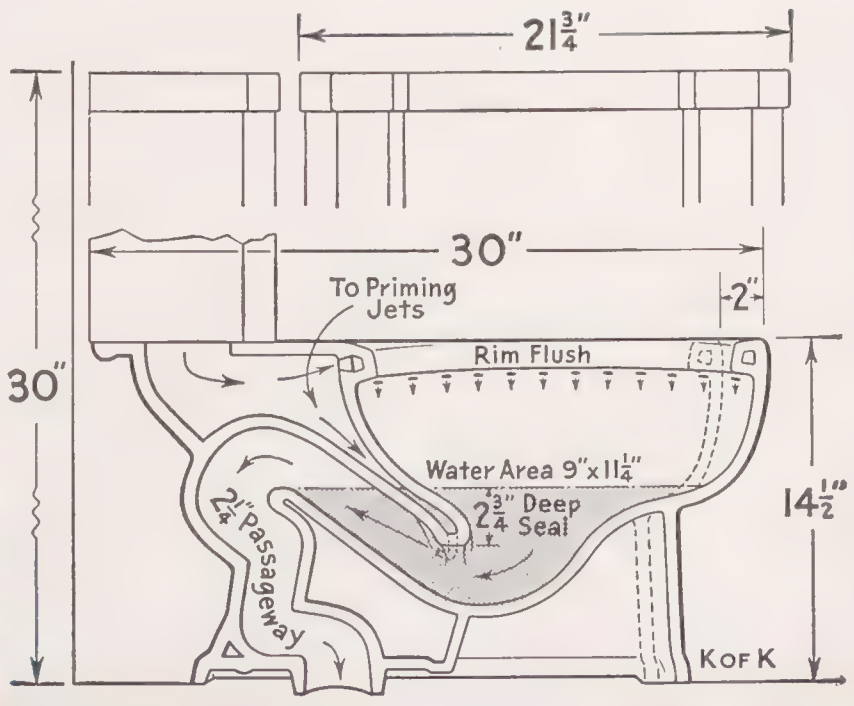
21¾″
30″
To Priming Jets
2″
30″
Rim Flush
Water Area 9″x11¼″
2¾″ Deep Seal
14½″
2¼″ Passageway
KofK

WELLWORTH

CLOSE-COUPLED VITREOUS CHINA REVERSE TRAP CLOSET

TRYLON

CLOSE-COUPLED VITREOUS CHINA WASHDOWN CLOSET

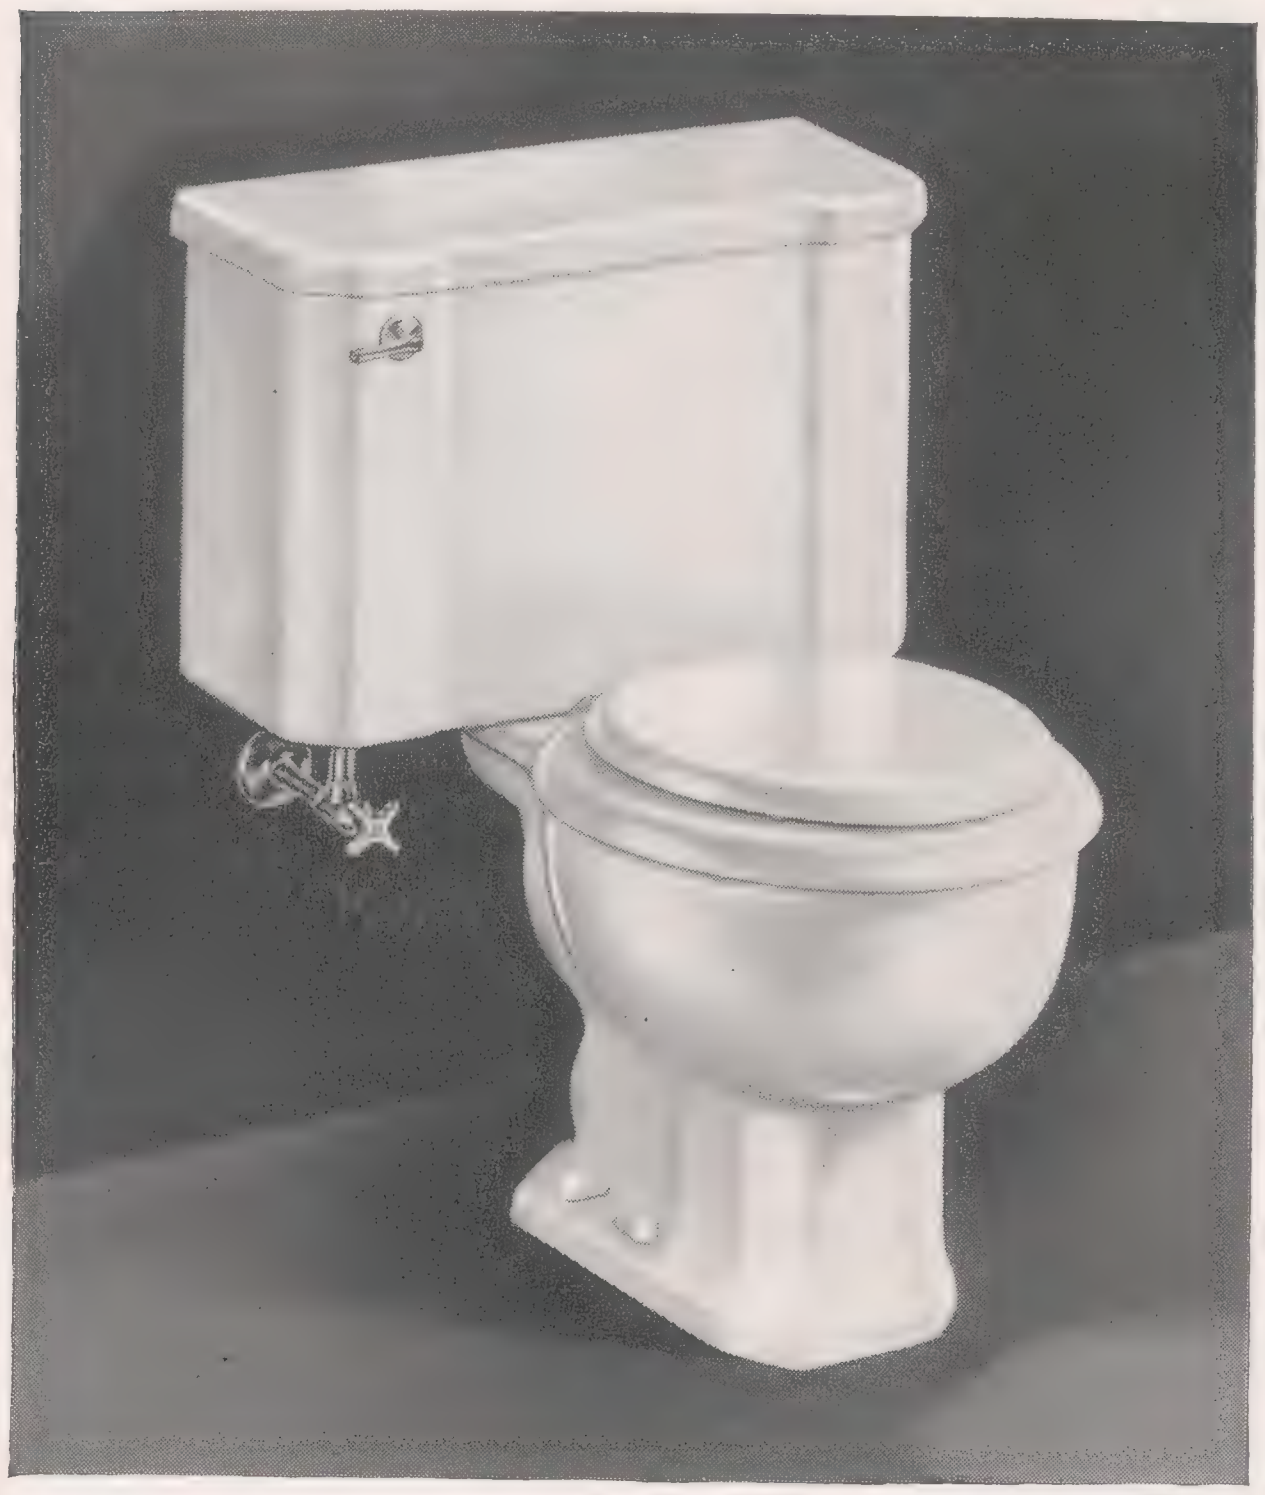

WELLWORTH K-3705-PB

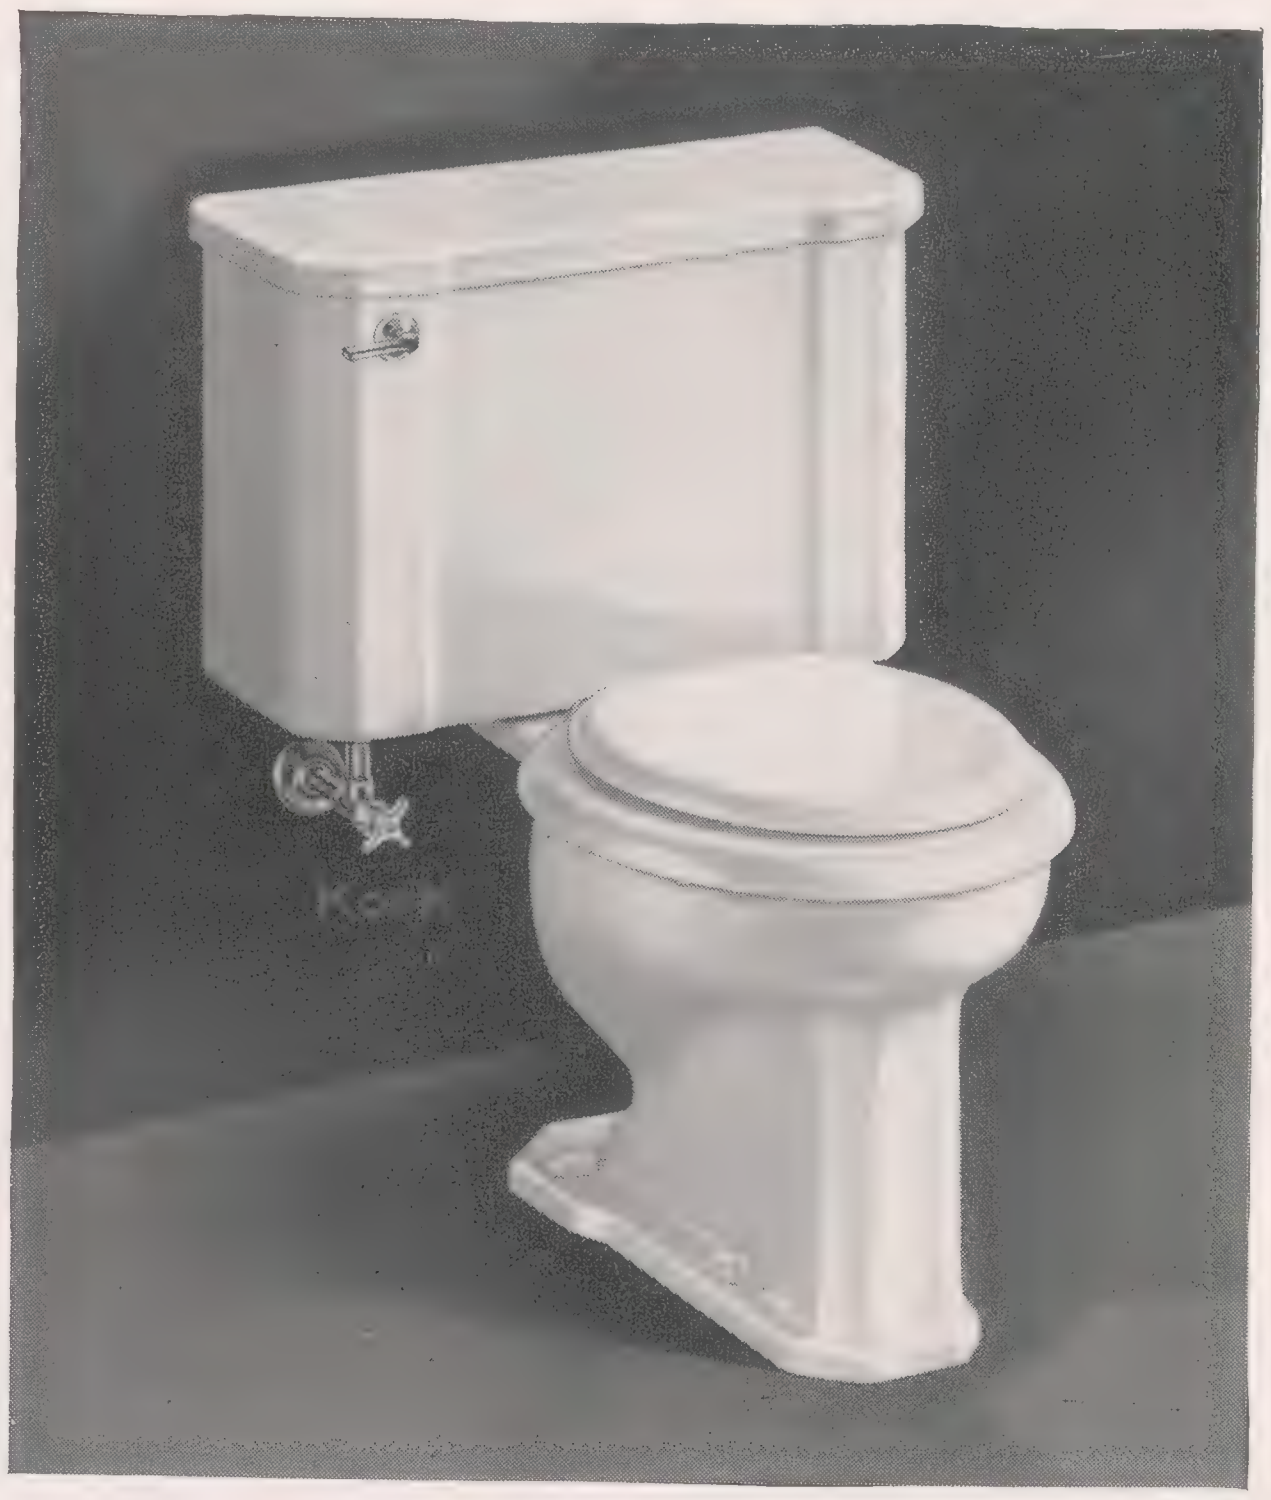

TRYLON K-3715-PB

Plate No.	K-3705-PB	K-3715-PB
Type	Reverse trap, round front	Washdown, round front
Roughing-In	12½″	12½″
Seat	**K-4726-T** TriKo	**K-4726-T** TriKo
⅜″ Angle Supply	**K-8334** with stop	**K-8334** with stop
Accessories	Bolt caps (4) Floor screws (2)	Bolt caps (4) Floor screws (2)

Wellworth and Trylon closets are equipped with **K-9255** float valves. Specify **K-9252** if anti-siphon float valve is desired. They are also available with **K-8342** straight supply pipes with stops, if specified.

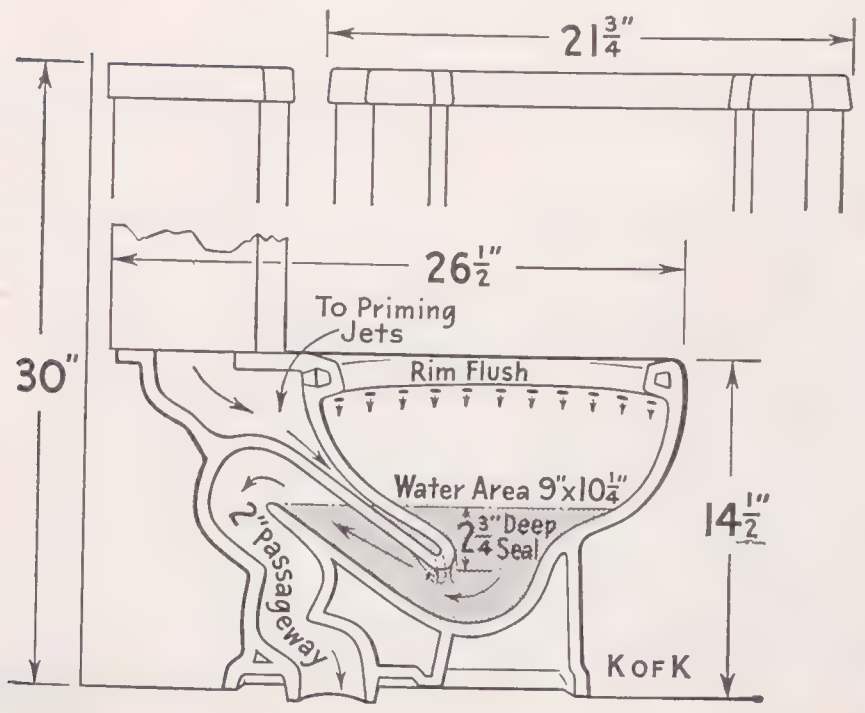
21¾″
26½″
30″
To Priming Jets
Rim Flush
Water Area 9″x10¼″
2¾″ Deep Seal
14½″
2″ Passageway
KofK

Cross Section of Wellworth Closet

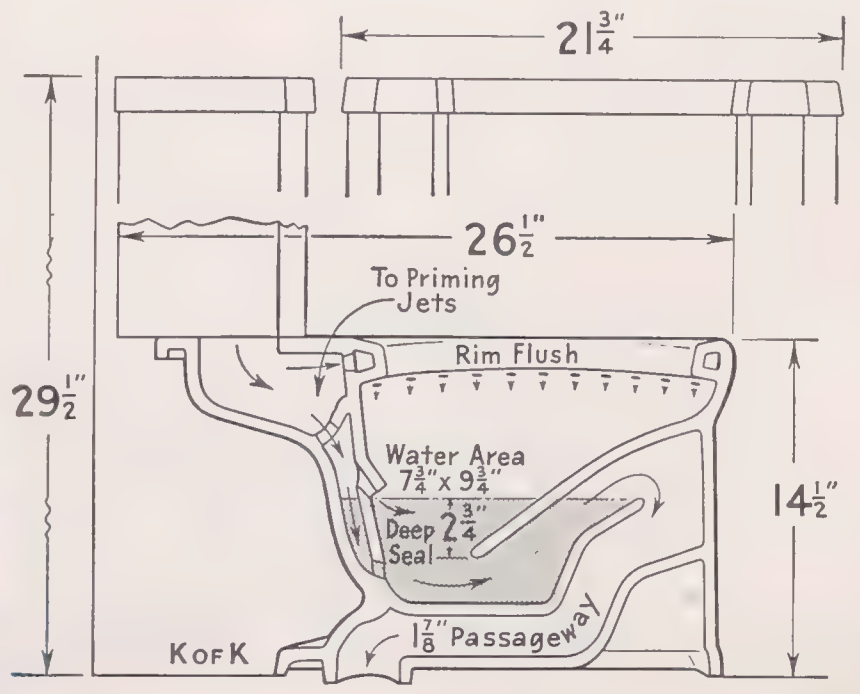
21¾″
26½″
29½″
To Priming Jets
Rim Flush
Water Area 7¾″x 9¾″
Deep 2¾″ Seal
14½″
1⅞″ Passageway
KofK

Cross Section of Trylon Closet

ROCKWELL VITREOUS CHINA SIPHON JET CLOSET WITH 2⅞-INCH PASSAGEWAY

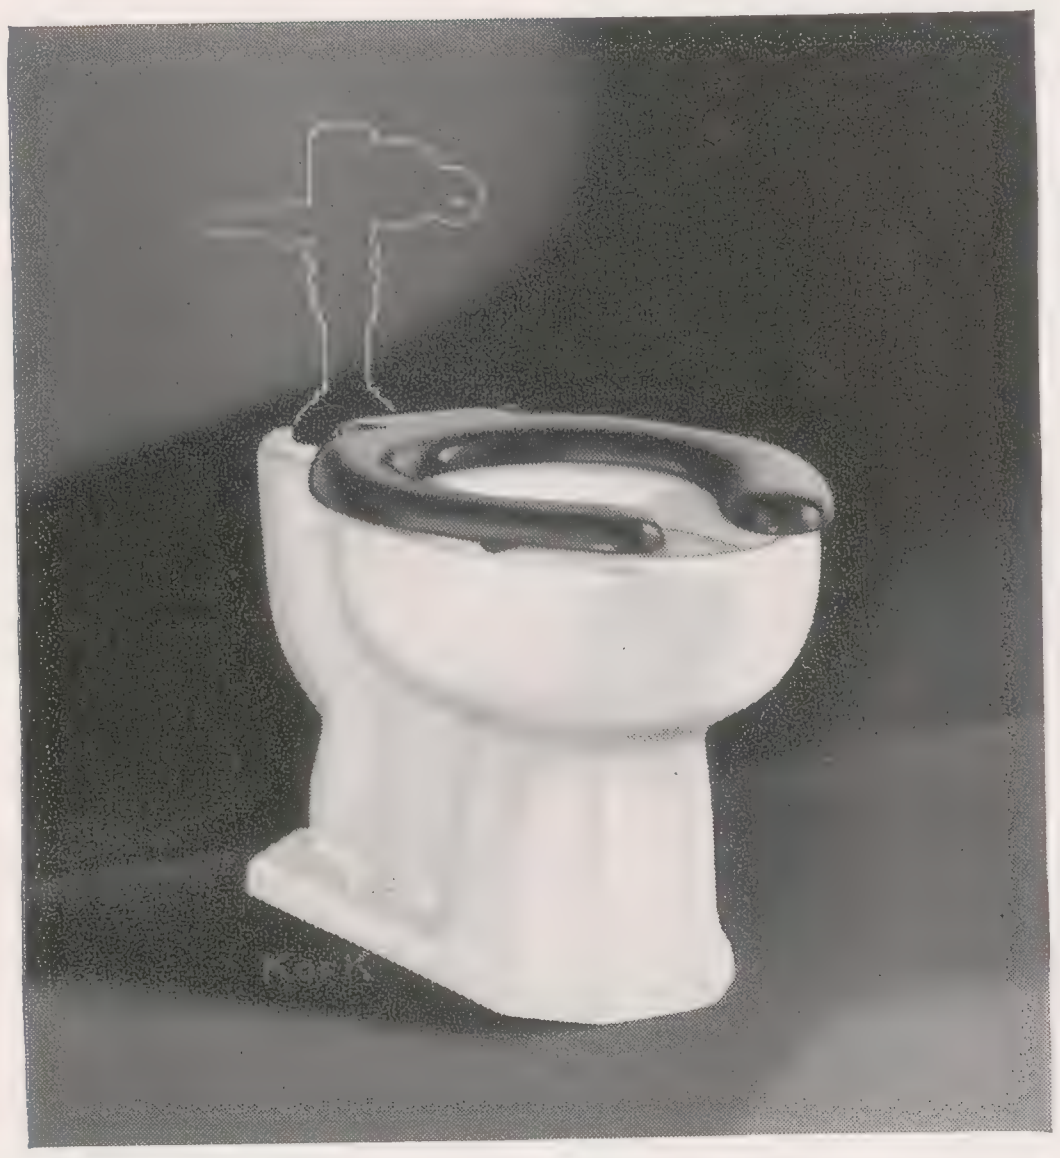

For Offices and Department Stores

ROCKWELL K-3800-ET

DOWNING VITREOUS CHINA SIPHON JET CLOSET WITH 2½-INCH PASSAGEWAY

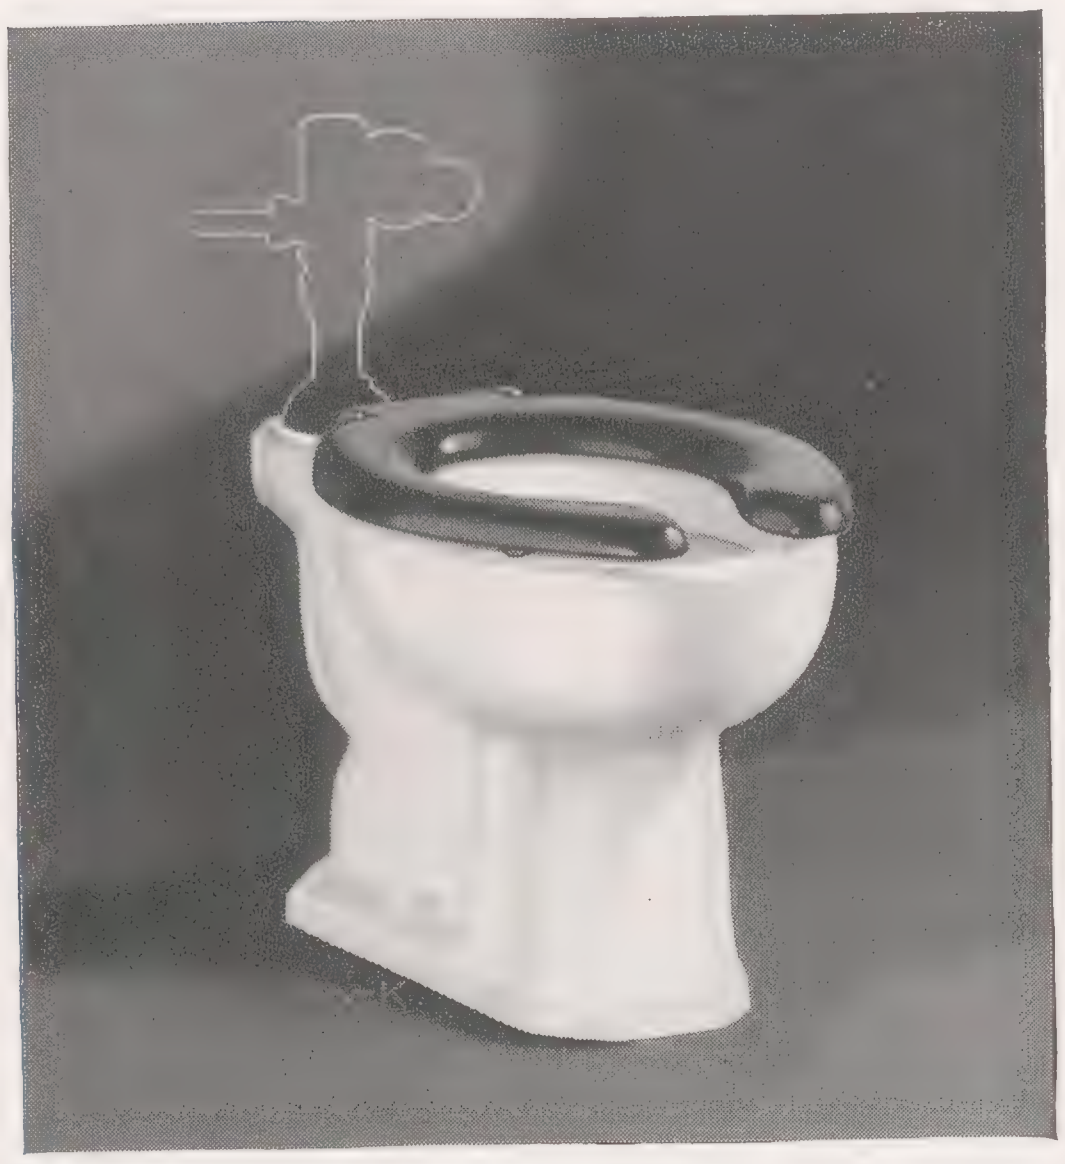

For Offices, Hotels and Public Buildings

DOWNING K-3841-ET

Plate No.	K-3800-ET (Illustrated)	K-3800-PT	K-3841-ET (Illustrated)	K-3841-PT
Type	Siphon jet Elongated	Siphon jet Round front	Siphon jet Elongated	Siphon jet Round front
Roughing-In	12″	12″	12″	12″
Bowl No.	**K-4260-ET** 1½″ top spud	**K-4260-PT** 1½″ top spud	**K-4291-ET** 1½″ top spud	**K-4291-PT** 1½″ top spud
Molded Seats: **Olsonite** **Sperzel**	**No. 10** black **No. 50E** black	**No. 5** black **No. 50** black	**No. 10** black **No. 50E** black	**No. 5** black **No. 50** black
		(These seats are available in white if specified.)		
Accessories	Bolt caps (2)	Bolt caps (2)	Bolt caps (2)	Bolt caps (2)
Flush Valves: **Kohler** **Sloan** **Watrous**	**K-9420** Metro **110-F** Royal **M-532** Majestic	**K-9420** Metro **110-F** Royal **M-532** Majestic	**K-9420** Metro **110-F** Royal **M-532** Majestic	**K-9420** Metro **110-F** Royal **M-532** Majestic

For flush valve with vacuum breaker to prevent back siphonage add suffix V to Kohler number, YV to Sloan number and VB to Watrous number.

Cross Section of Rockwell Closet

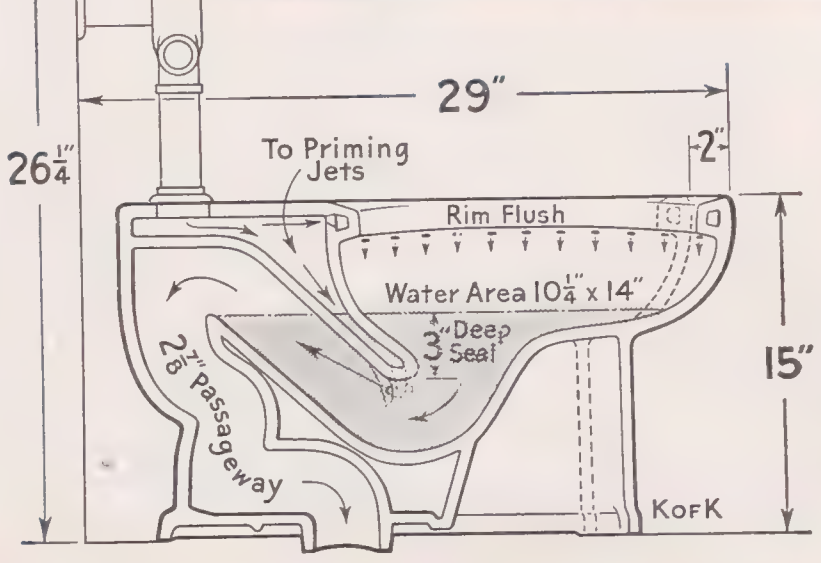

29″
26¼″
To Priming Jets
2″
Rim Flush
Water Area 10¼″ x 14″
3″ Deep Seal
2⅞″ Passageway
15″
KorK

Cross Section of Downing Closet

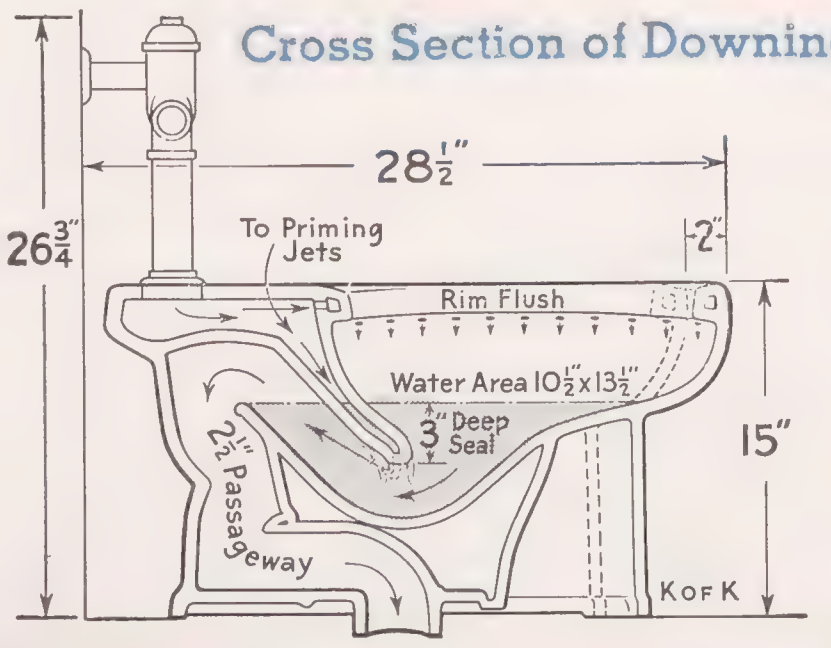

28½″
26¾″
To Priming Jets
2″
Rim Flush
Water Area 10½″x13½″
3″ Deep Seal
2½″ Passageway
15″
KorK

WELLAND VITREOUS CHINA QUIET SIPHON JET CLOSET WITH 2½-INCH PASSAGEWAY

For Close Roughing-in

For Offices, Public Buildings, and Apartments

WELLAND K-3855-ET

PENRYN VITREOUS CHINA SIPHON JET CLOSET WITH 2½-INCH PASSAGEWAY

For Close Roughing-in

For Hospitals, Offices, Stores and Public Buildings

PENRYN K-3858-ET

Plate No.	**K-3855-ET** (Illustrated)	**K-3855-PT**	**K-3858-ET** (Illustrated)	**K-3858-PT**	**K-3858-EV** (Concealed valve)
Type	Siphon jet Elongated	Siphon jet Round front	Siphon jet Elongated	Siphon jet Round front	Siphon jet Elongated
Roughing-In	10″	10″	10″	10″	12″
Bowl No.	**K-4270-ET** 1½″ top spud	**K-4270-PT** 1½″ top spud	**K-4280-ET** 1½″ top spud	**K-4280-PT** 1½″ top spud	**K-4280-ER** 1½″ rear spud
Molded Seats: **Olsonite** **Sperzel**	**No. 10** black **No. 50E** black	**No. 5** black **No. 50** black	**No. 10** black **No. 50E** black	**No. 5** black **No. 50** black	**No. 10** black **No. 50E** black
	(These seats are available in white if specified.)				
Accessories	Bolt caps (2)	Bolt caps (2)	Bolt caps (2)	Bolt caps (2)	Bolt caps (2)
Flush valves: **Kohler** **Sloan** **Watrous**	— **110-FQ** Royal **M-532** Majestic	— **110-FQ** Royal **M-532** Majestic	**K-9420** Metro **110-F** Royal **M-532** Majestic	**K-9420** Metro **110-F** Royal **M-532** Majestic	— **140** Royal **M-536** Majestic

For flush valve with vacuum breaker to prevent back siphonage add suffix V to Kohler number, YV to Sloan number and VB to Watrous number.

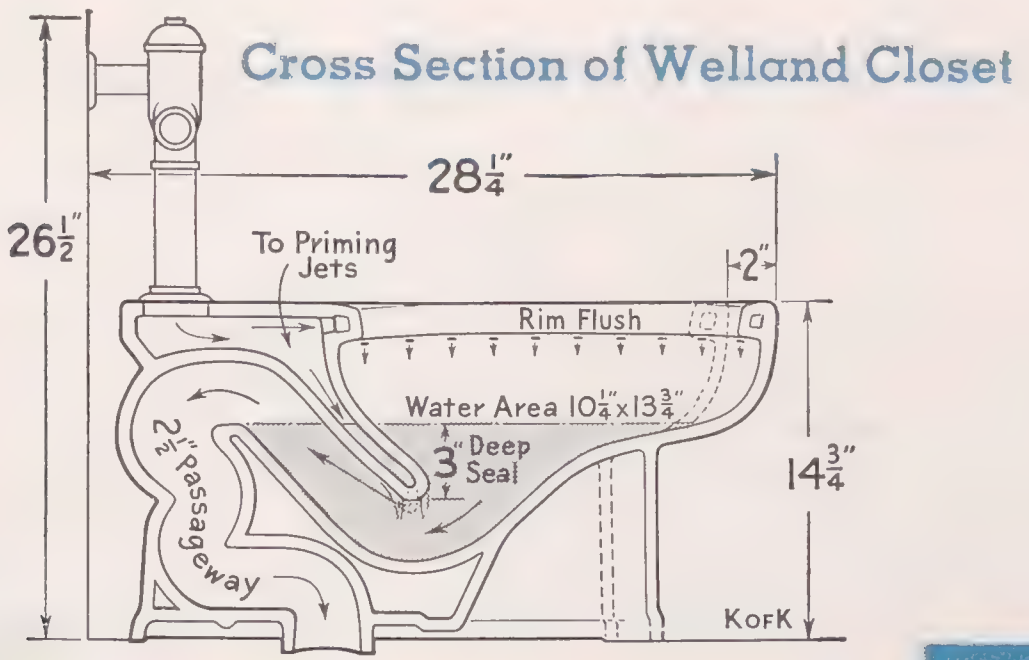

Cross Section of Welland Closet

28¼″
26½″
To Priming Jets
2″
Rim Flush
Water Area 10¼″x13¾″
3″ Deep Seal
2½″ Passageway
14¾″
KofK

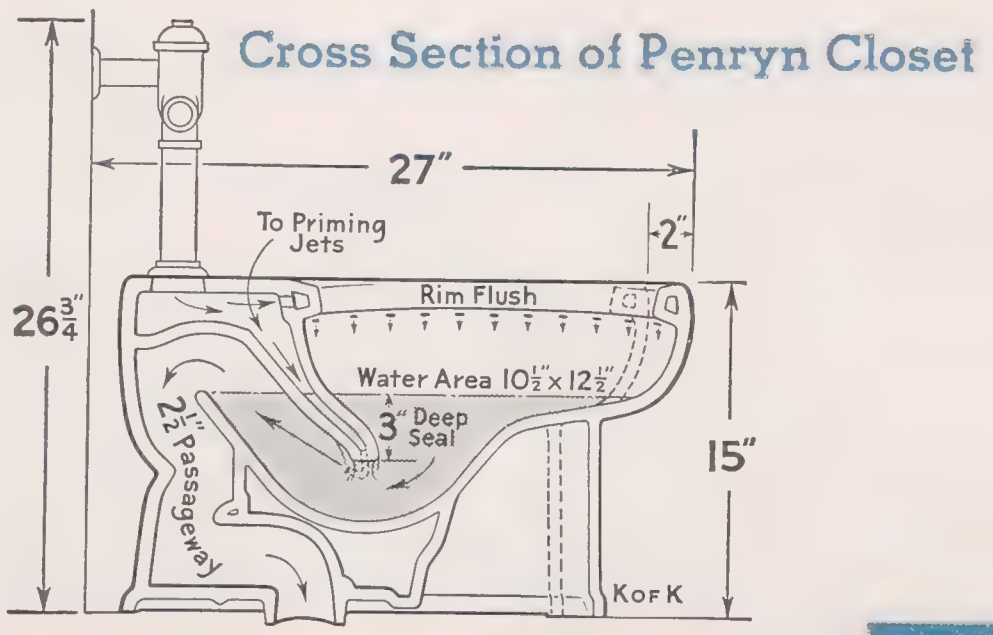

Cross Section of Penryn Closet

27″
26¾″
To Priming Jets
2″
Rim Flush
Water Area 10½″x12½″
3″ Deep Seal
2½″ Passageway
15″
KofK

JUVENILE VITREOUS CHINA SIPHON JET CLOSET WITH 2½-INCH PASSAGEWAY

For Grade Schools and Children's Wards in Hospitals

JUVENILE K-3860-ET Bowl 13" high

PRIMARY VITREOUS CHINA SIPHON JET CLOSET WITH 1⅞-INCH PASSAGEWAY

For Kindergartens, Children's Hospitals, Homes

PRIMARY K-3865-ET Bowl 10" high

Plate No.	**K-3860-ET** (Illustrated)	**K-3860-PT**	***K-3860-EB** With tank	**K-3865-ET** (Illustrated)	**K-3865-EB** With tank
Type	Siphon jet Elongated	Siphon jet Round front	Siphon jet Elongated	Siphon jet Elongated	Siphon jet Elongated
Roughing-In	11"	11"	12¼"	10"	10½"
Bowl No.	**K-4310-ET** 1½" top spud	**K-4310-PT** 1½" top spud	**K-4310-ET** 2" top spud	**K-4315-ET** 1½" top spud	**K-4315-ET** 2" top spud
Molded Seats:					
Olsonite	**No. 10** black	**No. 5** black	**No. 10** black	**No. 125** white	**No. 125** white
Sperzel	**No. 50E** black	**No. 50** black	**No. 50E** black	—	—
	(These seats are available in white if specified.)				
Accessories	Bolt caps (2)	Bolt caps (2)	Bolt caps (2)	Bolt caps (2)	Bolt caps (2)
Flush Valves:					
Kohler	**K-9420** Metro	**K-9420** Metro	—	**K-9420** Metro	—
Sloan	**110-F** Royal	**110-F** Royal	—	**110-F** Royal	—
Watrous	**M-532** Majestic	**M-532** Majestic	—	**M-532** Majestic	—
Tank	—	—	**K-4502-A**	—	**K-4508-A**
Supply Pipes	—	—	**K-8336** ⅜" angle with stops	—	**K-8336** ⅜" angle with stops

***K-3860-PB** Juvenile closet with tank, same as **K-3860-EB** except with **K-4310-PT** round front bowl and **No. 5** Black Olsonite seat. For flush valve with vacuum breaker to prevent back siphonage add suffix V to Kohler number, YV to Sloan number and VB to Watrous number.

Cross Section of Juvenile Closet

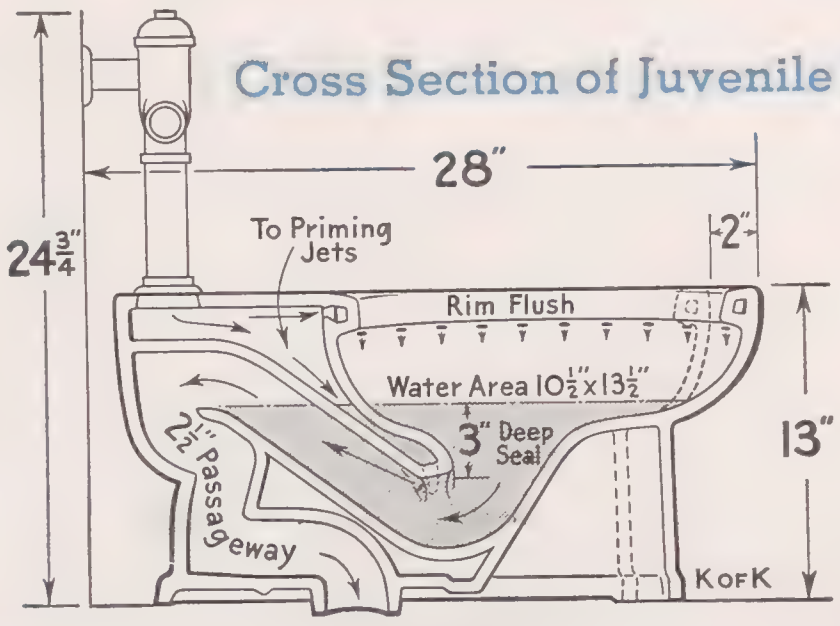
28"
24¾"
2"
To Priming Jets
Rim Flush
Water Area 10½"x13½"
3" Deep Seal
13"
2½" Passageway
KofK

Cross Section of Primary Closet

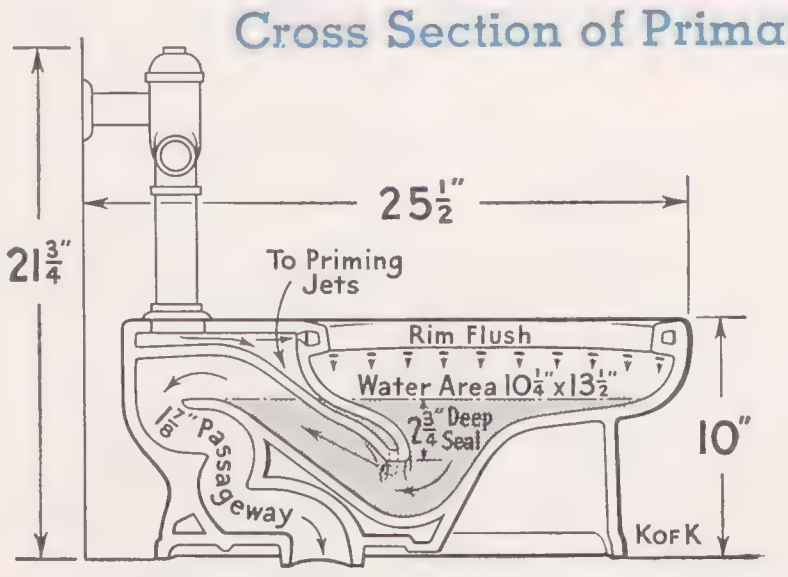
25½"
21¾"
To Priming Jets
Rim Flush
Water Area 10¼"x13½"
2¾" Deep Seal
10"
1⅞" Passageway
KofK

BROOKLANDS VITREOUS CHINA REVERSE TRAP CLOSET WITH 1⅞-INCH PASSAGEWAY

TRENT VITREOUS CHINA WASHDOWN CLOSET WITH 1⅞-INCH PASSAGEWAY

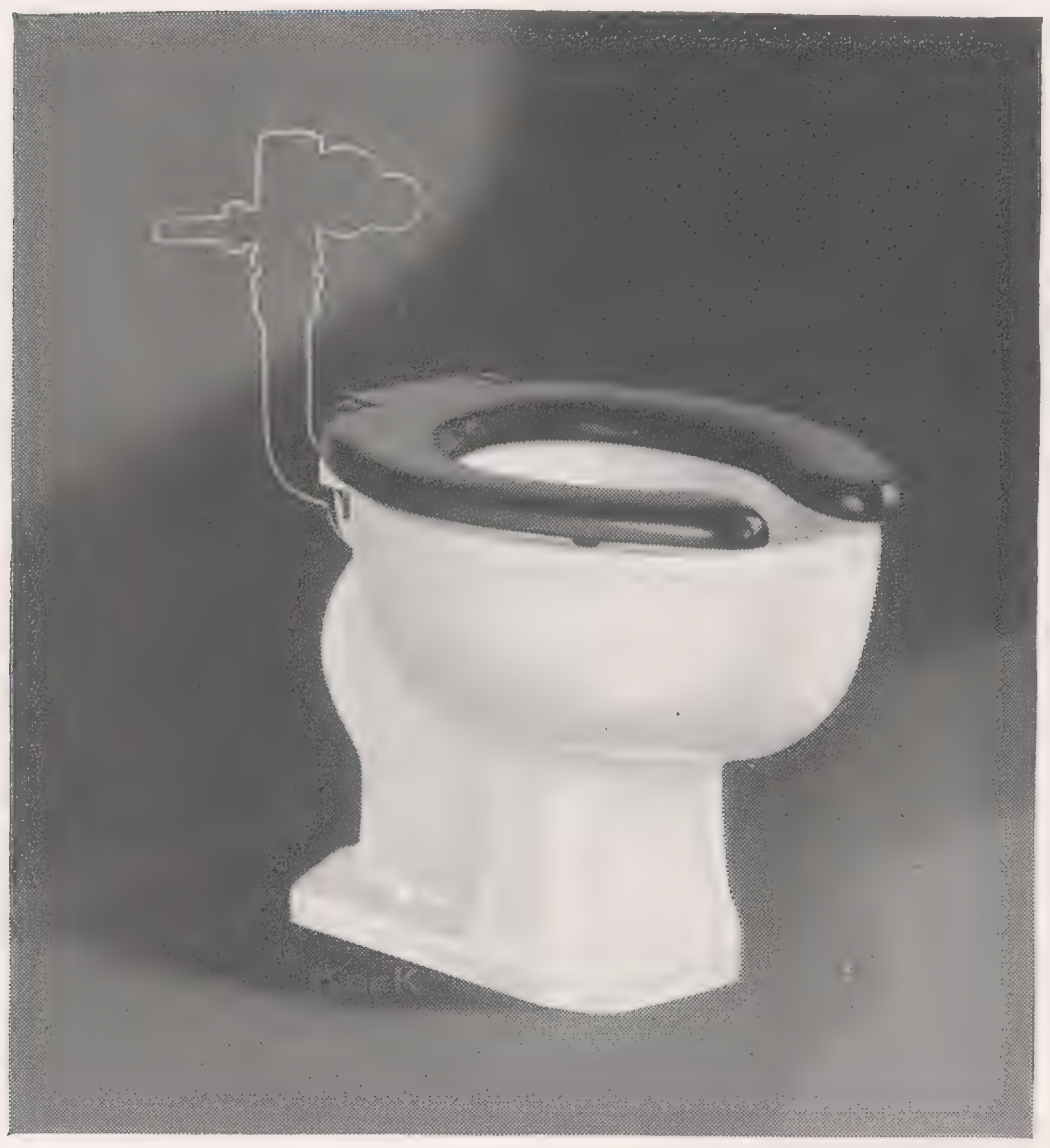

BROOKLANDS K-3941-ER

For Schools, Offices, Factories, Filling Stations and Public Buildings

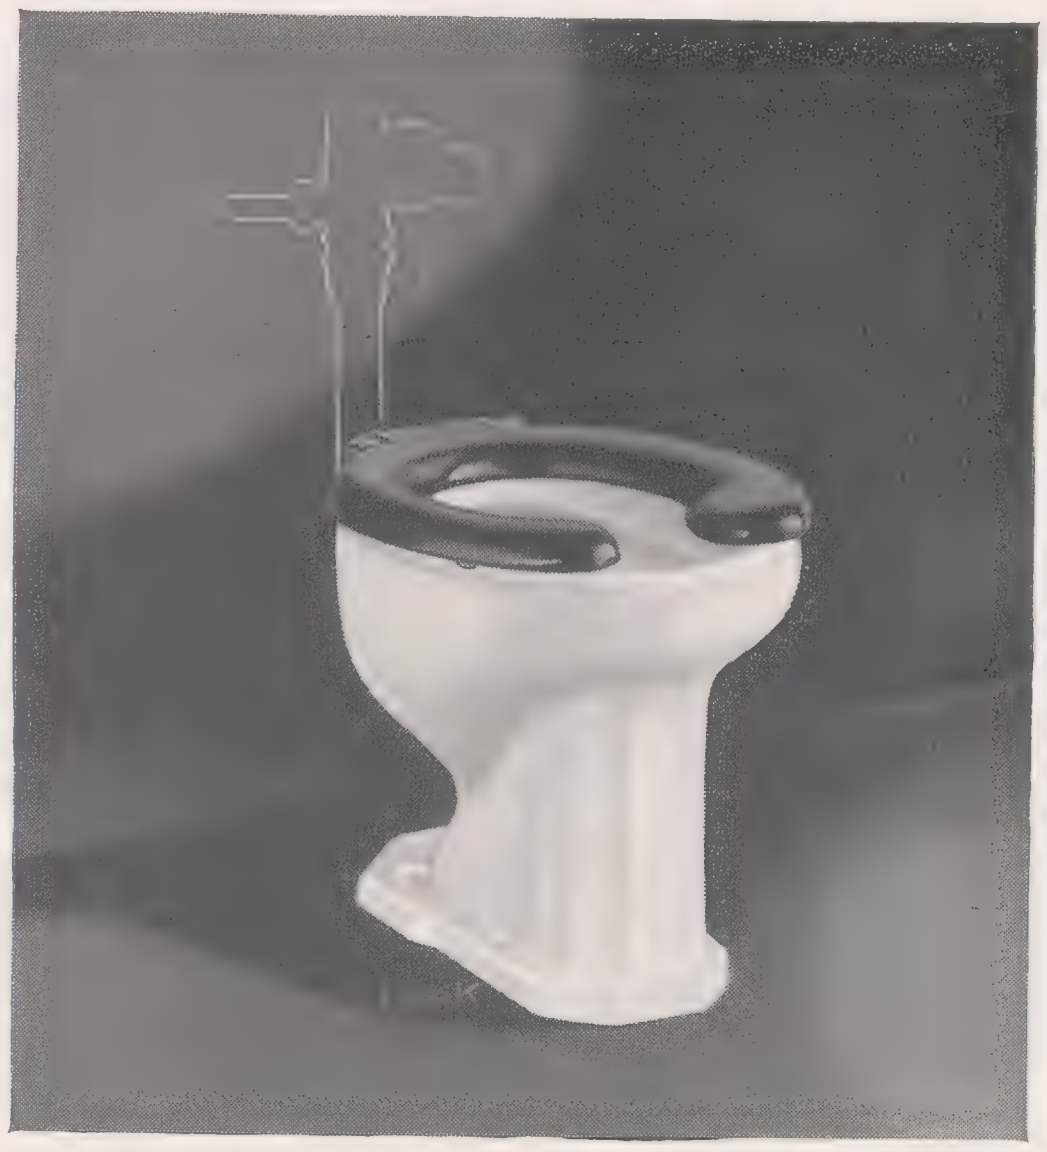

TRENT K-3960-PR

Plate No.	K-3941-ER (Illustrated)	K-3941-PR	K-3960-PR (Illustrated)	K-3961-PR
Type	Reverse trap Elongated	Reverse trap Round front	Washdown Round front	Washdown Round front
Roughing-In	9¾″	9¾″	11″	9″
Bowl No.	**K-4341-ER** 1½″ rear spud	**K-4341-PR** 1½″ rear spud	**K-4360-PR** 1½″ rear spud	**K-4361-PR** 1½″ rear spud
Molded Seats:				
Olsonite	**No. 10** black	**No. 5** black	**No. 5** black	**No. 5** black
Sperzel	**No. 50E** black	**No. 50** black	**No. 50** black	**No. 50** black
	(These seats are available in white if specified.)			
Accessories	Bolt caps (2)	Bolt caps (2) Floor screws (2)	Bolt caps (2) Floor screws (2)	Bolt caps (2) Floor screws (2)
Flush Valves:				
Kohler	**K-9428** Metro	**K-9428** Metro	**K-9428** Metro	**K-9428** Metro
Sloan	**120-F** Royal	**120-F** Royal	**120-F** Royal	**120-F** Royal
Watrous	**M-533** Majestic	**M-533** Majestic	**M-533** Majestic	**M-533** Majestic

For flush valve with vacuum breaker to prevent back siphonage, add suffix V to Kohler number, YV to Sloan number and VB to Watrous number.

Cross Section of Brooklands Closet

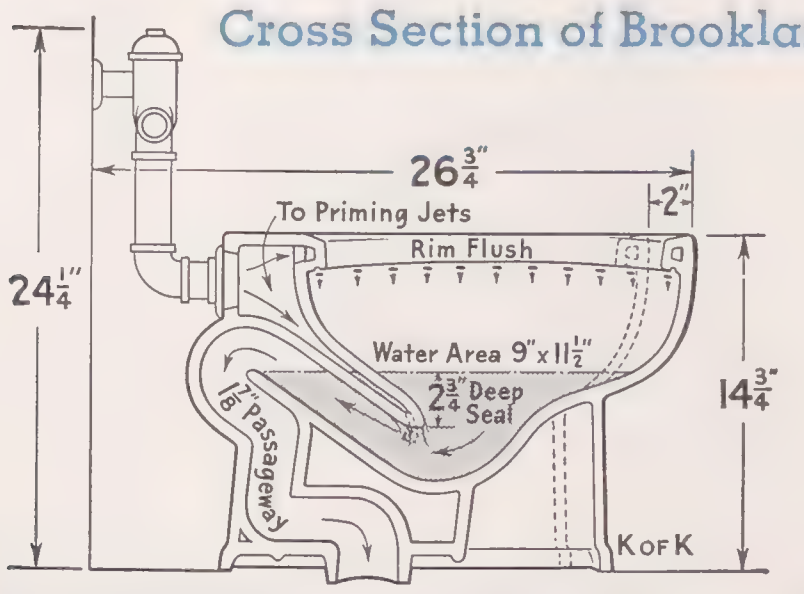
26¾″
2″
To Priming Jets
Rim Flush
24¼″
Water Area 9″x11½″
2¾″ Deep Seal
1⅞″ Passageway
14¾″
KofK

Cross Section of Trent Closet

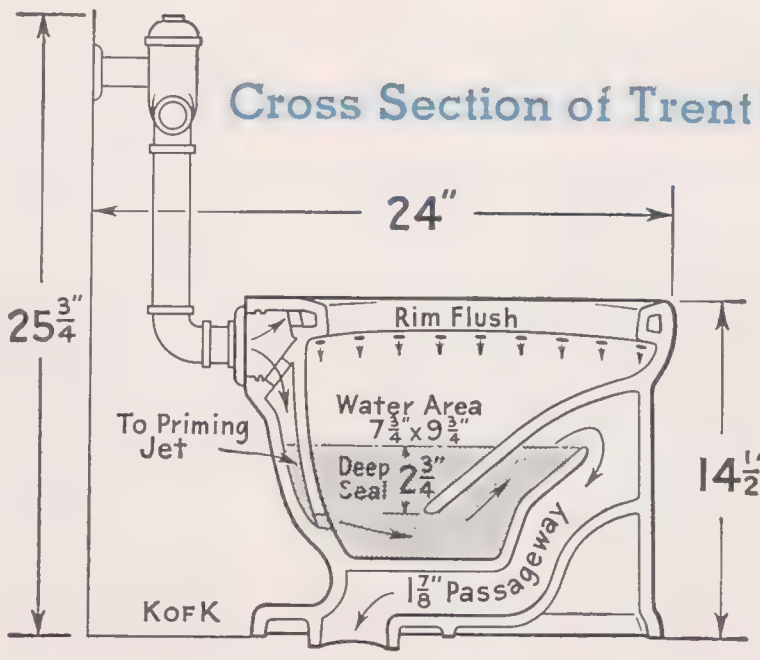
24″
25¾″
Rim Flush
Water Area 7¾″x9¾″
To Priming Jet
Deep Seal 2¾″
14½″
1⅞″ Passageway
KofK

KENWYN KINGSTON

VITREOUS CHINA WALL HANGING SIPHON JET CLOSETS WITH 2½-INCH PASSAGEWAY — QUIET ACTION

For Offices, Hotels, Hospitals, Schools and Public Buildings

KENWYN K-4010-ET

KINGSTON K-4020-ET

KINGSTON K-4022-EV

Plate No.	**K-4010-ET** (Illustrated)	**K-4010-EV** (Concealed valve)	**K-4020-ET** (Illustrated)	**K-4022-EV** (Illustrated)
Type	Siphon jet Elongated	Siphon jet Elongated	Siphon jet Elongated	Siphon jet Elongated
Bowl No.	**K-4410-ET** 1½" top spud	**K-4410-ER** 1½" rear spud	**K-4420-ET** 1½" top spud	**K-4422-ER** 1½" rear spud
Molded Seats:				
Olsonite	**No. 10** black	**No. 10** black	**No. 10** black	**No. 10** black
Sperzel	**No. 50E** black	**No. 50E** black	**No. 50E** black	—
		(These seats are available in white if specified.)		
Support	**Z-1212-3** Zurn chair carrier	**Z-1212-3** Zurn chair carrier	**Z-1212-3** Zurn chair carrier	**Z-1212-3** Zurn chair carrier
Flush Valves:				
Kohler	—	—	**K-9420** Metro	—
Sloan	**110-FQ** Royal	**143-Q** Royal	**110-F** Royal	**143** Royal
Watrous	**M-532** Majestic Silent action	**M-539** Majestic Silent action	**M-532** Majestic	**M-539** Majestic

K-4025-EV, same as **K-4022-EV** except with **K-4425-ER** bowl with integral seat for institutional use.
For flush valve with vacuum breaker to prevent back siphonage, add suffix V to Kohler number, YV to Sloan number and VB to Watrous number.

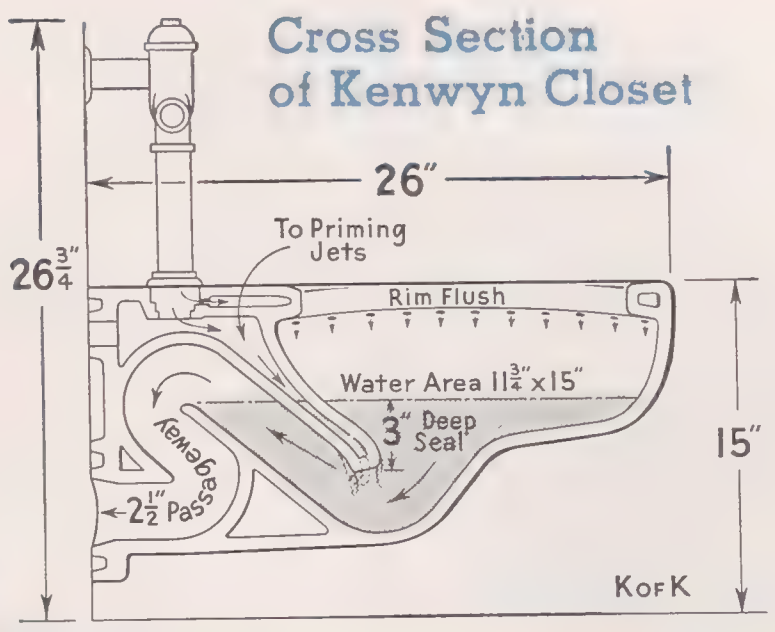
Cross Section of Kenwyn Closet
26"
26¾"
To Priming Jets
Rim Flush
Water Area 11¾"x15"
3" Deep Seal
2½" Passageway
15"
KorK

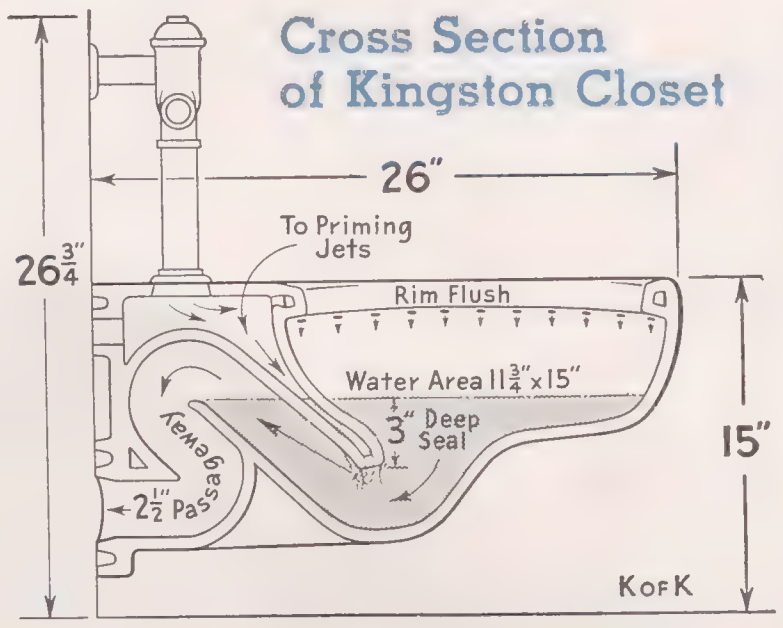
Cross Section of Kingston Closet
26"
26¾"
To Priming Jets
Rim Flush
Water Area 11¾"x15"
3" Deep Seal
2½" Passageway
15"
KorK

ZURN CHAIR CARRIERS


Z-1212-3 chair carrier with foot for wall hung siphon jet closets. Used on Kenwyn and Kingston closets.

Z-1212-3

Closet chair carriers regularly furnished for wall 1" thick. If wall exceeds

STRATTON SIFTON SUFFIELD

VITREOUS CHINA WALL HANGING BLOWOUT CLOSETS WITH 2½-INCH PASSAGEWAY

For Offices, Hotels and Public Places

For Institutions

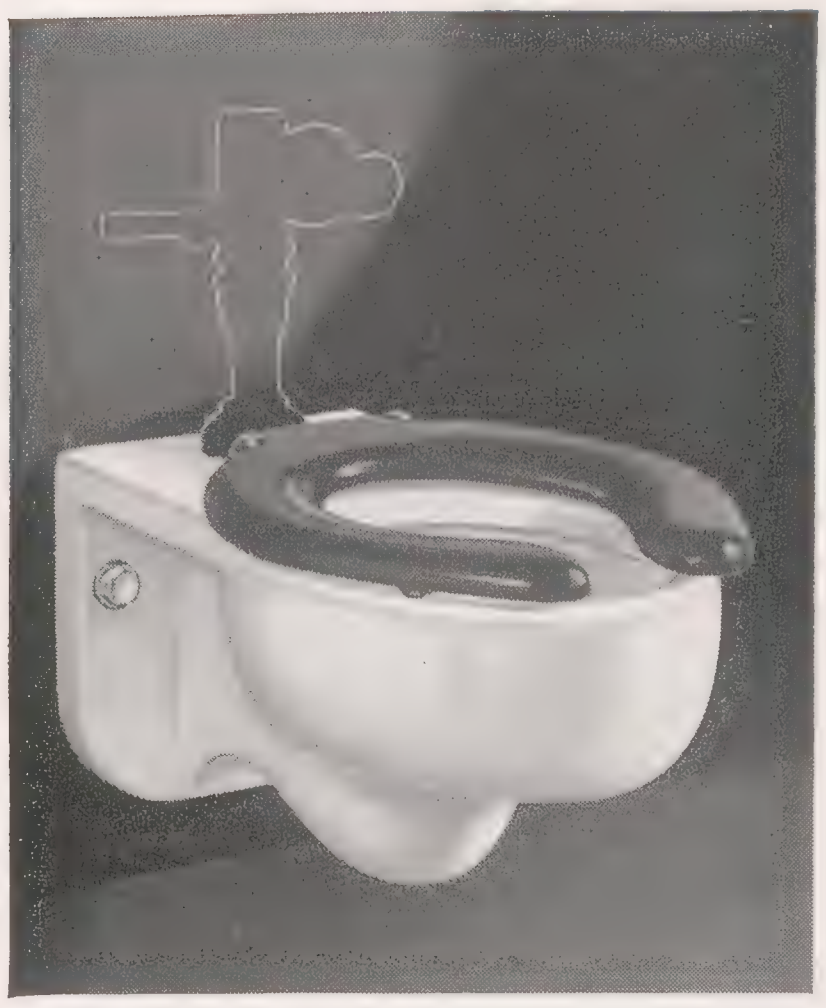

STRATTON K-4050-ET

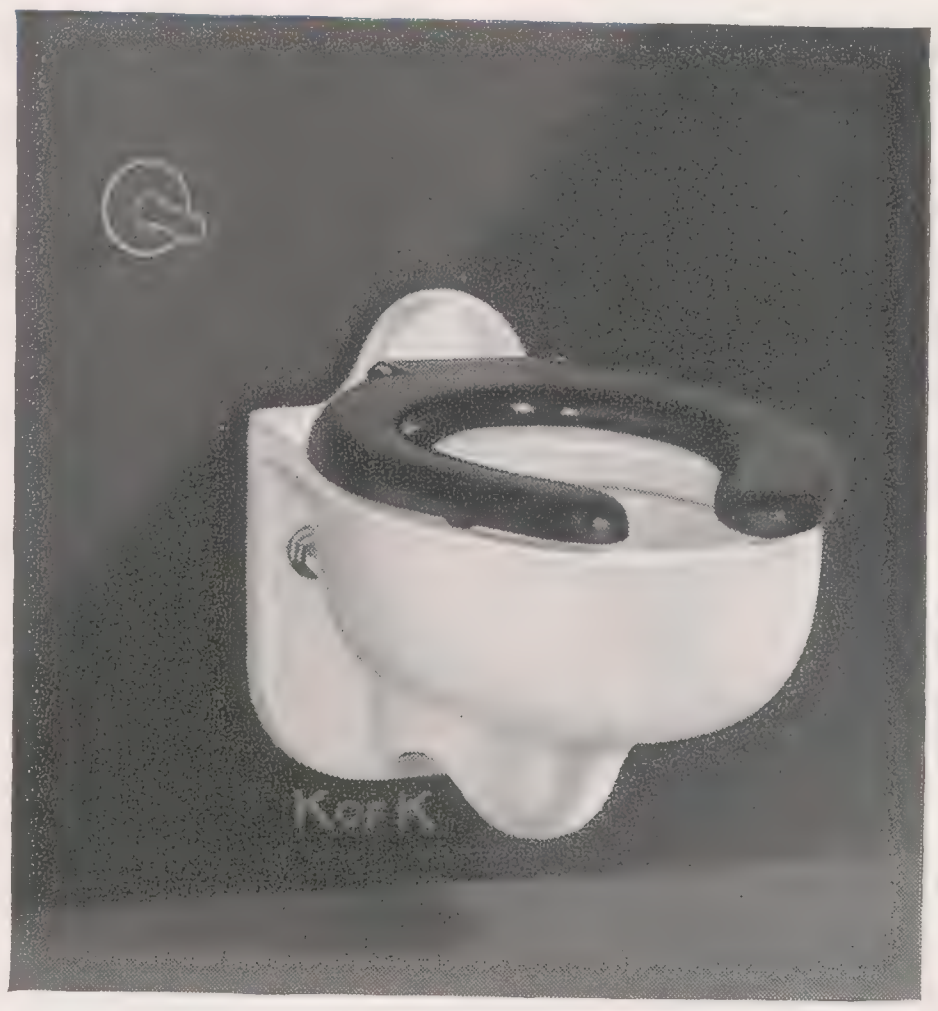

SIFTON K-4060-EV

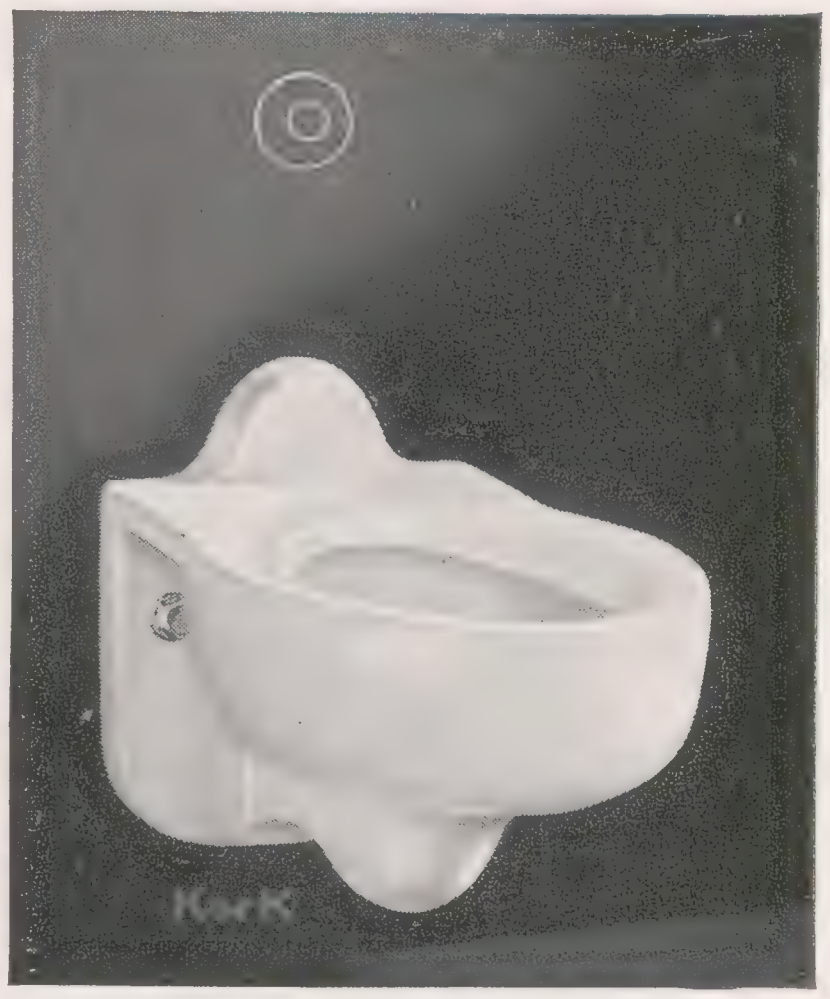

SUFFIELD K-4075-EV

Plate No.	**K-4050-ET** (Illustrated)	**K-4055-ET** Integral seat	**K-4060-EV** (Illustrated)	**K-4075-EV** Integral seat (Illustrated)
Type	Blowout Elongated	Blowout Elongated	Blowout Elongated	Blowout Elongated
Bowl No.	**K-4450-ET** 1½" top spud	**K-4455-ET** 1½" top spud	**K-4460-ER** 1½" rear spud	**K-4475-ER** 1½" rear spud
Molded Seats: **Olsonite** **Sperzel**	**No. 10** black **No. 50E** black Available in white	Bowl has integral seat	**No. 10** black **No. 50E** black Available in white	Bowl has integral seat
Support	**Z-1204-2** Zurn chair carrier	**Z-1204-2** Zurn chair carrier	**Z-1204-2** Zurn chair carrier	**Z-1204-2** Zurn chair carrier
Flush Valves: **Kohler** **Sloan** **Watrous**	 **K-9420** Metro **110-F** Royal **M-532** Majestic	 **K-9420** Metro **110-F** Royal **M-532** Majestic	 — **143** Royal **M-539** Majestic	 — **152** Royal **M-548½** Majestic

For satisfactory operation, blowout bowls require a minimum of 25 pounds working pressure at the bowl. For flush valve with vacuum breaker to prevent back siphonage, add suffix V to Kohler number, YV to Sloan number and VB to Watrous number.

For Wall Hanging Closets

Z-1204-2 chair carrier with foot for wall hung blowout closets. Used on Stratton, Sifton and Suffield closets.



Z-1204-2



Cross Section of Stratton Closet

26¾"
26"
To Priming Jets
Rim Flush
Water Area 11½"x15"
2½" Passageway
3" Deep Seal
15"
KorK



Cross Section of Sifton Closet

27"
21½"
To Priming Jets
Rim Flush
Water Area 11"x13½"
2½" Passageway
3" Deep Seal
15"
KorK

1" thickness, specify distance from face of chair carrier to finished wall.

ANGLESEY ANGLEBORO

VITREOUS CHINA ANGLE BACK AND BASE SIPHON JET CLOSETS WITH 2½-INCH PASSAGEWAY

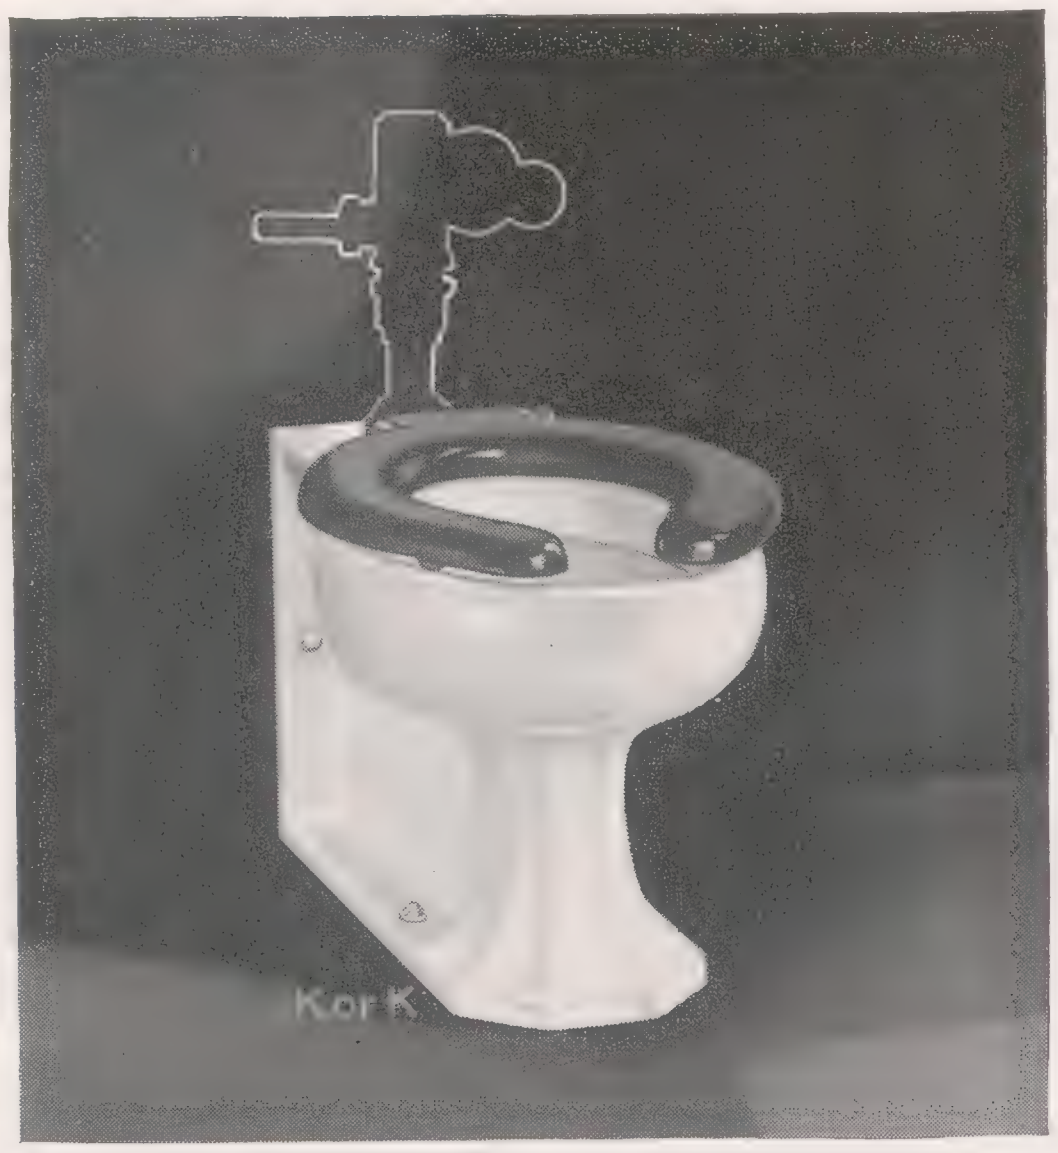

ANGLESEY K-4076-ET

WALL OUTLET

FLOOR OUTLET

For Institutions

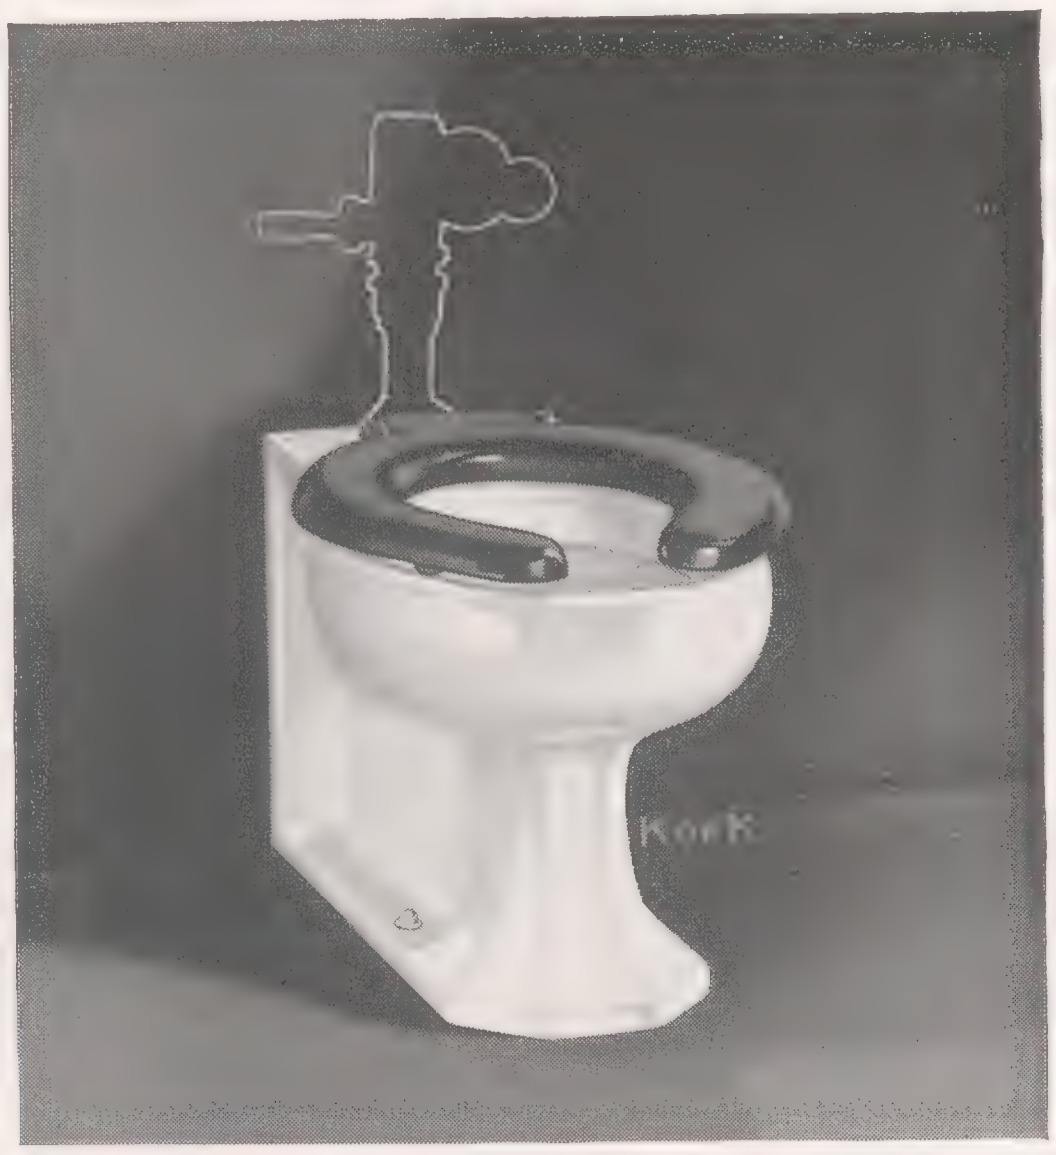

ANGLEBORO K-4077-ET

Plate No.	**K-4076-ET** (Illustrated)	**K-4078-EV** Concealed valve Integral seat	**K-4077-ET** (Illustrated)	**K-4079-EV** Concealed valve Integral seat
Type	Siphon jet Elongated	Siphon jet Elongated	Siphon jet Elongated	Siphon jet Elongated
Roughing-in	4½″ floor to center of wall outlet	4½″ floor to center of wall outlet	10″	10″
Bowl No.	**K-4476-ET** 1½″ top spud	**K-4478-ER** 1½″ rear spud	**K-4477-ET** 1½″ top spud	**K-4479-ER** 1½″ rear spud
Outlet	Wall	Wall	Floor	Floor
Molded Seats: **Olsonite** **Sperzel**	**No. 10** black **No. 50E** black Available in white	Bowl has integral seat	**No. 10** black **No. 50E** black Available in white	Bowl has integral seat
Accessories	Floor screws (2)	Floor screws (2)	—	—
Flush Valves: **Kohler** **Sloan** **Watrous**	**K-9420** Metro **110-F** Royal **M-532** Majestic	— **152** Royal **M-548½** Majestic	**K-9420** Metro **110-F** Royal **M-532** Majestic	— **143** Royal **M-539** Majestic

For flush valve with vacuum breaker to prevent back siphonage, add suffix V to Kohler number, YV to Sloan number and VB to Watrous number.

Cross Section of Anglesey Closet

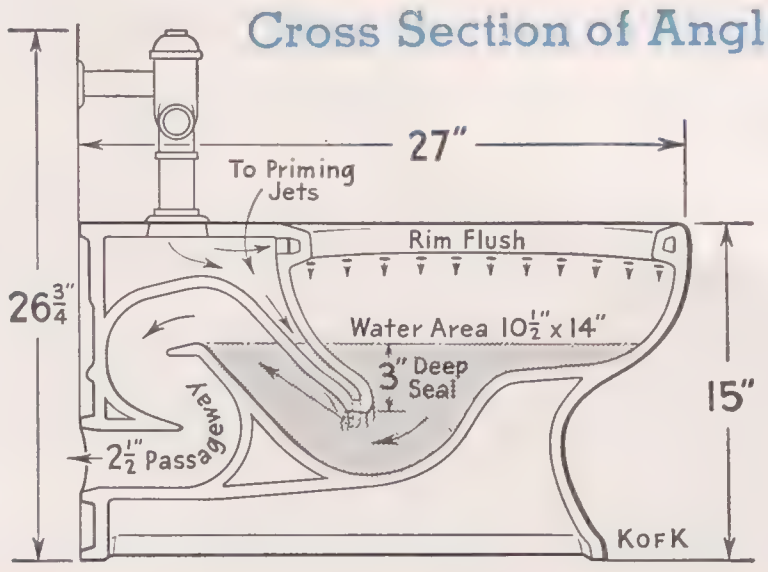
27″
To Priming Jets
Rim Flush
26¾″
Water Area 10½″x14″
3″ Deep Seal
15″
2½″ Passageway
KofK

Cross Section of Angleboro Closet

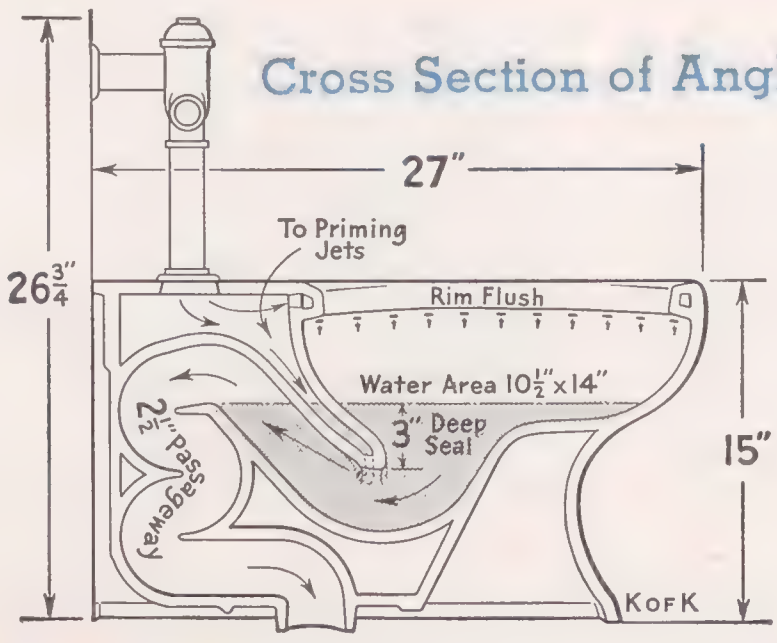
27″
To Priming Jets
Rim Flush
26¾″
Water Area 10½″x14″
3″ Deep Seal
15″
2½″ Passageway
KofK

ANGLO VITREOUS CHINA ANGLE BACK AND BASE BLOWOUT CLOSET WITH 2½-INCH PASSAGEWAY

WALL OUTLET

For Institutions

ANGLO K-4100-EV

SWIFT VITREOUS CHINA BLOWOUT CLOSET WITH 2½-INCH PASSAGEWAY

FLOOR OUTLET

For Schools, Offices, Factories

SWIFT K-4140-ET

Plate No.	**K-4100-EV** (Illustrated)	**K-4140-ET** (Illustrated)	**K-4145-ET**
Type	Blowout Elongated	Blowout Elongated	Blowout Elongated
Roughing-in	11″ floor to center of wall outlet	9″	9″
Bowl No.	**K-4480-ER** 1½″ rear spud	**K-4490-ET** 1½″ top spud	**K-4495-ET** 1½″ top spud
Outlet	Wall	Floor	Floor
Molded Seats: **Olsonite** **Sperzel**	Bowl has integral seat	**No. 10** black **No. 50E** black (These seats are available in white if specified.)	Bowl has integral seat
Accessories	Floor screws (2)	Bolt caps (2)	Bolt caps (2)
Flush Valves: **Kohler** **Sloan** **Watrous**	— **152** Royal **M-548½** Majestic	**K-9420** Metro **110-F** Royal **M-532** Majestic	**K-9420** Metro **110-F** Royal **M-532** Majestic

For satisfactory operation, Anglo and Swift bowls require a minimum of 25 pounds working pressure at the bowl.

For flush valve with vacuum breaker to prevent back siphonage add suffix V to Kohler number, suffix YV to Sloan number and VB to Watrous number.

Cross Section of Anglo Closet


21½″
To Priming Jets
Rim Flush
41″
Water Area 9½″x11″
2½″ Passageway
3″ Deep Seal
15″
KofK

Cross Section of Swift Closet

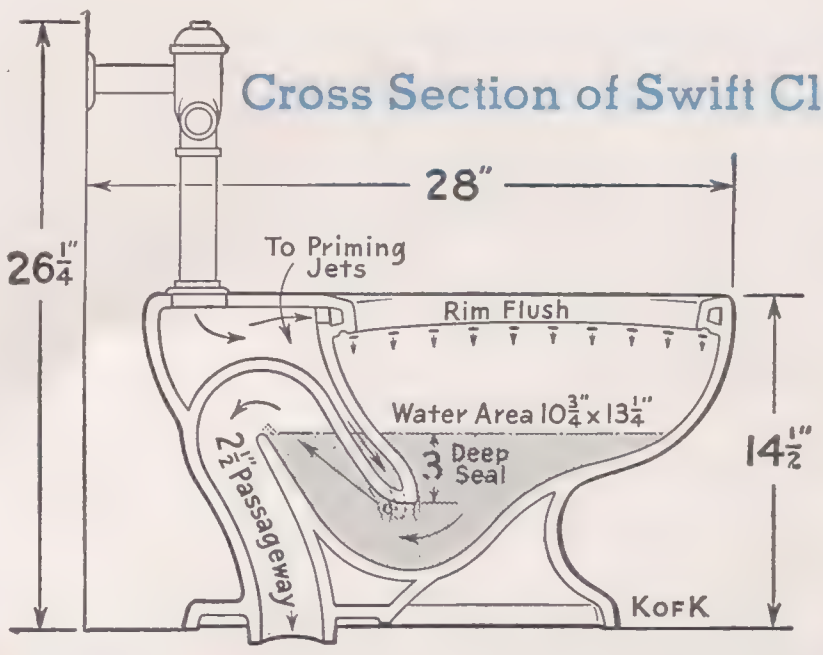
28″
To Priming Jets
26¼″
Rim Flush
Water Area 10¾″x13¼″
3″ Deep Seal
2½″ Passageway
14½″
KofK

VITREOUS CHINA CLOSET BOWLS *For Tanks or Flush Valves*

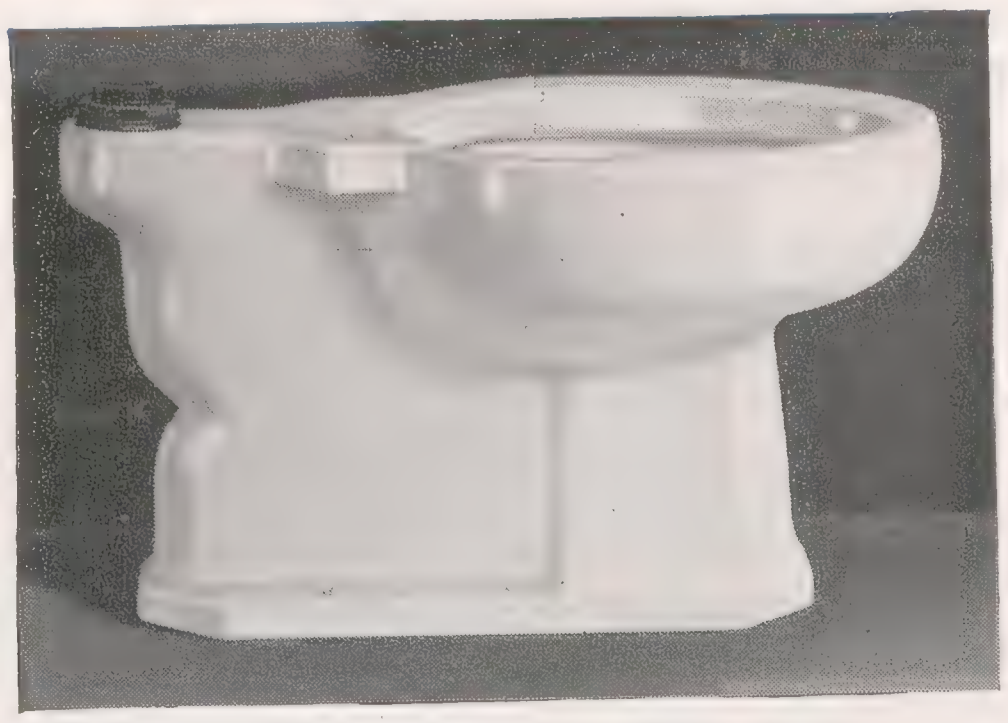

DOWNING K-4291-ET

SIPHON JET

REVERSE TRAP

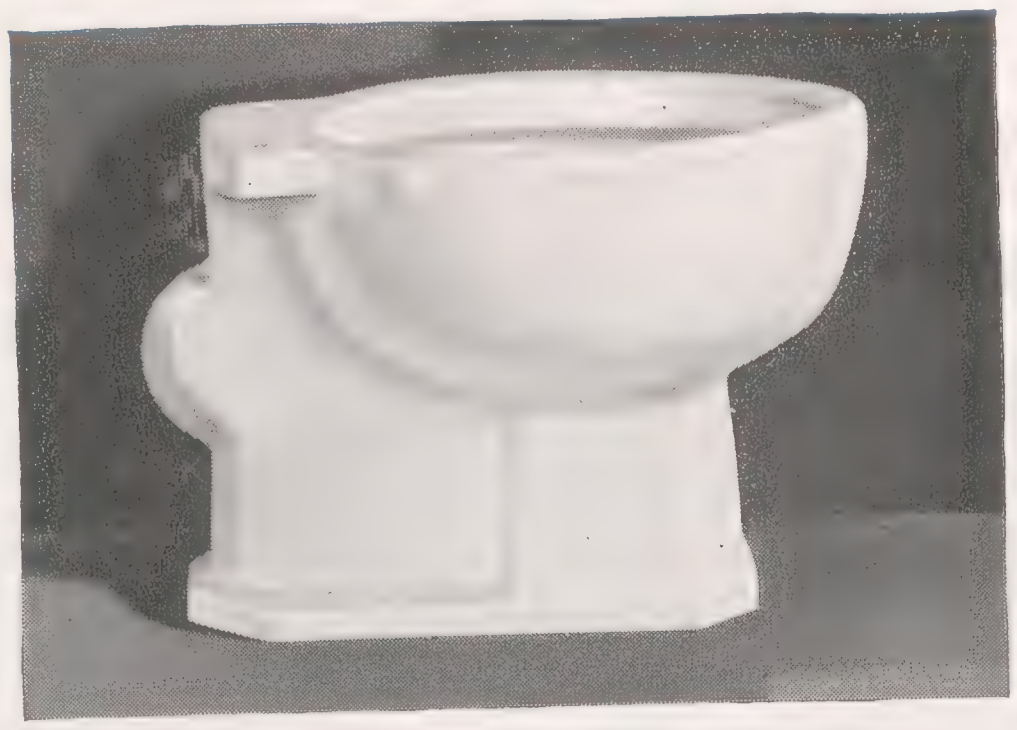

BROOKLANDS K-4341-ER

Plate No.	K-4291-ET (Illustrated)	K-4291-PT	K-4341-ER (Illustrated)	K-4341-PR
Type	Siphon jet Elongated	Siphon jet Round front	Reverse trap Elongated	Reverse trap Round front
Roughing-In	12″	12″	12″ for tank 9¾″ for flush valve	12″ for tank 9¾″ for flush valve
Passageway	2½″	2½″	1⅞″	1⅞″
Spud	2″ top	2″ top	2″ rear	2″ rear
C/C Inlet to Outlet	8″	8″	4⅜″	4⅜″

For elongated Downing with integral seat, specify K-4296-ET; for round front Downing with integral seat, specify K-4296-PT.

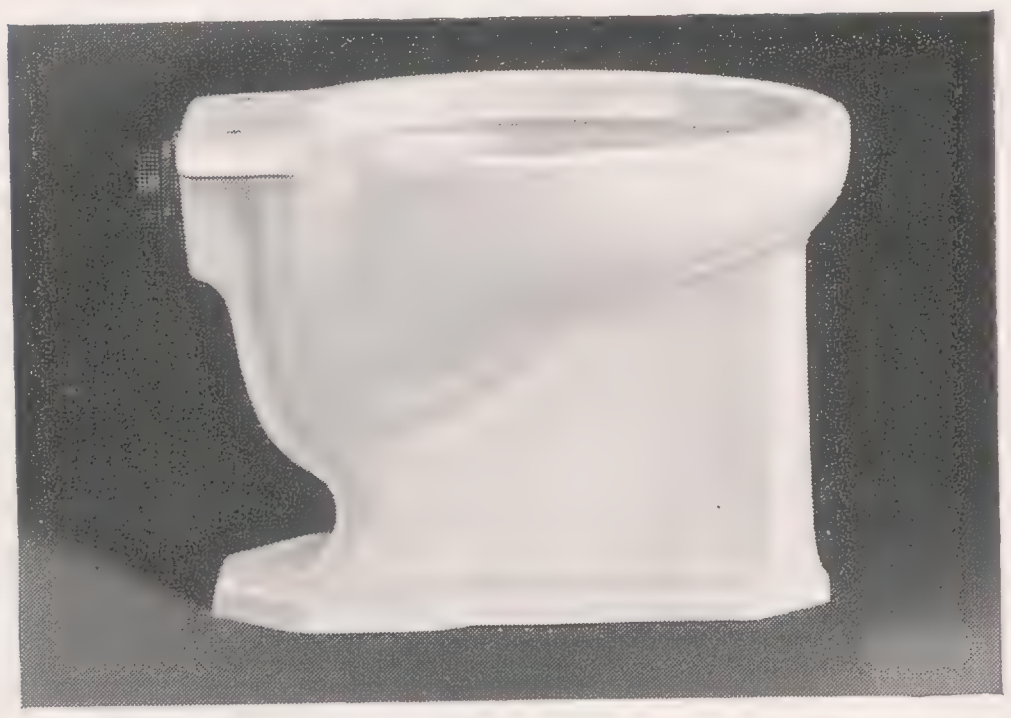

TRENT K-4360-PR

WASH-DOWN

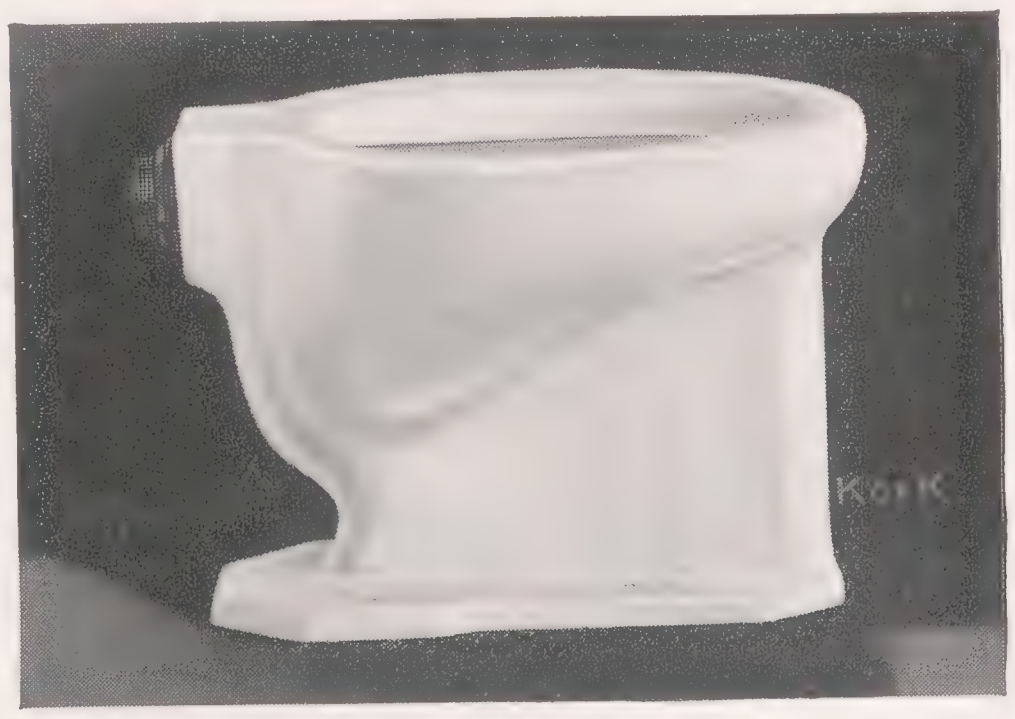

THURLOW K-4365-PR

Plate No.	K-4360-PR (Illustrated)	K-4361-PR	K-4362-PR	K-4365-PR Integral seat (Illustrated)
Type	Washdown Round front	Washdown Round front	Washdown Round front	Washdown Round front
Roughing-In	14″ for tank 11″ for flush valve	12″ for tank 9″ for flush valve	10″ for tank 7″ for flush valve	14″ for tank 11″ for flush valve
Passageway	1⅞″	1⅞″	1⅞″	1⅞″
Spud	2″ rear	2″ rear	2″ rear	2″ rear

Above bowls are available with 1½″ and 1¼″ spuds.

VITREOUS CHINA TANKS

For Closets

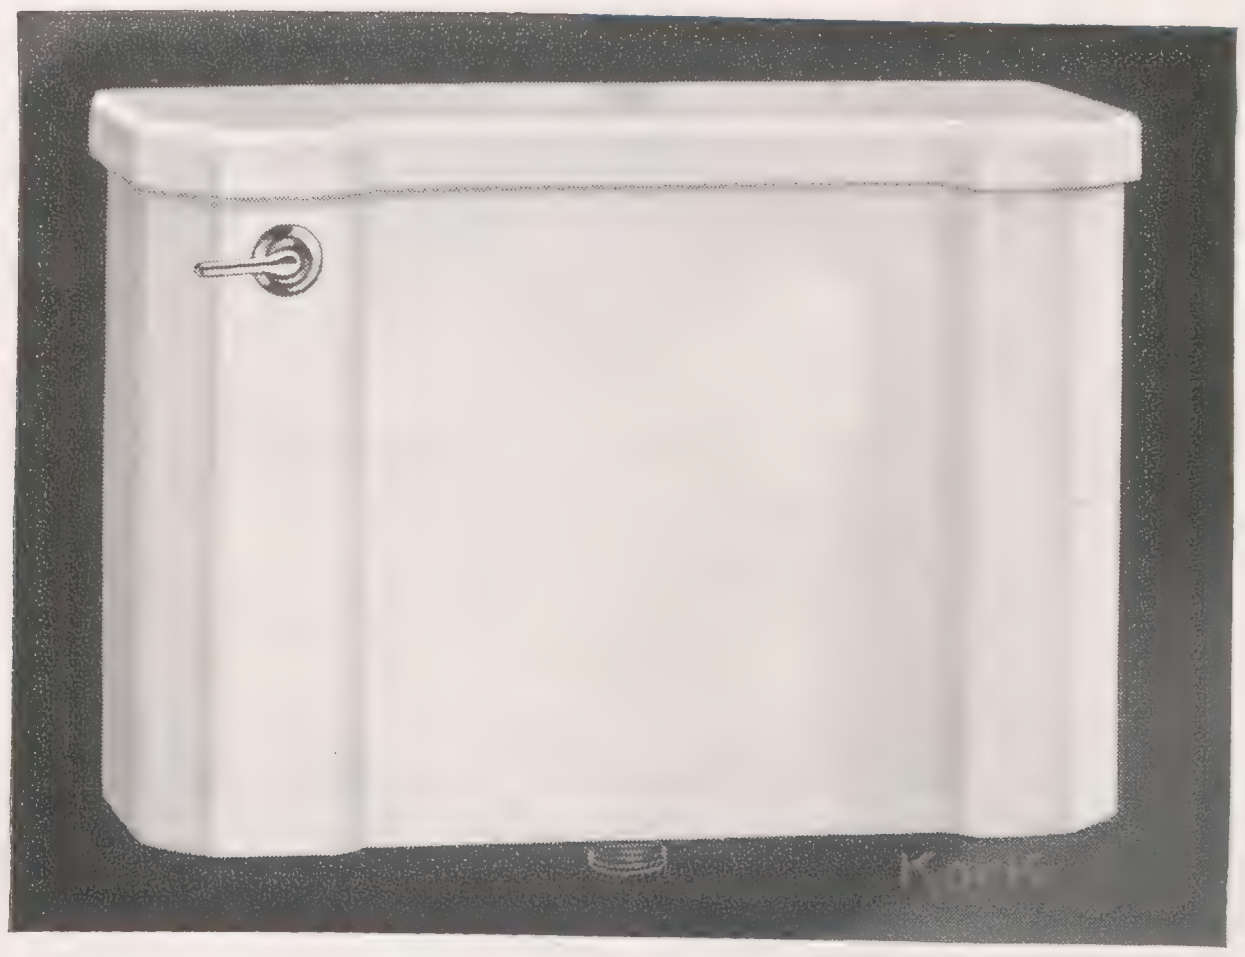

WINSLOW K-4508-A

For Urinals

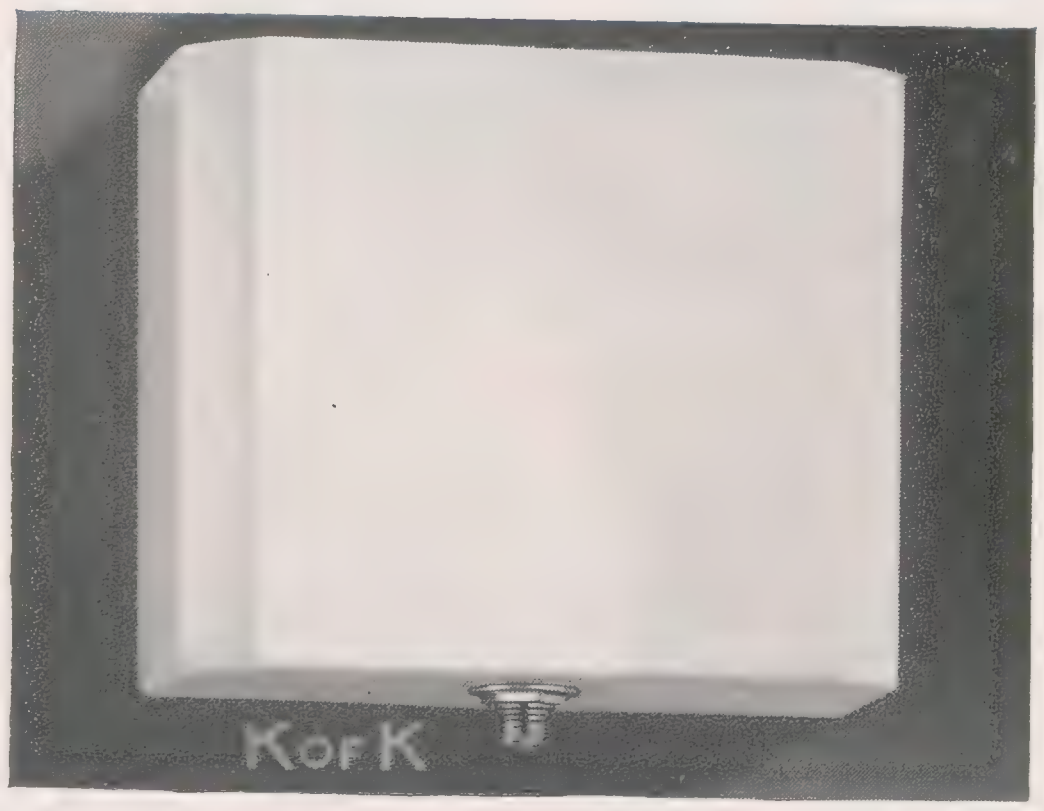

BROMPTON K-4570-A

Plate No.	K-4508-A (Illustrated) For washdown and reverse trap bowls	K-4502-A For siphon jet bowls Has straight front
Float Valve with Float	**K-9255-F** For anti-siphon float valve, specify **K-9252-F**	**K-9256-F** For anti-siphon float valve, specify **K-9251-F**
Flush Valve	**K-9355**	**K-9355**
Trip Lever	**K-9400**	**K-9400**
Flush Connection	**K-9480** elbow	**K-9482** straight

Plate No.	K-4570-A (Illustrated)	K-4572-A Brompton
Flushing Capacity	3 gallon	6 gallon
Automatic Flush Valve	**K-9320** with ¾" outlet connection (for 1 or 2 urinals)	**K-9322** with 1¼" outlet connection (for 4 urinals)
Supply Valve	**K-9325**	**K-9325**

Winslow tanks are available with
K-8336 angle supply with stop
K-8345 straight supply with stop
K-8351 straight supply less stop

For 3 urinals, specify **K-4570-A** with **K-9321** flush valve with 1" outlet.
For 5 urinals, specify **K-4572-A** with **K-9323** flush valve with 1½" outlet.

K-4508-A SIZE	22x8¼x15"
K-4502-A SIZE	23½x8¼x18¾"

K-4570-A SIZE	15½x8x12½"
K-4572-A SIZE	19x11x12½"



K-4559
TANK COVER LOCK

CLOSET AND CLOSET TANK ACCESSORIES

K-4559 Vandal-proof tank cover lock for vitreous china tanks. One pair per tank.

If **K-4559** tank cover locks are desired, add suffix "T" to closet combination number or tank number.

K-4564 Closet floor flange with graphited asbestos gasket, flanged bolts, nuts and washers.



K-4564
FLOOR FLANGE

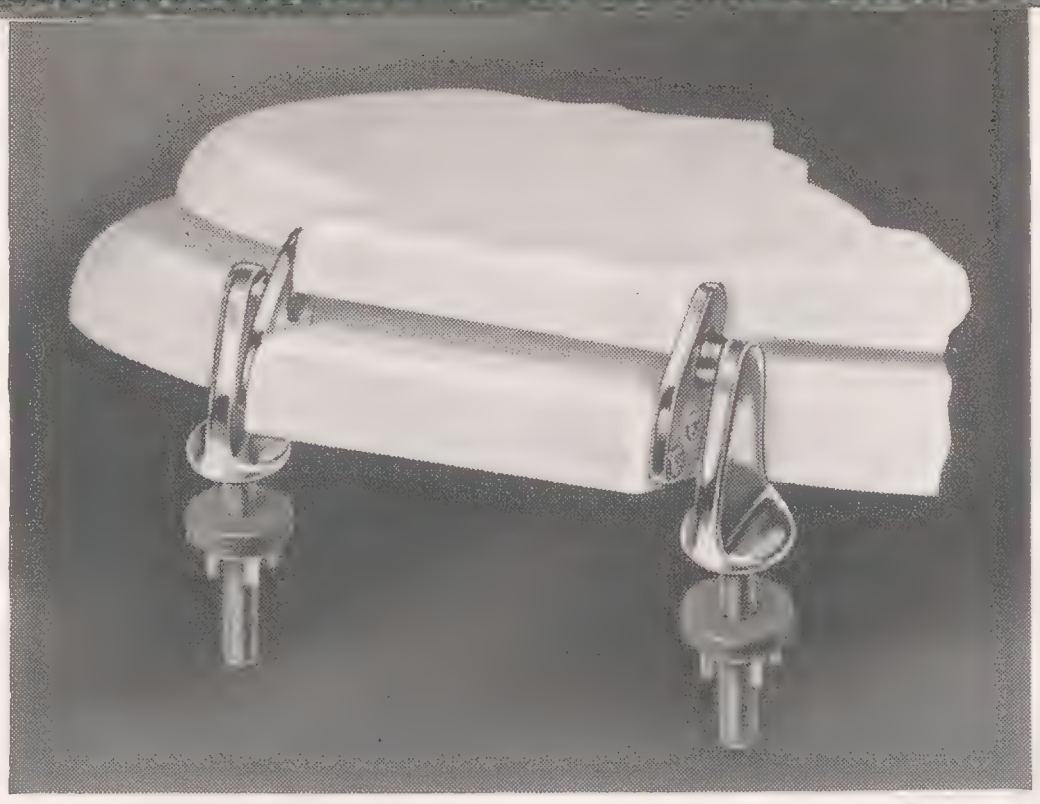

HYGIENIC SHEET COVERED CLOSET SEATS

For Homes, Apartments and Offices

1. Hygienic closet seats are made of thoroughly kiln dried birch stock, reinforced with dowels running cross grain.
2. Covering is smooth, tough, and impervious to moisture. Will not crack, craze or chip.
3. Streamlined hinges permit use with one-piece and close-coupled closets or any staple bowl, allowing full clearance when cover is opened and closed.
4. Non-rust screws anchor hinge securely to seat and seat cover.

ARDWICK K-4700

ASHBOURNE K-4702

BALCOMBE K-4704

BRAMLEY K-4706

Plate No.	K-4700	K-4702	K-4704	K-4706
Style	Open front with cover	Closed front with cover	Open front with cover	Closed front with cover
Type Bowl	Elongated	Elongated	Round front	Round front
Color	White	White	White	White

Add suffix "P" for seat in Plain color; specify color.

REGENT CLOSET SEATS—TRIKO FINISH

For Residential Use

Regent closet seats are finished with the well-known TriKo coating—a material which produces a fine and durable finish.

It is tough and flexible, expanding and contracting with the molded composition core. Resists moisture, eliminating swelling and blistering.

TriKo finish is glossy and will stand up well under ordinary usage.

Plate No.	K-4724-T	K-4726-T
Style	Open front with cover, bar hinge	Closed front with cover, bar hinge
Type Bowl	Round front	Round front
Color	White	White

BARRHILL K-4724-T

BRAMHALL K-4726-T

Olsonite No. 56
(Concealed hinge)

MOLDED

CLOSET SEATS

For Residential Use

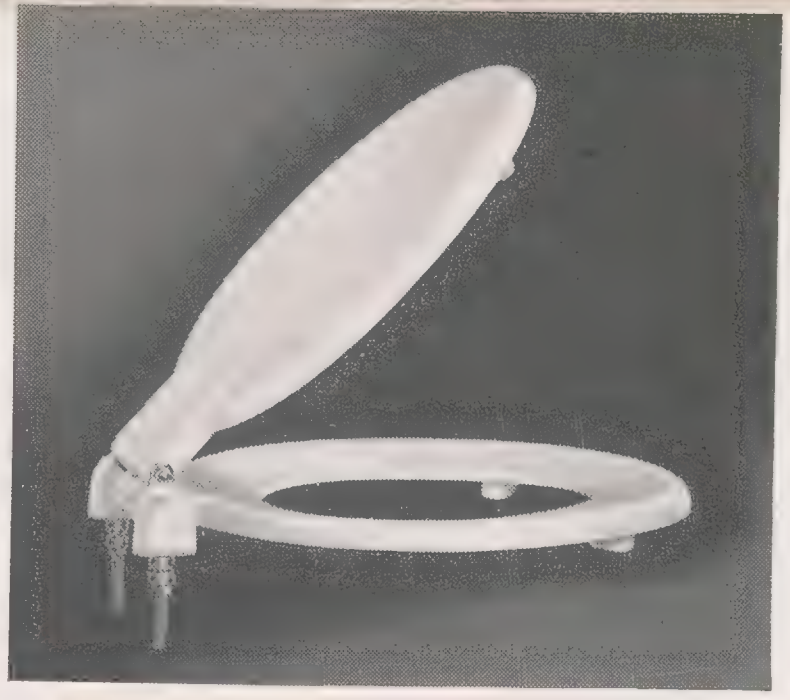

Sperzel No. 100
(Self-sustaining hinge)

Plate No. **Olsonite** (Concealed hinge)	**No. 56** (Illustrated)	**No. 54**	**No. 52**	**No. 50**
Sperzel (Self-sustaining hinge)	**No. 55E**	**No. 100E**	**No. 55**	**No. 100** (Illustrated)
Style	Open front with cover	Closed front with cover	Open front with cover	Closed front with cover
Type Bowl	Elongated	Elongated	Round front	Round front
Color	White or color	White or color	White or color	White or color

Specify Color: Olsonite seats are available in Plain and Pearlescent colors. Add suffix "P" for Plain colors; "J" for Pearlescent. Sperzel seats are available in Plain colors only.

For Hotels, Offices, Schools, Hospitals, Commercial and Industrial Installation

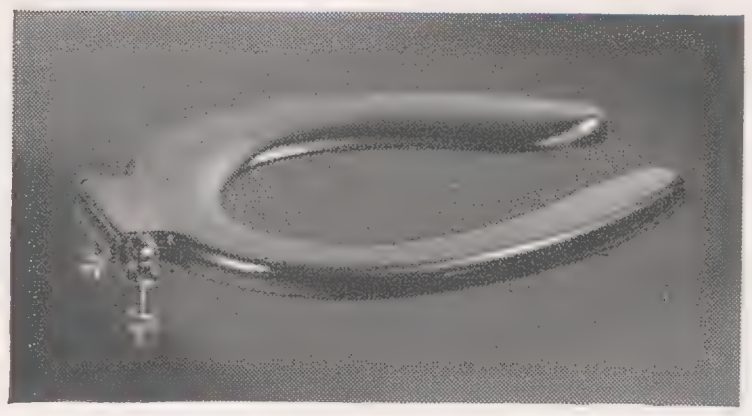

Olsonite No. 10
(Concealed hinge)



Sperzel No. 50
(Self-sustaining hinge)

Olsonite No. 1050
(Concealed hinge)

Plate No. **Olsonite** (Concealed hinge)	**No. 10** (Illustrated)	**No. 5**	**No. 1050** (Illustrated) (Check hinge)
Sperzel (Self-sustaining hinge)	**No. 50E**	**No. 50** (Illustrated)	—
Style	Open front, less cover	Open front, less cover	Open front and back, less cover
Type Bowl	Elongated	Round front	Elongated
Color	White or black	White or black	White or black

Add suffix "C" to plate number for check hinges on Olsonite seats less cover. Add suffix "S" to plate number for self-sustaining hinges on Olsonite seats less cover.

For Residential Use

CONCAVE SEAT AND COVER

Plate No. **Olsonite** (Concealed hinge)	**No. 90** (Illustrated)
Style	Concave seat and cover
Type Bowl	Round front
Color	Plain white, marbleized black, and marbleized colors

Olsonite No. 90

IMPORTANT: When ordering, give manufacturer's name and number.

VALENCIA

ORIZABA

VITREOUS CHINA BIDETS

For Personal Hygiene

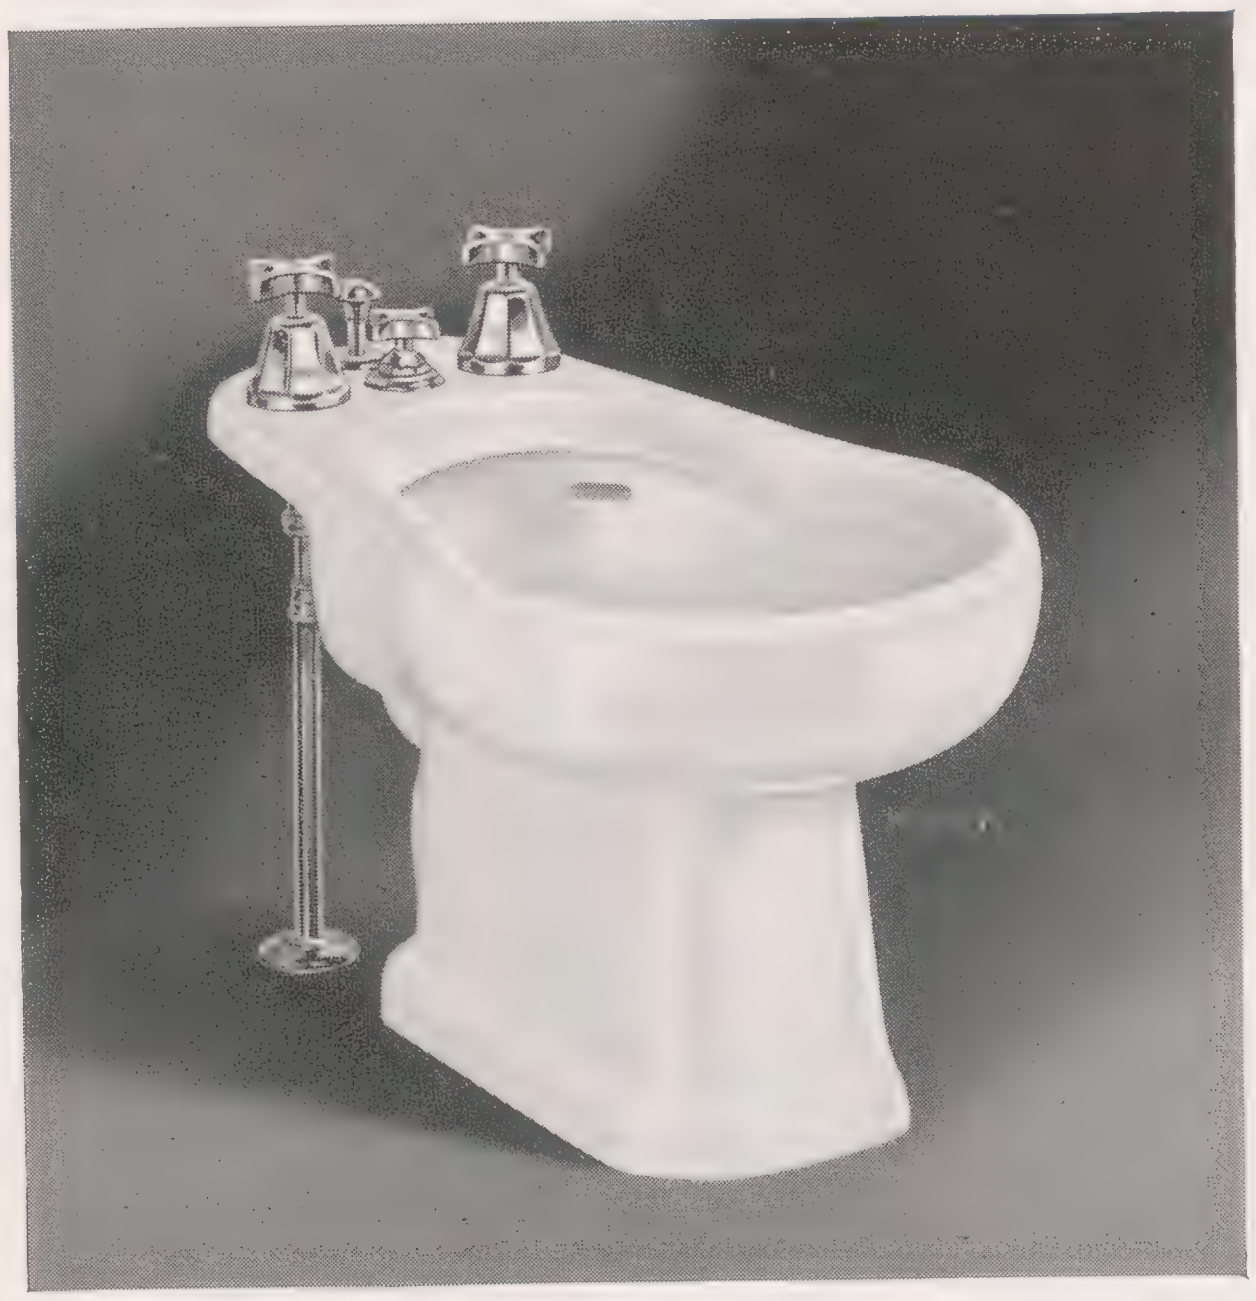

VALENCIA K-4860-A

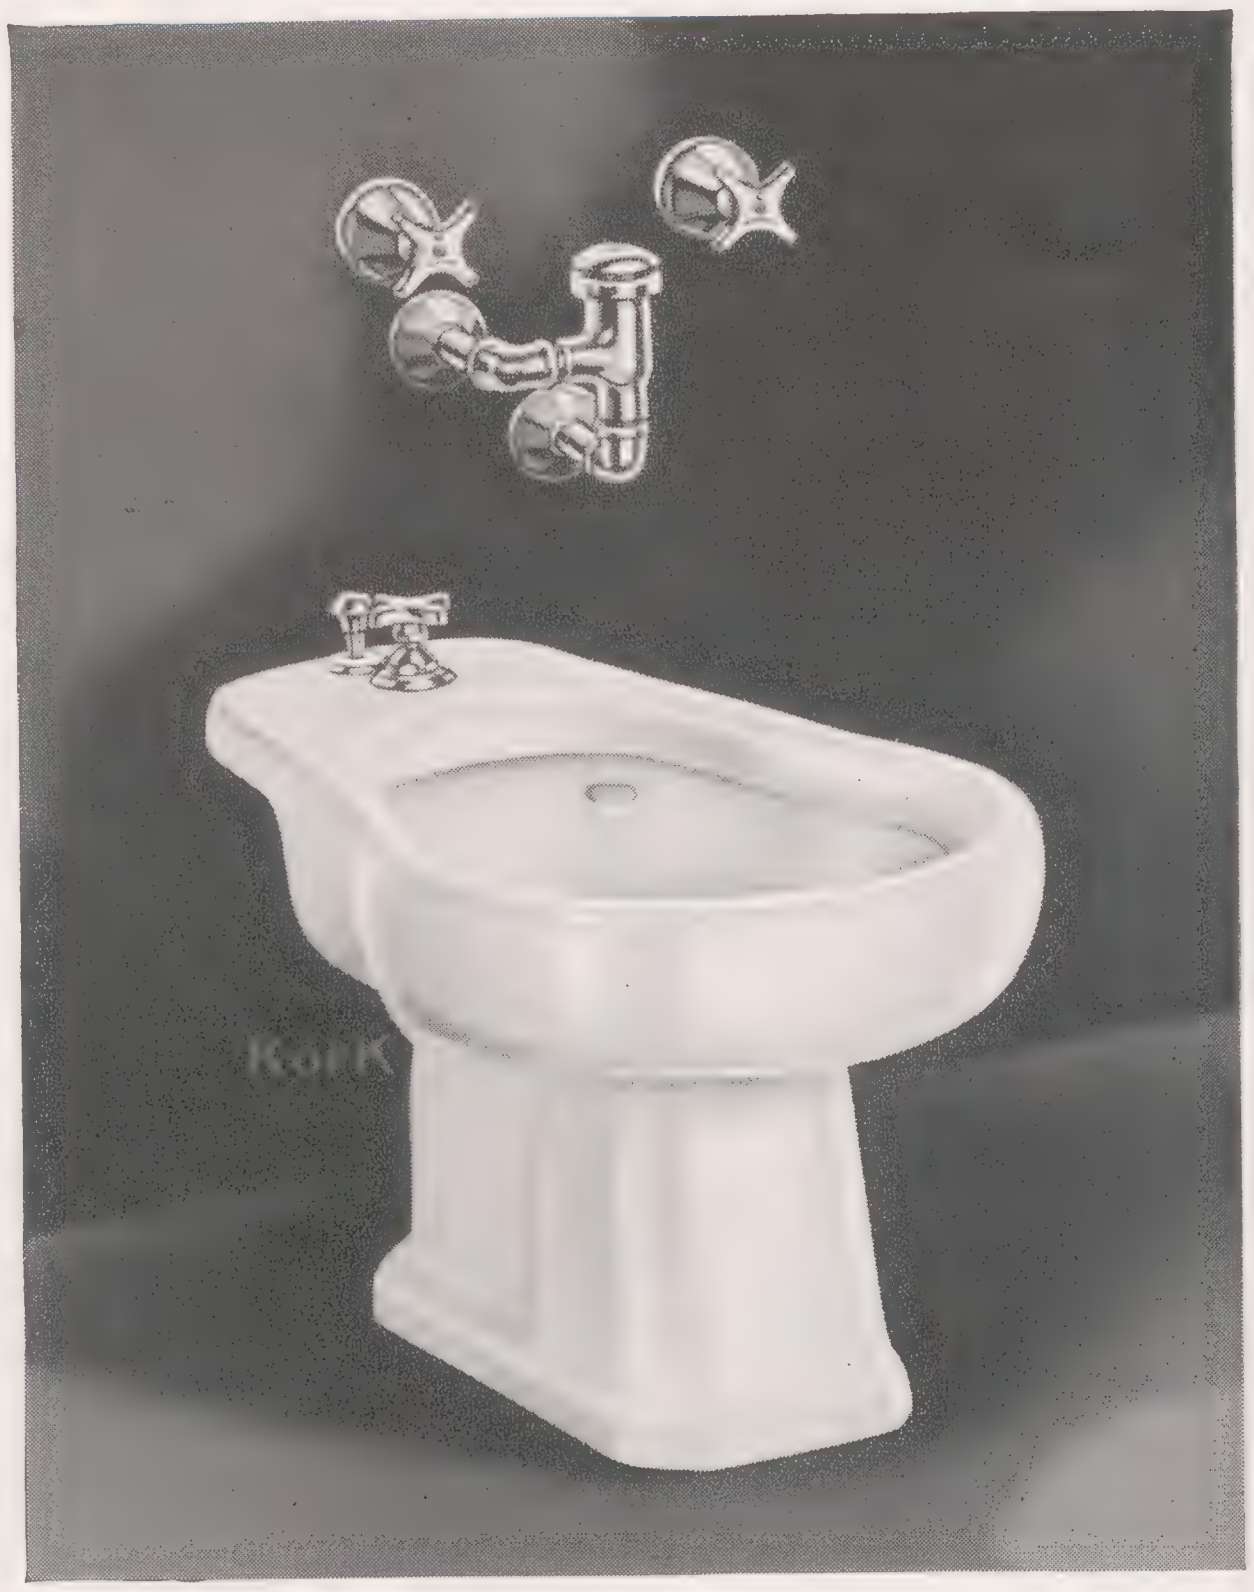

ORIZABA K-4865-A

Plate No.	K-4860-A	K-4865-A
Fitting	**K-8163** Chromium plated combination supply and drain fitting with transfer valve for supplying hot, cold, or tempered water to flush rim and douche, douche control valve, Synchro pop-up drain and ⅜″ supply pipes to floor.	**K-8165** Chromium plated combination fitting with built-in valves to supply hot, cold, or tempered water to rim and douche, vacuum breaker, douche control valve, Synchro pop-up drain.

LENGTH OVERALL	25″
WIDTH	14″
HEIGHT TO TOP OF RIM	14″

Bidet Installations in Latin America

A residence in Panama.

Apartment house in Central America.

K OF K URINALS

Successful architects specify and plumbing contractors install K of K urinals with the confidence that comes of experience with a reliable product. K of K urinals have an established reputation for quality.

The line is complete, including stall, wall-hanging, and pedestal types, to meet the needs of modern buildings.

An exclusive feature is the patented flow control, providing a positive cleansing flush whether a water line feeds a single unit or a battery. Spraying of water beyond the urinal due to excessive pressure is eliminated. The flow control is accessible for easy adjustment.

The glass-hard vitreous china of all K of K urinals is impervious and completely sanitary. Cleaning and maintenance time is reduced to a minimum because the smooth flowing design eliminates dirt-catching ornamentations.

Every unit is thoroughly inspected and water-tested before leaving the factory.

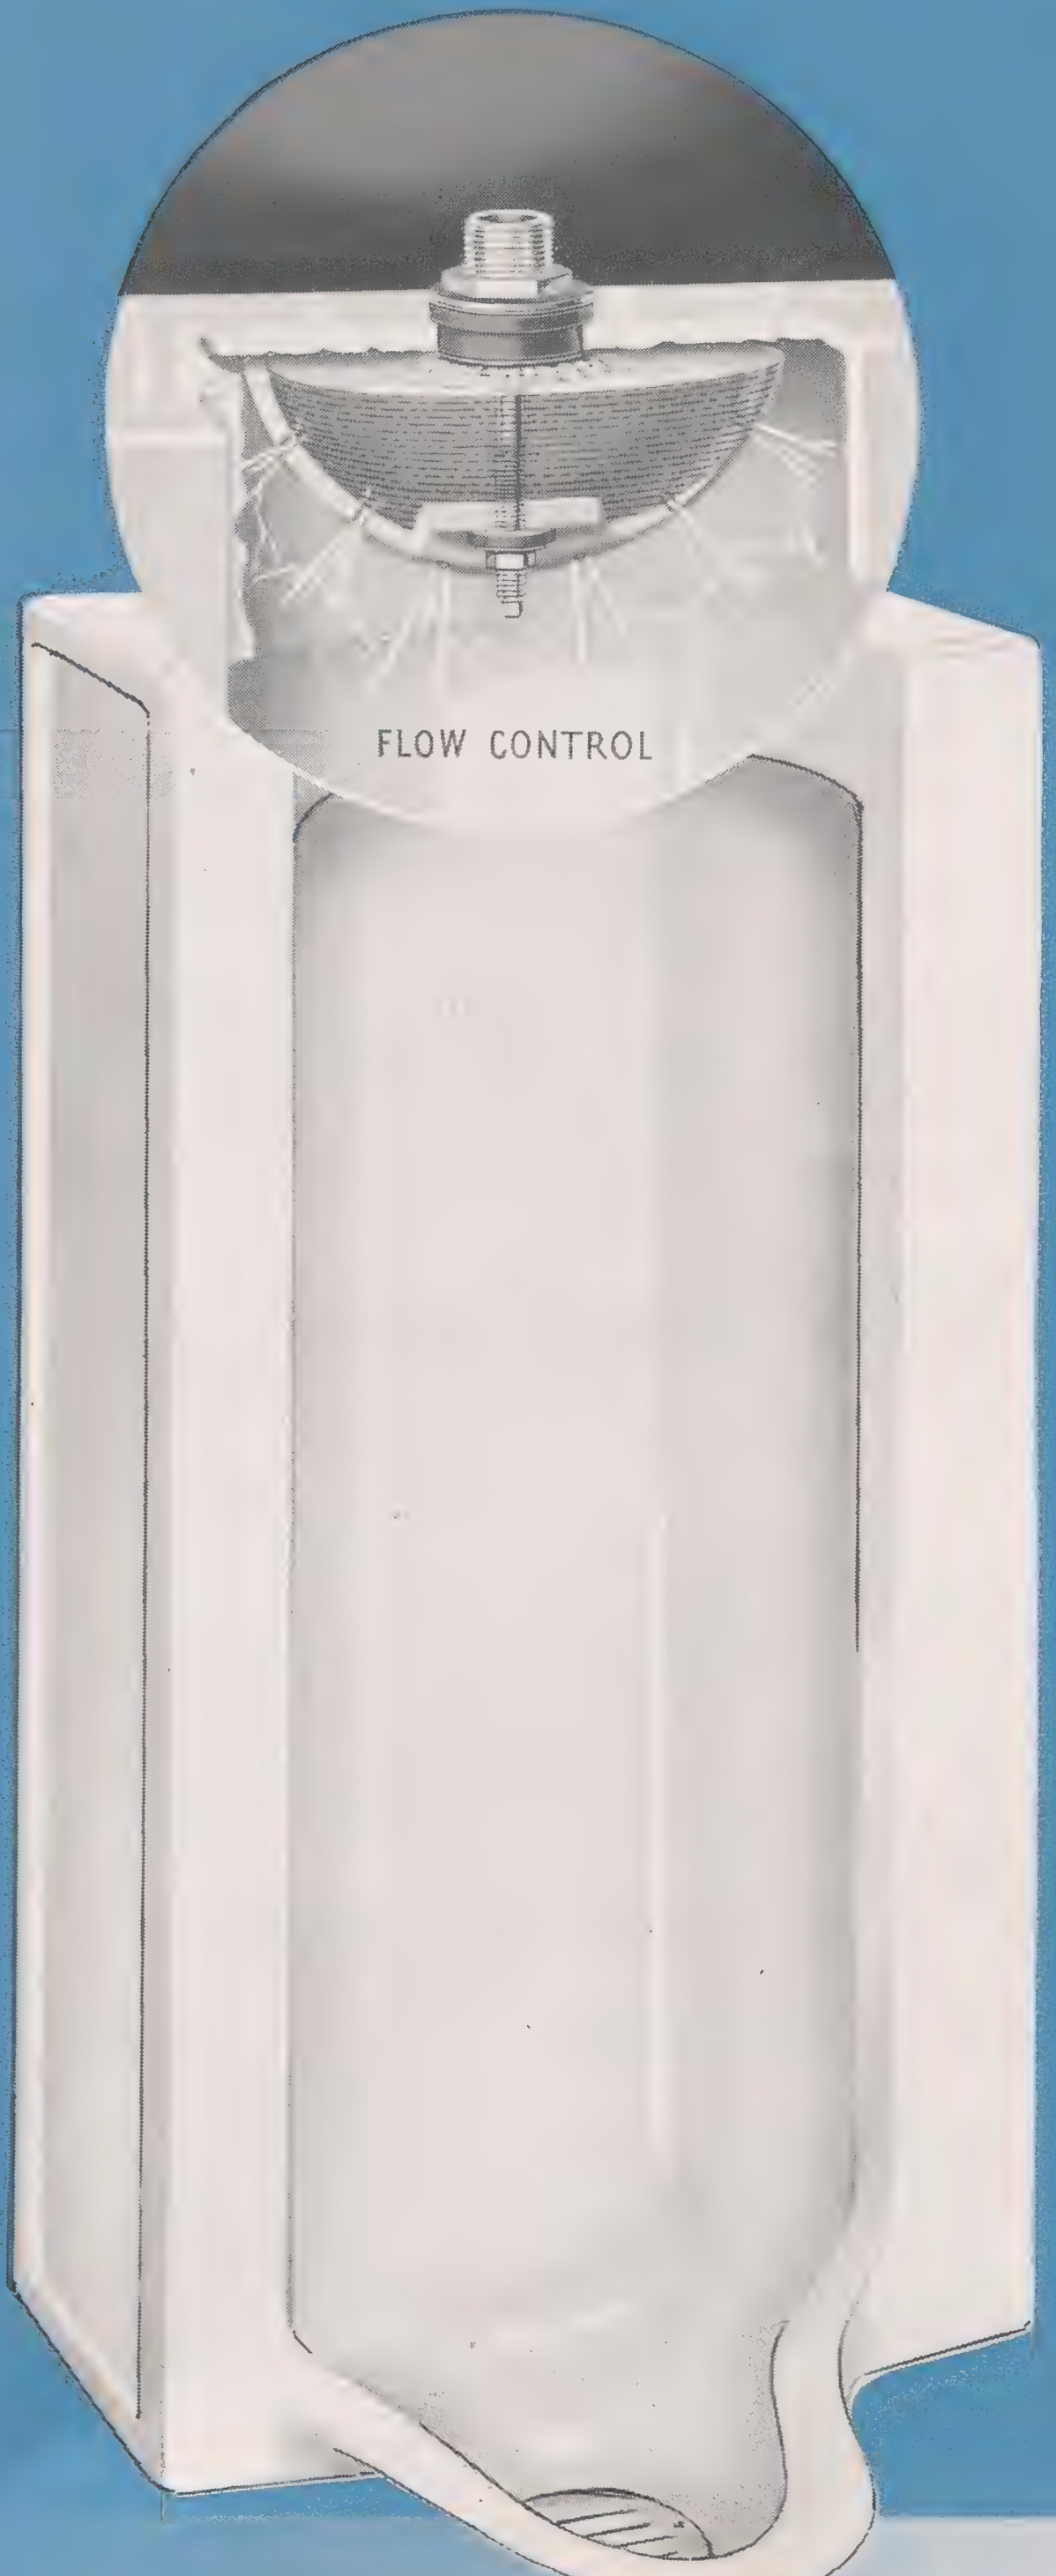

BRANHAM

VITREOUS CHINA URINAL STALLS

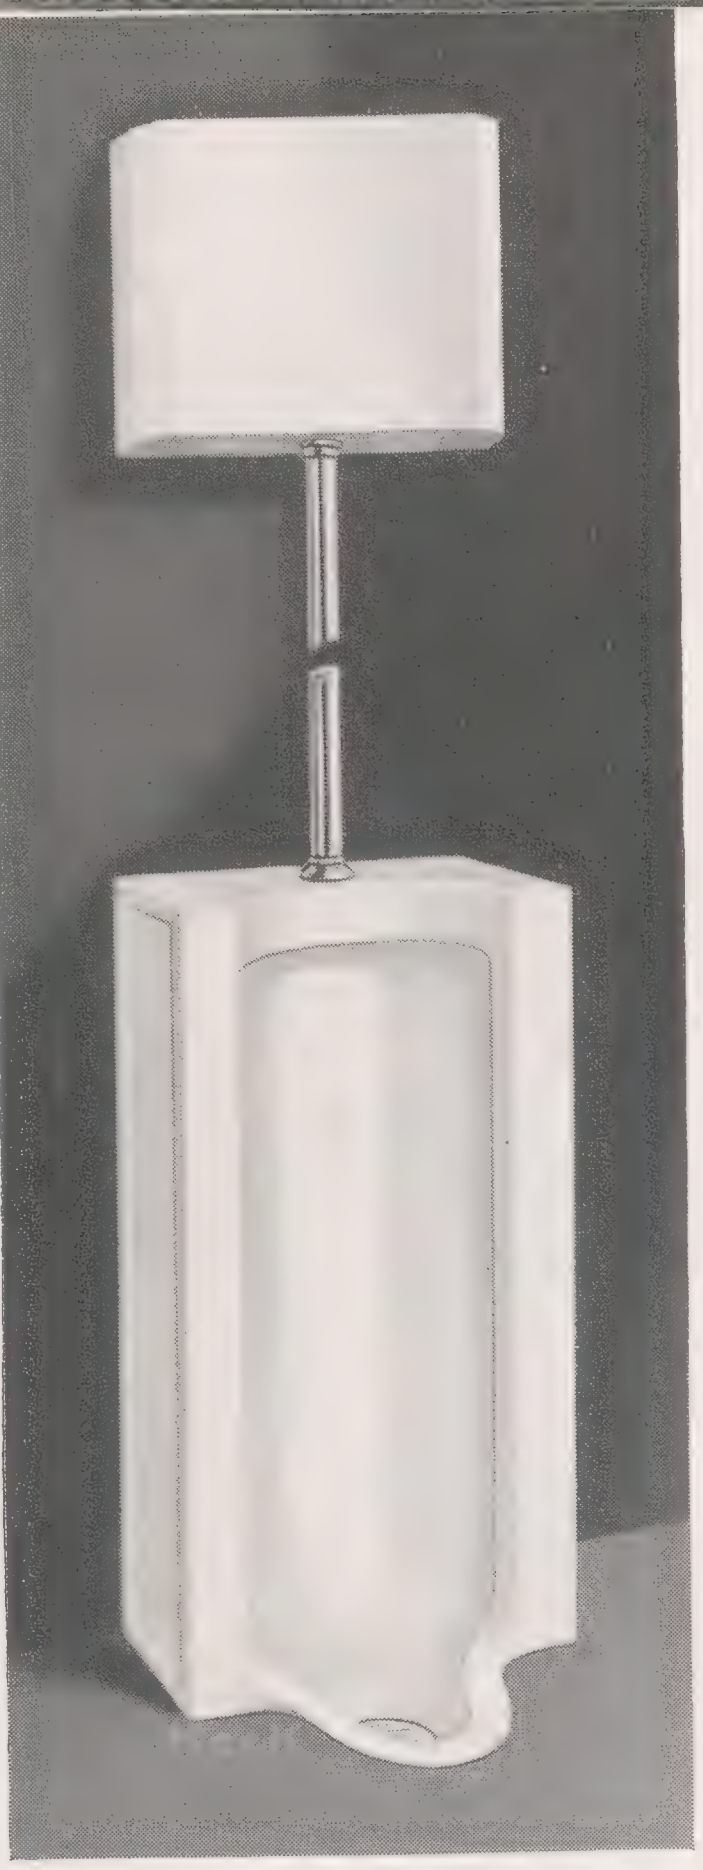

BRANHAM K-4881

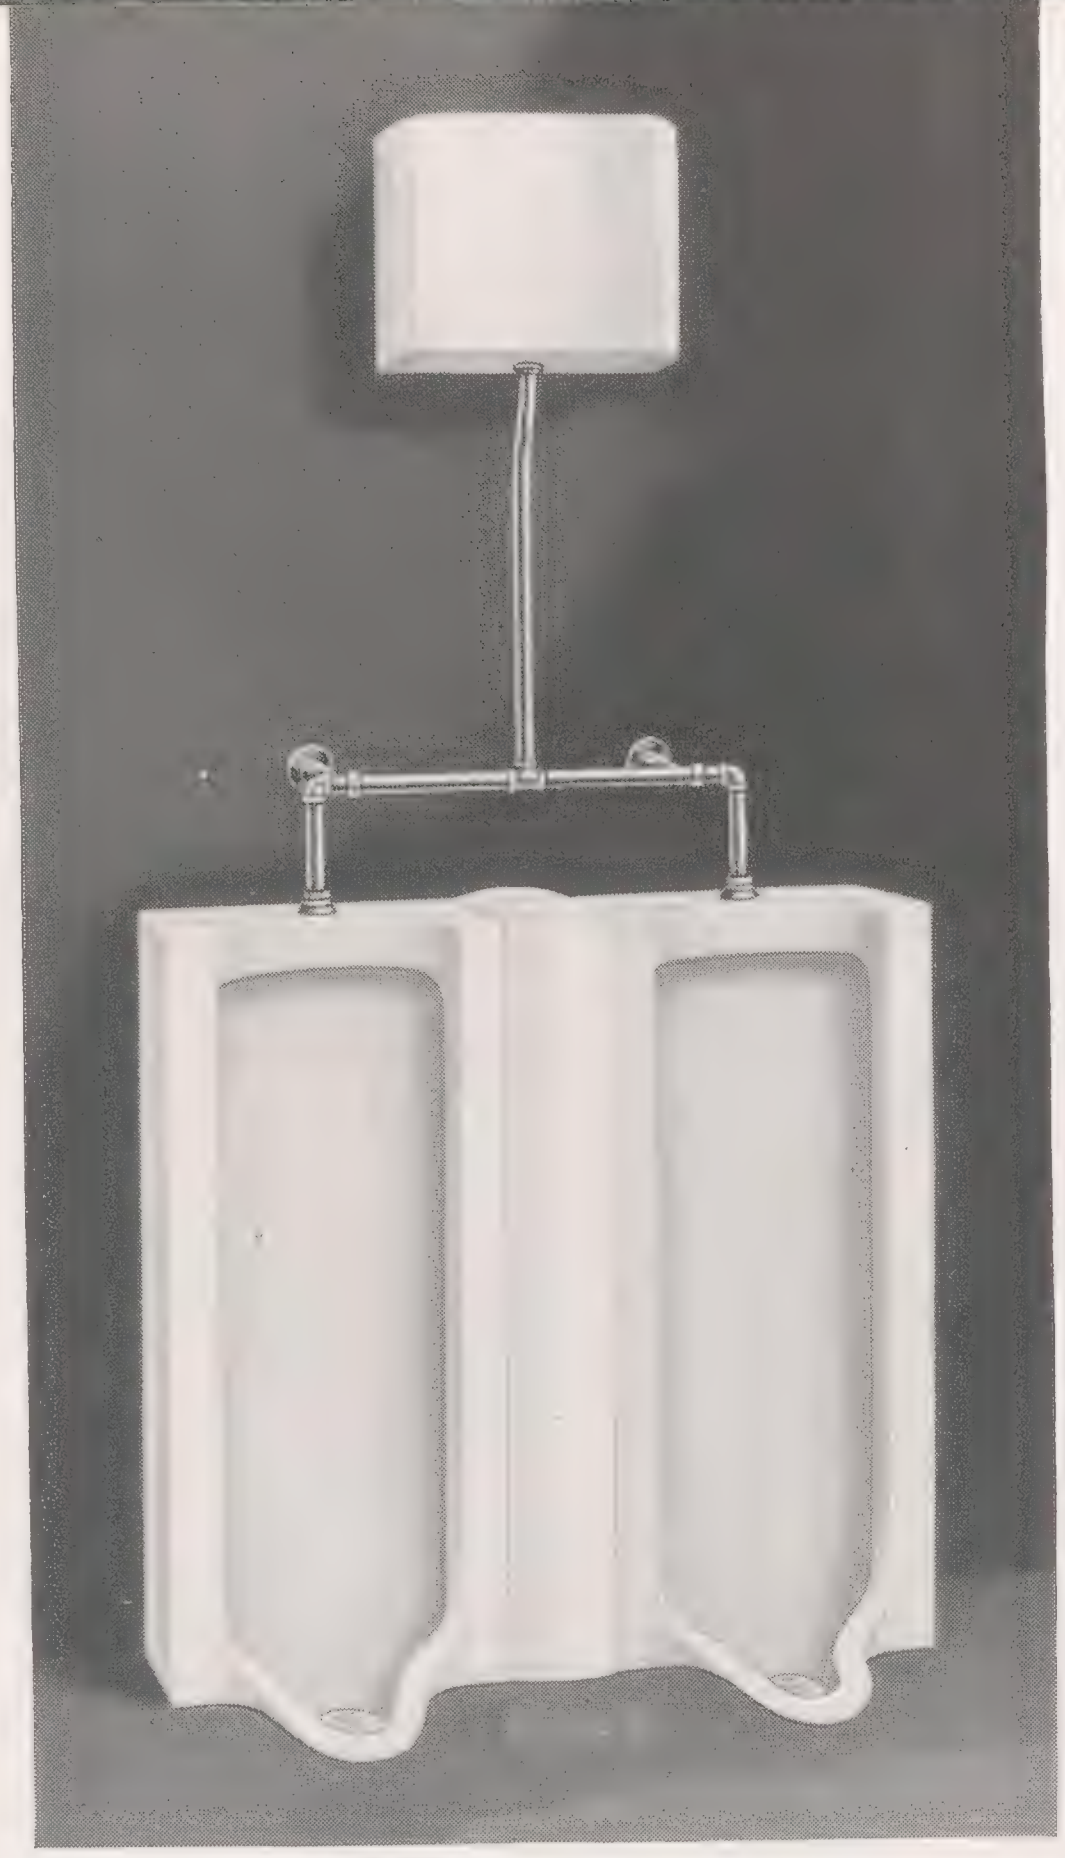

BRANHAM K-4882

K-4931

Seam cover with spring clamps.

Plate No.	**K-4881** Single (Illustrated)	**K-4882** Battery of Two (Illustrated)	**K-4883** Battery of Three	**K-4884** Battery of Four	**K-4885** Battery of Five
Urinal Stalls	One **K-4925-T**	Two **K-4925-T**	Three **K-4925-T**	Four **K-4925-T**	Five **K-4925-T**
Inlet	¾″	¾″	¾″	¾″	¾″
Seam Covers With Spring Clamps	—	One **K-4931**	Two **K-4931** Specify if for 21″ or 24″ centers.	Three **K-4931**	Four **K-4931**
Tank with Automatic Fitting	**K-4570-A**	**K-4570-A**	**K-4570-A**	**K-4572-A**	**K-4572-A**
Tank Connection	¾″	¾″	1″	1¼″	1½″
Flush Pipe	**K-9201**	**K-9202**	**K-9203**	**K-9204**	**K-9205**
Strainers	One **K-9172**	Two **K-9172**	Three **K-9172**	Four **K-9172**	Five **K-9172**

Specify distance between urinal centers so that proper size seam covers can be furnished. For urinals with rear inlet, specify **K-4925-R.**

WIDTH (one stall only)	**18″**	**HEIGHT FROM FLOOR**	**38″**
HEIGHT OVERALL	**42″**	**WALL TO FRONT OF FLARE**	**16″**

FLOW CONTROL



The flow control on K of K urinals has these important advantages:

1. Provides a uniform distribution of water to all urinals.
2. Delivers a full positive cleansing flush.
3. Eliminates the spraying of water beyond the urinal.

Suggested Method of Installation

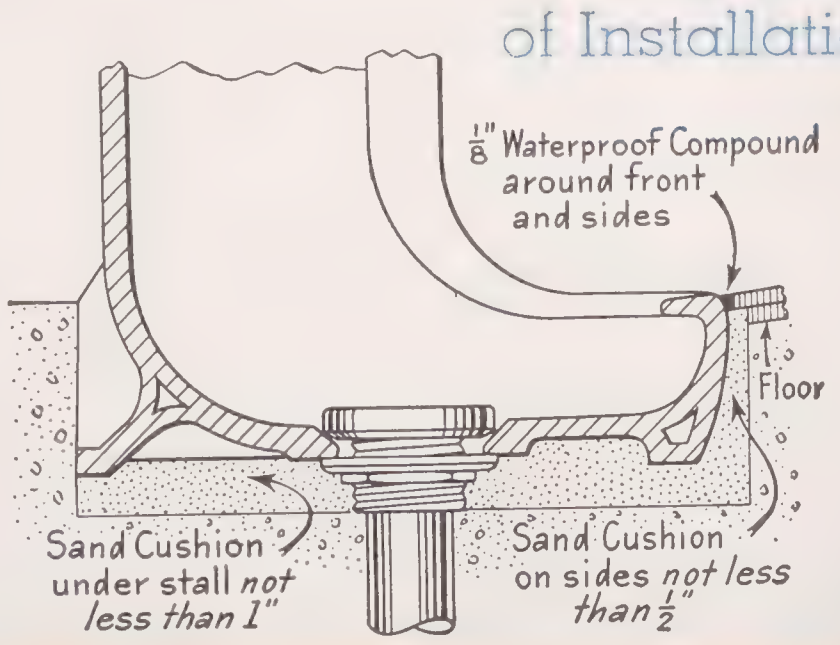
⅛″ Waterproof Compound around front and sides
Floor
Sand Cushion under stall *not less than 1″*
Sand Cushion on sides *not less than ½″*

BRANHAM

VITREOUS CHINA URINAL STALLS

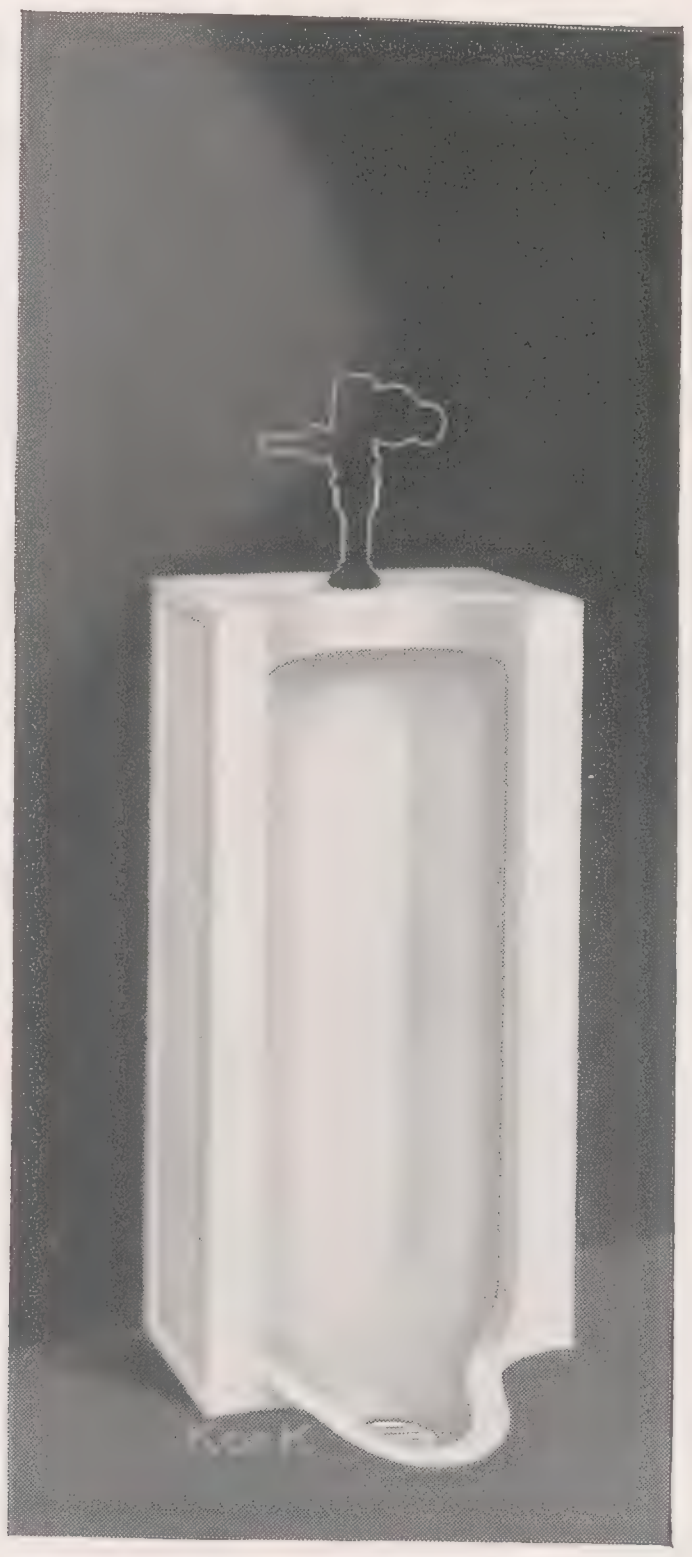

BRANHAM K-4891

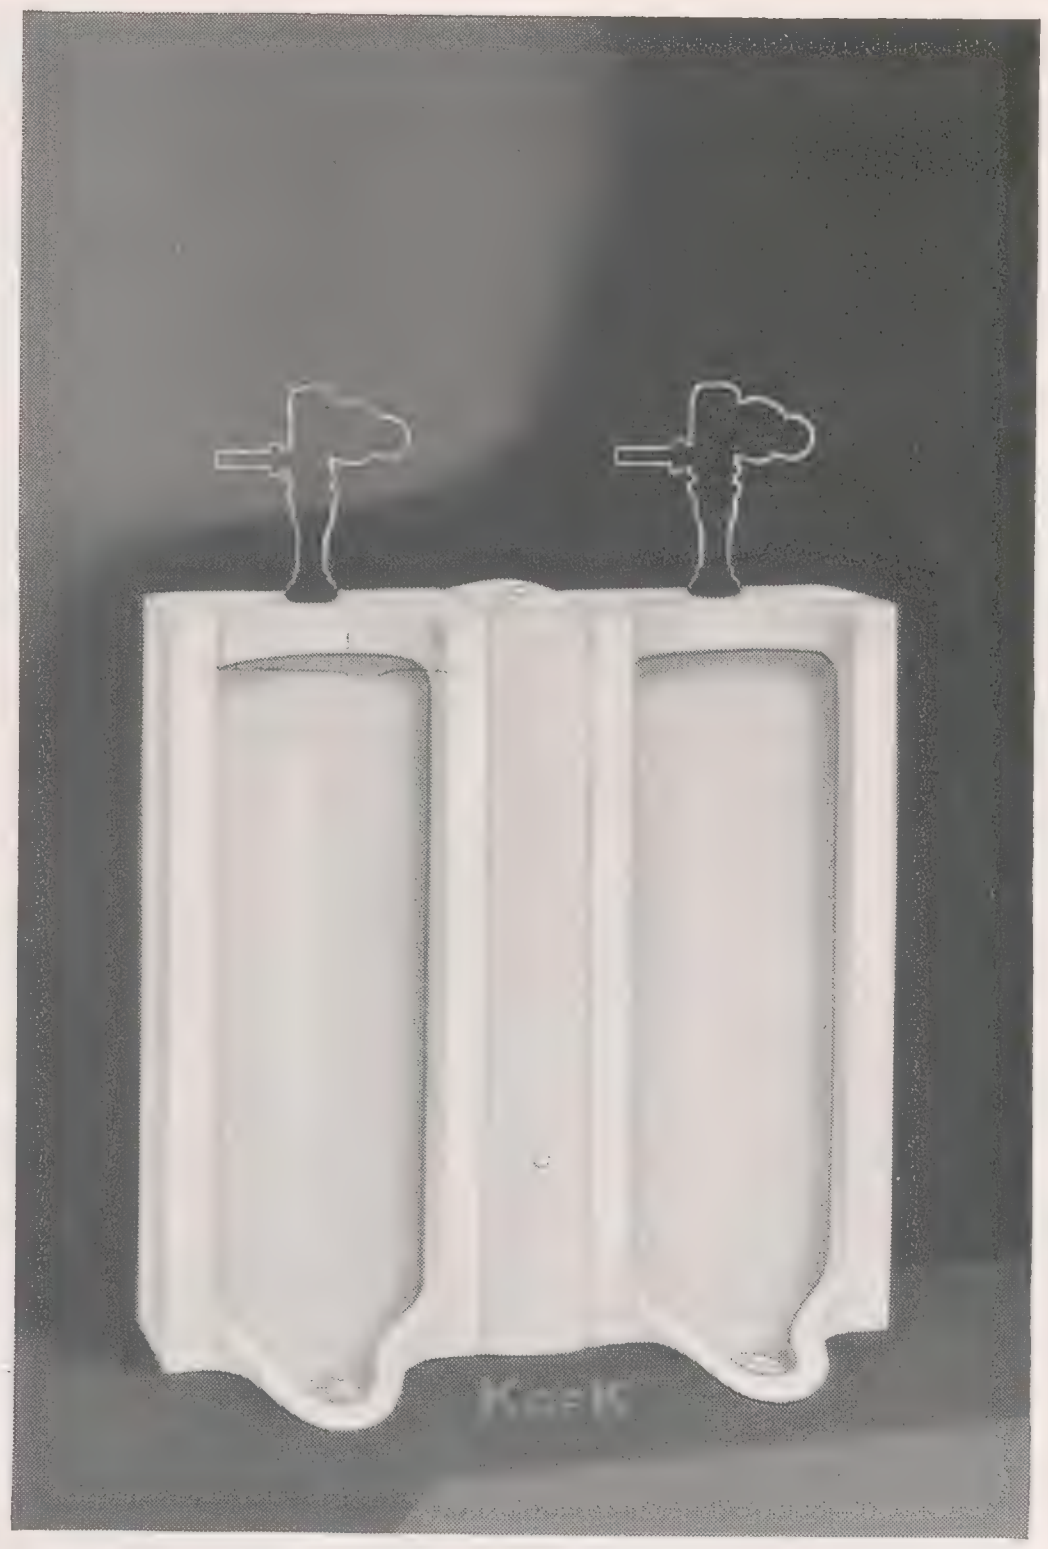

BRANHAM K-4892

Plate No.	**K-4891** Single (Illustrated)	**K-4892** Battery of Two (Illustrated)	**K-4893** Battery of Three	**K-4894** Battery of Four	**K-4895** Battery of Five
Urinal Stalls	One **K-4925-T**	Two **K-4925-T**	Three **K-4925-T**	Four **K-4925-T**	Five **K-4925-T**
Inlet	¾″	¾″	¾″	¾″	¾″
Seam Covers With Spring Clamps	—	One **K-4931**	Two **K-4931** Specify if for 21″ or 24″ centers.	Three **K-4931**	Four **K-4931**
Strainers	One **K-9172**	Two **K-9172**	Three **K-9172**	Four **K-9172**	Five **K-9172**
Flush Valves: **Kohler** **Sloan** **Watrous**	 **K-9435** Metro **185** Royal **M-549** Majestic	 **K-9435** Metro **185** Royal **M-549** Majestic	 **K-9435** Metro **185** Royal **M-549** Majestic	 **K-9435** Metro **185** Royal **M-549** Majestic	 **K-9435** Metro **185** Royal **M-549** Majestic

Specify distance between urinal centers so that proper size seam covers can be furnished. For urinals with rear inlet, specify **K-4925-R.**

WIDTH (one stall only)	18″	HEIGHT FROM FLOOR	38″
HEIGHT OVERALL	42″	WALL TO FRONT OF FLARE	16″

STRAINERS FOR URINAL STALLS



K-9172

K-9172	Strainer with china grate for vitreous china urinal stall. For caulking 2″ iron pipe or soldering 2″ lead pipe.
K-9173	Strainer with brass beehive grate for vitreous china urinal stall. For caulking 2″ iron pipe or soldering 2″ lead pipe.
K-9175	Strainer, same as **K-9173** except with outlet tapped for 2″ I.P.



K-9173

STANWELL

VITREOUS CHINA
WALL HANGING
BLOWOUT URINAL

BARDON

VITREOUS CHINA
WALL HANGING
WASHOUT URINALS

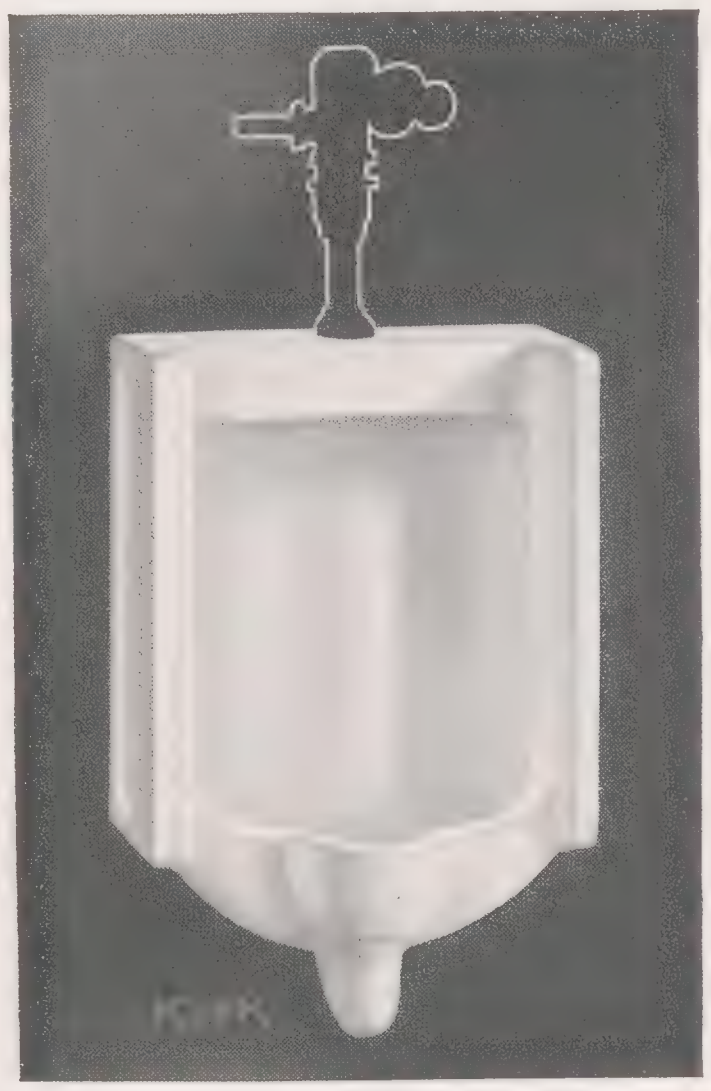

STANWELL K-4961

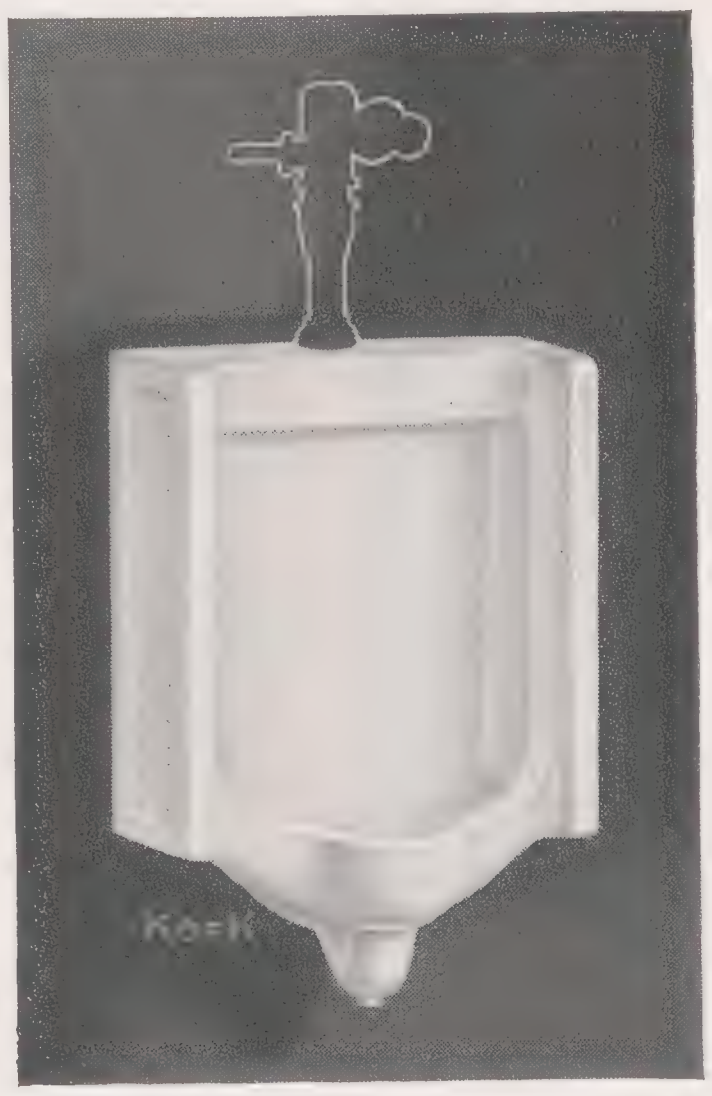

BARDON K-4977

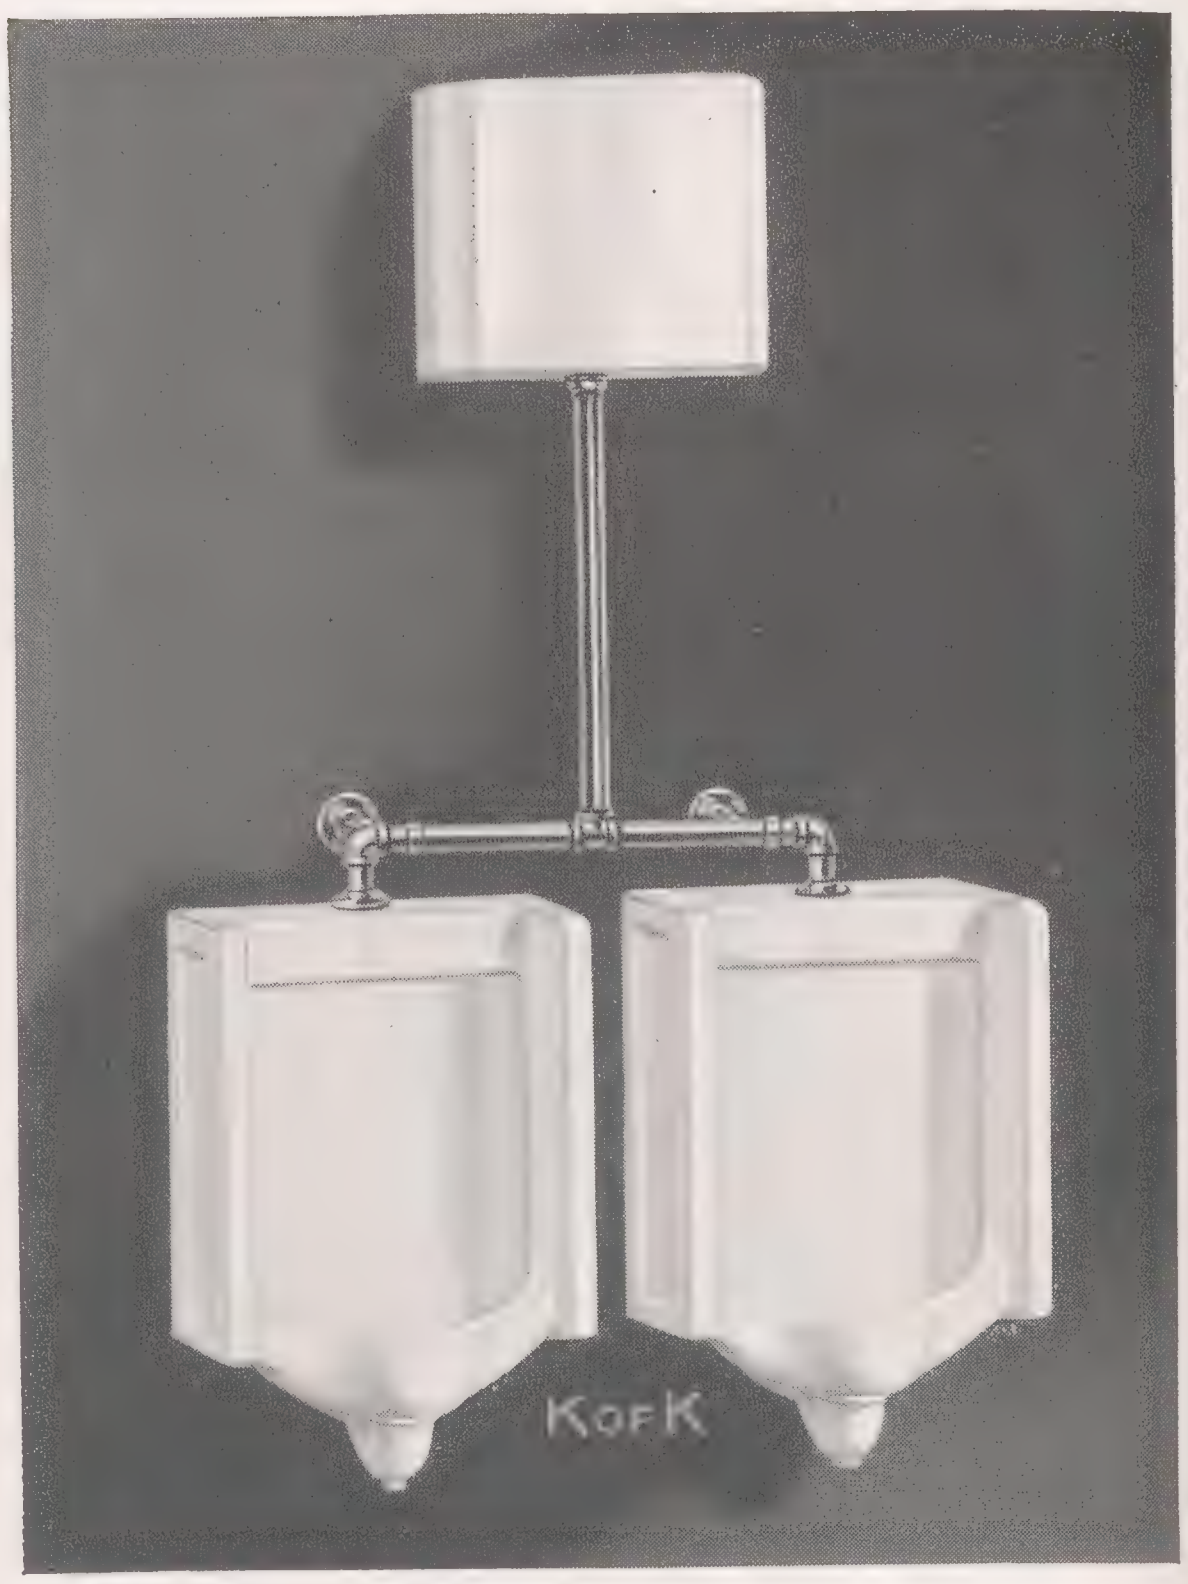

BARDON K-4975

Plate No.	**K-4961** Single (Illustrated)	**K-4977** Single (Illustrated)	**K-4976** Single Urinal with Tank	**K-4975** Battery of Two (Illustrated)
Type	Blowout	Washout	Washout	Washout
Urinal No.	**K-4967-T**	One **K-4982-T**	One **K-4982-T**	Two **K-4982-T**
Outlets	2" I.P.S.	2" I.P.S.	2" I.P.S.	2" I.P.S.
Spud	1¼" top	¾" top	¾" top	¾" top
Support	Wall hangers	Wall hangers	Wall hangers	Wall hangers
Flush Valve:				
Kohler	**K-9424** Metro	**K-9435** Metro	—	—
Sloan	**180** Royal	**180** Royal	—	—
Watrous	**M-549-S** Majestic	**M-549** Majestic	—	—
Tank with Automatic Fittings	—	—	**K-4570-A** ¾" connection	**K-4570-A** ¾" connection
Flush Pipe	—	—	**K-9201**	**K-9202**

Stanwell for flush valve operation only. Water pressure should not exceed 60 pounds. Stanwell urinal not recommended for tank installation.

For Stanwell and Bardon urinals with rear inlet substitute suffix "R" instead of "T."

STANWELL		BARDON	
HEIGHT OVERALL (urinal only)	27¾"	HEIGHT OVERALL (urinal only)	27¾"
WIDTH	18"	WIDTH	18"
WALL TO FRONT OF FLARE	11¾"	WALL TO FRONT OF FLARE	11¾"

ZURN CARRIERS FOR URINALS

Z-1221-2 Zurn carrier with one plate support. For use on Stanwell and Bardon wall hanging urinals.

Furnished only when specified.

BRAMPFORD VITREOUS CHINA SIPHON JET PEDESTAL URINALS

DERRY VITREOUS CHINA WALL HANGING BLOWOUT URINALS FOR FLUSH VALVE INSTALLATION ONLY

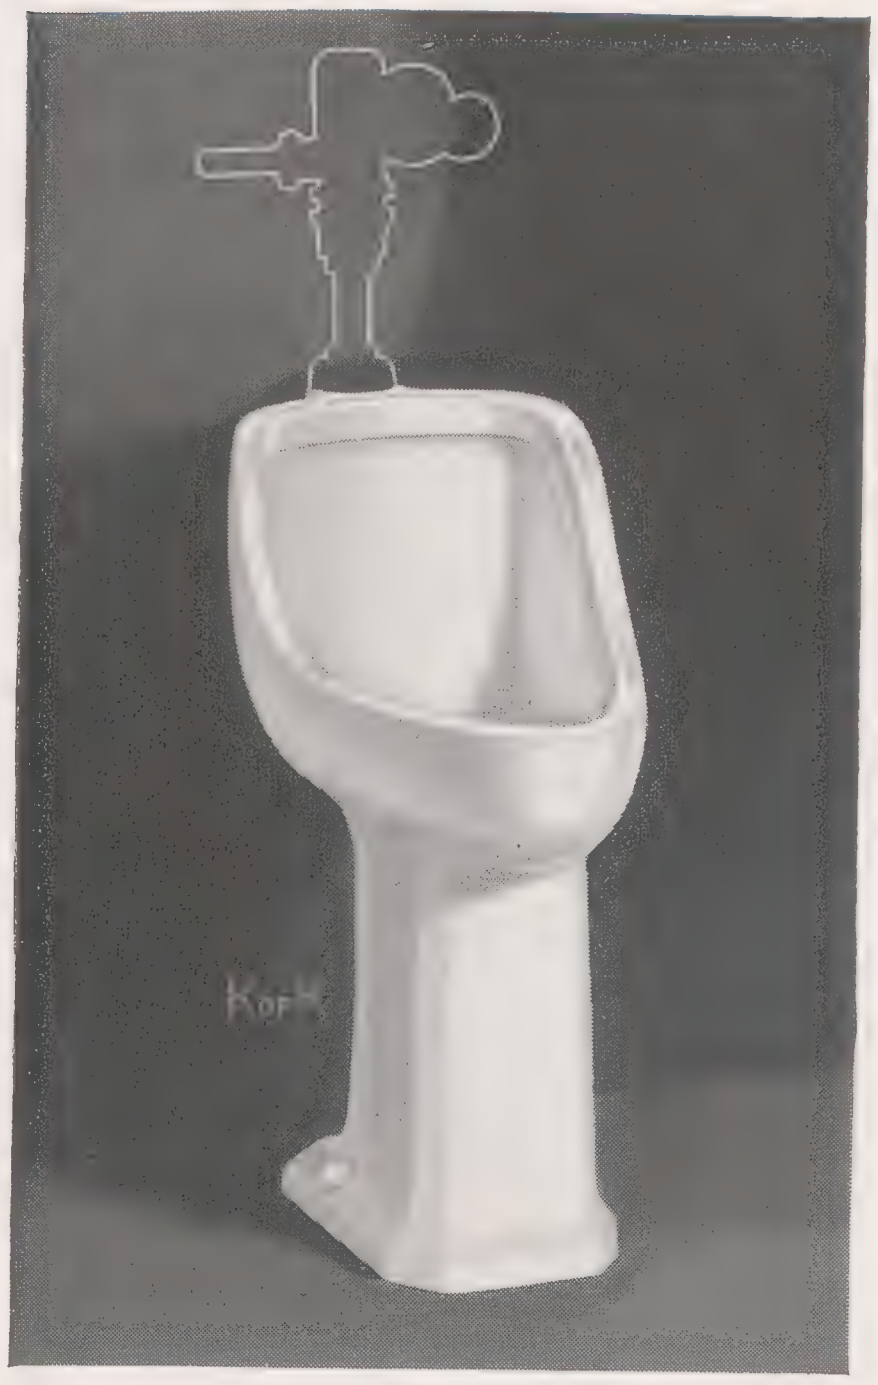
BRAMPFORD K-4992

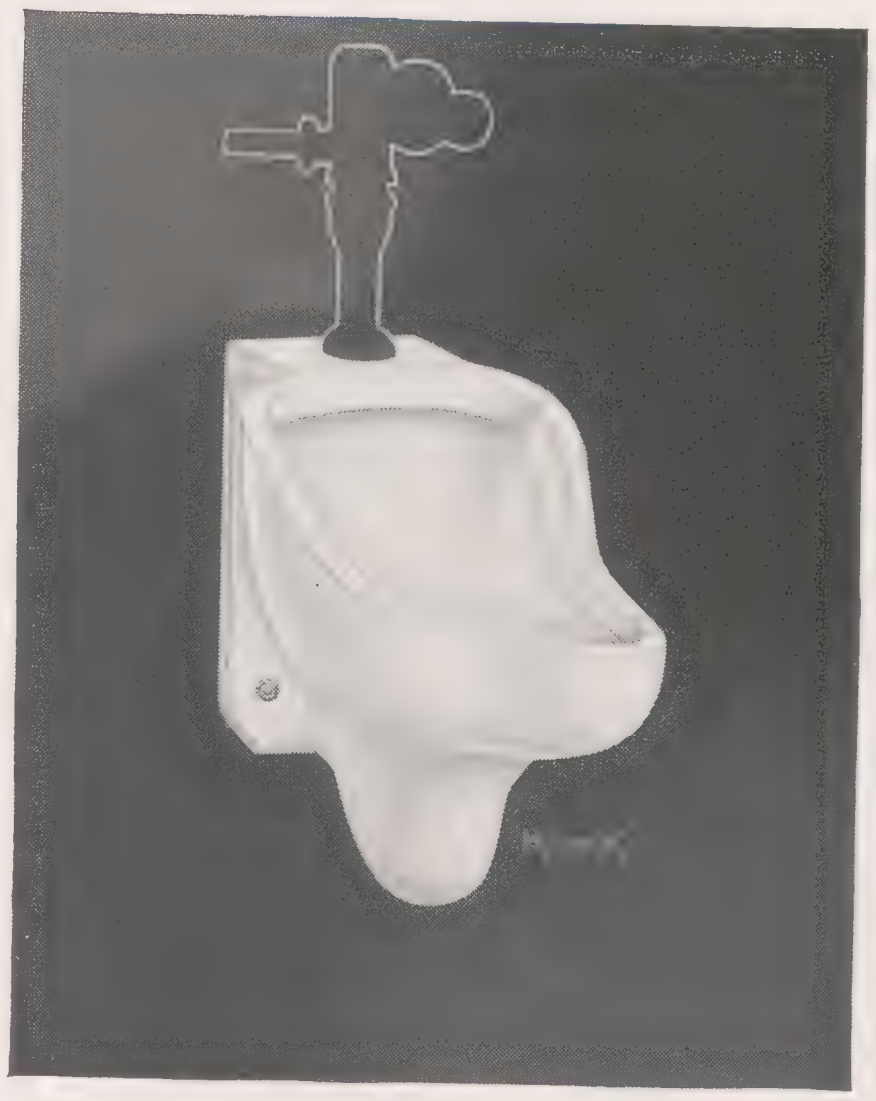
DERRY K-5001

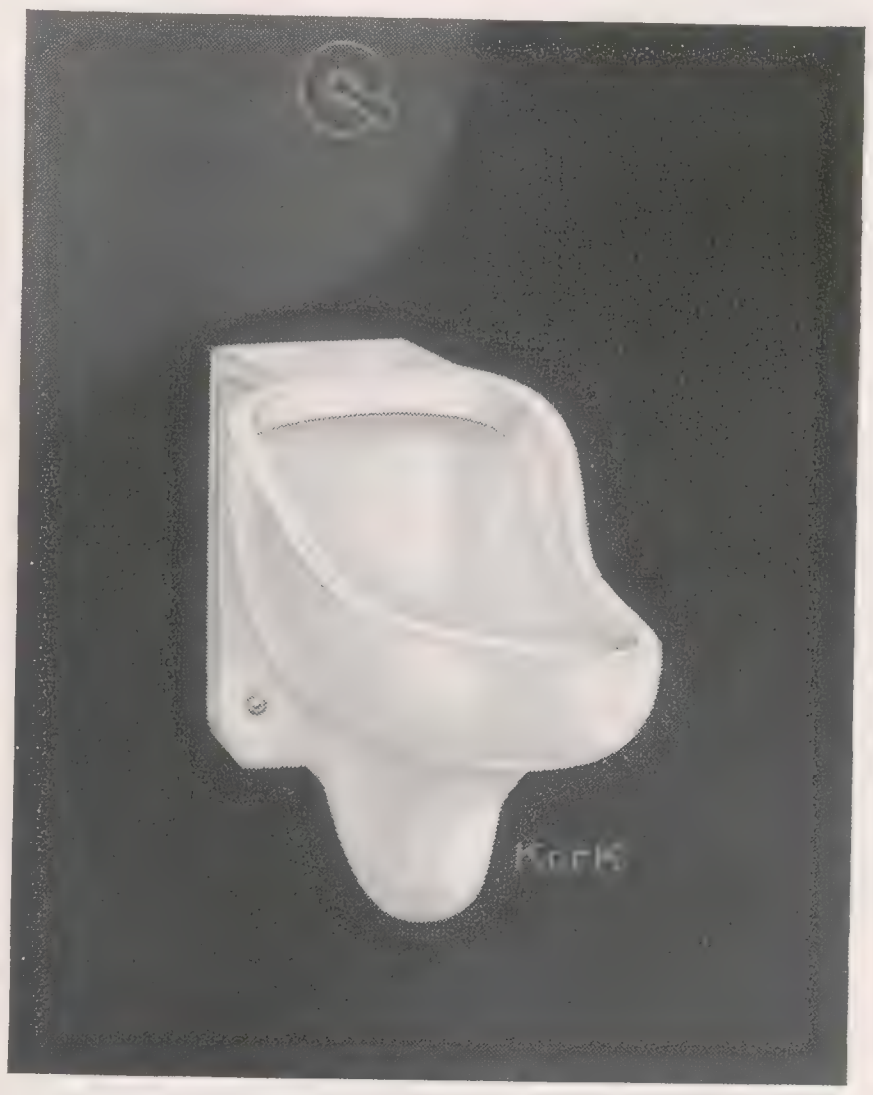
DERRY K-5002

Plate No.	**K-4992** (Illustrated)	**K-4990** Brampford with tank	**K-5001** (Illustrated)	**K-5002** concealed valve (Illustrated)
Type	Siphon jet	Siphon jet	Blowout	Blowout
Urinal No.	**K-4995-T**	**K-4995-T**	**K-5005-T**	**K-5005-R**
Outlet	—	—	2" I.P.S.	2" I.P.S.
Spud	1¼" top	1¼" top	1½" top	1½" rear
Support	Pedestal	Pedestal	Wall bolts	Wall bolts
Accessories	Bolt caps (2)	Bolt caps (2)	—	—
Flush Valves: Kohler Sloan Watrous	 **K-9425** Metro **181-HU** Royal **M-543-S** Majestic	 — — —	 **K-9420** Metro **180-T** Royal **M-549-F** Majestic	 — **190-T** Royal **M-541-F** Majestic
Tank with Automatic Fittings	—	**K-4570-A** 1¼" connection	—	—
Flush Pipe	—	**K-9212**	—	—

A single tank will not flush more than one Brampford urinal.
For Brampford urinal with rear inlet, specify K-4995-R.

BRAMPFORD	
HEIGHT OVERALL (urinal only)	28"
WIDTH	14"
WALL TO FRONT OF FLARE	23¾"
FLOOR TO TOP OF FLARE	20"

DERRY	
HEIGHT OVERALL (urinal only)	17¾"
WIDTH	14"
WALL TO FRONT OF FLARE	21"

DEXTER SIPHON JET

DARFIELD WASHOUT

VITREOUS CHINA
WALL HANGING
URINALS

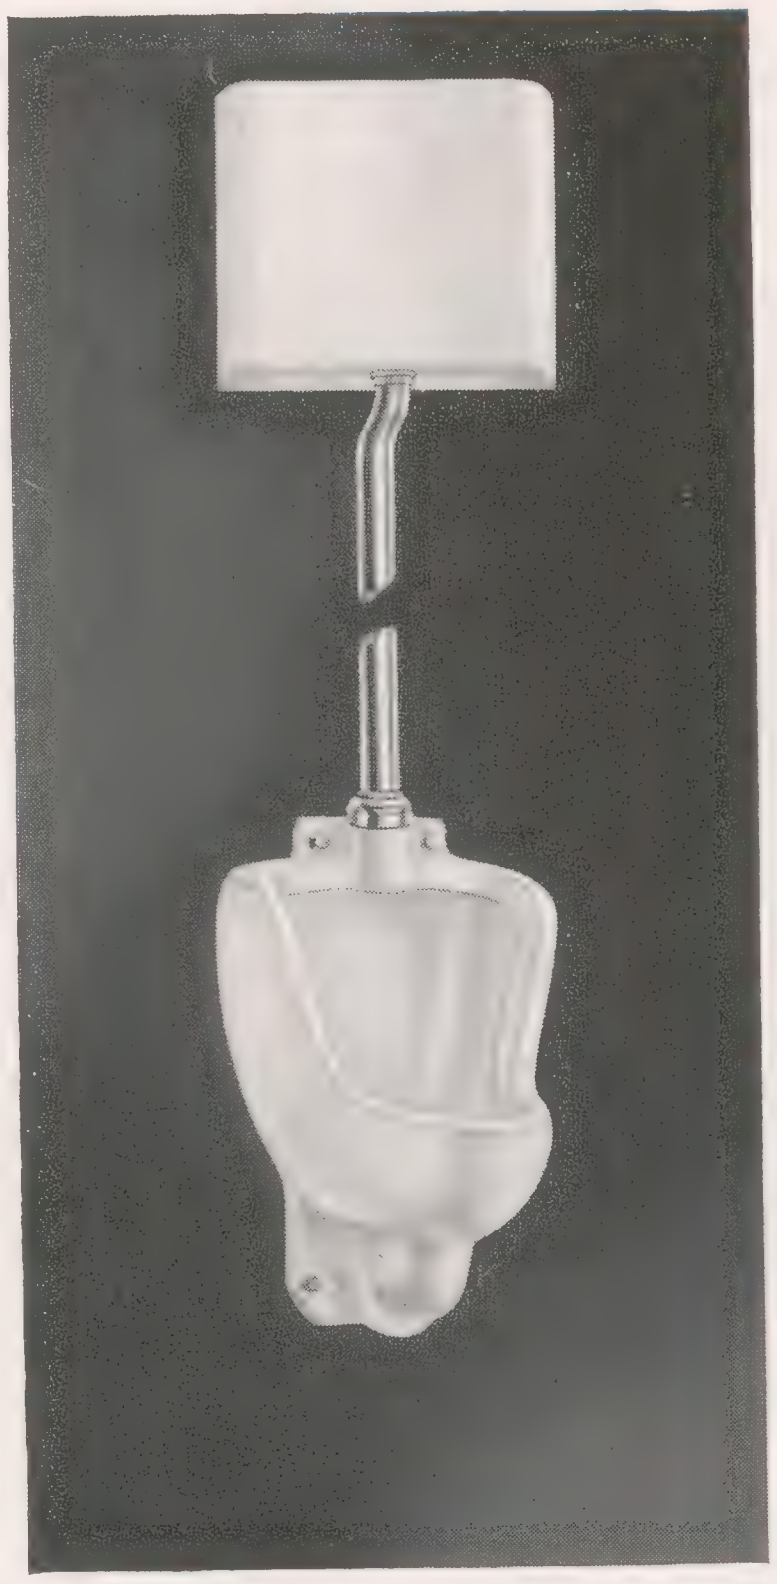
DEXTER K-5010

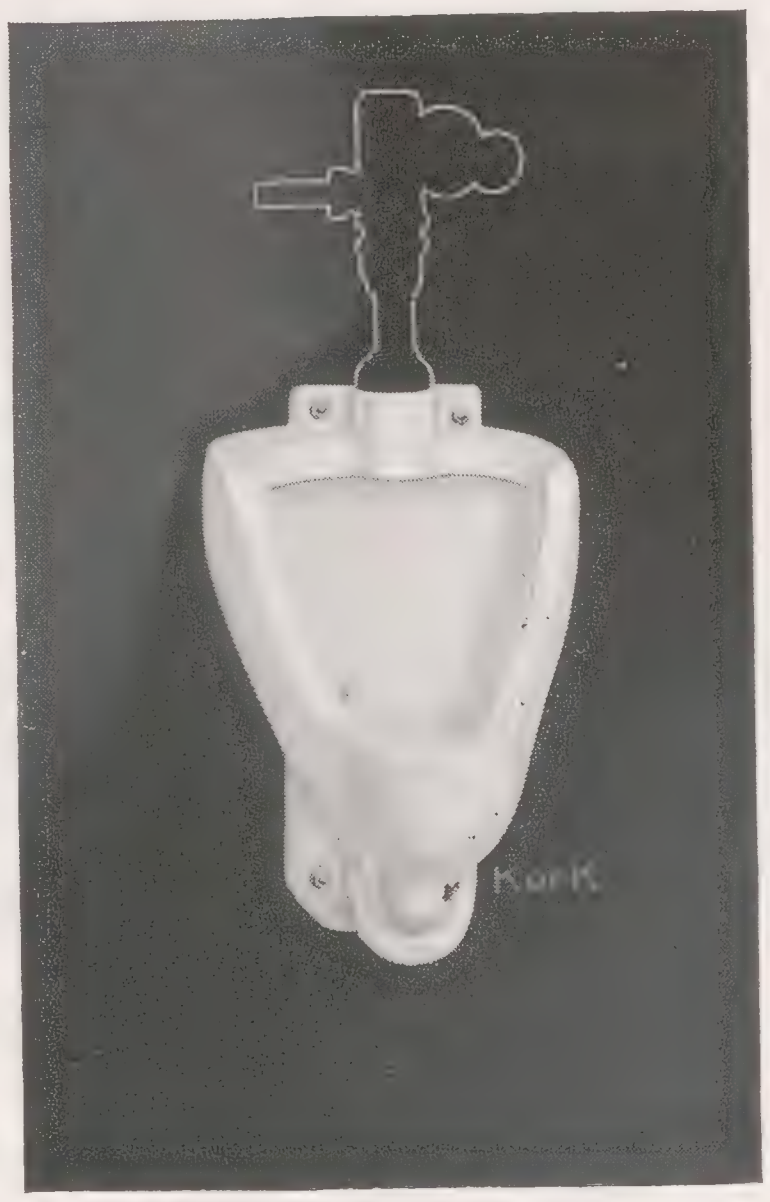
DEXTER K-5013

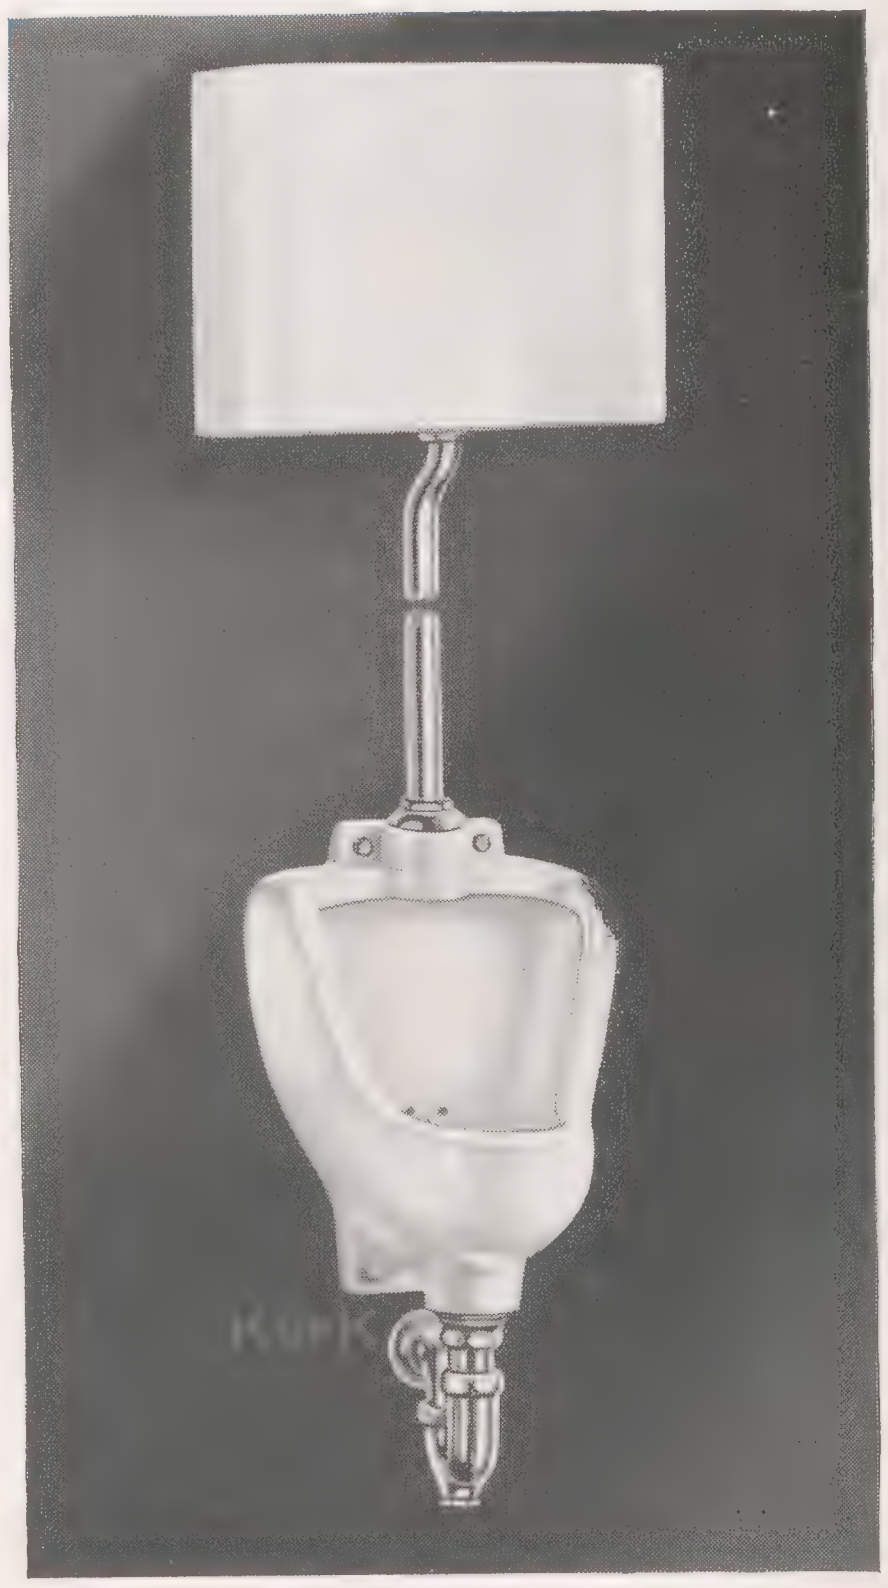
DARFIELD K-5018

Plate No.	K-5010 (Illustrated)	K-5013 (Illustrated)	K-5018 (Illustrated)	K-5019 With exposed valve
Type	Siphon jet	Siphon jet	Washout	Washout
Urinal No.	K-5015-T	K-5015-T	K-5020-T	K-5020-T
Outlet	2" I.P.S.	2" I.P.S.	1½" O.D. tailpiece	1½" O.D. tailpiece
Spud	1¼"	¾"	¾"	¾"
Support	Wall bolts	Wall bolts	Wall bolts	Wall bolts
Flush Valves:				
Kohler	—	**K-9435** Metro	—	**K-9435** Metro
Sloan	—	**185** Royal	—	**185** Royal
Watrous	—	**M-549** Majestic	—	**M-549** Majestic
Tank with Automatic Fittings	**K-4570-A** with 1¼" connection	—	**K-4570-A** with ¾" connection	—
Flush Pipe	**K-9210**	—	**K-9201**	—
Trap	Integral	Integral	**K-9000** 1½"	**K-9000** 1½"

Dexter urinals for tank installation are furnished with 1¼" spud; for flush valve, with ¾" spud. For Dexter urinal with rear inlet, specify **K-5015-R.**

	DEXTER
HEIGHT OVERALL (urinal only)	19"
WIDTH	14"
WALL TO FRONT OF FLARE	14"

	DARFIELD
HEIGHT OVERALL (urinal only)	17"
WIDTH	13"
WALL TO FRONT OF FLARE	14"

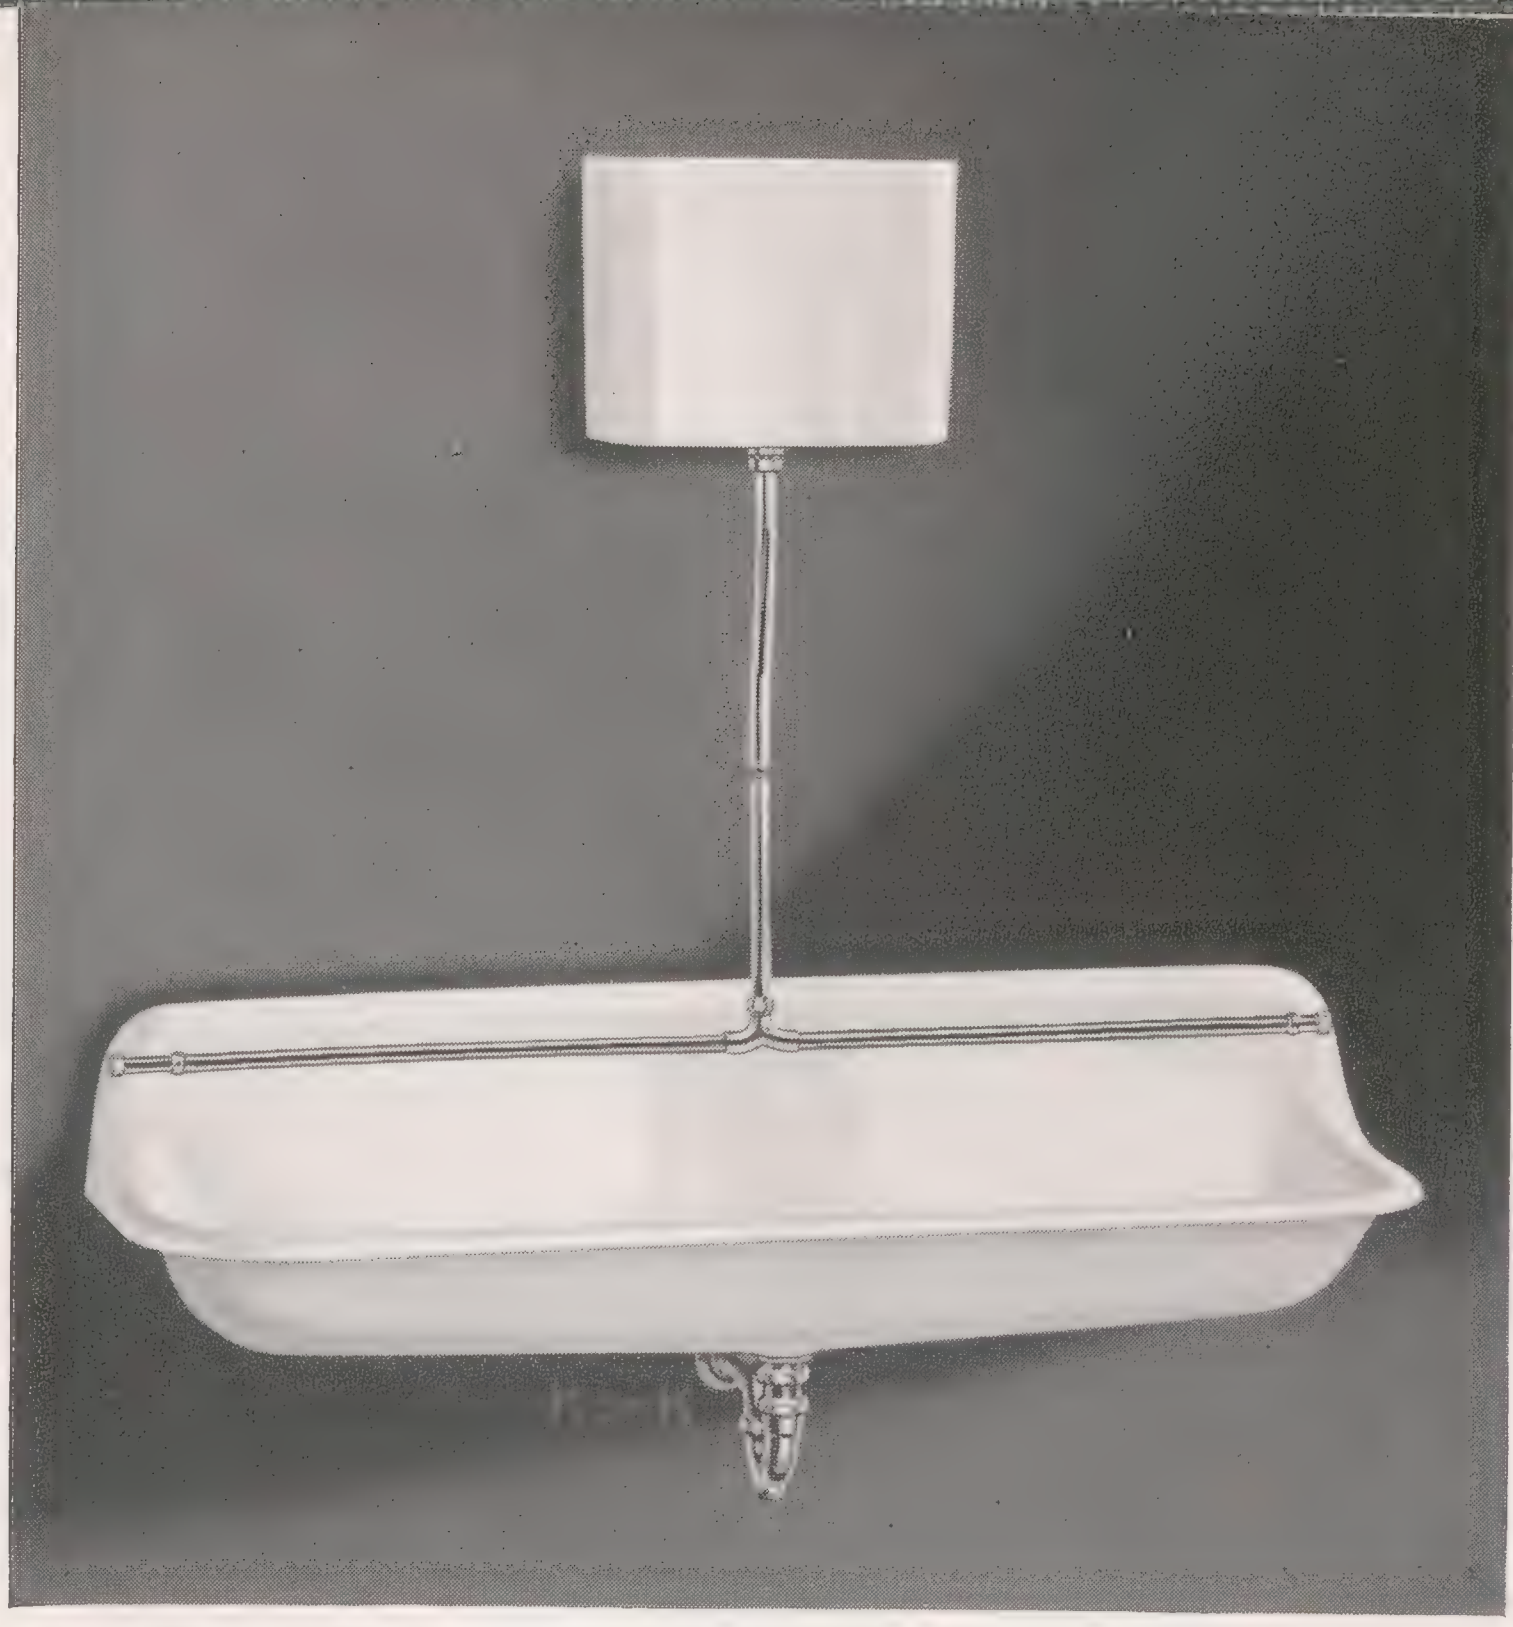

JARVES

ACID-RESISTING
ENAMELED CAST IRON
WALL HANGING
TROUGH URINAL

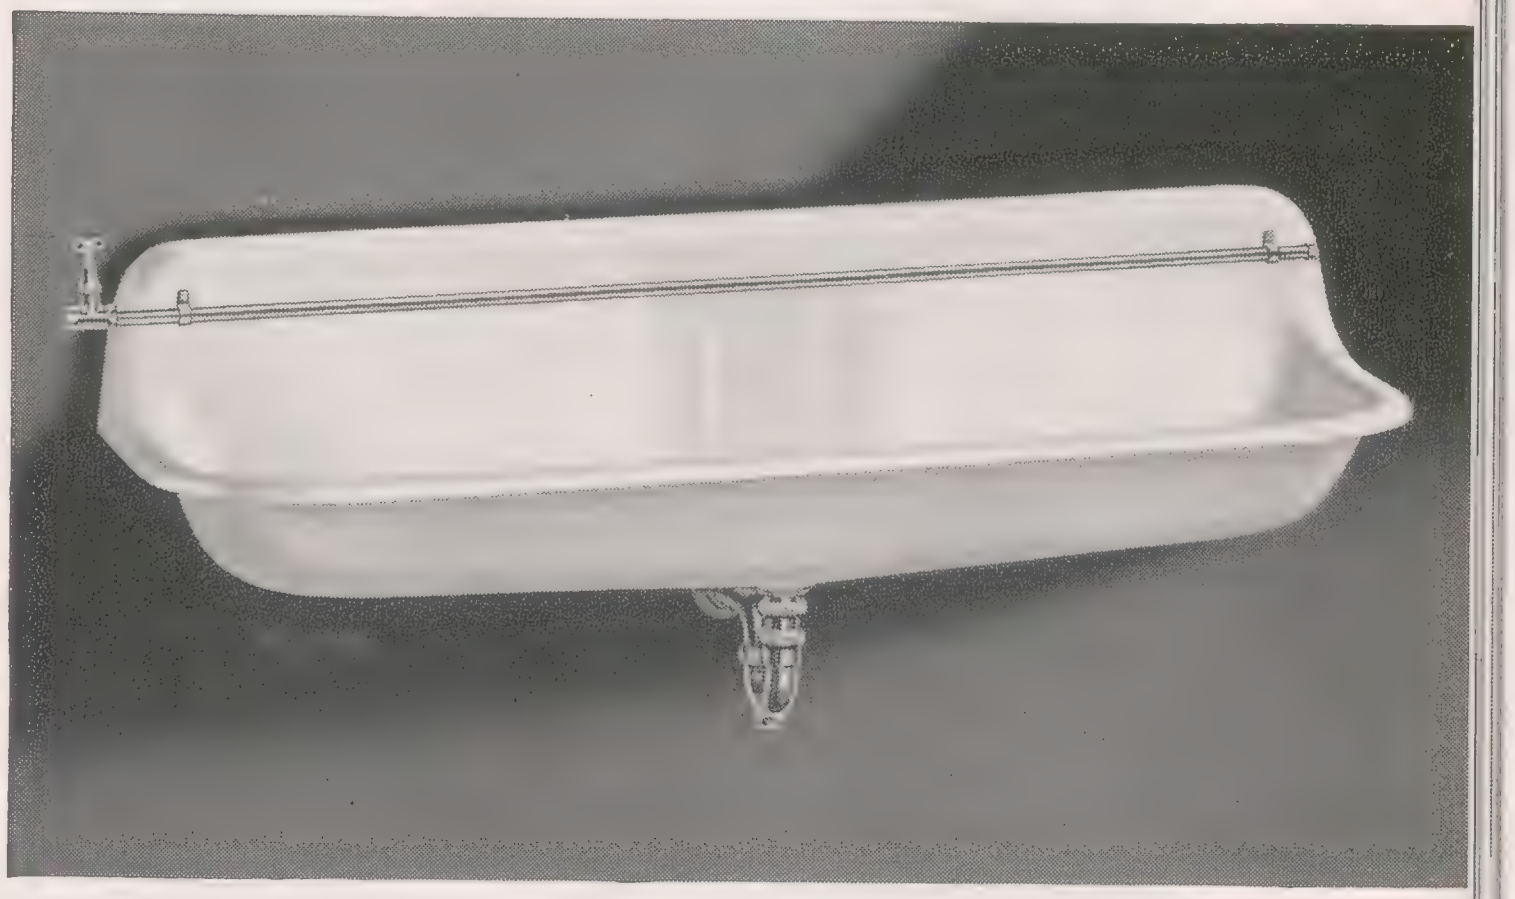

JARVES K-5054-A

JARVES K-5055-A

Plate No.	K-5054-A
Urinal No.	K-5055
Strainer	**K-9160** Beehive
Support	Wall hangers
Tank with Automatic Fittings	**K-4570-A** with ¾″ outlet connection
Flush Pipe	**K-9214** flush and perforated washdown pipe
Trap	**K-9000** 1½″

Plate No.	K-5055-A
Urinal No.	K-5055
Strainer	**K-9160** Beehive
Support	Wall hangers
Flush Pipe	**K-9213** perforated washdown pipe
Trap	**K-9000** 1½″

SIZES, LENGTH	4′	5′	6′
WALL TO FRONT	17½″	17½″	17½″
DEPTH AT OUTLET	7½″	7½″	7½″
BACK	8″	8″	8″



K-9320
Flush Valve



K-9325
Supply Valve

FITTINGS FOR URINAL TANKS

Automatic Flush Valve	For 3 gallon tank. **K-9320** for ¾″ O.D. flush pipe. **K-9321** for 1″ O.D. flush pipe.
	For 6 gallon tank. **K-9322** for 1¼″ O.D. flush pipe. **K-9323** for 1½″ O.D. flush pipe.
Supply Valve	**K-9325** for both 3 gallon and 6 gallon tanks.
Beehive Strainer	**K-9160** for enameled iron urinals, 1½″ tailpiece.

BEEHIVE STRAINER



K-9160

HYGIA VITREOUS CHINA PEDESTAL TYPE SIPHON JET URINALS

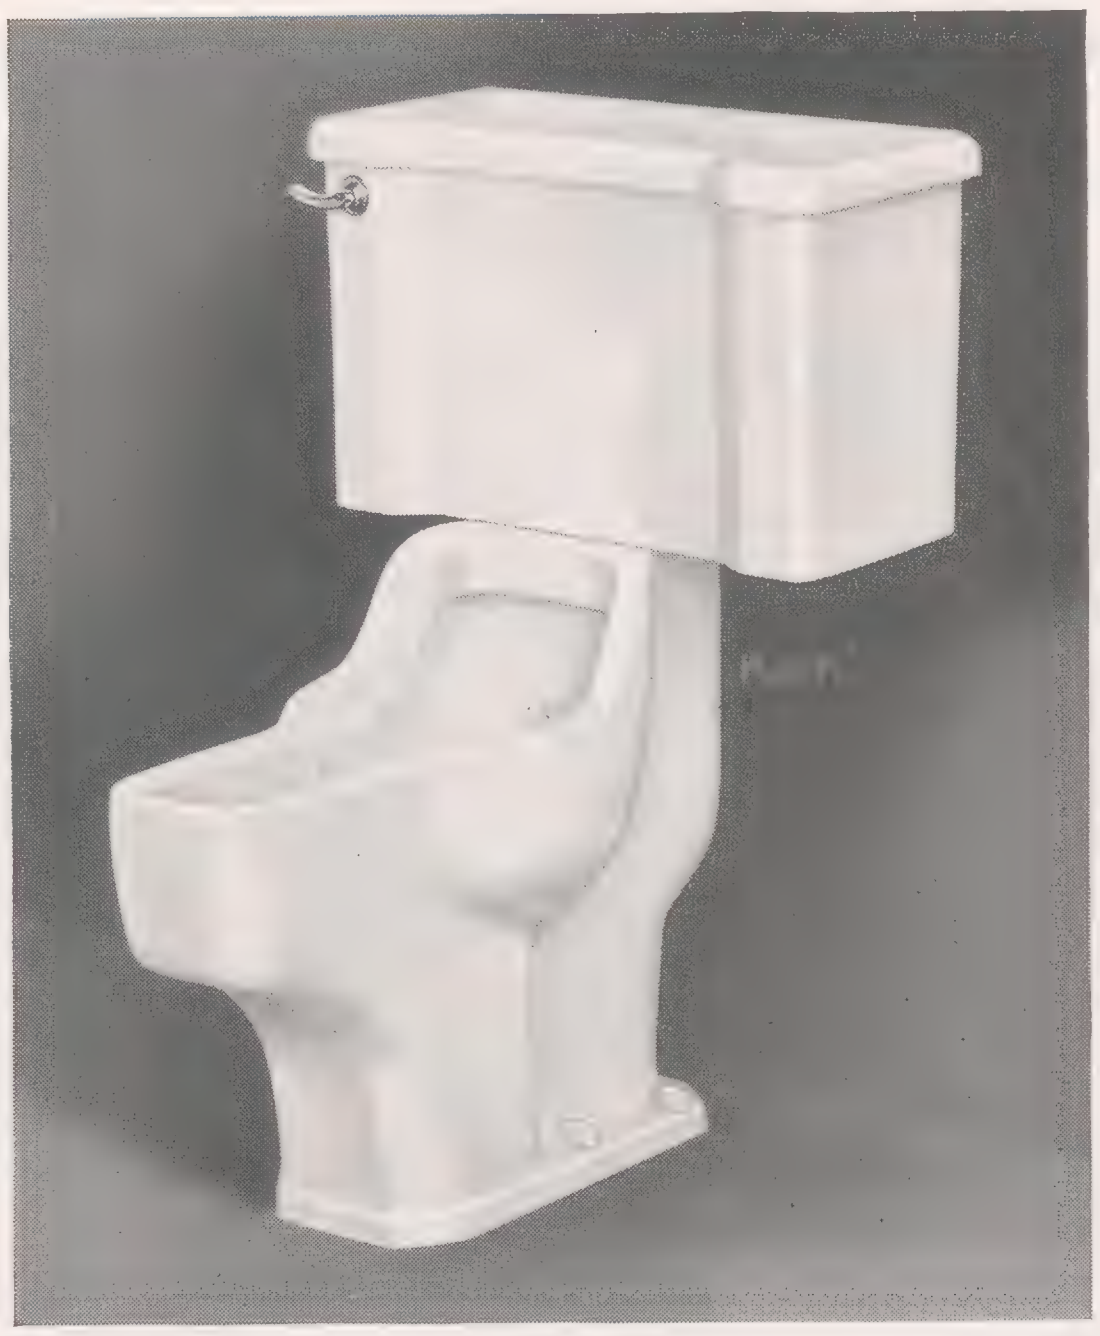

HYGIA K-5068

For Women's Washrooms

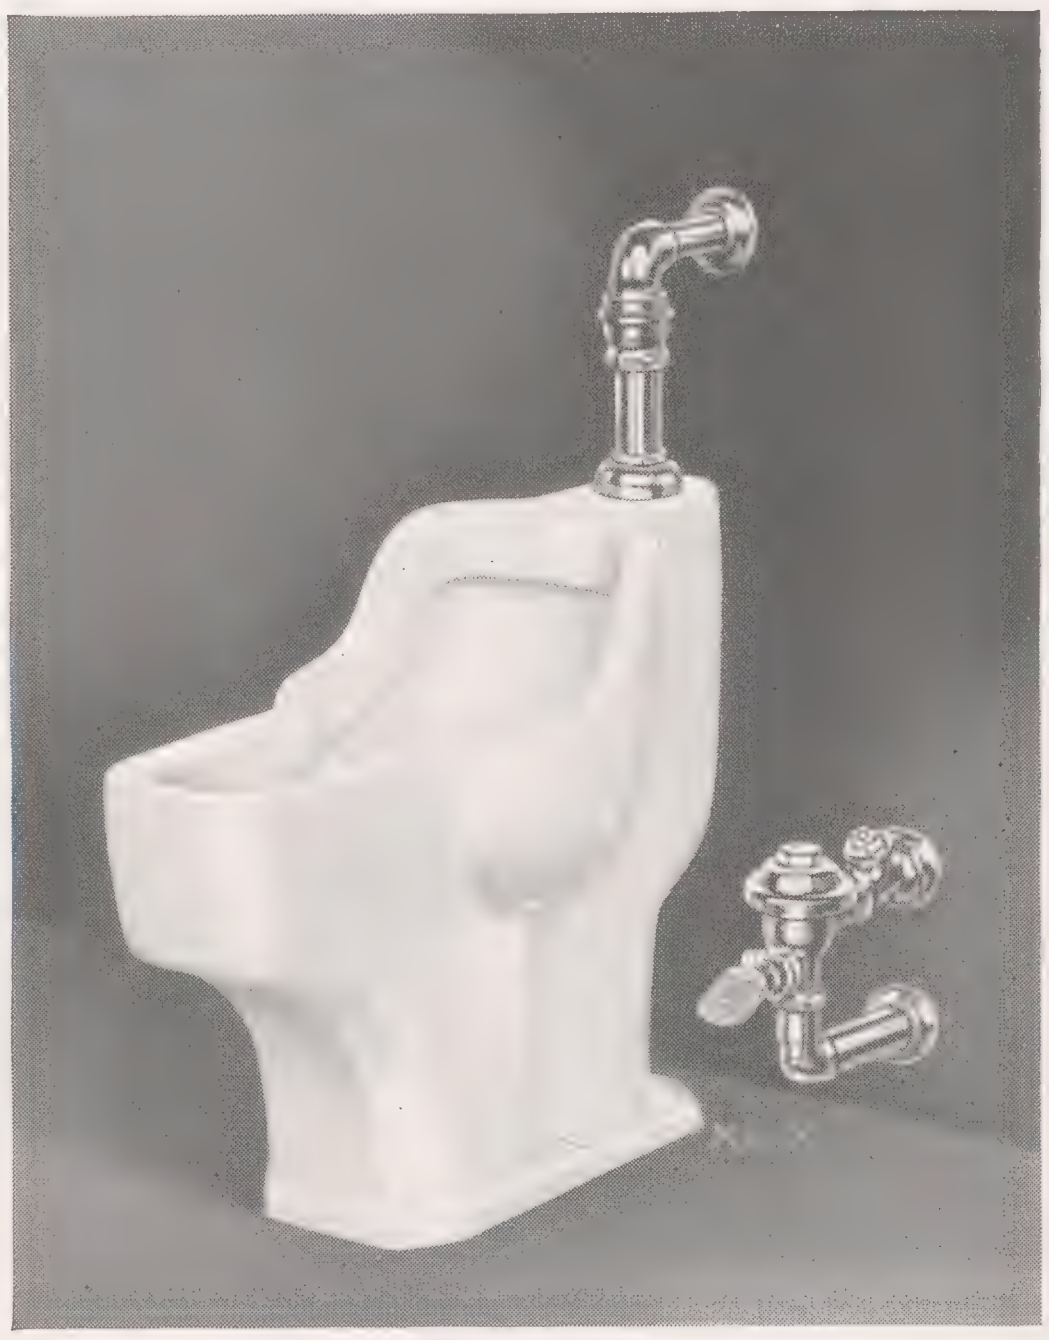

HYGIA K-5070

Plate No.	K-5068	K-5070
Type	Siphon jet	Siphon jet
Roughing-in	12″	12″
Urinal No.	—	**K-5072-T** 1½″ top spud
⅜″ Angle Supply	**K-8336** with stop	
Flush Valve with Vacuum Breaker	—	**No. 353YV** Sloan Royal pedal operated, or **M-579VB** Watrous Majestic pedal operated
Accessories	Bolt caps (4) Floor screws (2)	Bolt caps (4) Floor screws (2)

K-5068 Hygia urinal is equipped with **K-9252** anti-siphon float valve.

A New Plumbing Fixture for Enclosed Installation in Women's Washrooms.

Easy-to-Clean, Vitreous China.

Large Water Area—Siphon Jet Flush—Large Passageway.

For Department Stores, Factories, Hospitals, Offices, Restaurants, Schools, Service Stations, Theatres, All Public Buildings.

Cross-section of Hygia Urinal

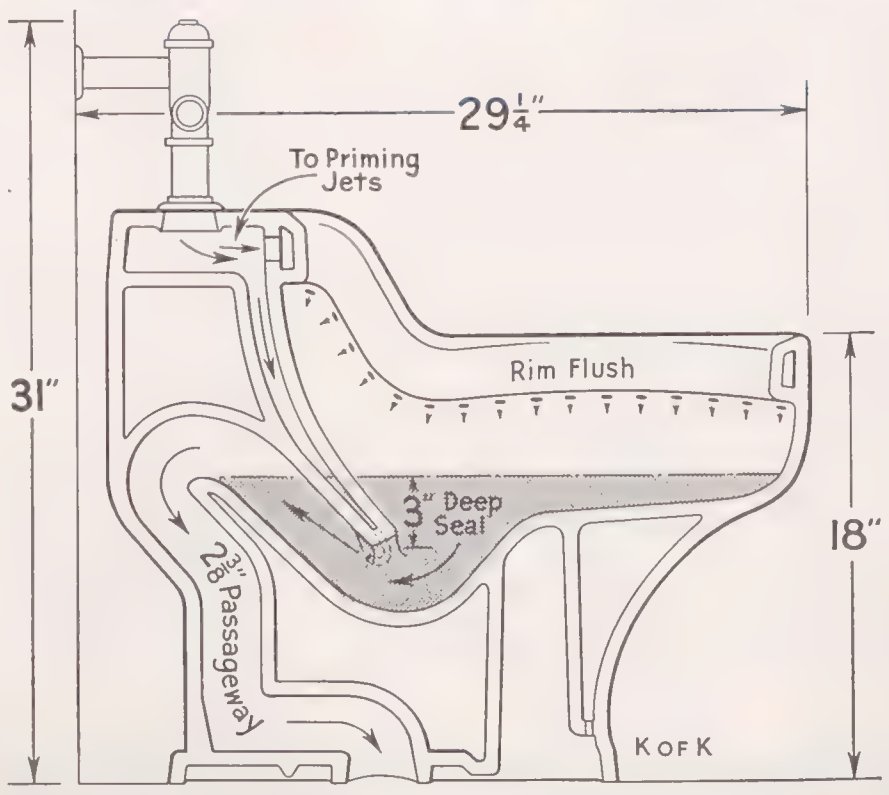

HYGIA VITREOUS CHINA WALL HANGING SIPHON JET URINALS

For Women's Washrooms

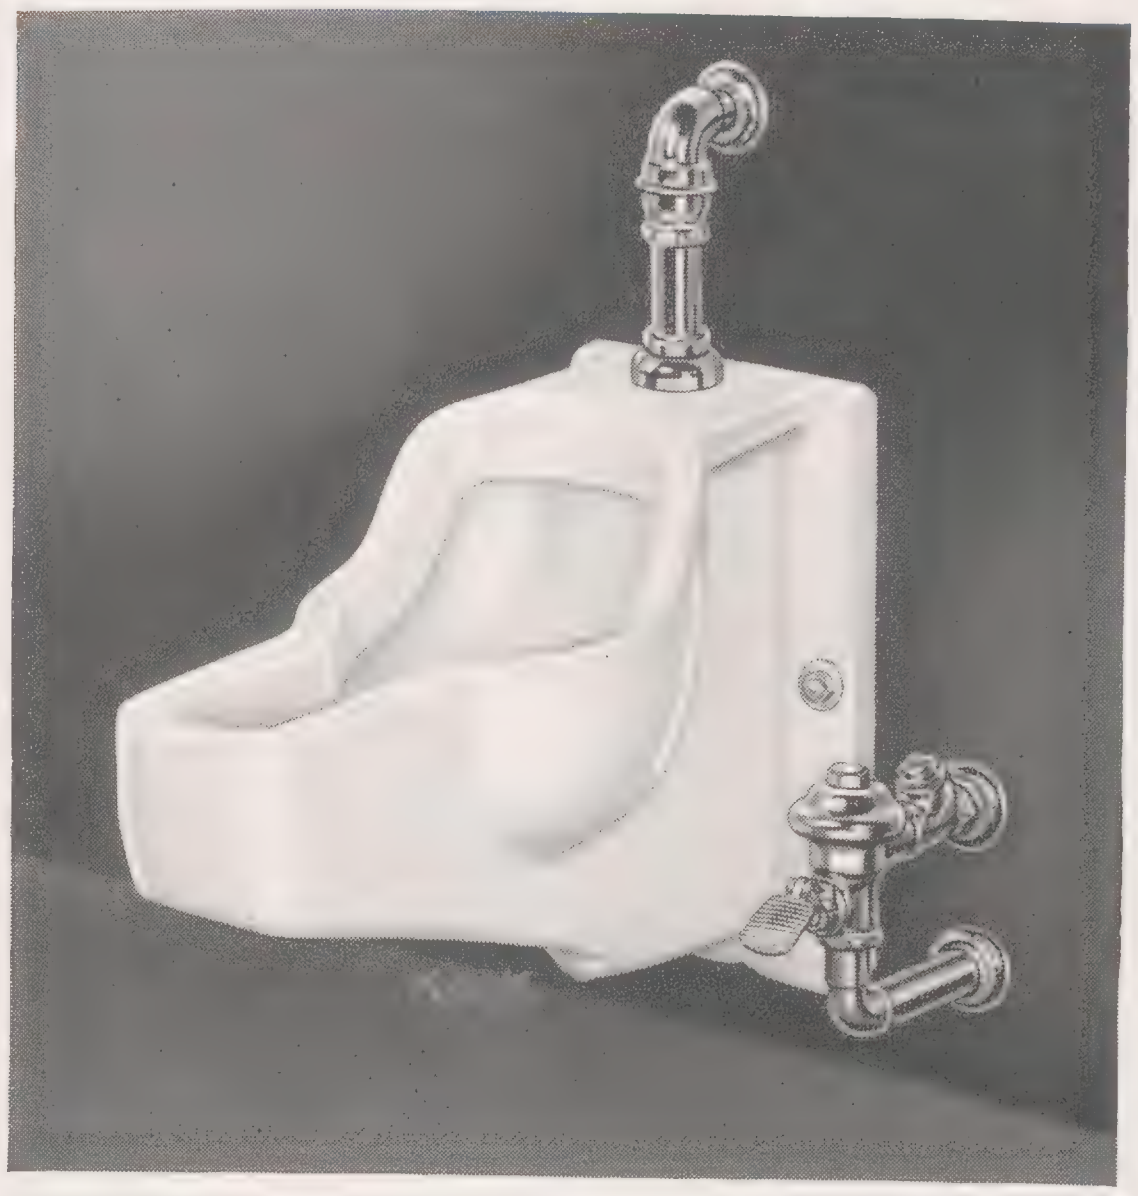

HYGIA K-5075

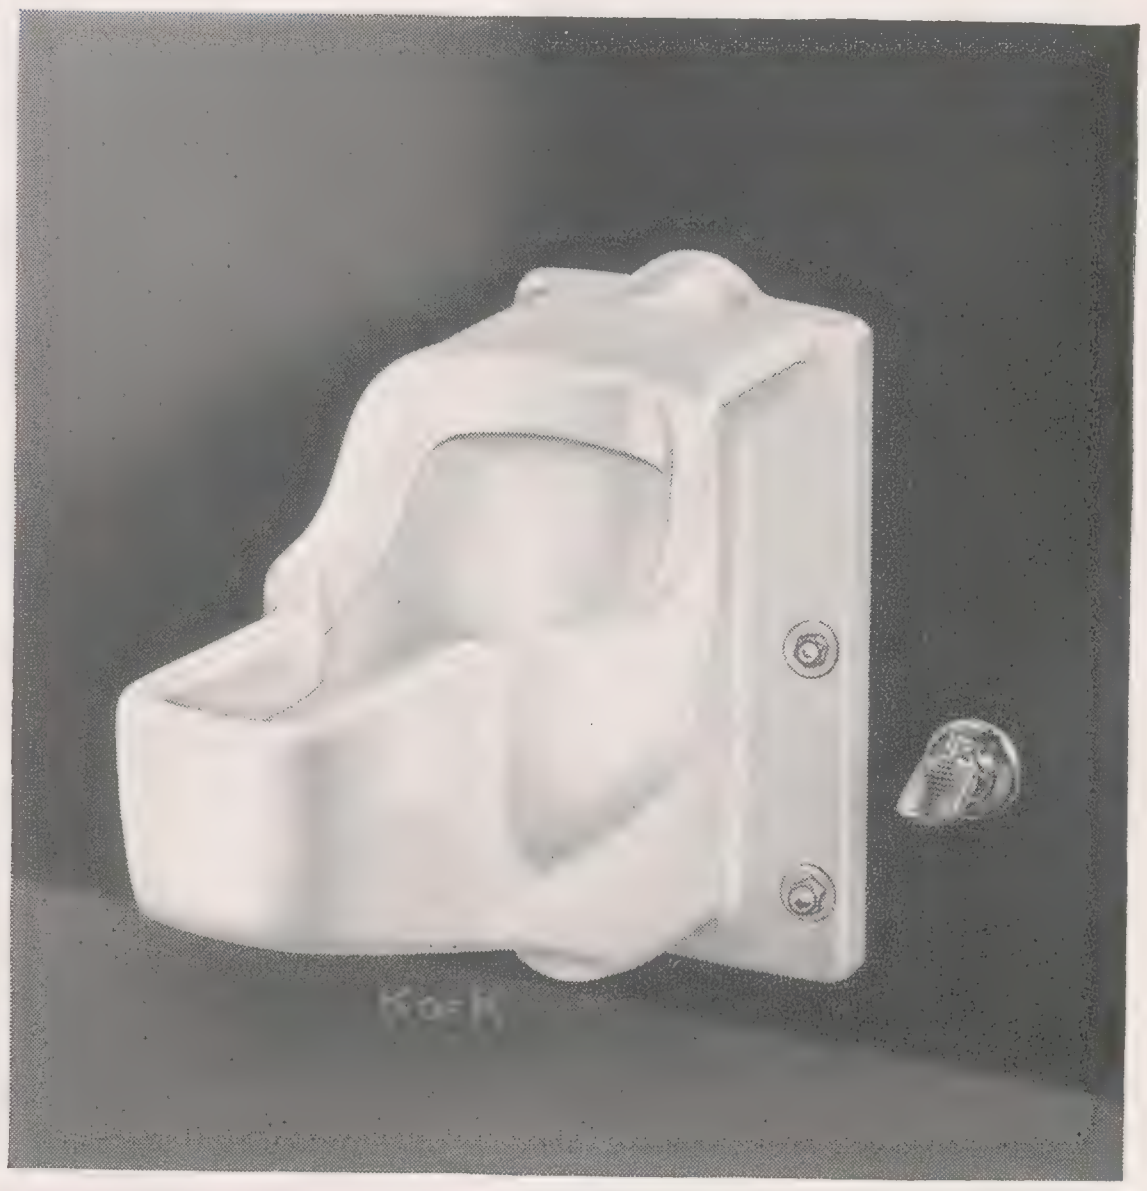

HYGIA K-5077

Plate No.	K-5075	K-5077
Type	Siphon jet	Siphon jet
Urinal No.	**K-5078-T** 1½″ top spud	**K-5078-R** 1½″ rear spud
Support	**Z-1205-SHR4** Zurn chair carrier right hand horizontal wall fitting with hub connection	**Z-1205-SHR4** Zurn chair carrier right hand horizontal wall fitting with hub connection
Flush Valve with Vacuum Breaker	**No. 353YV** Sloan Royal pedal operated, or **M-579VB** Watrous Majestic pedal operated	**No. 354YV** Sloan Royal concealed pedal operated, or **M-594-VBSS** Watrous Majestic concealed pedal operated

Adjustable outlet connection couplings regularly furnished to set face plate 7¼″ minimum distance to finished wall.

Cross-section of Hygia Urinal

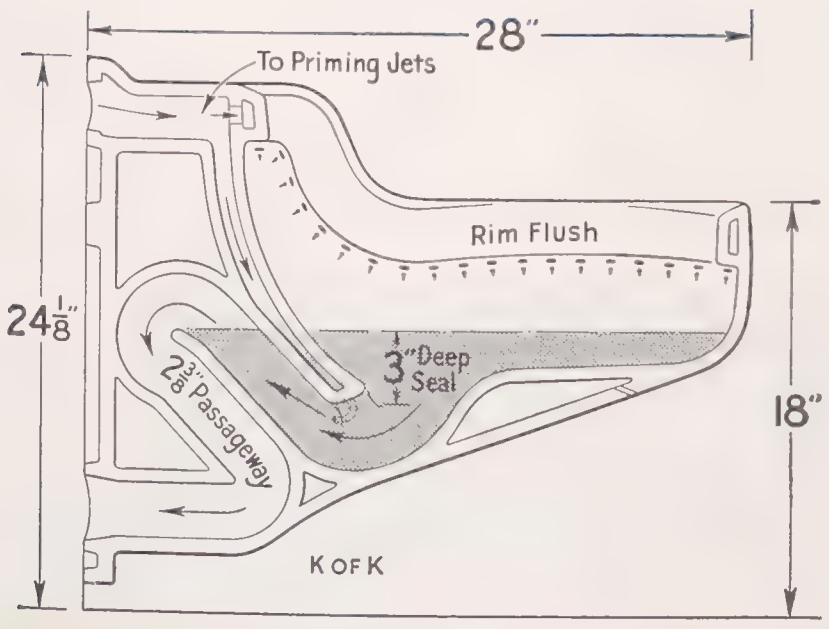

Chair Carrier for Hygia Urinal

Z-1205-SHR4 right hand type horizontal wall fitting with hub connection.

For hub connection at left, specify **Z-1205-SHL4.**



Z-1205-SHR4

VITREOUS CHINA **Service Sinks** WITH AND WITHOUT BACK

For Use in Hospitals, Clinics, Office Buildings, Hotels, and Public Buildings

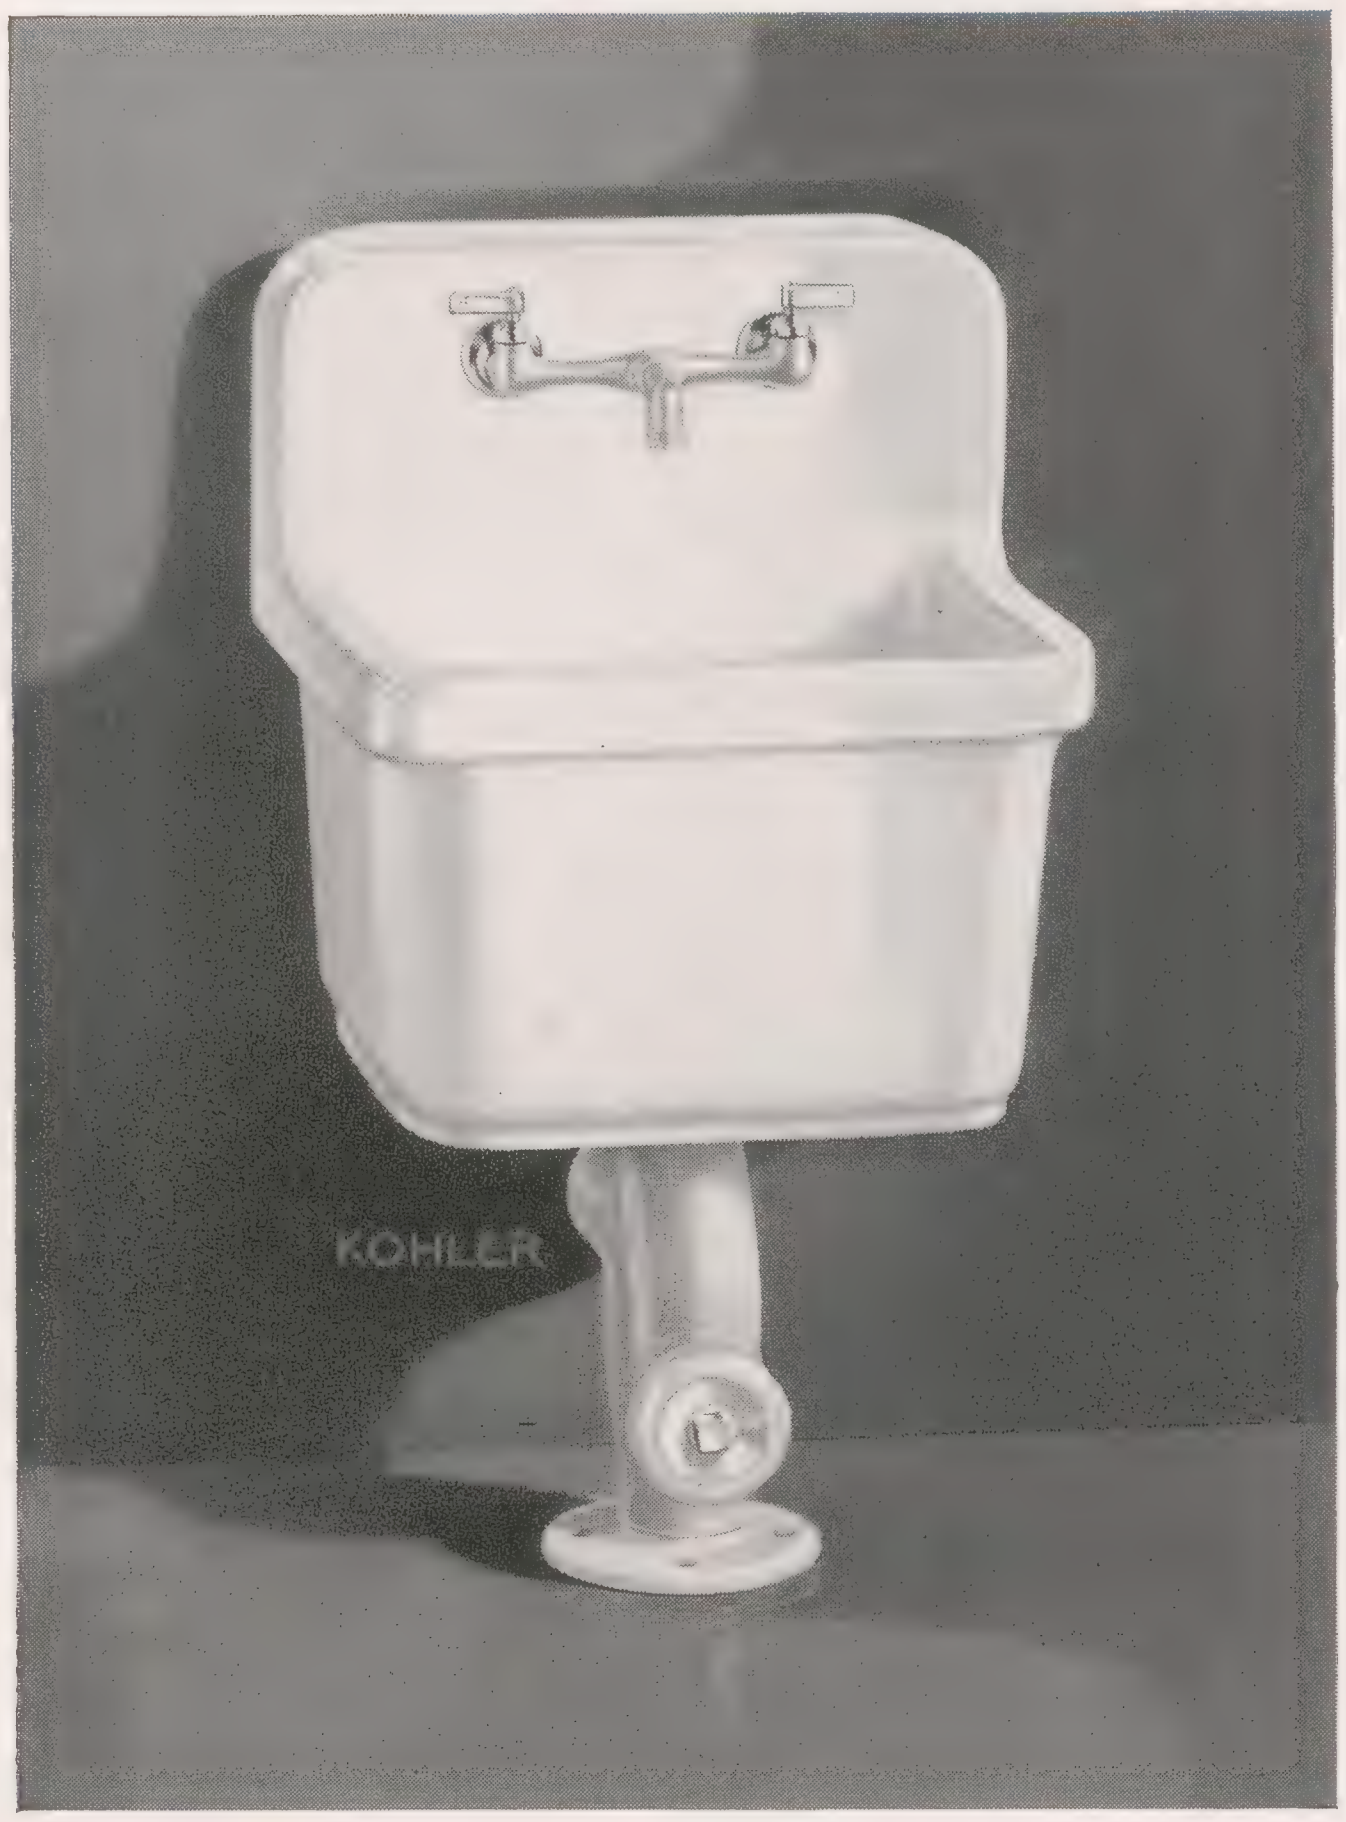

SUDBURY K-5115-A Sizes 20x18", 22x20"

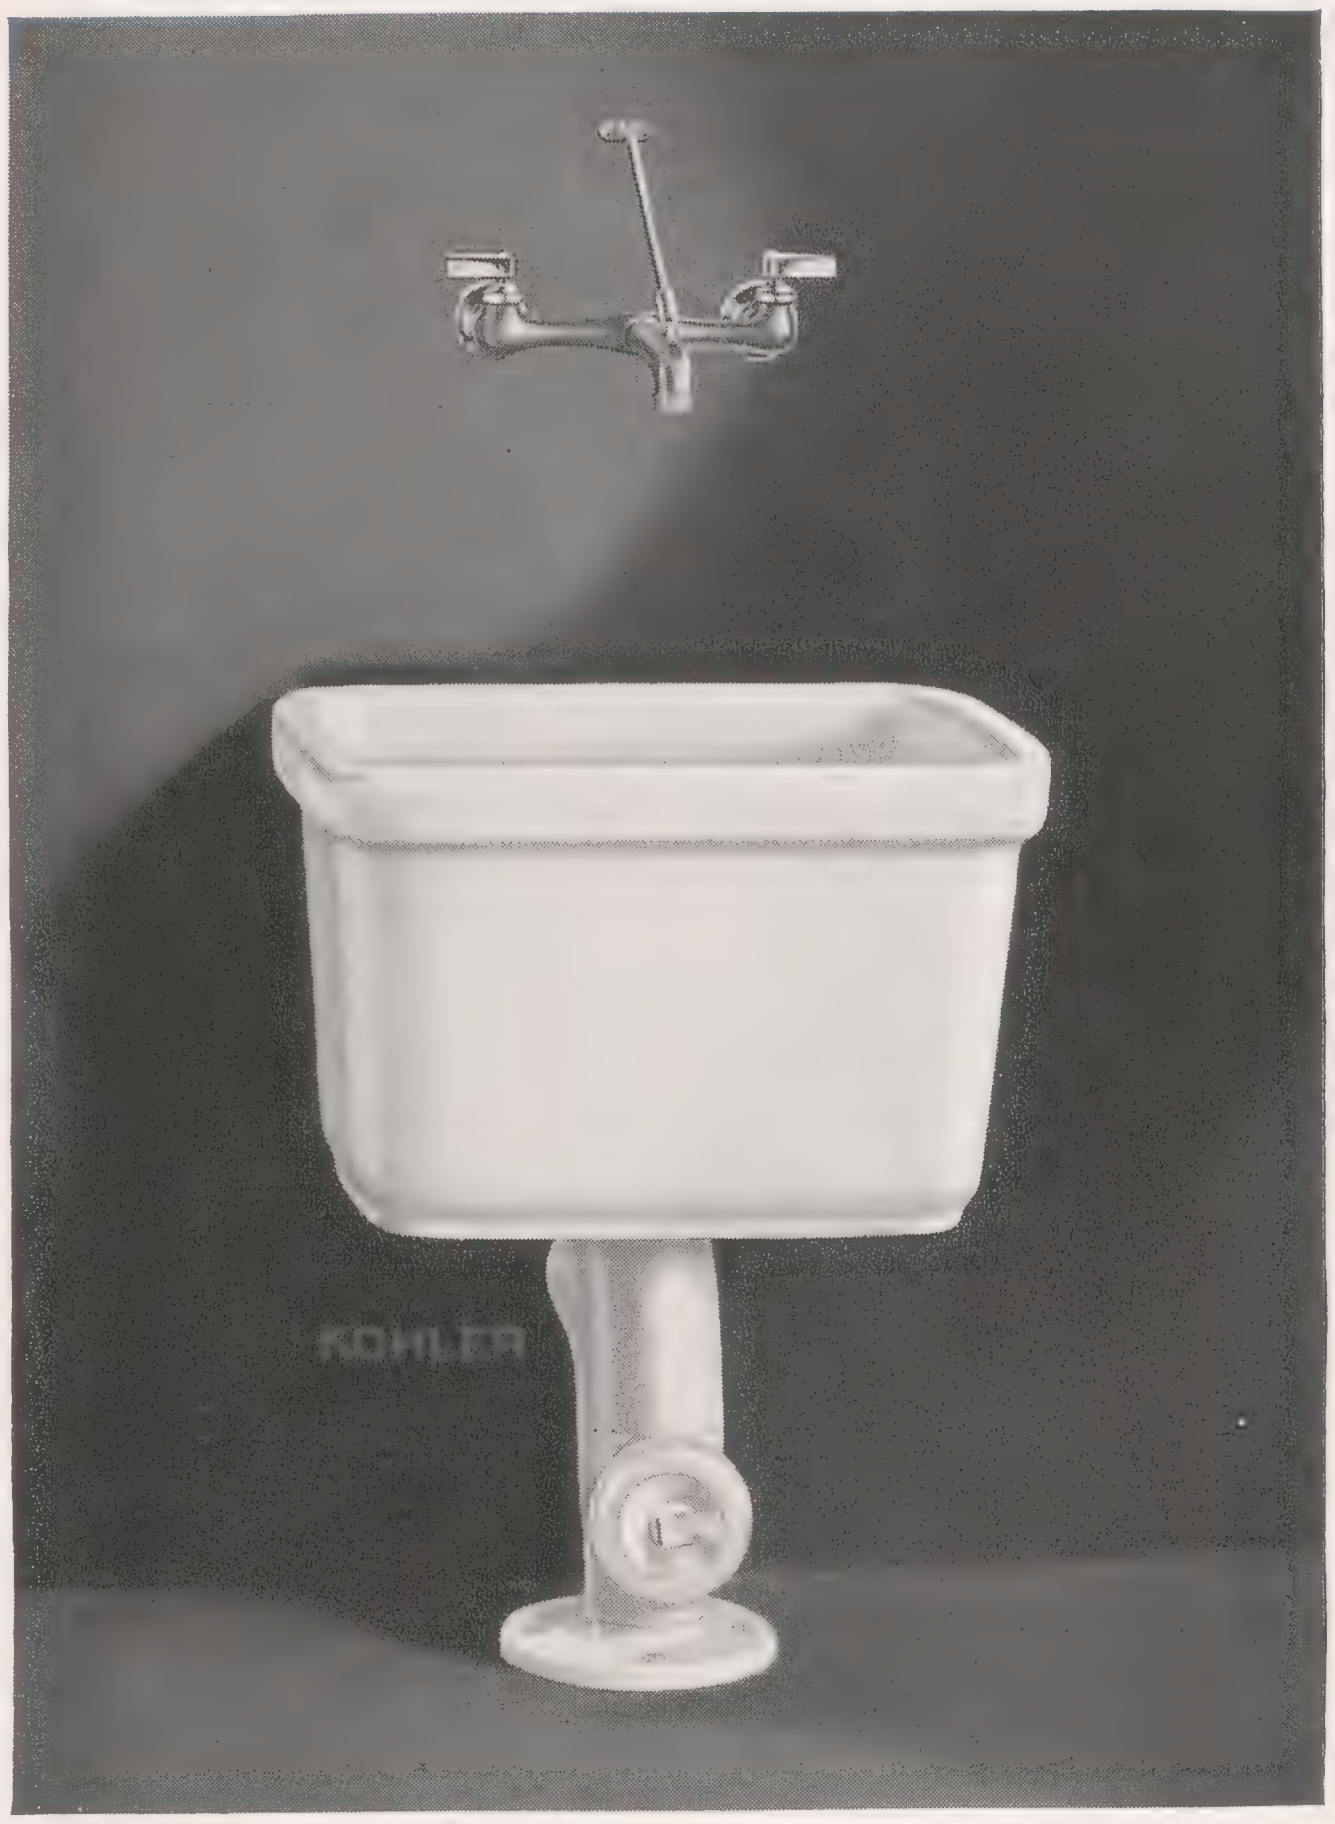

SECOR K-5121-A Size 22x18"

Fixture Complete	**K-5115-A**	**K-5121-A**
Fixture Less Trap Standard and Fittings	**K-5115**	**K-5121**
Supply Fitting	**K-8912** with threaded spout	**K-8910** with pail hook, wall brace and threaded spout
Trap Standard	**K-5239** 3" enameled inside with strainer	**K-5239** 3" enameled inside with strainer
Support	Wall hangers	

SIZES	20x18"	22x20"
DEPTH	12"	12⅜"
BACK	10"	10"
FLOOR TO RIM	28"	28"

SIZE	22x18"
DEPTH	12"
FLOOR TO RIM	29"

Metal Rim Guard

For **K-5115** and **K-5121** vitreous china service sinks.

K-8934



VITREOUS CHINA

Flushing Rim Service Sinks

For Hospitals and Clinics

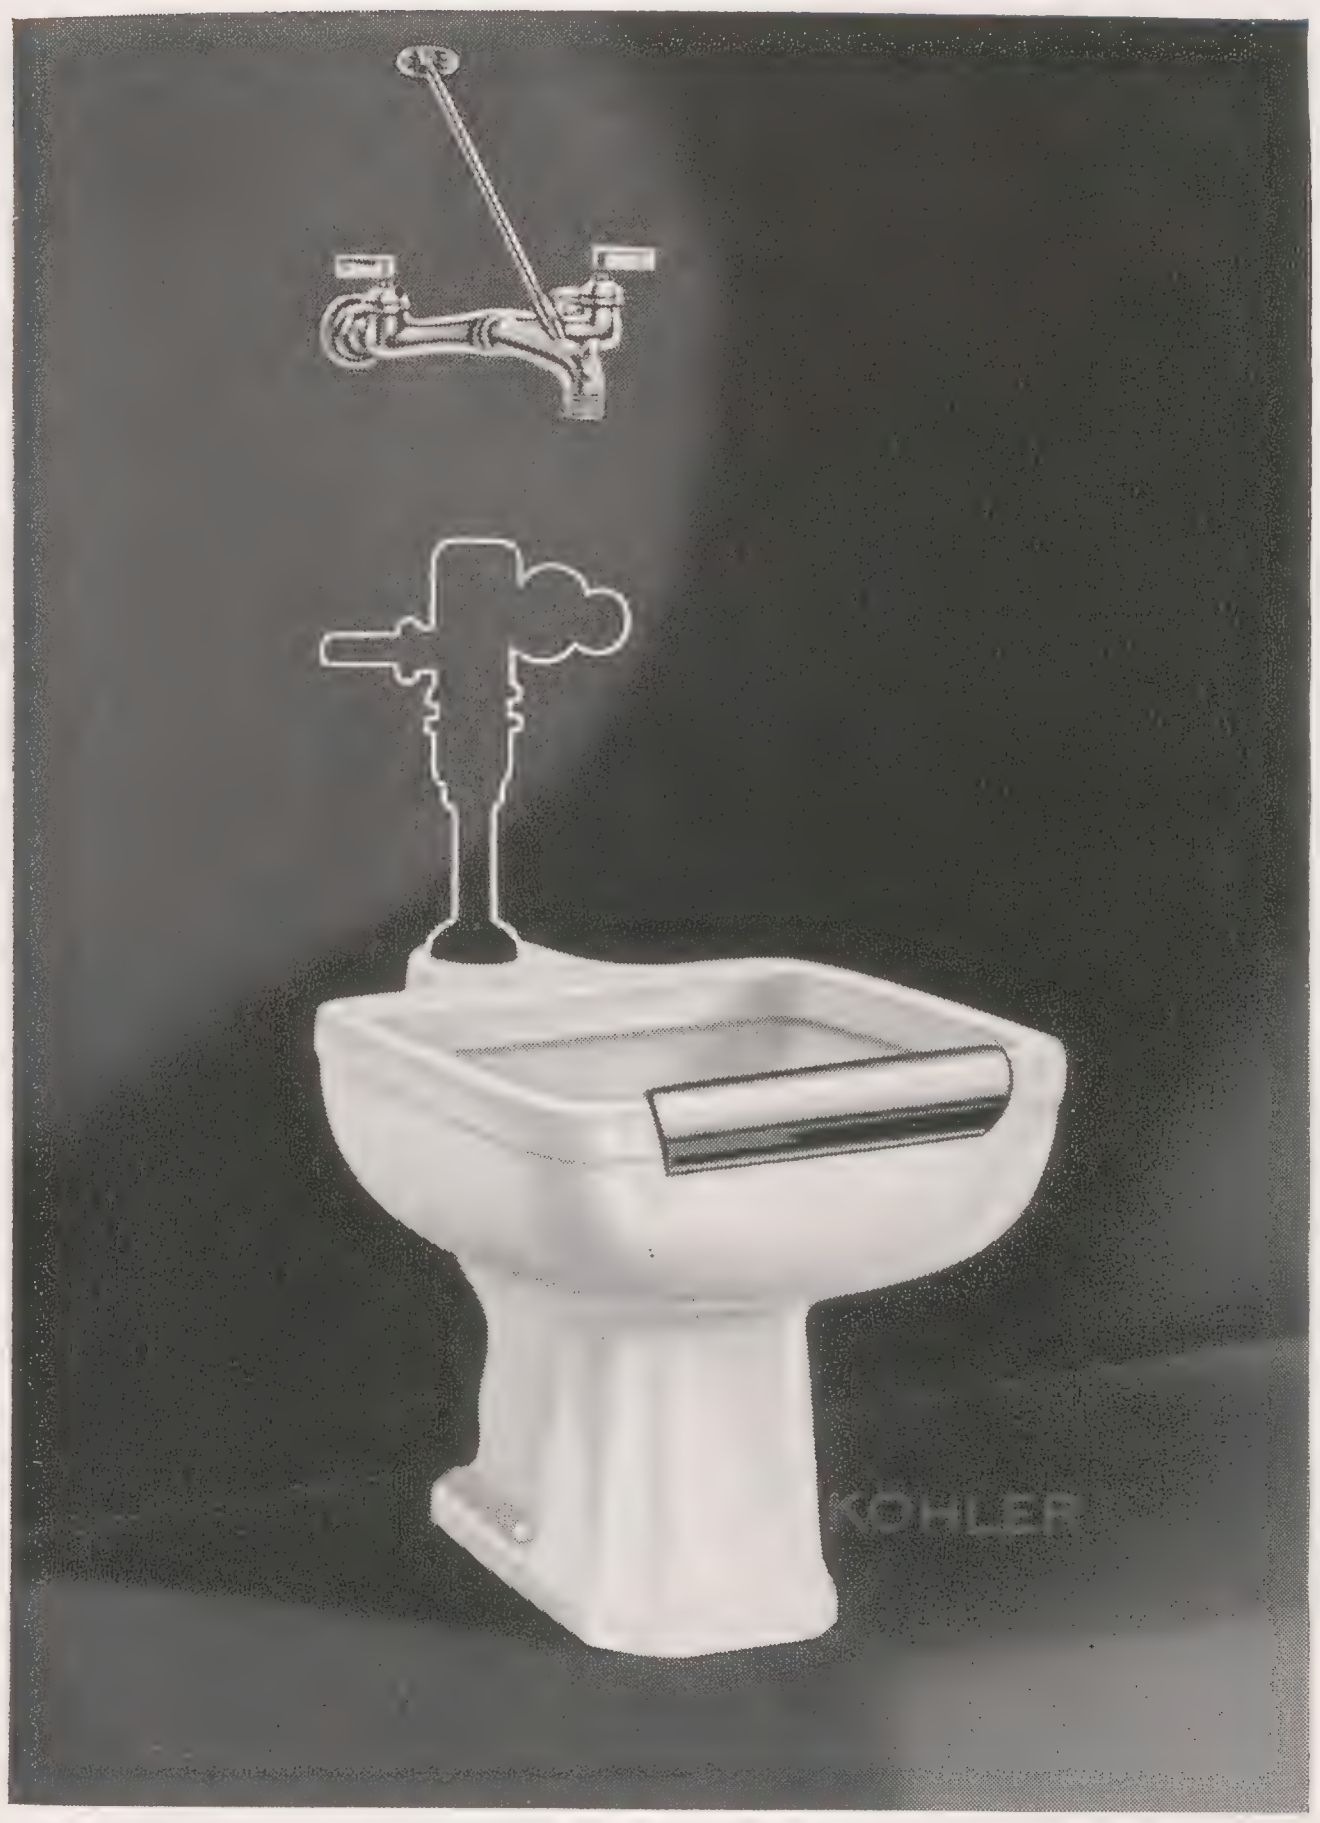

TYRRELL K-5160-A Size 20x20″

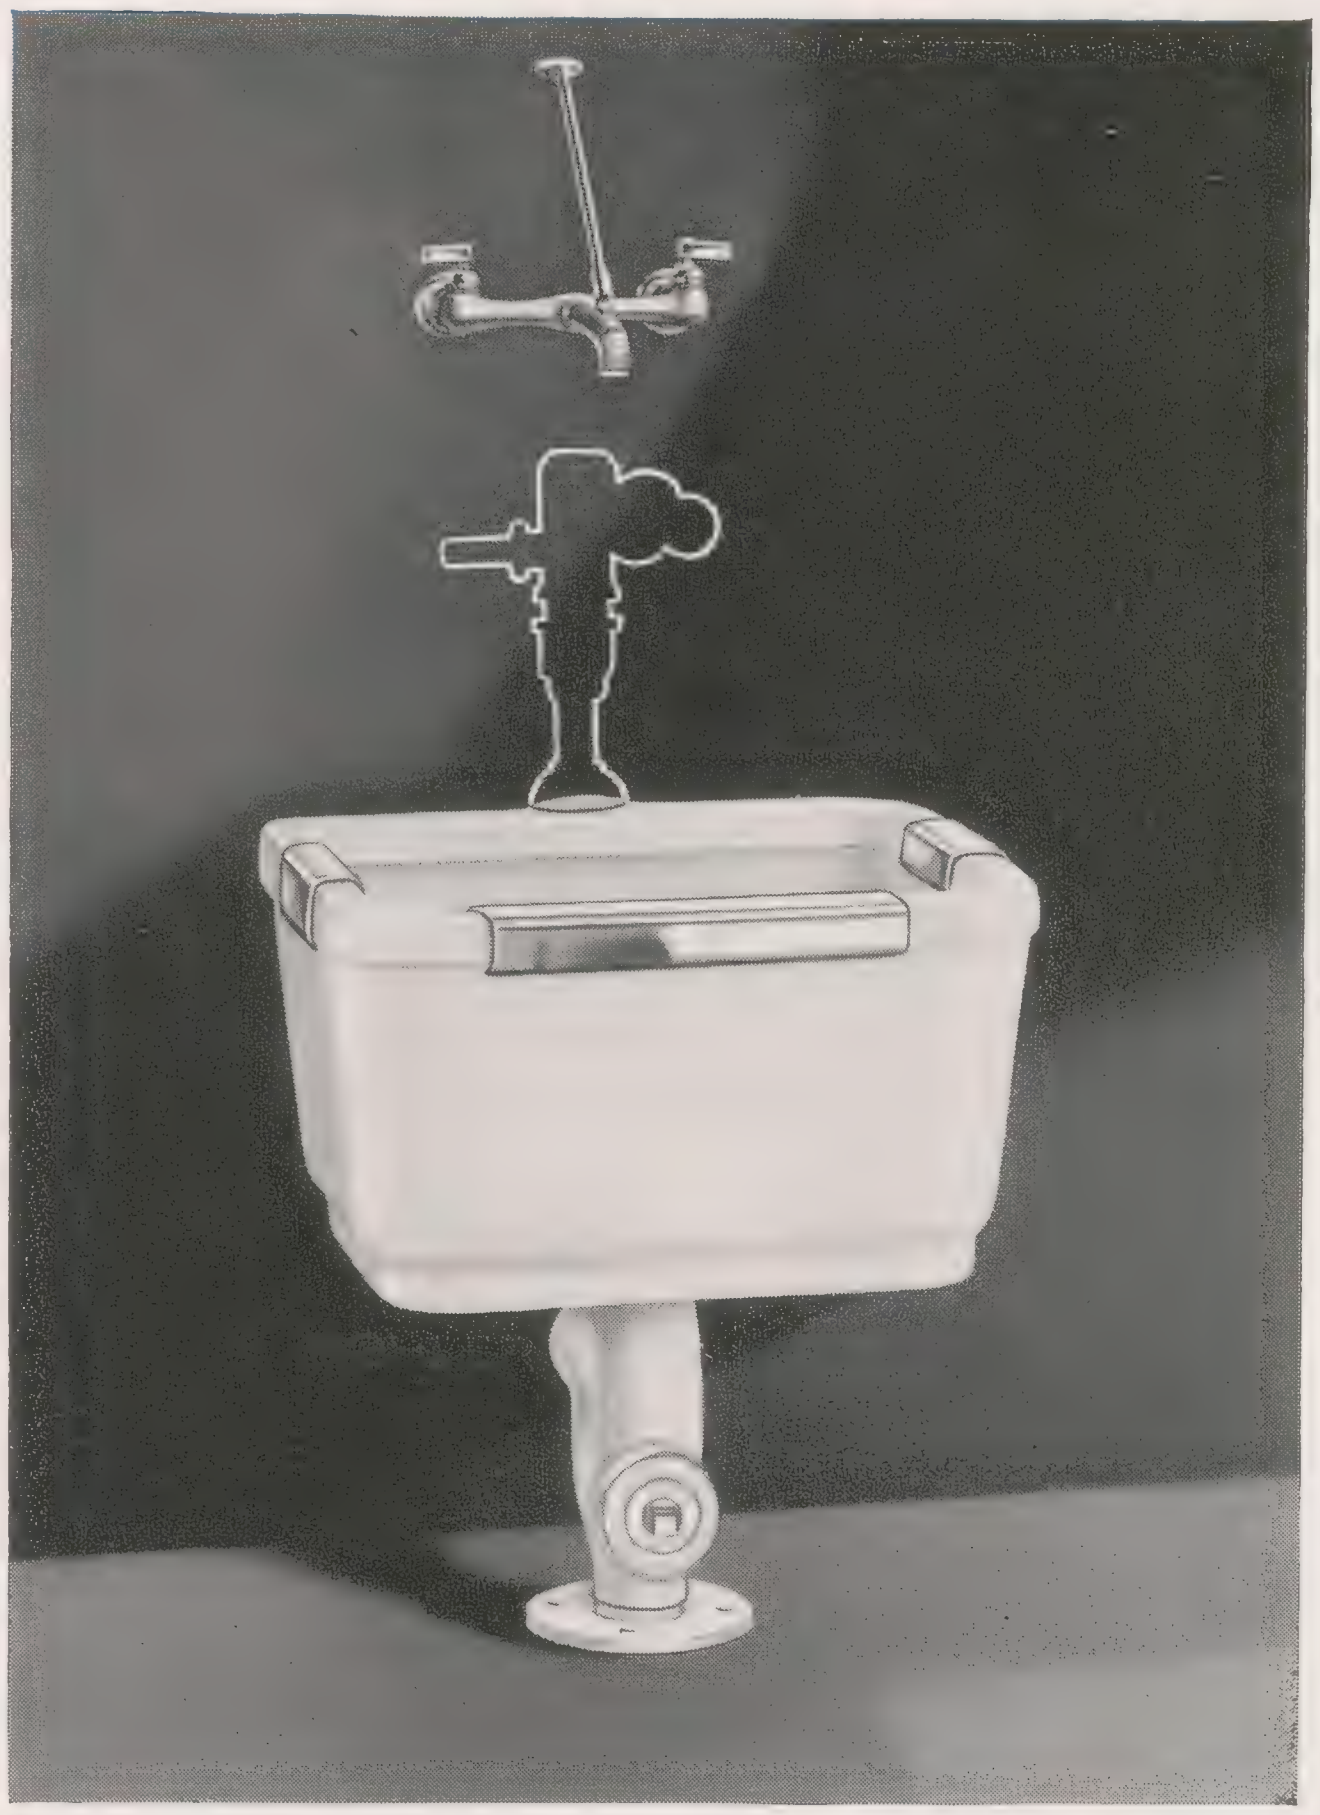

THURMONT K-5170-A Size 24x20″

Fixture Complete	**K-5160-A**
Fixture Less Fittings, and Rim Guard	**K-5160**
Supply Fitting	**K-8917** with wall brace and with threaded spout
Rim Guard	**K-8935** 11″ in length
Accessories	Bolt caps (4) Floor bolts (2) Floor screws (2)
Flush Valves:	
Kohler	**K-9420** Metro
Sloan	**110-FYV** Royal
Watrous	**M-532-VB** Majestic
Support	Floor

Fixture Complete	**K-5170-A**
Fixture Less Fittings, Trap Standard and Rim Guards	**K-5170**
Supply Fitting	**K-8910** with wall brace and with threaded spout
Trap Standard	**K-5239** 3″ enameled inside with strainer
Rim Guard	Three **K-8935** 11″ in length
Flush Valves:	
Kohler	**K-9420-V** Metro
Sloan	**110-FYV** Royal
Watrous	**M-532-VB** Majestic
Support	**K-2072** wall brackets **K-5239** 3″ trap standard

SIZE	20x20″
HEIGHT	20″
FLOOR TO RIM	20″

SIZE	24x20″
DEPTH	13″
FLOOR TO RIM	29″

Metal Rim Guard



For **K-5160** and **K-5170** vitreous china flushing rim service sinks.

K-8935

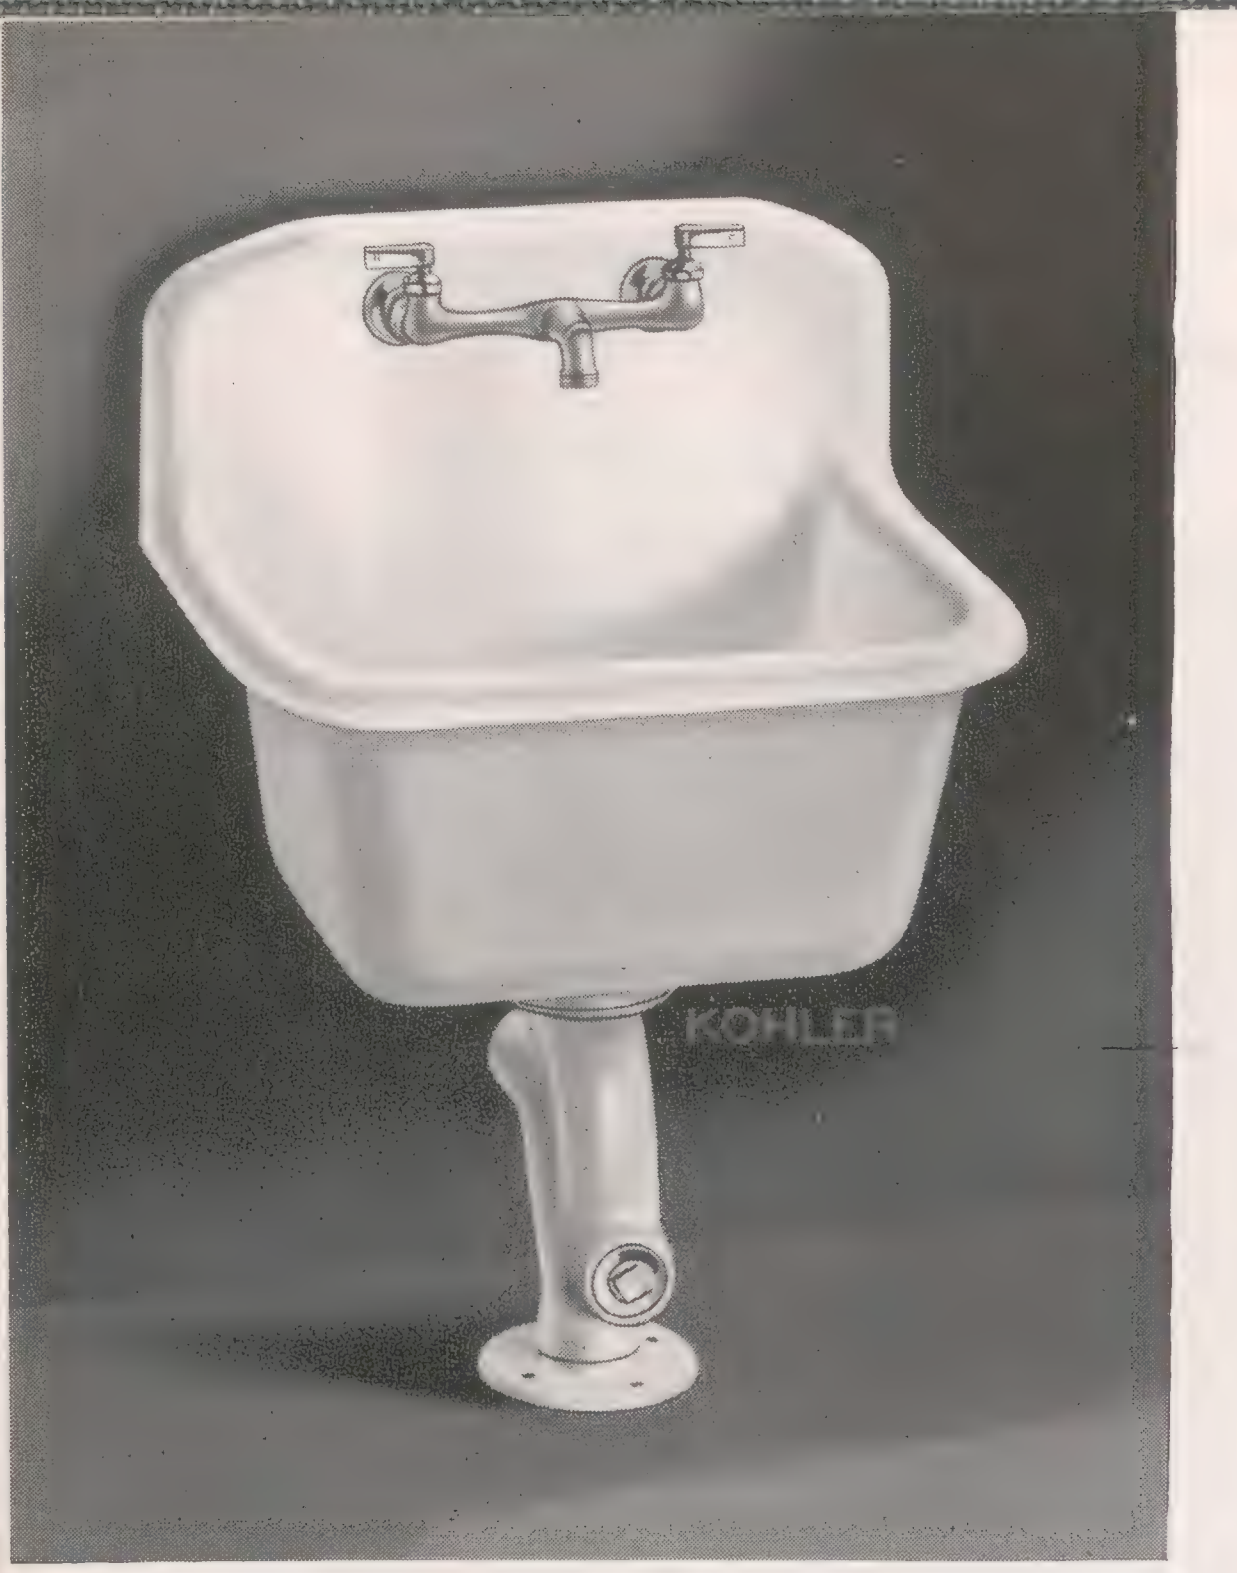

BANNON K-5200-A

BANNON ACID-RESISTING ENAMELED CAST IRON SERVICE SINK

Fixture	K-5200-A (Illustrated)	K-5200-B
Service Sink With Hanger	K-5200	K-5200
Supply Fitting	**K-8912** with threaded spout	**K-8912** with threaded spout
Trap Standard	**K-5239** 3″ enameled inside with strainer	—
Strainer	—	**K-9144** with open grate and 1½″ tailpiece
Support	Wall hangers	Wall hangers

SIZES	22x18″	24x20″
DEPTH	12″	12″
BACK	10″	10″
FLOOR TO RIM	27″	27″



K-8933 C.P. rim guard for K-5200 service sinks.

TRAP STANDARDS FOR VITREOUS CHINA AND ENAMELED CAST IRON SERVICE SINKS



K-5235 3″ size



K-5239 3″ and 2″ sizes

K-5235	Trap standard for 3″ lead pipe connection, with cleanout plug, strainer and collar.
K-5237	Same as **K-5235** except with spigot end for 3″ soil pipe.
K-5239	Adjustable trap standard for 3″ iron pipe connection with cleanout plug, strainer and collar.
	K-5239 available for 2″ I.P. connection.

BALFRON ACID-RESISTING ENAMELED CAST IRON SERVICE SUMP

Fixture With Strainer	K-5245-A
Service Sump	K-5245
Strainer	**K-8820** with 1½″ tailpiece

SIZE 16x16x10″

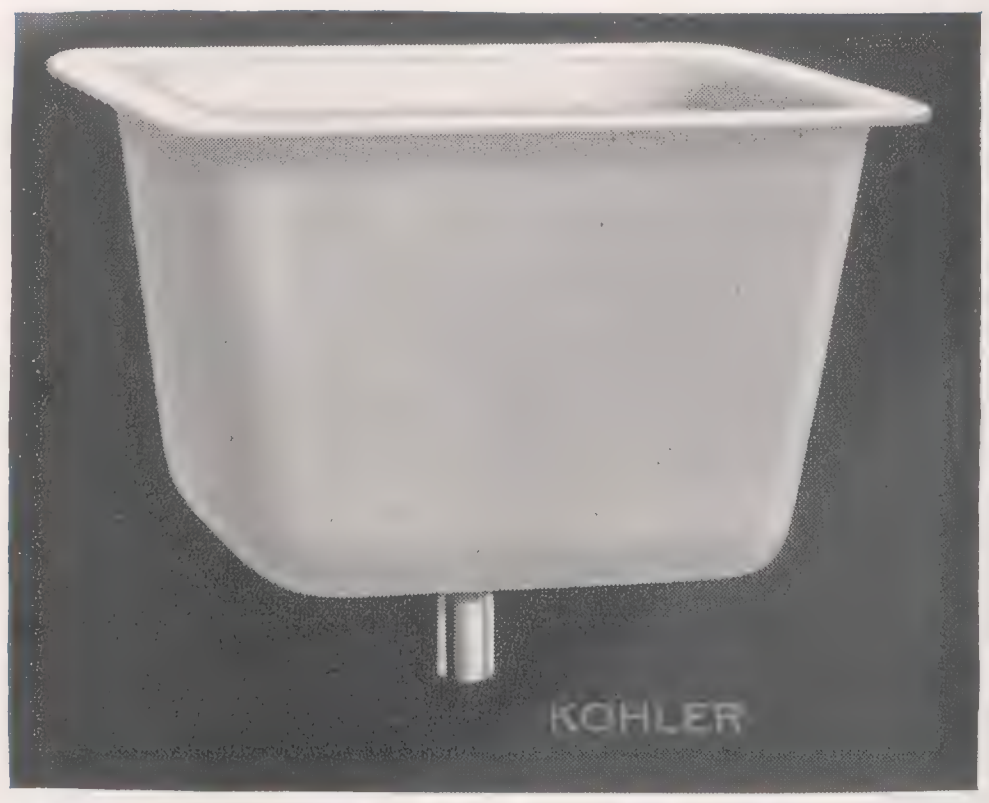

BALFRON K-5245-A

en grate
ece

200

nection,
ar.

end for

pe con-
d collar.

KOHLER DRINKING FOUNTAINS

Kohler drinking fountains are made in a range of types to meet the needs of schools, hospitals, public buildings, stores, institutions, factories, offices, parks, playgrounds and stadia. Fountains of vitreous china and enameled cast iron are available.

Each fountain is designed to deliver an angle-stream drinking mound. The valve is self-closing, adjustable for continuous flow if desired. An automatic flow control, standard equipment on all models, maintains an even stream of water regardless of pressure.

The gracefully curved chromium plated guard of the bubbler prevents contact of the mouth with the fountain opening. Furthermore, the opening is located above the highest point of the bowl to eliminate the possibility of back-siphonage. Every Kohler fountain meets local health codes as well as the requirements of the American Public Health Association.

A practical feature of Kohler fountains is the design of the bubbler head to defeat attempts to squirt water by partially covering the opening. When this is done, water is diverted to a lower opening and escapes to the drain.

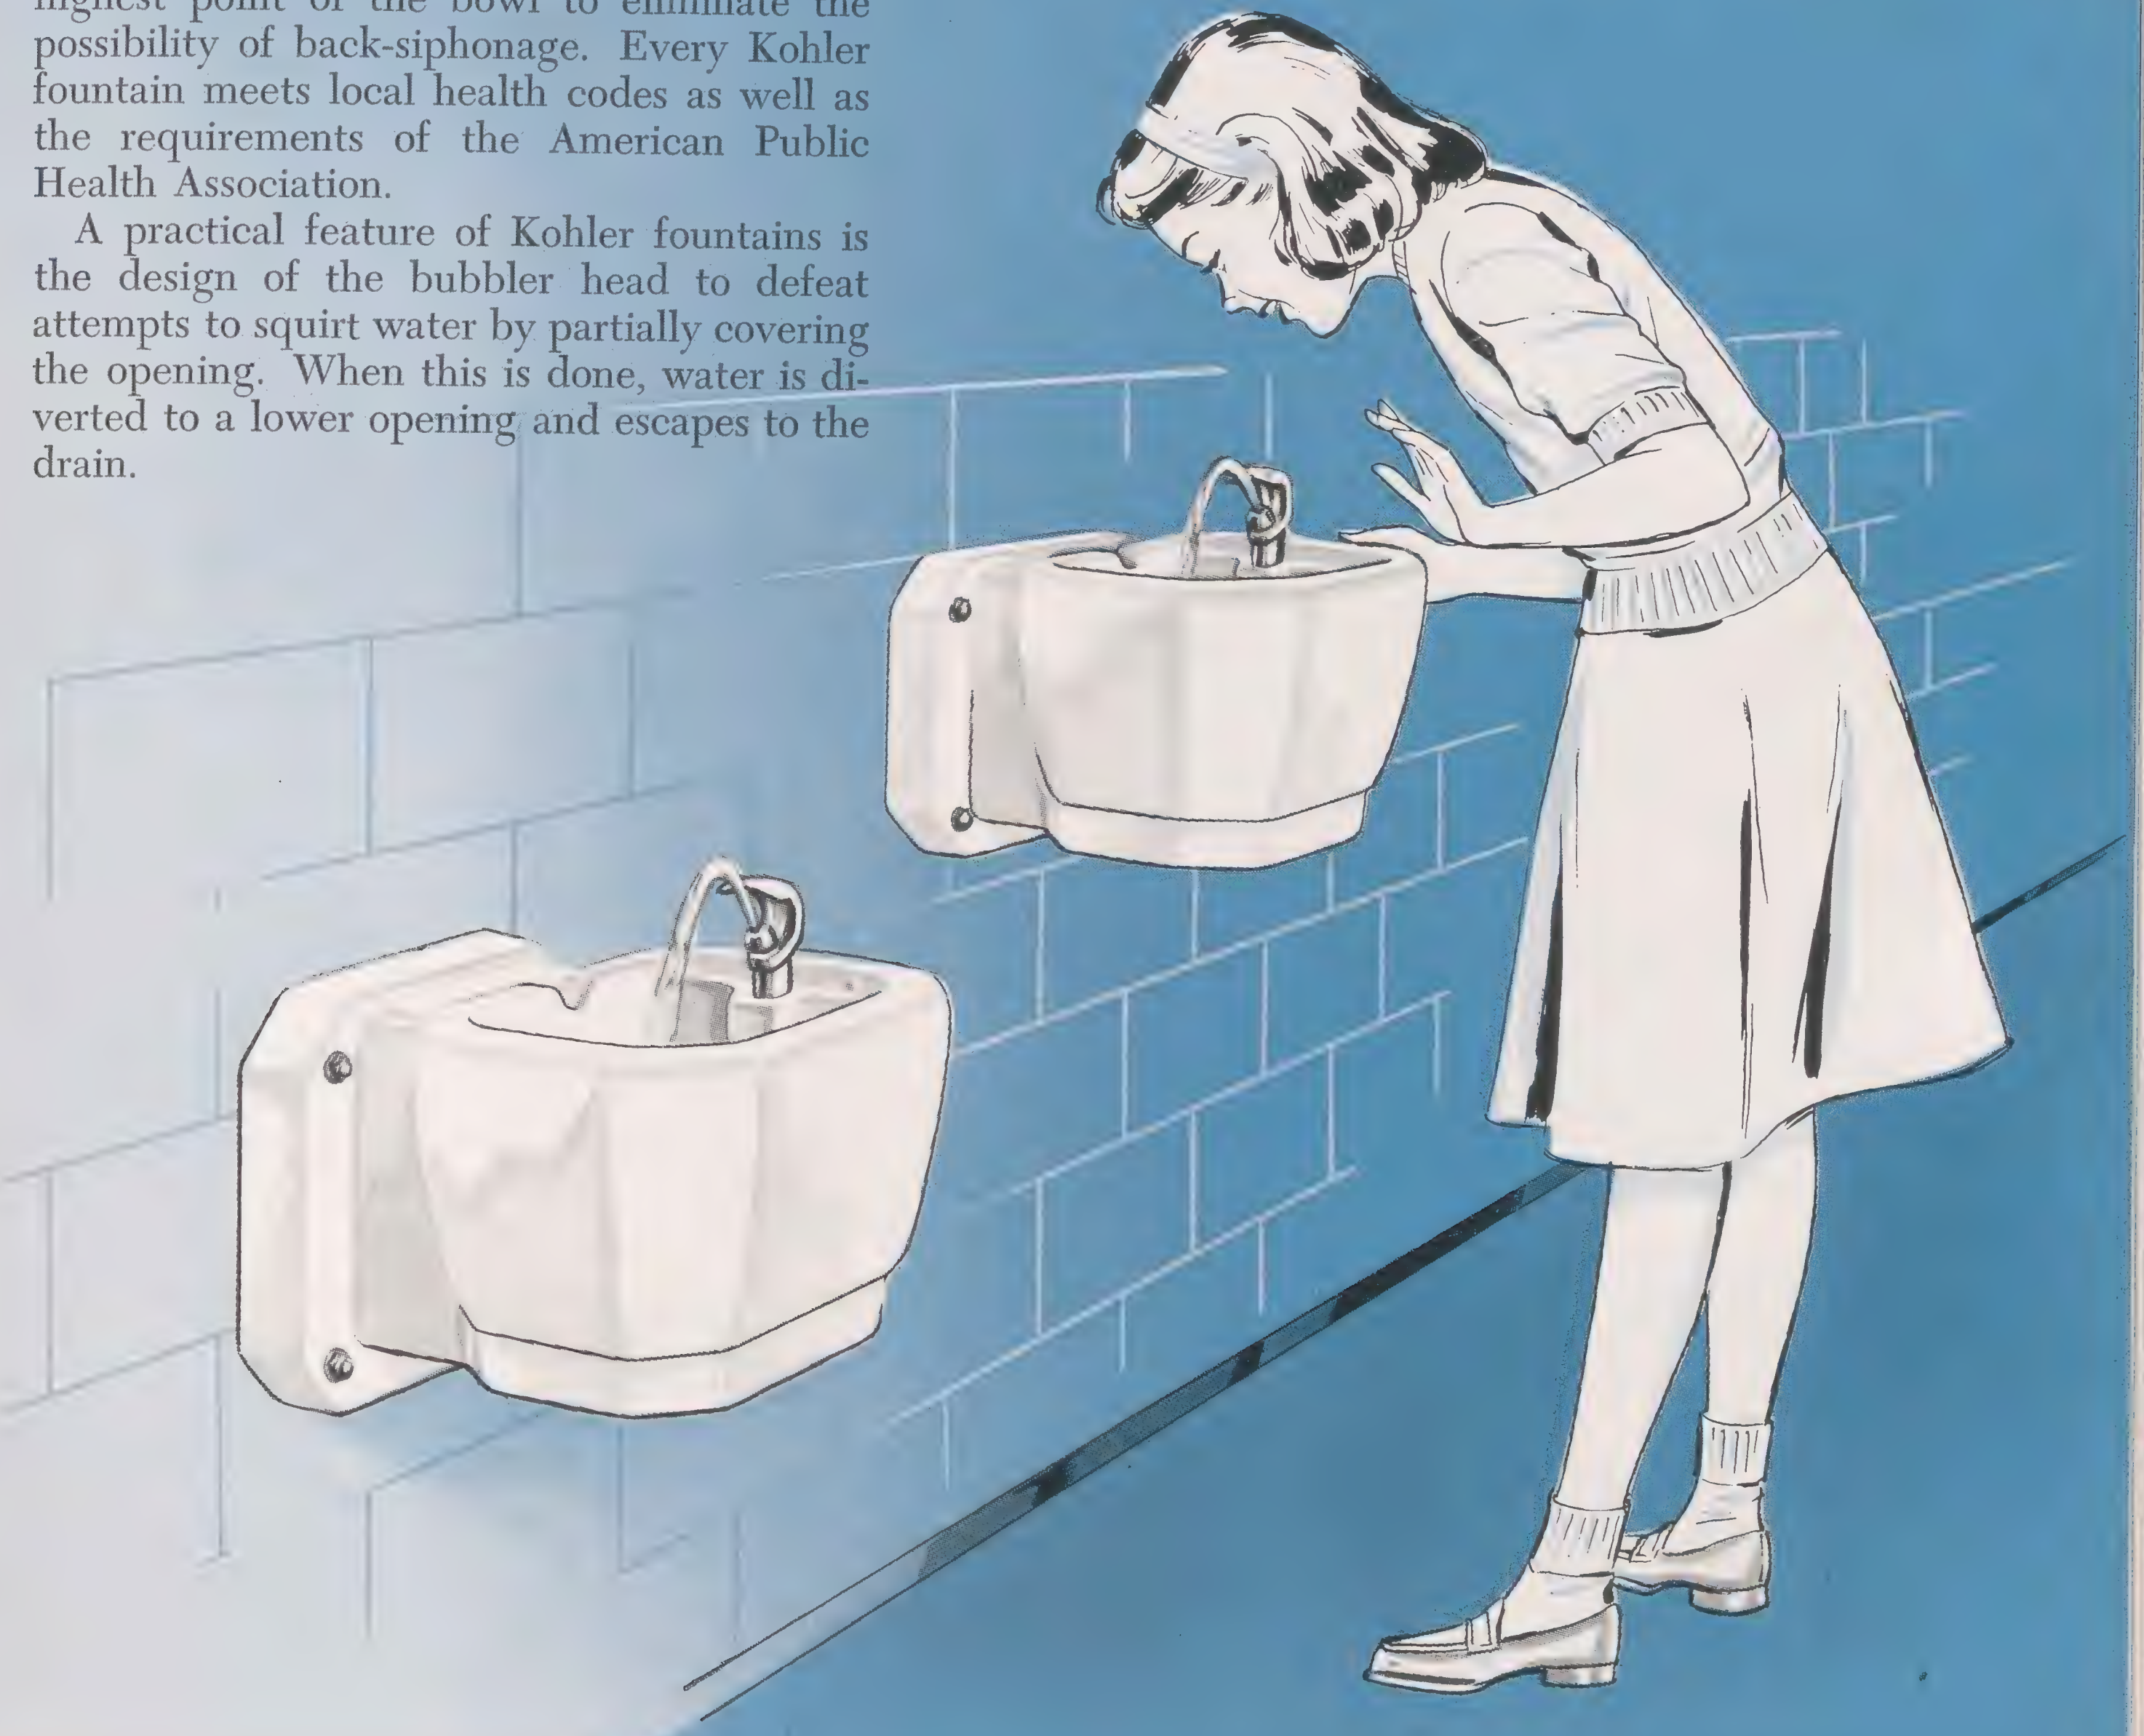

VITREOUS CHINA WALL HANGING

DRINKING FOUNTAINS

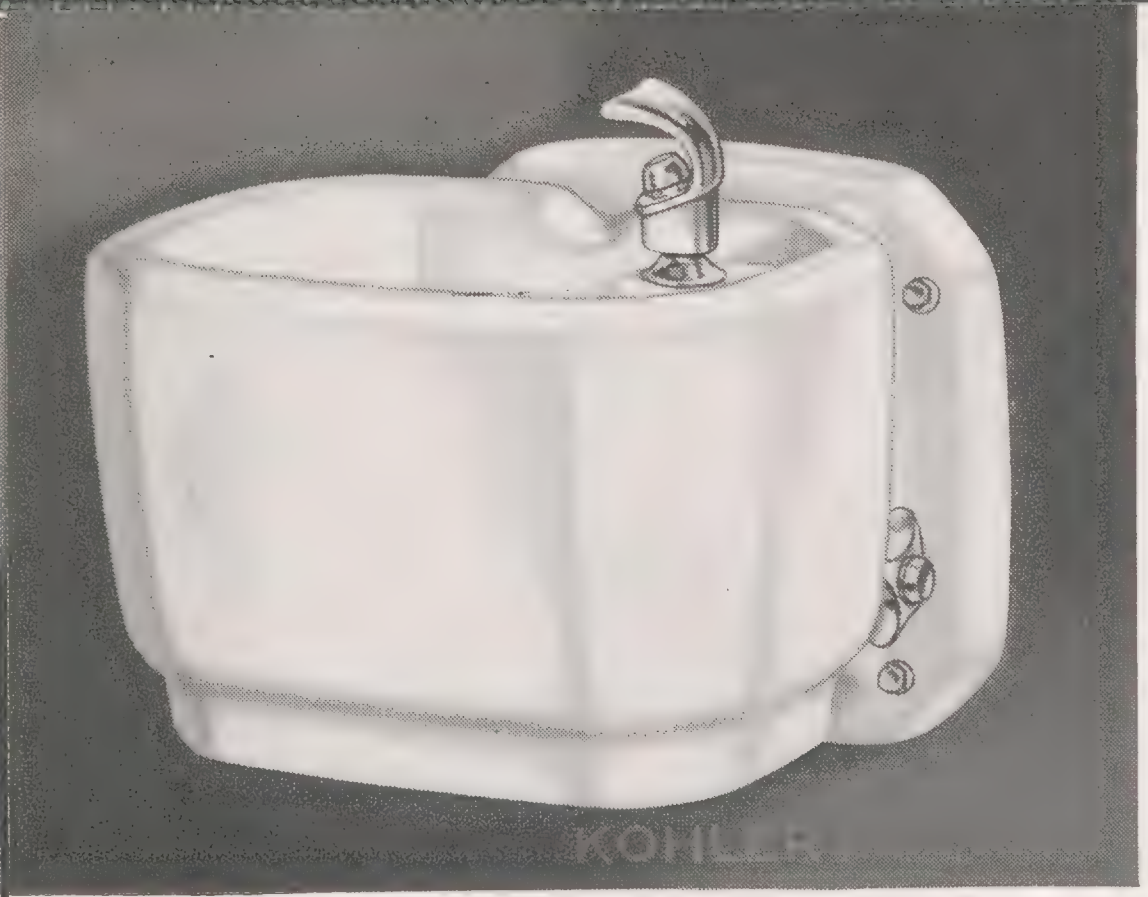

DAYBROOK K-5335-A

Fixture Complete	**K-5335-A**
Supply Fitting	**K-8562** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator, screw driver regulating stop with ⅜" I.P. connection, strainer, trap with cleanout, 1¼" I.P. outlet.
Support	Wall screws (4)

Specify **K-5335-AP** for Daybrook drinking fountain with condensation plate.

SIZE OF BOWL	14x10"
WALL TO FRONT OF BOWL	14"

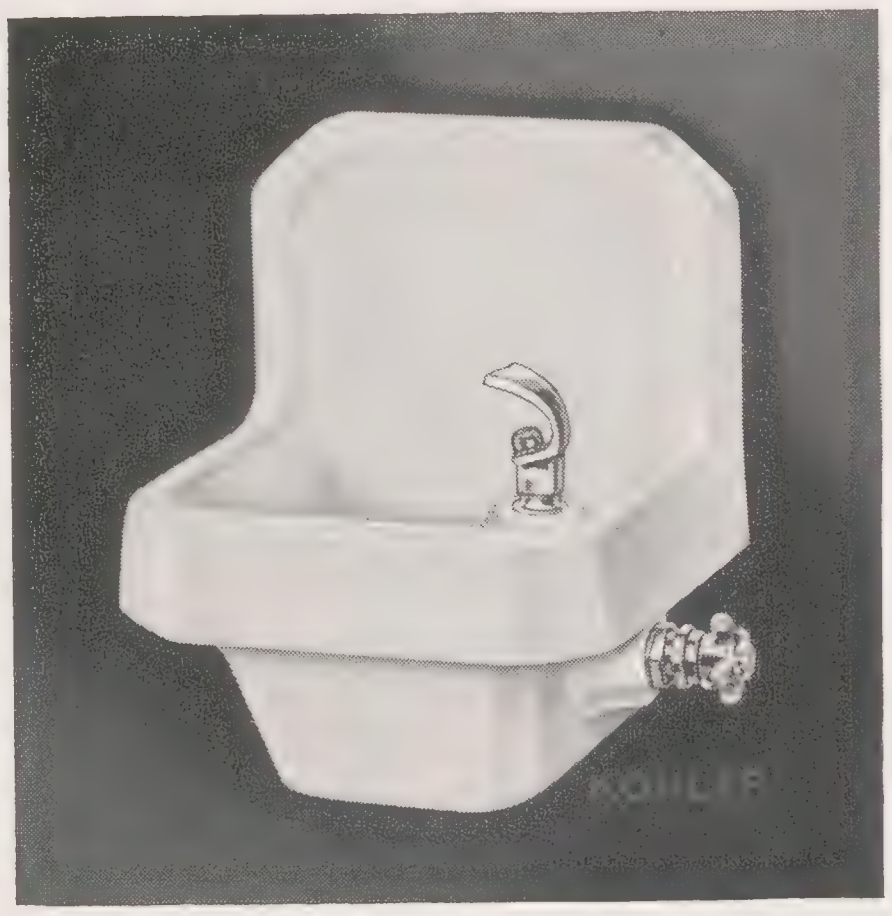

ROCKBROOK K-5340-A

Fixture Complete	**K-5340-A**
Supply Fitting	**K-8534** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator, screw driver regulating stop with ⅜" I.P. connection, strainer, trap with cleanout, 1¼" I.P. outlet.
Support	Wall hangers

Specify **K-5340-AP** for Rockbrook drinking fountain with condensation plate.

SIZE OF BOWL	12x12x16"
WALL TO FRONT OF BOWL	12"
HEIGHT OF BACK	8"

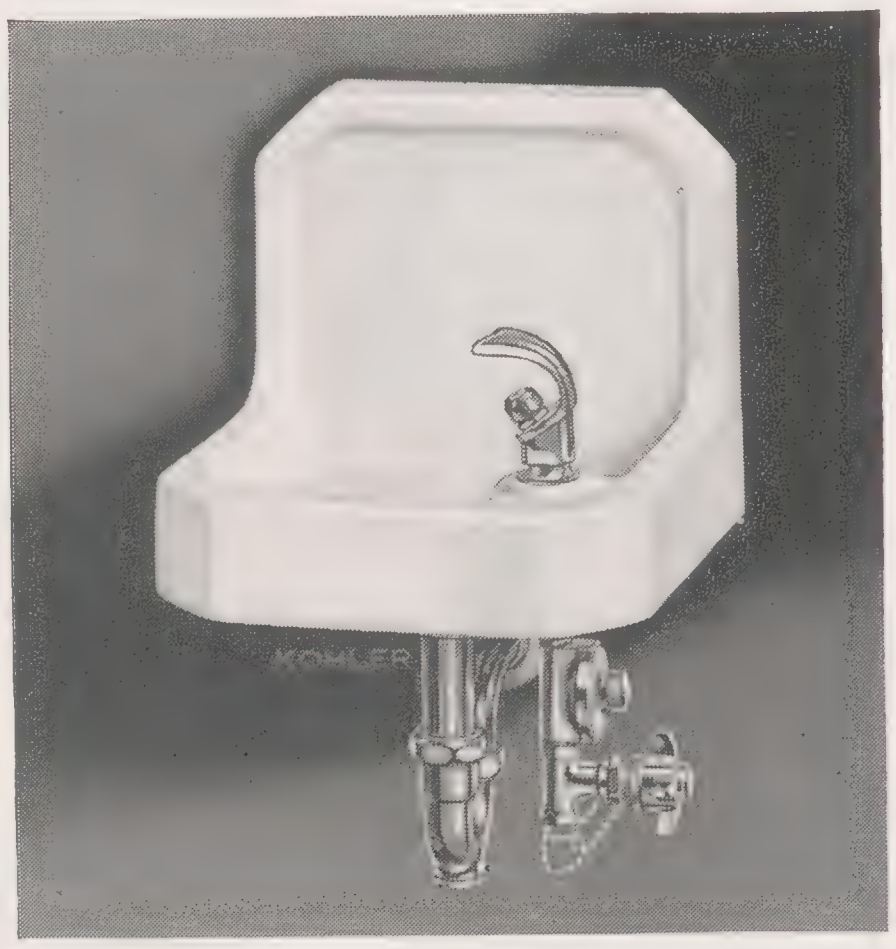

DEERBROOK K-5345-A

Fixture Complete	**K-5345-A**
Fixture Complete, Less Trap	**K-5345**
Supply Fitting	**K-8554** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator. (Supply pipes to wall not furnished.)
Strainer	**K-8595**
Trap	**K-9000** 1¼"
Support	Wall hangers

SIZE OF BOWL	12x12x11¼"
WALL TO FRONT OF BOWL	12"
HEIGHT OF BACK	8"

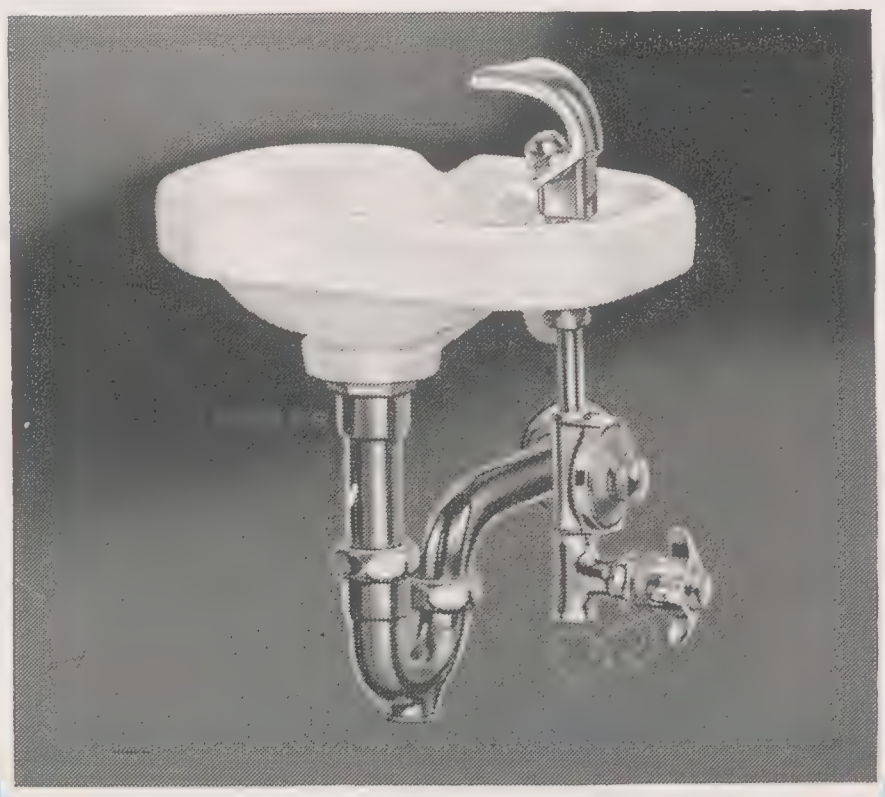

CLEARBROOK K-5350-A

Fixture Complete	**K-5350-A**
Fixture Complete, Less Trap	**K-5350**
Supply Fitting	**K-8554** Supply fitting with non-squirting Vandal-proof bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator. (Supply pipes to wall not furnished.)
Strainer	**K-8595**
Trap	**K-9000** 1¼"
Support	Painted wall bracket

SIZE OF BOWL	11x7½"
WALL TO FRONT OF BOWL	12"

MEADOWBROOK

VITREOUS CHINA DRINKING FOUNTAINS

TWO BUBBLERS

Fixture Complete	**K-5355-A**
Fixture Less Trap	**K-5355**
Supply Fitting, Right Side	**K-8573** Supply fitting with non-squirting bubbler head, self-closing control valve, adjustable for continuous flow, volume regulator, ⅜" offset supply, loose key stop.
Supply Fitting, Left Side	**K-8572** Same as above for left side
Strainer	**K-8820** 1¼" tailpiece
Trap	**K-9000** 1¼"
Support	Wall hangers

ONE BUBBLER

Fixture Complete	**K-5359-A**
Fixture Less Trap	**K-5359**
Supply Fitting, Right Side	**K-8573** Supply fitting with non-squirting bubbler head, self-closing control valve, adjustable for continuous flow, volume regulator, ⅜" offset supply, loose key stop.
Ice Water Faucet	**K-8210**
Strainer	**K-8820** 1¼" tailpiece
Trap	**K-9000** 1¼"
Support	Wall hangers

SIZE 24x13"
BACK 8"


K-8210

Ice Water Faucet

K-8210 Self-closing push button ice water faucet, flow regulator. Inlet tapped for ⅜" I.P.

VITREOUS CHINA SACRARIUM

Fixture Complete	**K-5360-A**
Fitting	**K-8564** Cover with lock
Strainer	**K-8566** Strainer and drain to wall
Support	Four wall screws

SIZE 14x14"

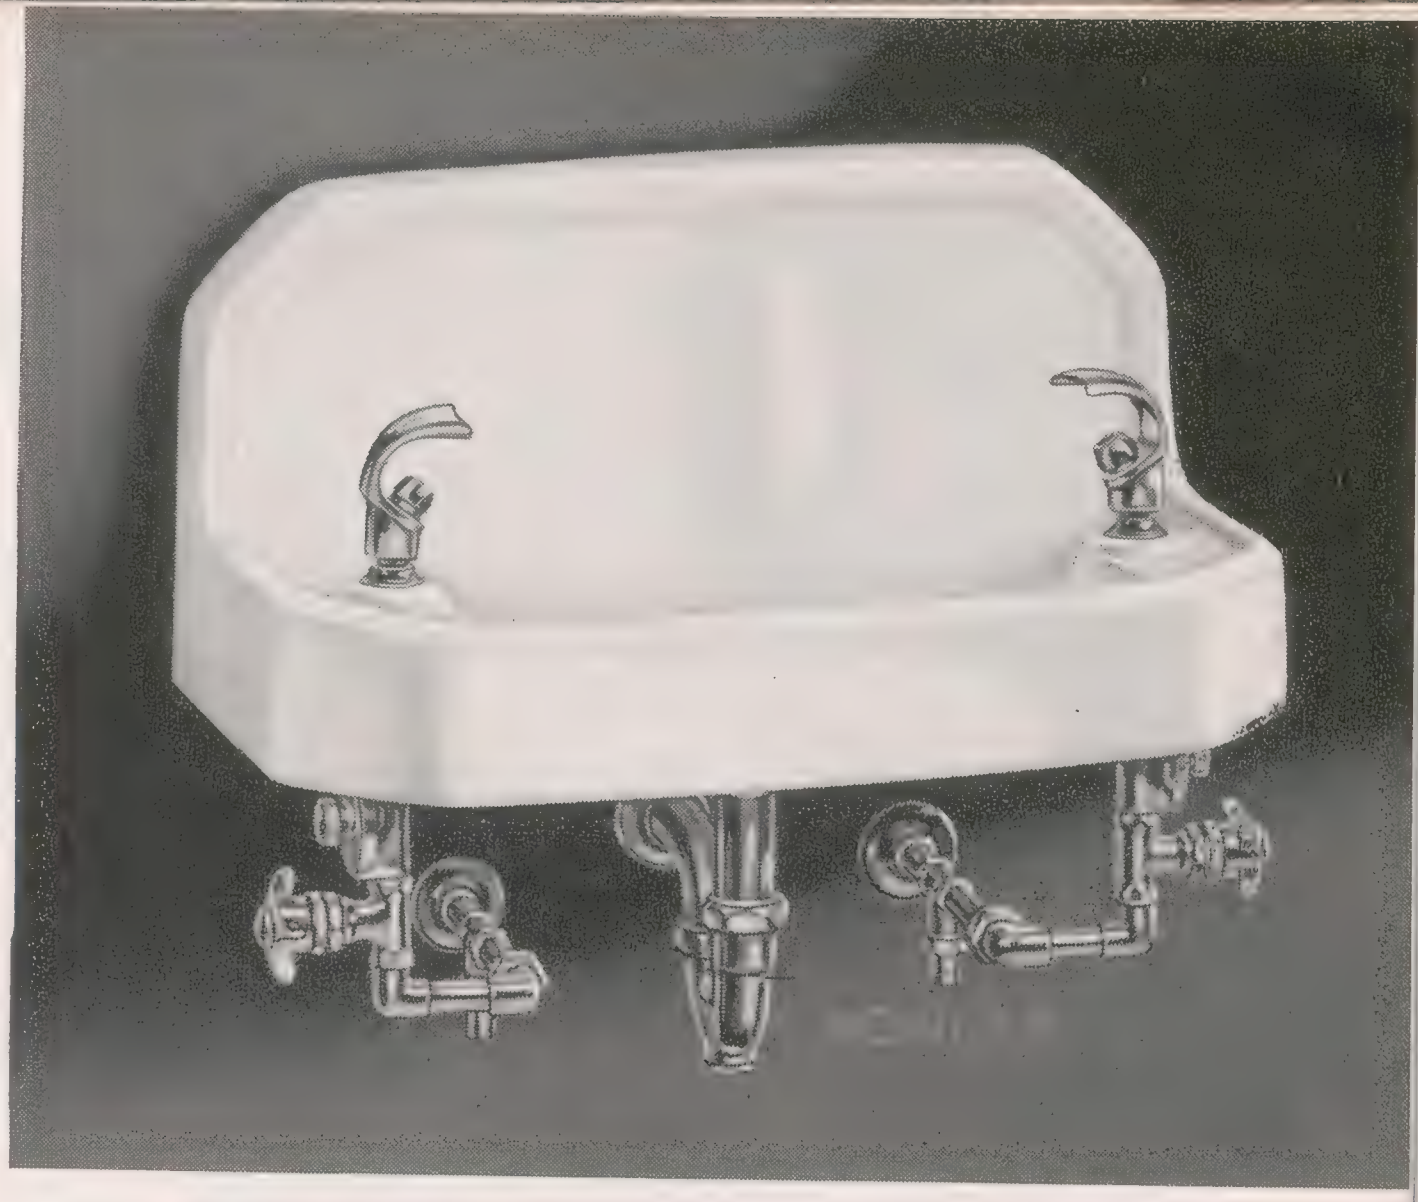
MEADOWBROOK K-5355-A Size 24x13"

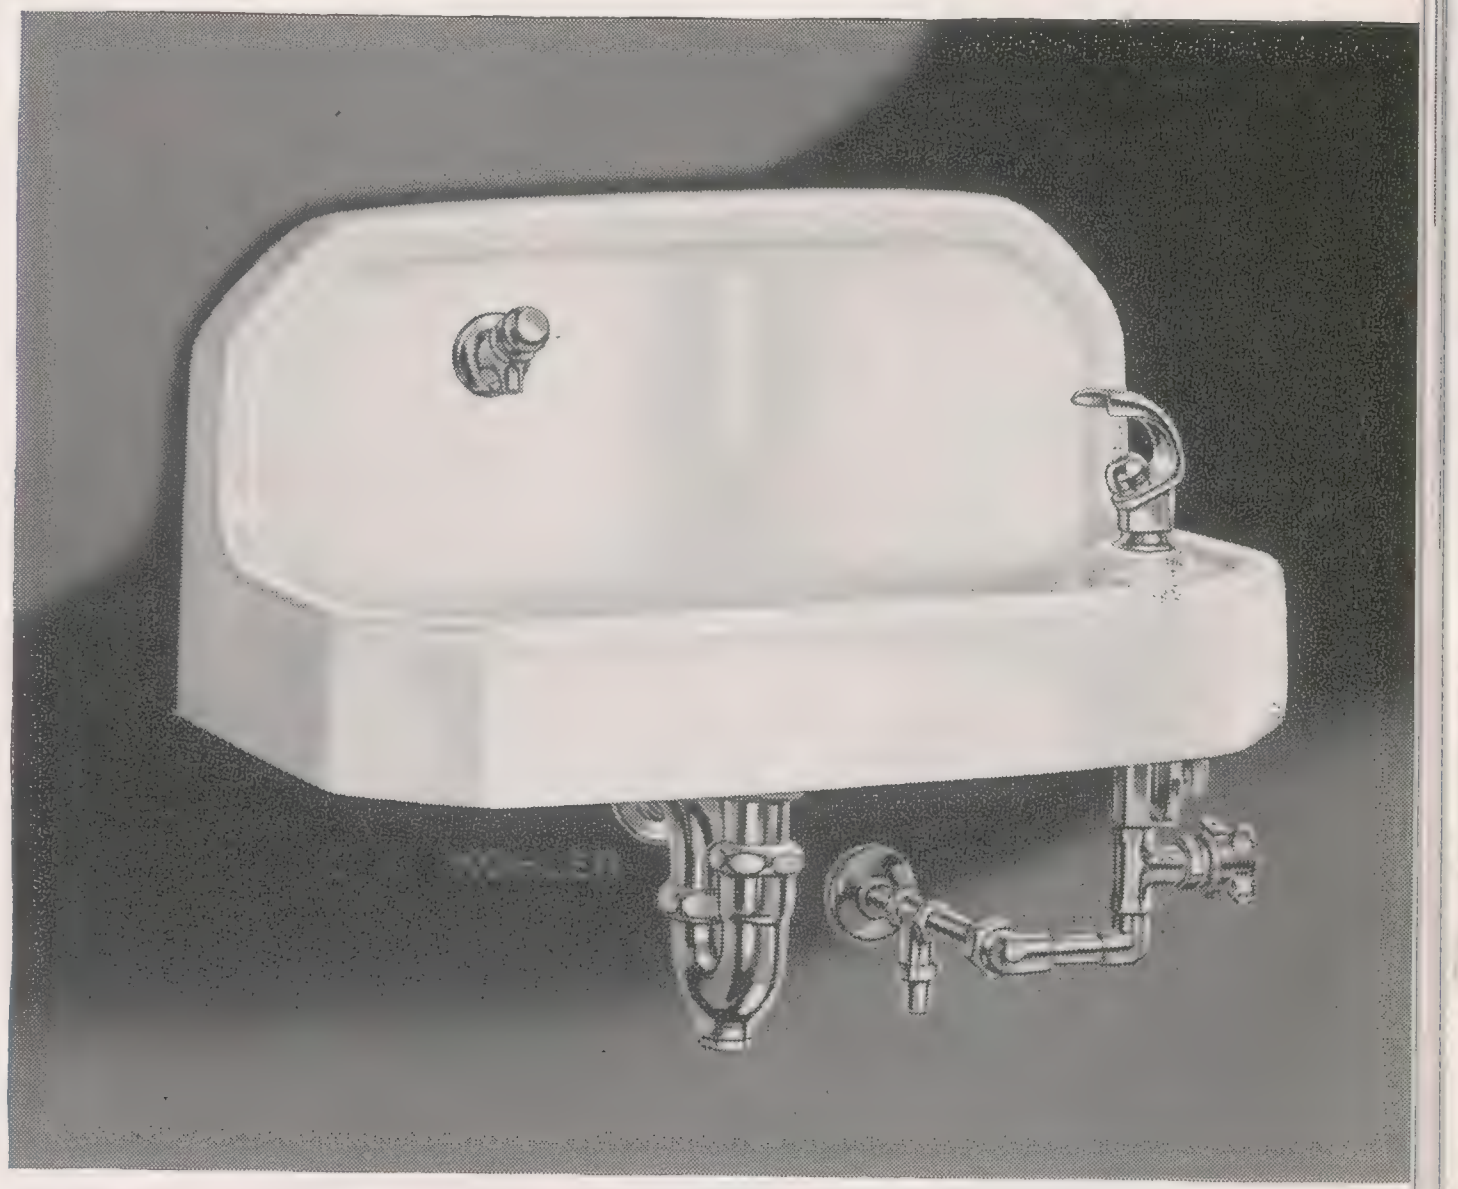

MEADOWBROOK K-5359-A Size 24x13"

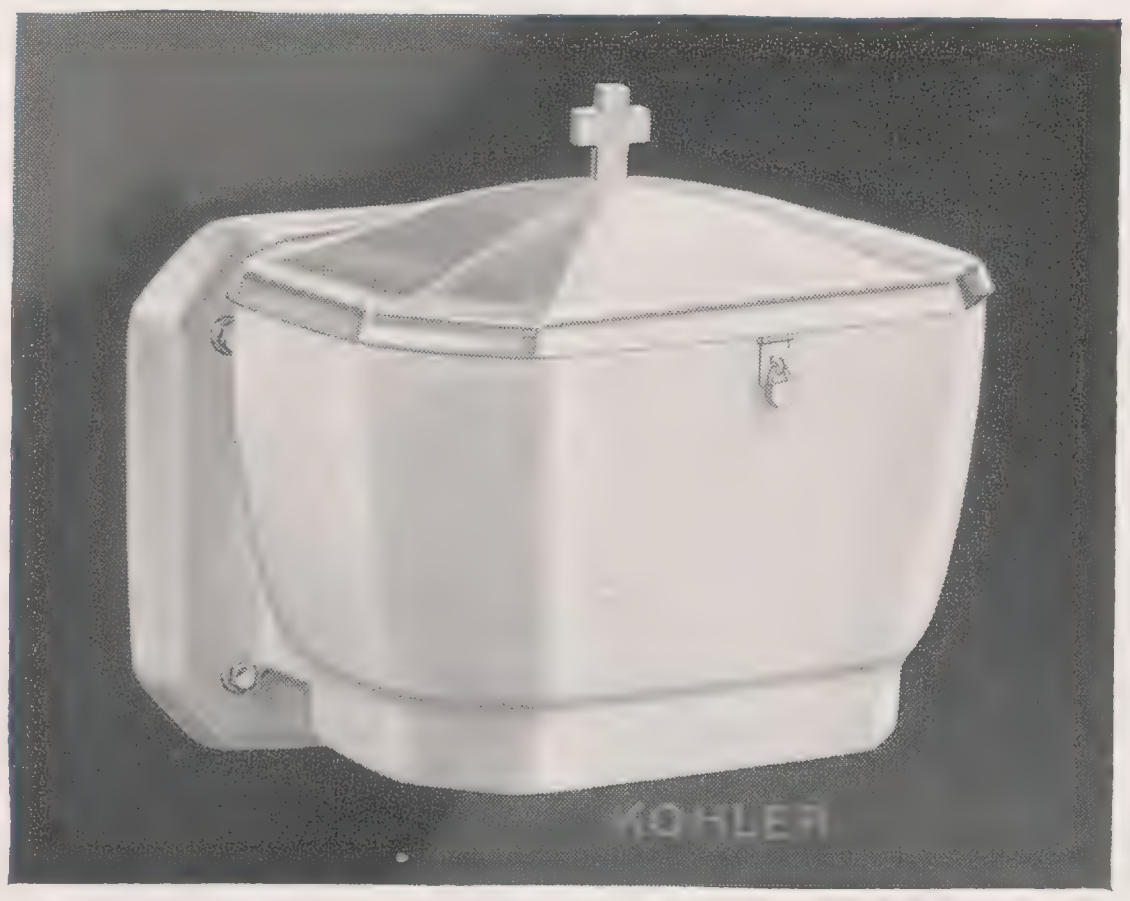

SACRARIUM K-5360-A

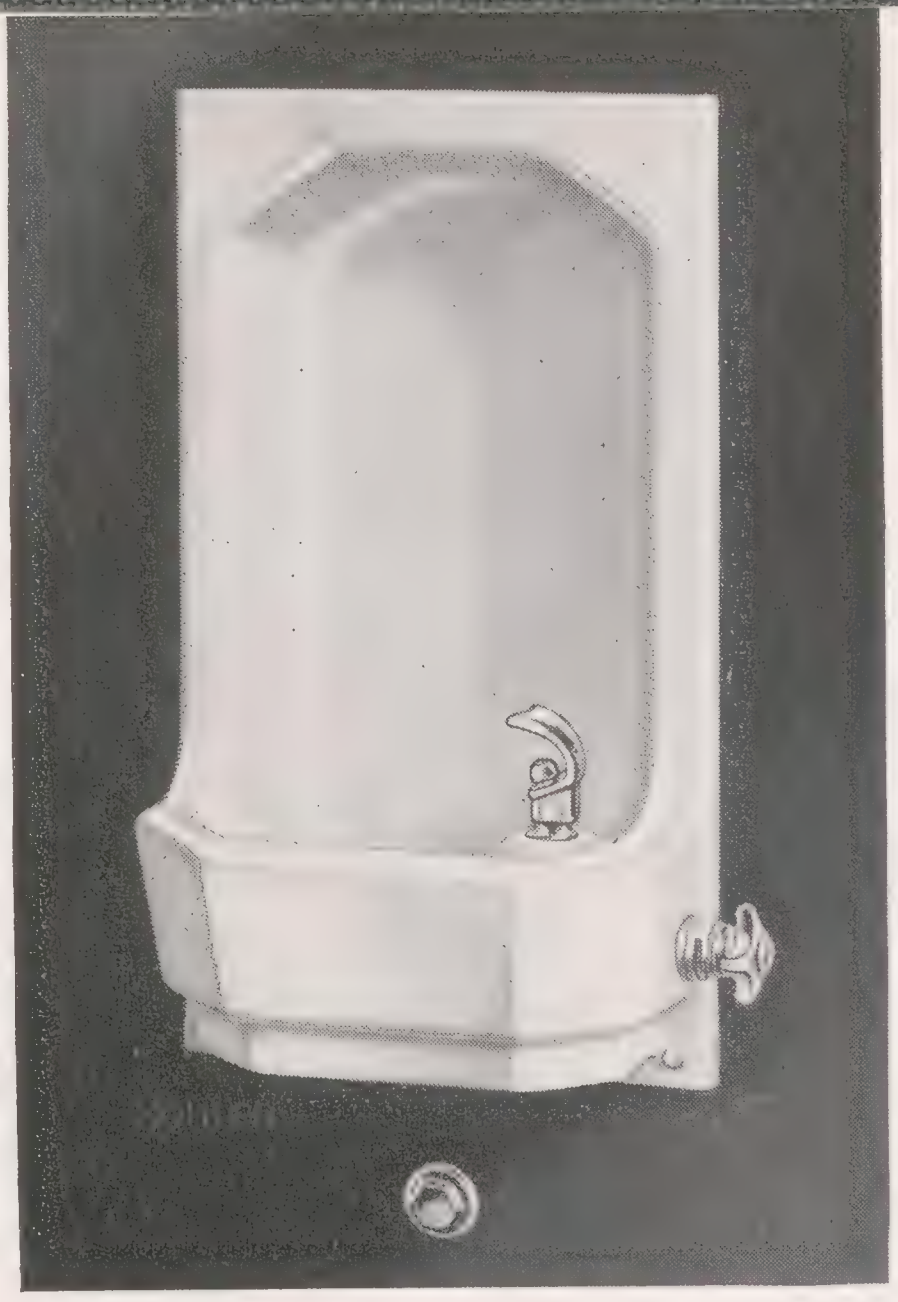

GLENBROOK K-5365-A

GLENBROOK VITREOUS CHINA SEMI-RECESSED DRINKING FOUNTAIN

Fixture Complete	**K-5365-A**
Supply Fitting	**K-8558** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator, screw driver regulating stop with ⅜″ I.P. connection, strainer, cast brass trap with cleanout plug.
Support	Wall screws (3)

Specify **K-5365-AP** for Glenbrook drinking fountain with condensation plate.

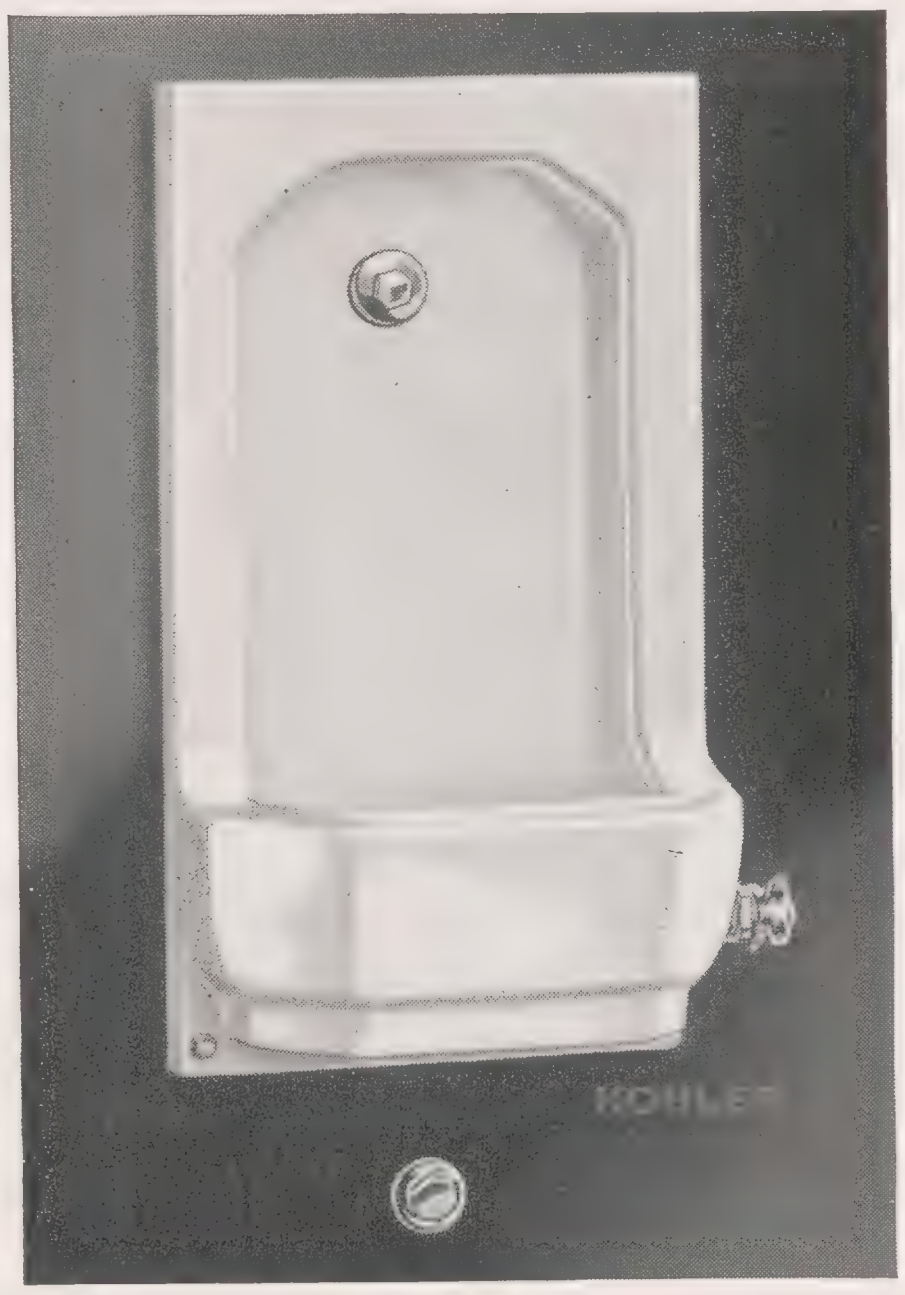

GLENGUARD K-5364-A

GLENGUARD VITREOUS CHINA SEMI-RECESSED CUSPIDOR

Fixture Complete	**K-5364-A**
Supply Fitting	**K-8547** Supply fitting with self-closing valve, screw driver regulating stop, ⅜″ I.P. inlet connection, supply pipe to spreader, C.P. brass spreader, strainer, cast brass trap with cleanout extension to wall.
Support	Wall screws (3)

	Glenbrook	Glenguard
OVERALL HEIGHT	26¼″	26¼″
OVERALL WIDTH	14¾″	14¾″
OVERALL FRONT TO BACK	4½″	4½″
INSIDE DEPTH, FRONT FACE TO BACK	6¾″	6¾″

GLENBROOK - GLENGUARD COMBINATION FOR GYMNASIUMS AND PUBLIC CORRIDORS

Fixture Complete	**K-5362-A** Combination
Supply Fitting for K-5365 Glenbrook Fountain	**K-8545** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic regulator, screw driver regulating stop with ⅜″ I.P. inlet connection, by-pass connection to cuspidor, strainer, cast brass trap with cleanout plug. Wall screws (3).
Supply Fitting for K-5363 Glenguard Cuspidor	**K-8546** Supply fitting, connection to spreader, C.P. brass spreader, strainer, cast brass trap with cleanout extension to wall. Wall screws (3).

Specify **K-5362-AP** for Glenbrook drinking fountain with condensation plate.

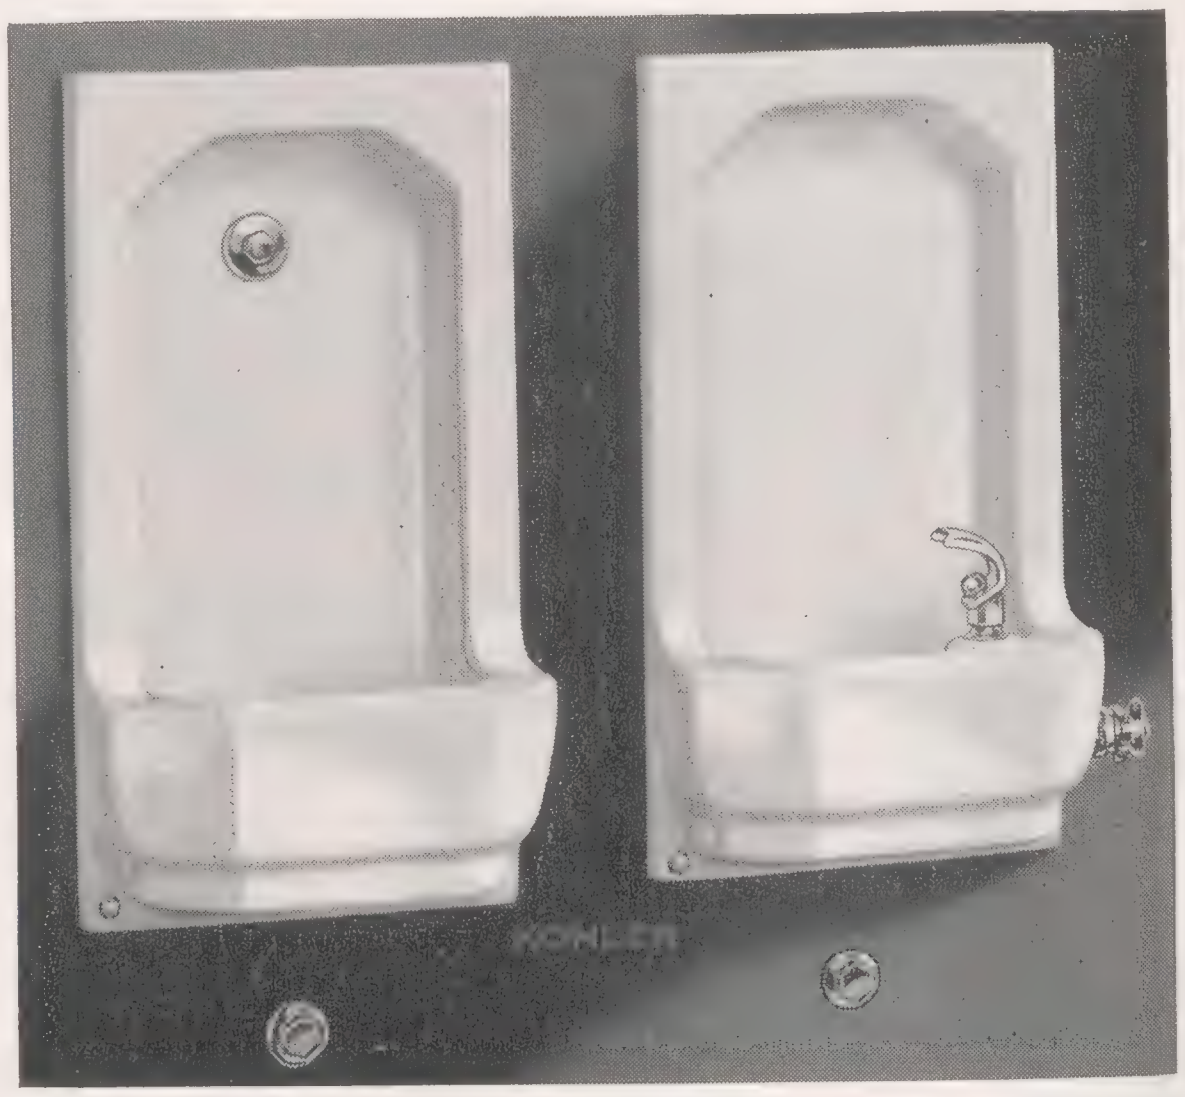

GLENBROOK-GLENGUARD K-5362-A

BROOK VITREOUS CHINA RECESSED DRINKING FOUNTAIN

Fixture Complete	**K-5368-A**
Supply Fitting	**K-8559** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator, screw driver regulating stop with ⅜″ I.P. connection, strainer, cast brass trap with cleanout extension to wall.
Support	Wall screws (3)

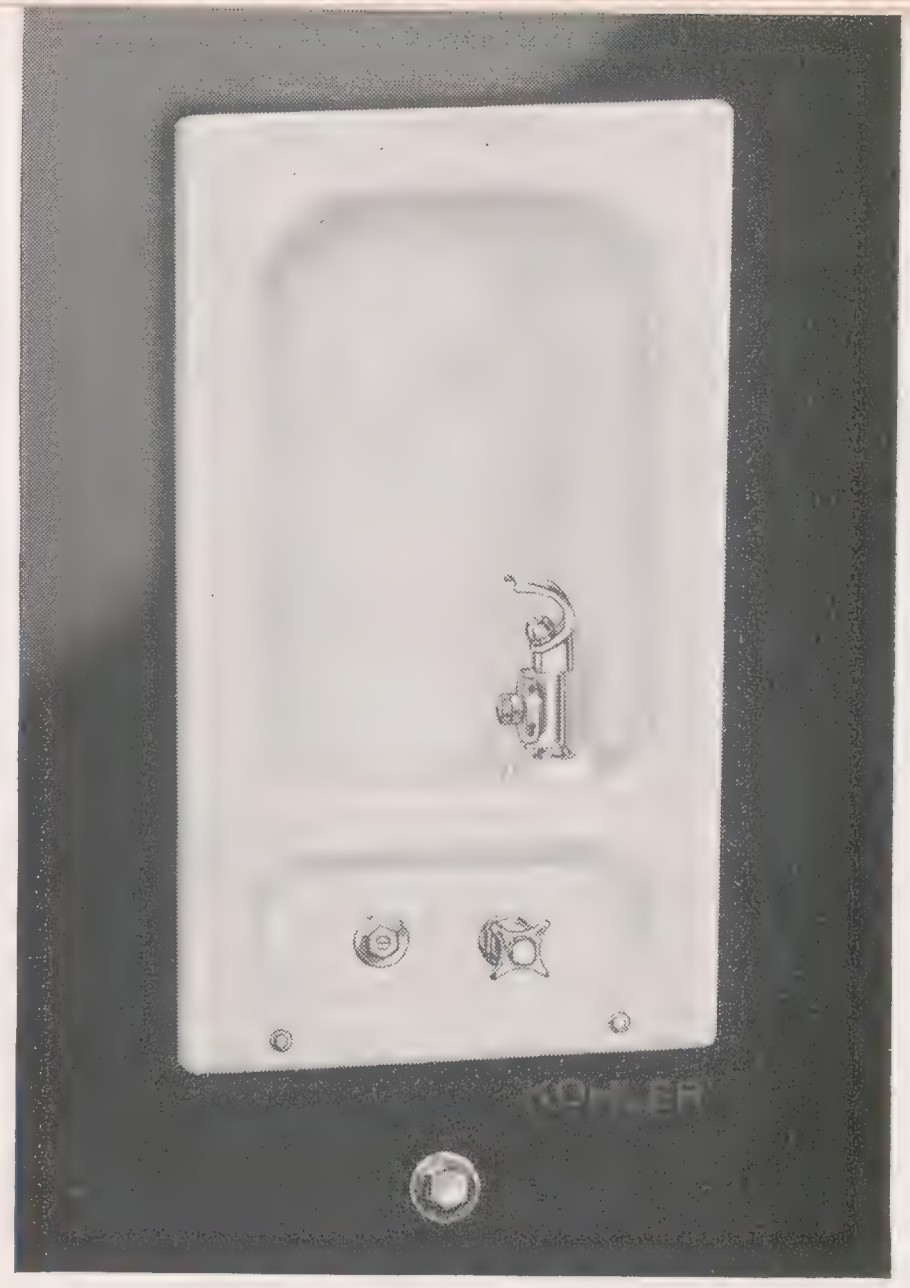
BROOK K-5368-A

GUARD VITREOUS CHINA RECESSED CUSPIDOR

Fixture Complete	**K-5370-A**
Supply Fitting	**K-8560** Supply fitting with self-closing valve with screw driver regulating stop, ⅜″ I.P. connection, supply pipe to spreader, C.P. brass spreader, strainer, cast brass trap with cleanout extension to wall.
Support	Wall screws (3)

	BROOK	GUARD
OVERALL HEIGHT	30″	30″
OVERALL WIDTH	16½″	16½″
OVERALL FRONT TO BACK	11″	11″
RECESS DEPTH	10″	10″

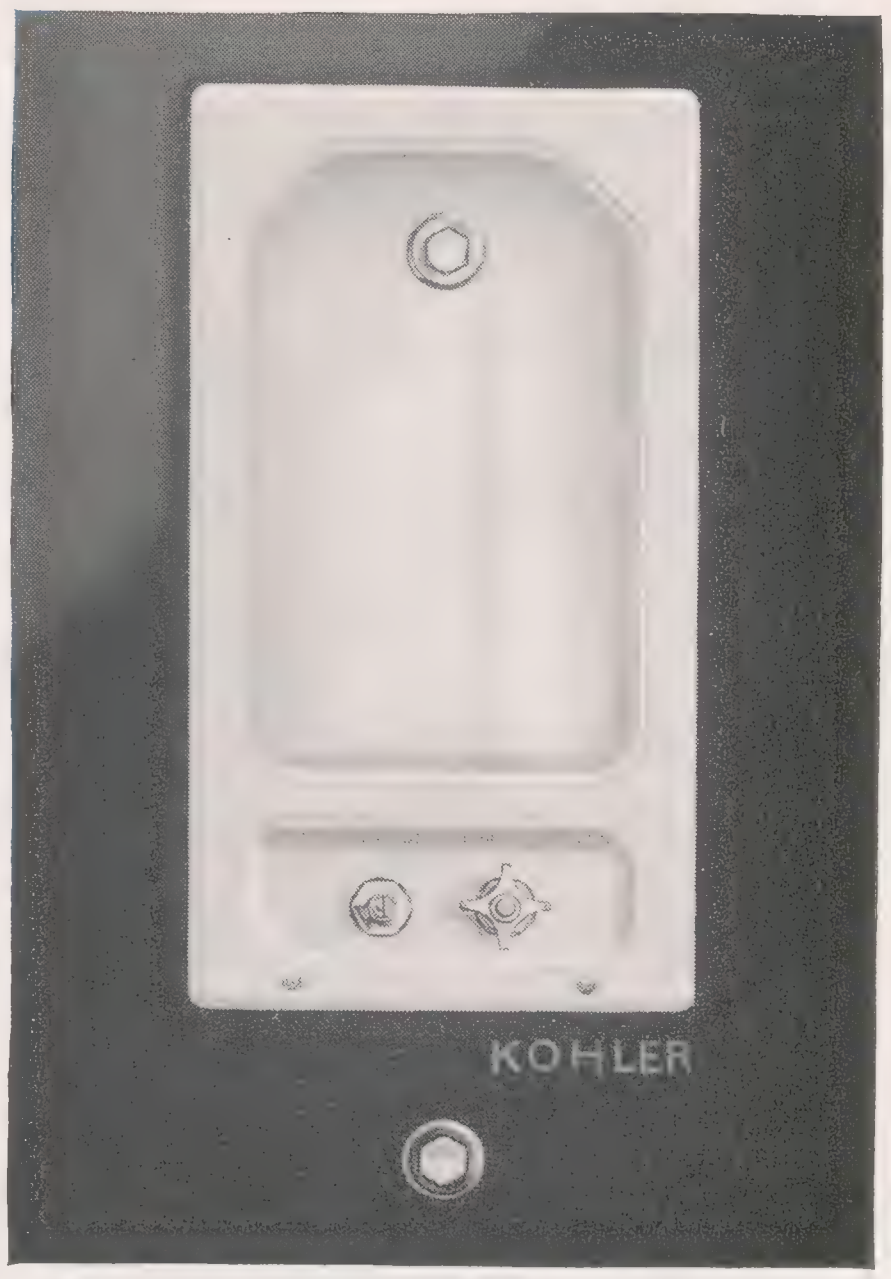
GUARD K-5370-A

BROOK-GUARD COMBINATION FOR GYMNASIUMS AND PUBLIC CORRIDORS

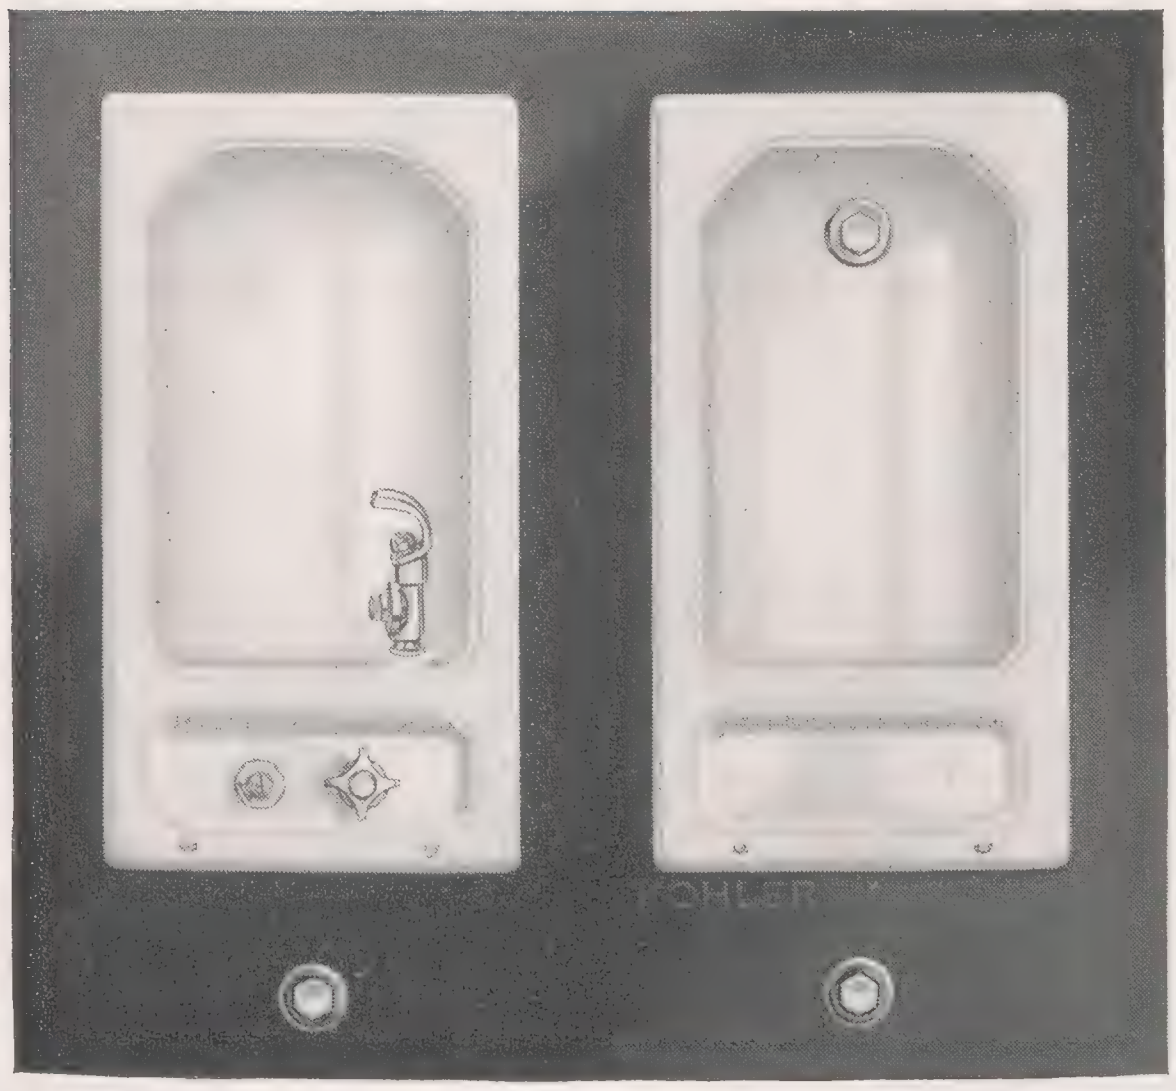
BROOK-GUARD K-5367-A

Fixture Complete	**K-5367-A** Combination
Supply Fitting for K-5368-A Brook Fountain	**K-8559** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator, screw driver regulating stop with ⅜″ I.P. connection, by-pass connection to cuspidor, strainer, cast brass trap with cleanout extension to wall. Wall screws (3).
Supply Fitting for K-5371-A Guard Cuspidor	**K-8561** Supply fitting, connection to spreader, C.P. brass spreader, supply pipe from by-pass valve on fountain, strainer, cast brass trap with cleanout extension to wall. Wall screws (3).

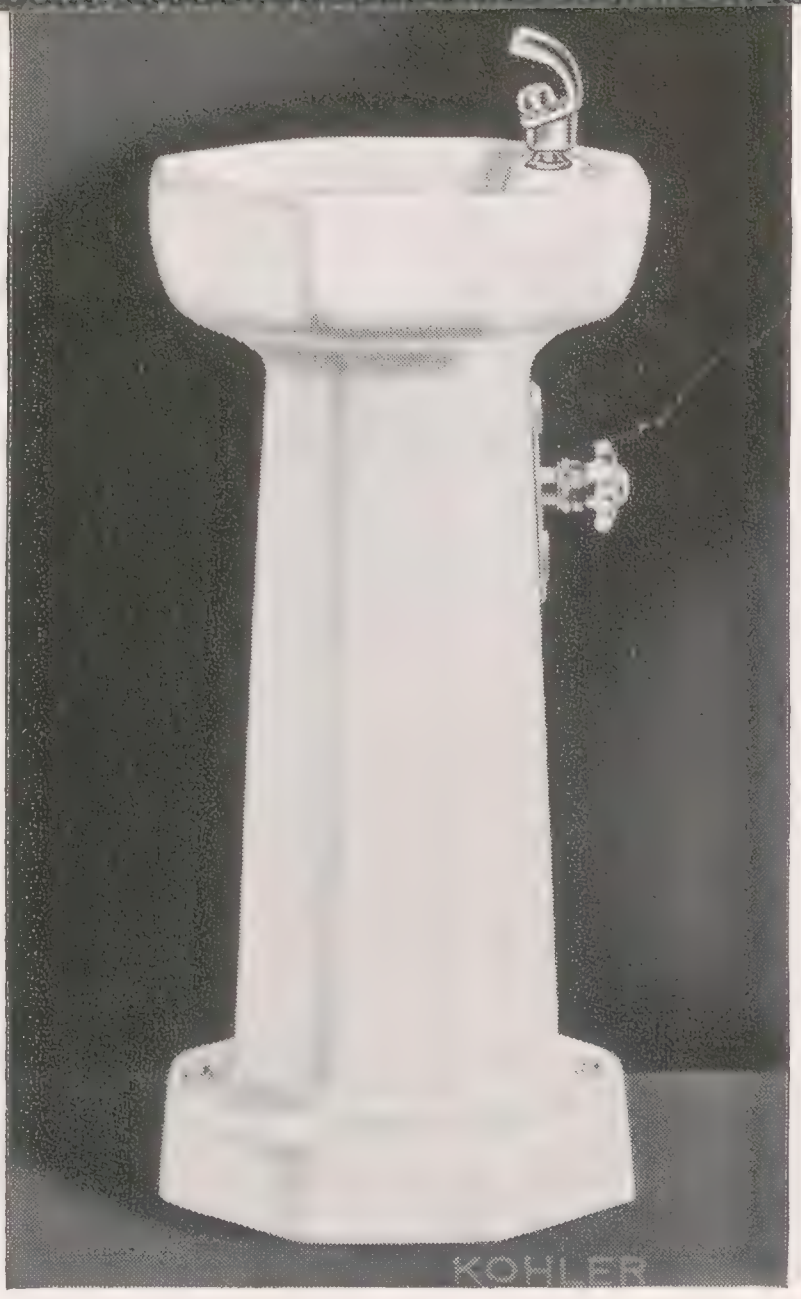

CARISBROOK K-5374-A

CARISBROOK VITREOUS CHINA PEDESTAL DRINKING FOUNTAIN

Fixture Complete	K-5374-A
Supply Fitting	**K-8550** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator, screw driver regulating stop, ⅜" I.P. supply from floor, strainer and connections for 1¼" I.P. outlet. (Drain pipe to floor not furnished.)
Accessories	Floor screws with washers (2)

DIAMETER OF BOWL	13¼"
HEIGHT	30"

SUNNYBROOK

VITREOUS CHINA DRINKING FOUNTAIN ON GALVANIZED IRON STAND

Fixture Complete	K-5378-A
Supply Fitting	**K-8554** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator. (Supply pipe from floor not furnished.)
Support with Strainer	**K-8581** Galvanized iron stand with strainer and drain.

SIZE OF BOWL	11x7½"	11x7½"
HEIGHT (Floor from Top of Rim)	30"	36"

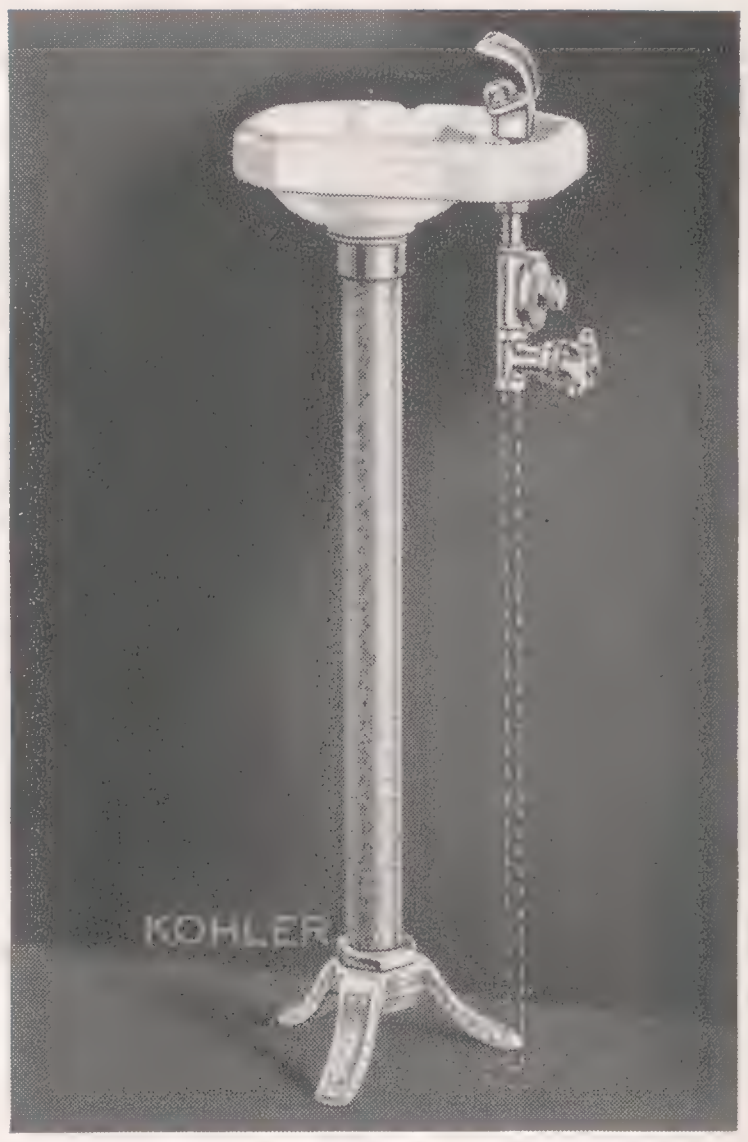

SUNNYBROOK K-5378-A

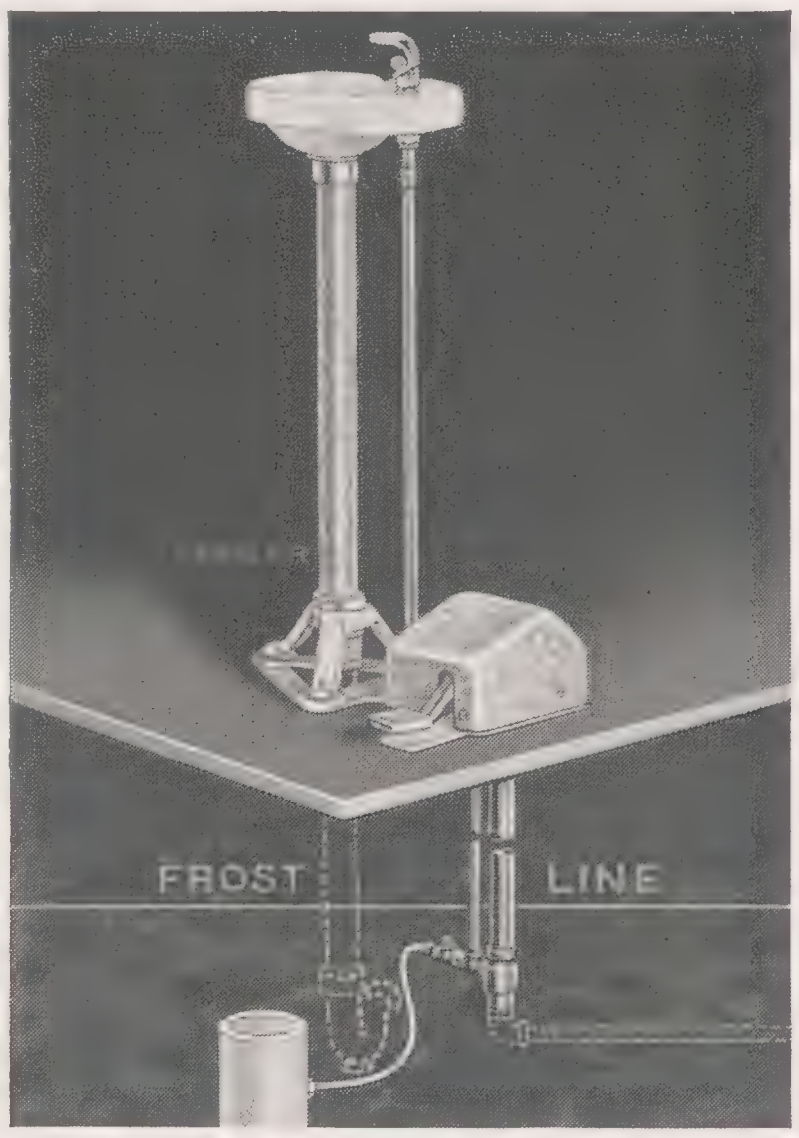

SUNNYBROOK K-5379-A

SUNNYBROOK

FREEZE-PROOF DRINKING FOUNTAIN

Fixture Complete	K-5379-A
Supply Fitting	**K-8530** Supply fitting with non-squirting bubbler head and concealed automatic volume regulator, strainer, combined support and drain, galvanized supply from valve to bubbler.
Pedal Action Supply	**K-8531** Brass self-draining pedal action supply valve with two vermin-proof ball checks and brass air vent pipe with screened top, enclosed with cover, galvanized supporting plate—for 18" bury.
Support	Galvanized iron stand.

VALVE MUST BE SET BELOW FROST LINE.

Specify if 36, 48 or 60" bury is required. Drainage should be provided below frost line as illustrated, using a length of drain tile filled with gravel.

EDGEBROOK ENAMELED CAST IRON WALL HANGING DRINKING FOUNTAIN

Fixture Complete	K-5390-A
Fixture Complete, Less Trap	K-5390
Supply Fitting	**K-8554** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator. (Supply pipe to wall not furnished.)
Strainer	K-8595
Trap	K-9000 1¼"
Support	**K-8596** Painted wall bracket.

SIZE, BOWL	12x8"
WALL TO FRONT	12"

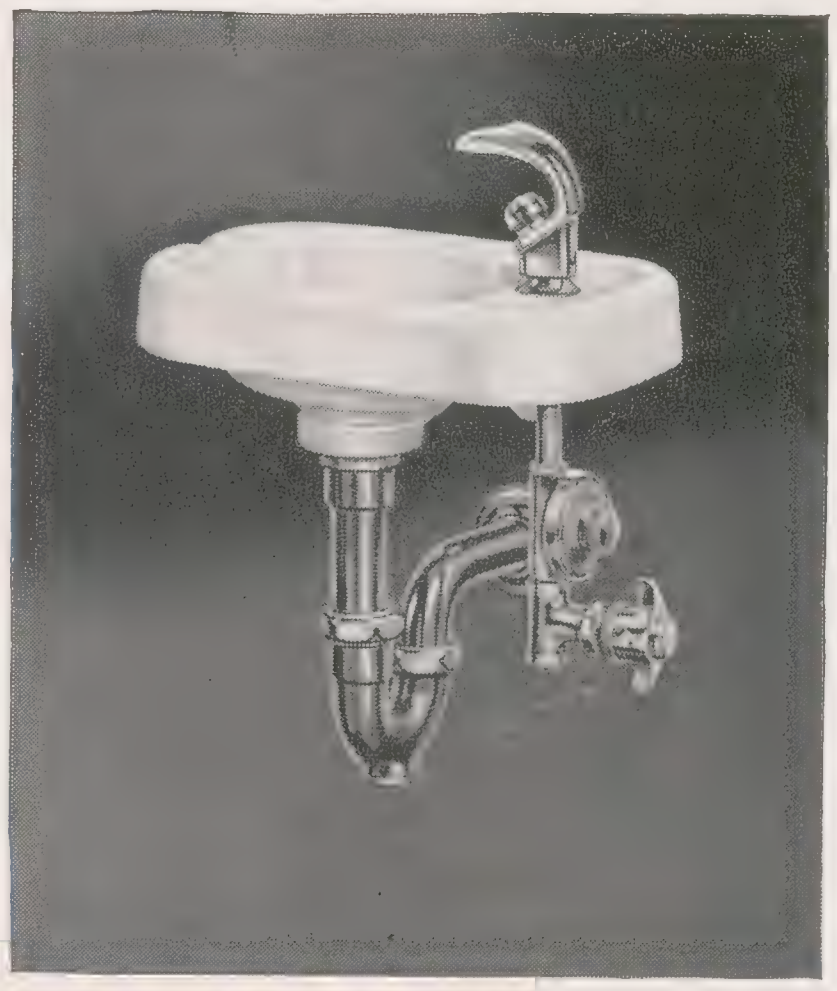
EDGEBROOK K-5390-A

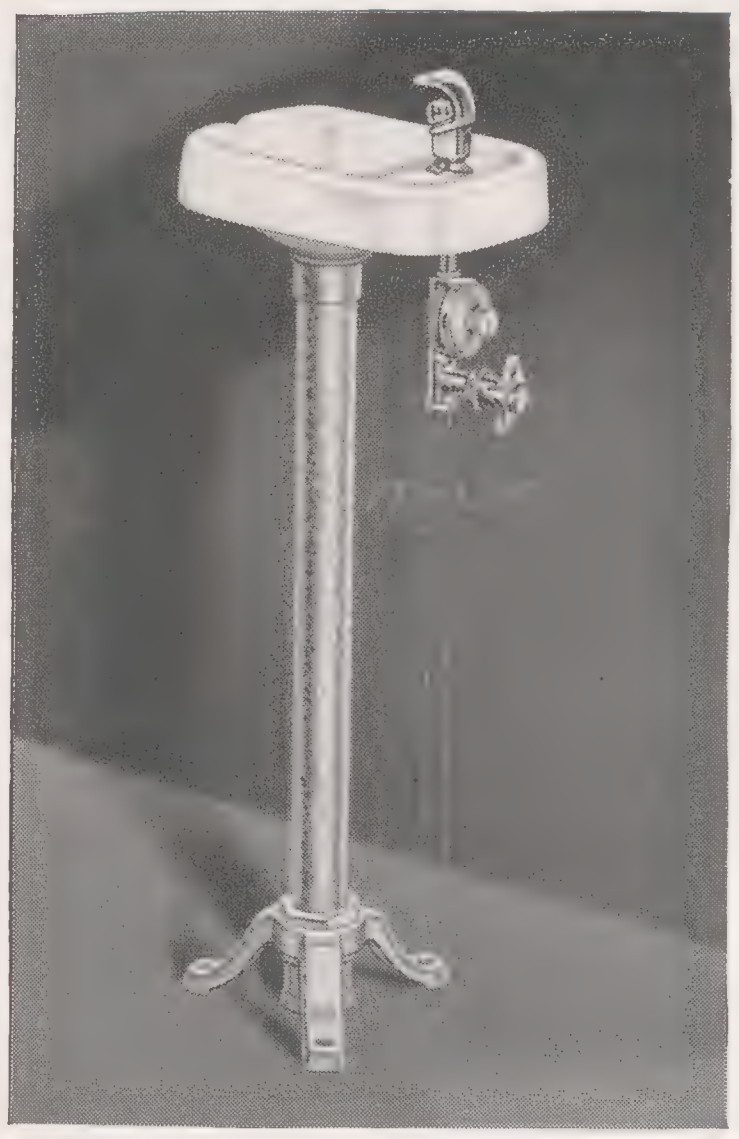
CRANBROOK K-5395-A

CRANBROOK ENAMELED CAST IRON DRINKING FOUNTAIN ON GALVANIZED IRON STAND

Fixture Complete	K-5395-A
Supply Fitting	**K-8554** Supply fitting with non-squirting bubbler head, self-closing control valve adjustable for continuous flow, automatic volume regulator. (Supply pipe from floor not furnished.)
Support with Strainer	**K-8581** Galvanized iron stand with strainer and drain.

SIZE, BOWL	12x8"	12x8"
FLOOR TO TOP OF RIM	30"	36"

MONTELLO ENAMELED CAST IRON DRINKING FOUNTAIN

Fixture Complete	K-5400-A
Fixture Complete, Less Trap	K-5400
Supply Fitting	**K-8578** Supply fitting with self-closing valves and loose key stop, non-squirting bubbler heads with volume regulators (for 54" size). (Illustrated) **K-8577** Supply for 42" size. **K-8576** Supply for 30" size.
Strainer	K-8820
Trap	K-9000 1¼"
Support	Wall brackets (2)

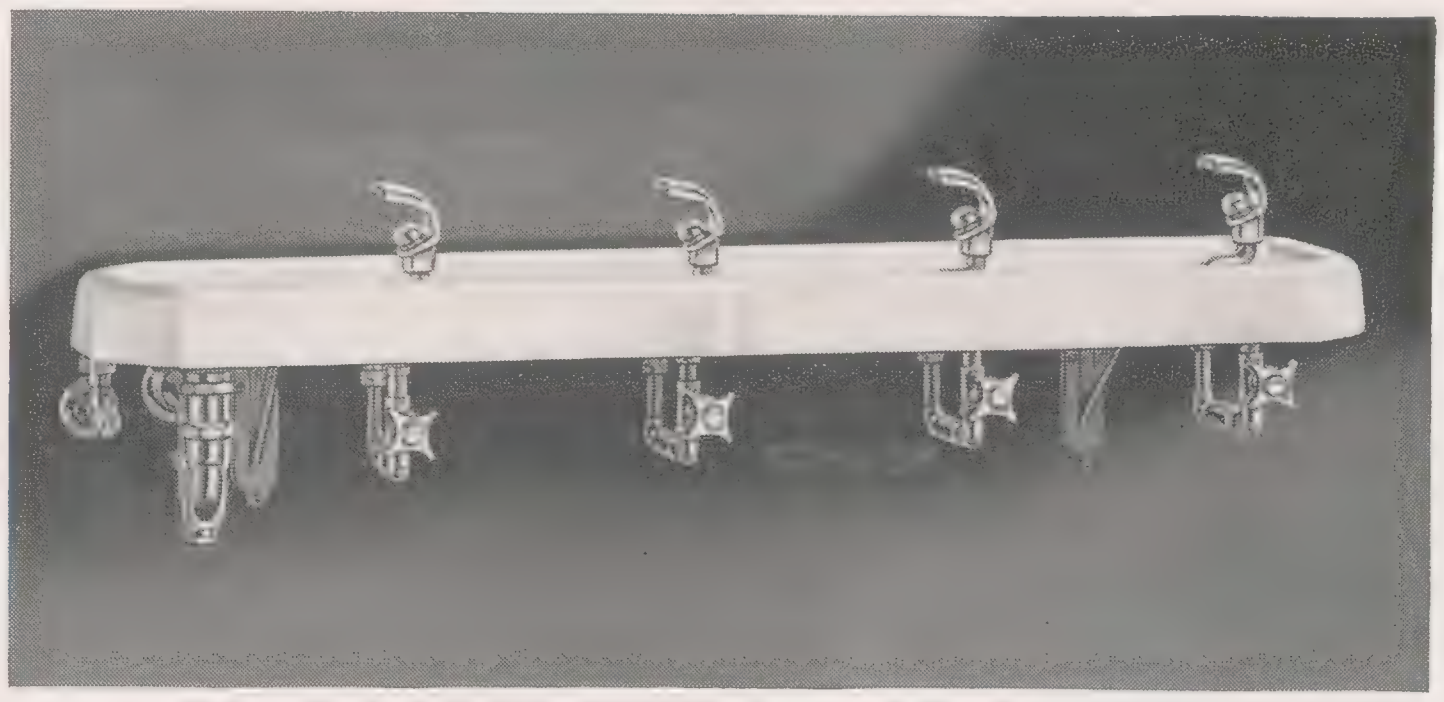
MONTELLO K-5400-A

SIZES	30"	42"	54"
WIDTH OF FOUNTAIN	13¼"	13¼"	13¼"
DEPTH INSIDE AT OUTLET	2½"	2½"	2½"
NUMBER OF BUBBLERS	2	3	4
CENTER TO CENTER OF BUBBLERS	12"	12"	12"

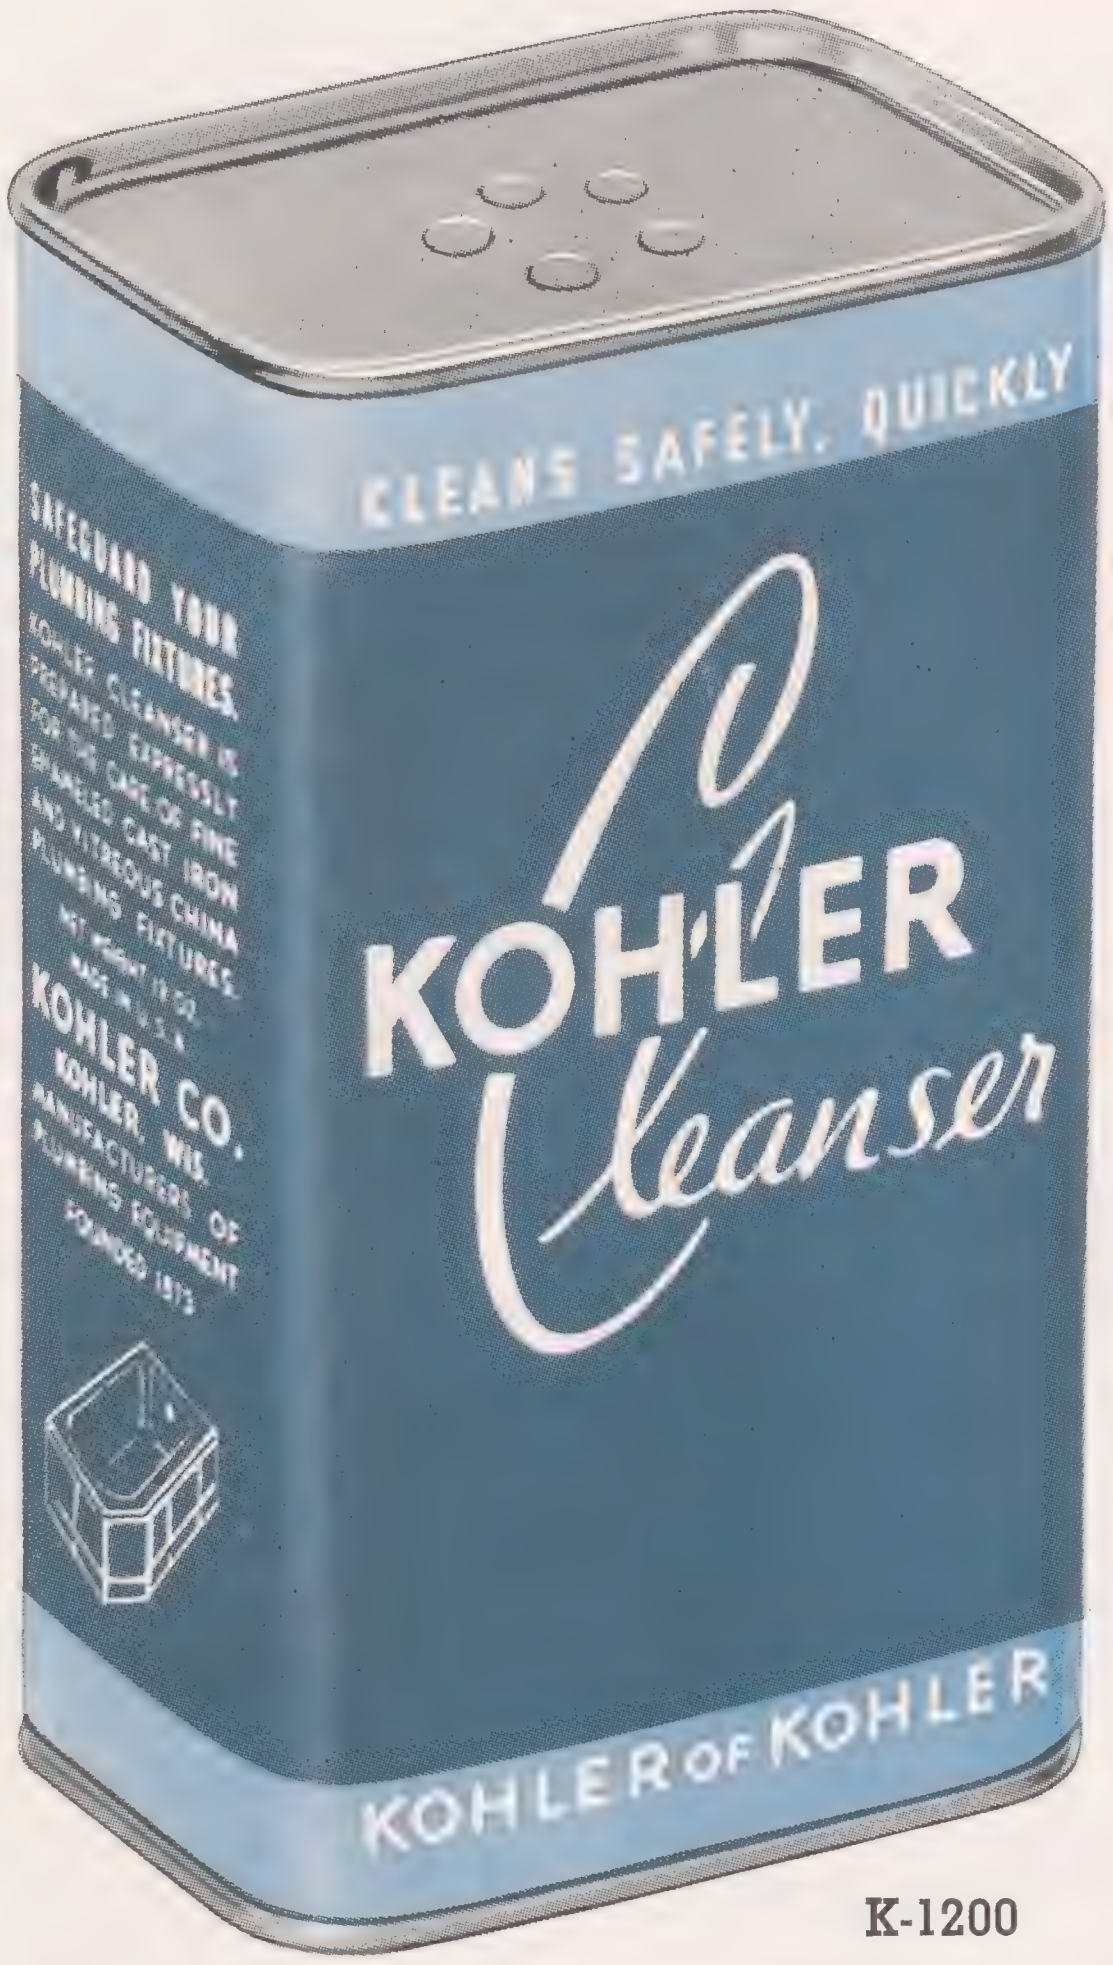
CLEANS SAFELY, QUICKLY
SAFEGUARD YOUR PLUMBING FIXTURES.
KOHLER CLEANSER IS PREPARED EXPRESSLY FOR THE CARE OF FINE ENAMELED CAST IRON AND VITREOUS CHINA PLUMBING FIXTURES.
NET WEIGHT 12 OZ.
MADE IN U.S.A.
KOHLER CO.
KOHLER, WIS.
MANUFACTURERS OF PLUMBING EQUIPMENT
FOUNDED 1873
KOHLER Cleanser
KOHLER OF KOHLER

K-1200

... recommended for plumbing fixtures

KOHLER Cleanser
KOHLER OF KOHLER

Kohler Cleanser cleans quickly, easily and thoroughly, yet safeguards the lustrous surfaces of enameled and vitreous china plumbing fixtures and fittings. Manufactured by Kohler Co. especially for the care of plumbing fixtures, the cleanser can be used equally well on glass, tile, and utensils. It is harmless to the skin.

Kohler Cleanser is packed in cartons containing 24 12-oz. cans.

KOHLER KITCHEN SINKS

The enamel on all Kohler sinks is acid-resisting clear through and has a sparkling finish, easy to clean and clean looking.

This superior enamel is safeguarded from strain because it is fused to a strong, rigid base of cast iron.

Other advantages of Kohler sinks are full-length ledge with built-in soap dish, Kohler Duostrainers which make the deep basins water-retaining, collect solid waste and drain quickly with self-cleansing action; a thumb-pressure sprayer for rinsing, and chromium-plated fittings matching the fixtures in style and quality.

Kohler sinks are made in a wide range of styles and sizes to meet space or budget requirements. Many have integral drainboards on one or both sides, affording the utility and convenience of self-draining work areas. All are available in the soft, pure white for which Kohler enamel is noted. For those who prefer color, certain sinks are available in the Kohler pastels.

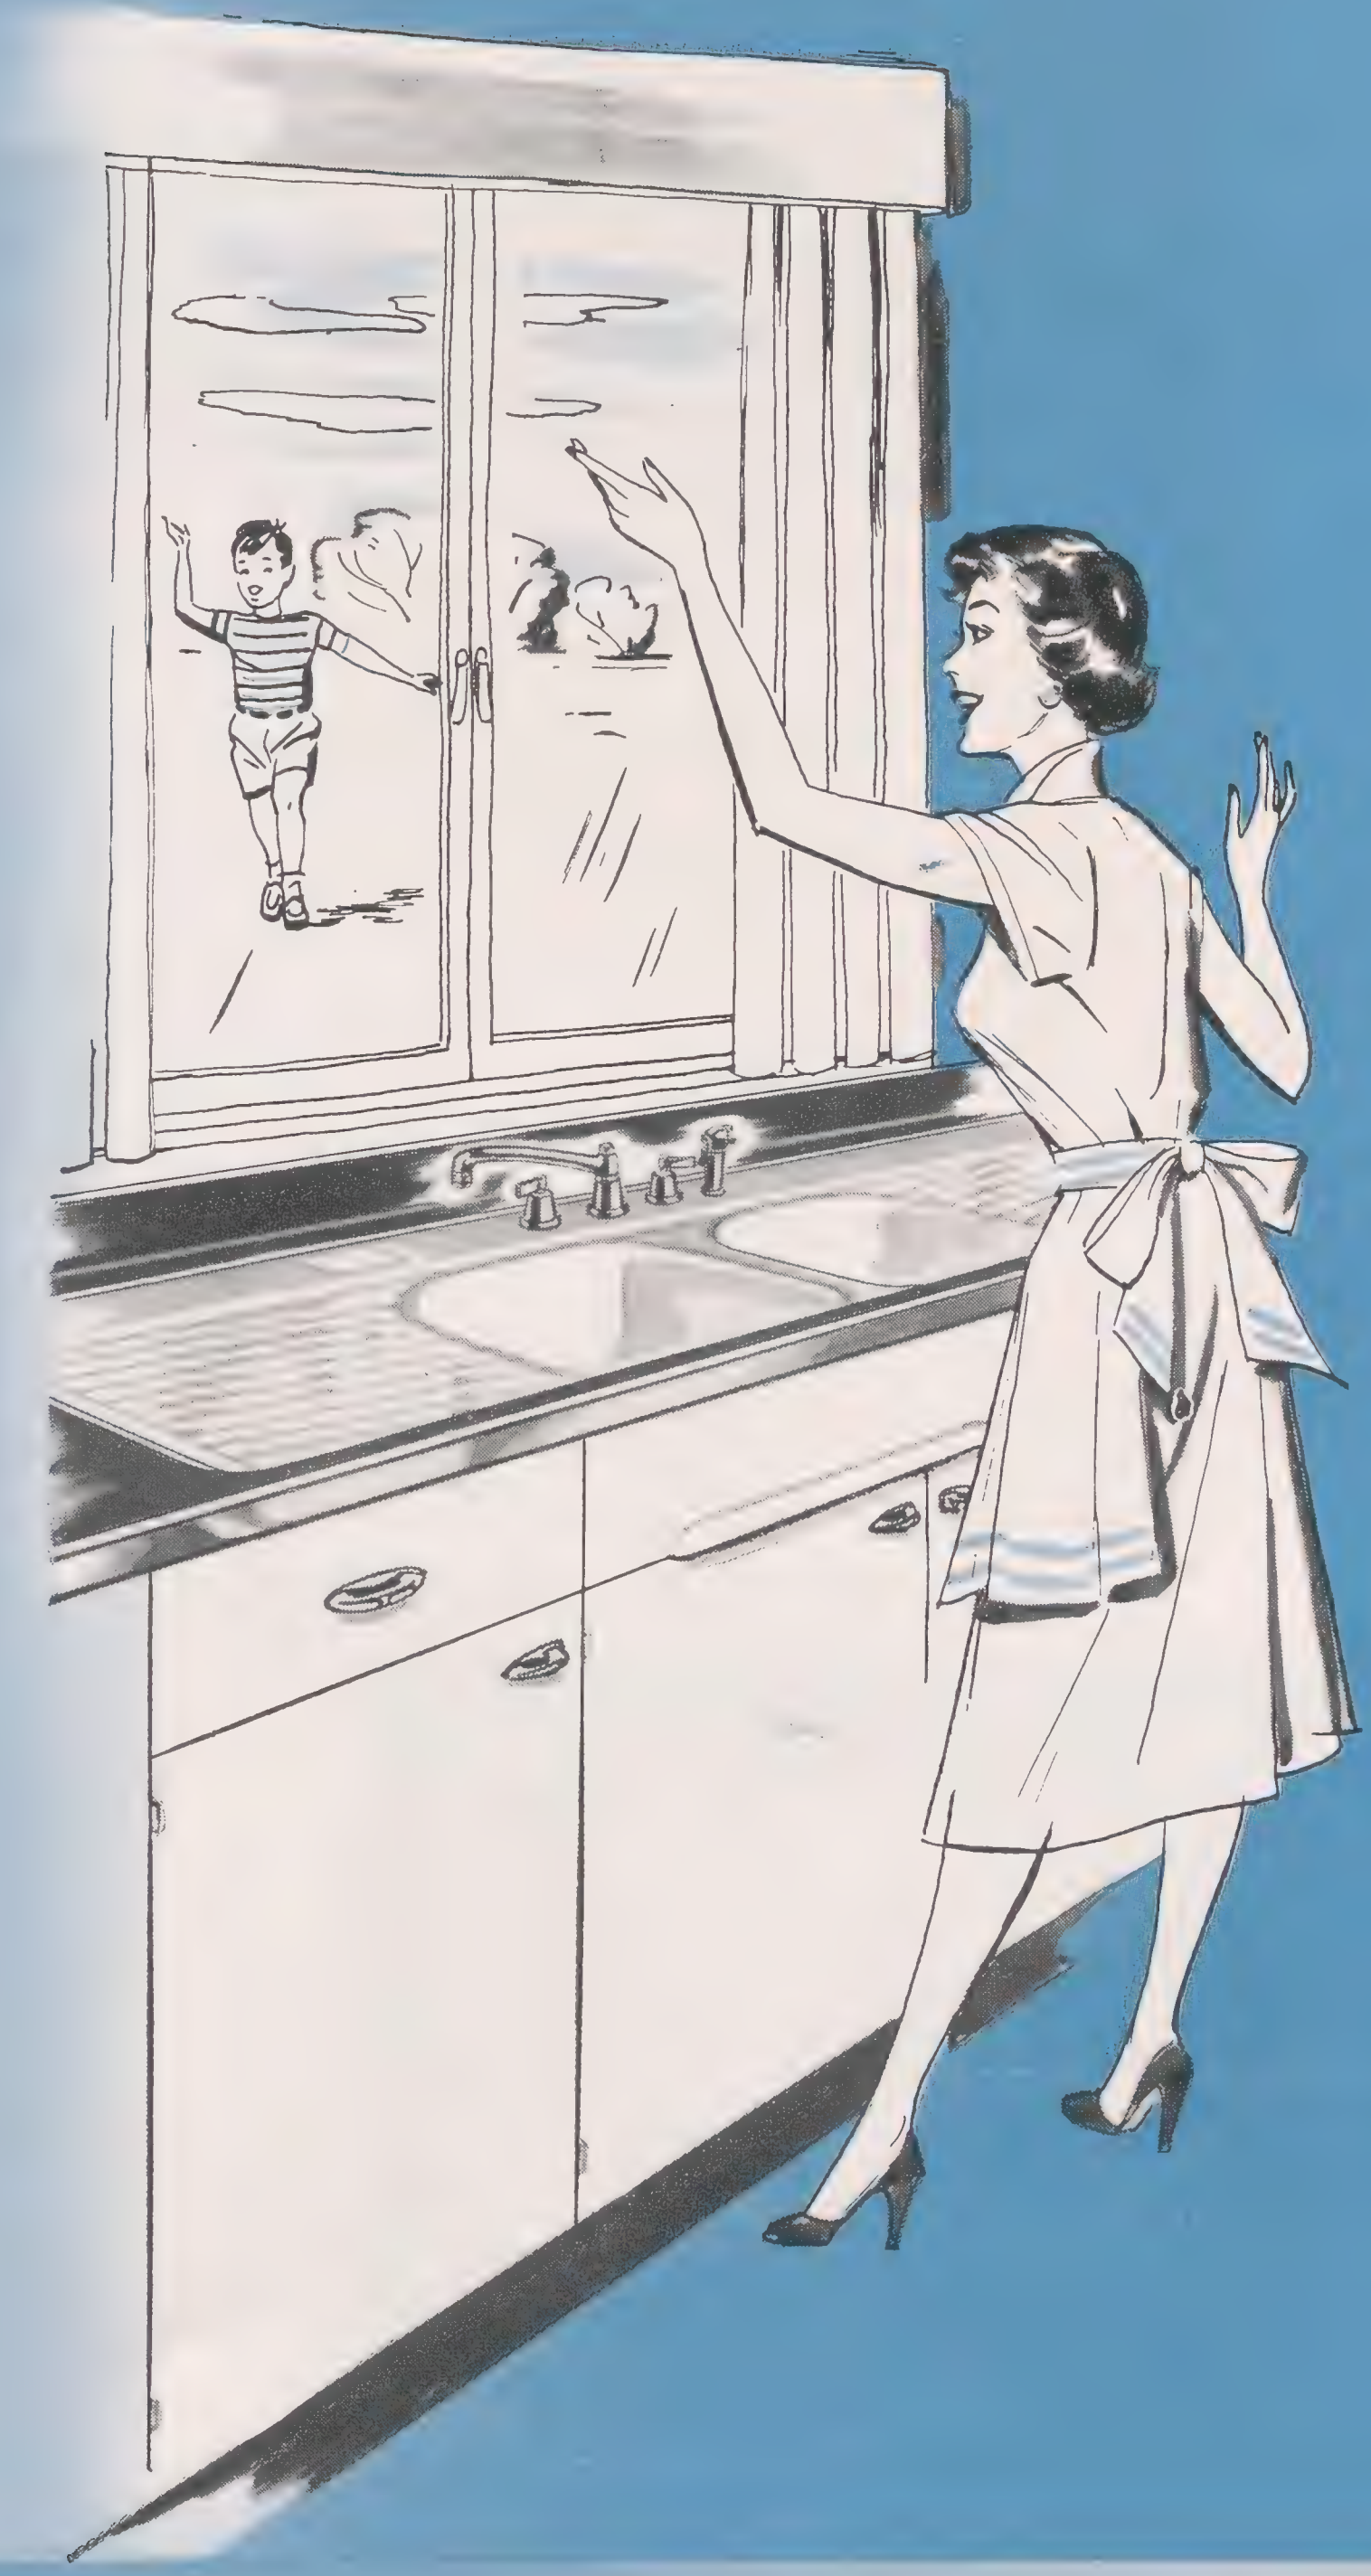

WILSHIRE ACID-RESISTING ENAMELED CAST IRON DOUBLE COMPARTMENT, DOUBLE DRAINBOARD LEDGE SINK

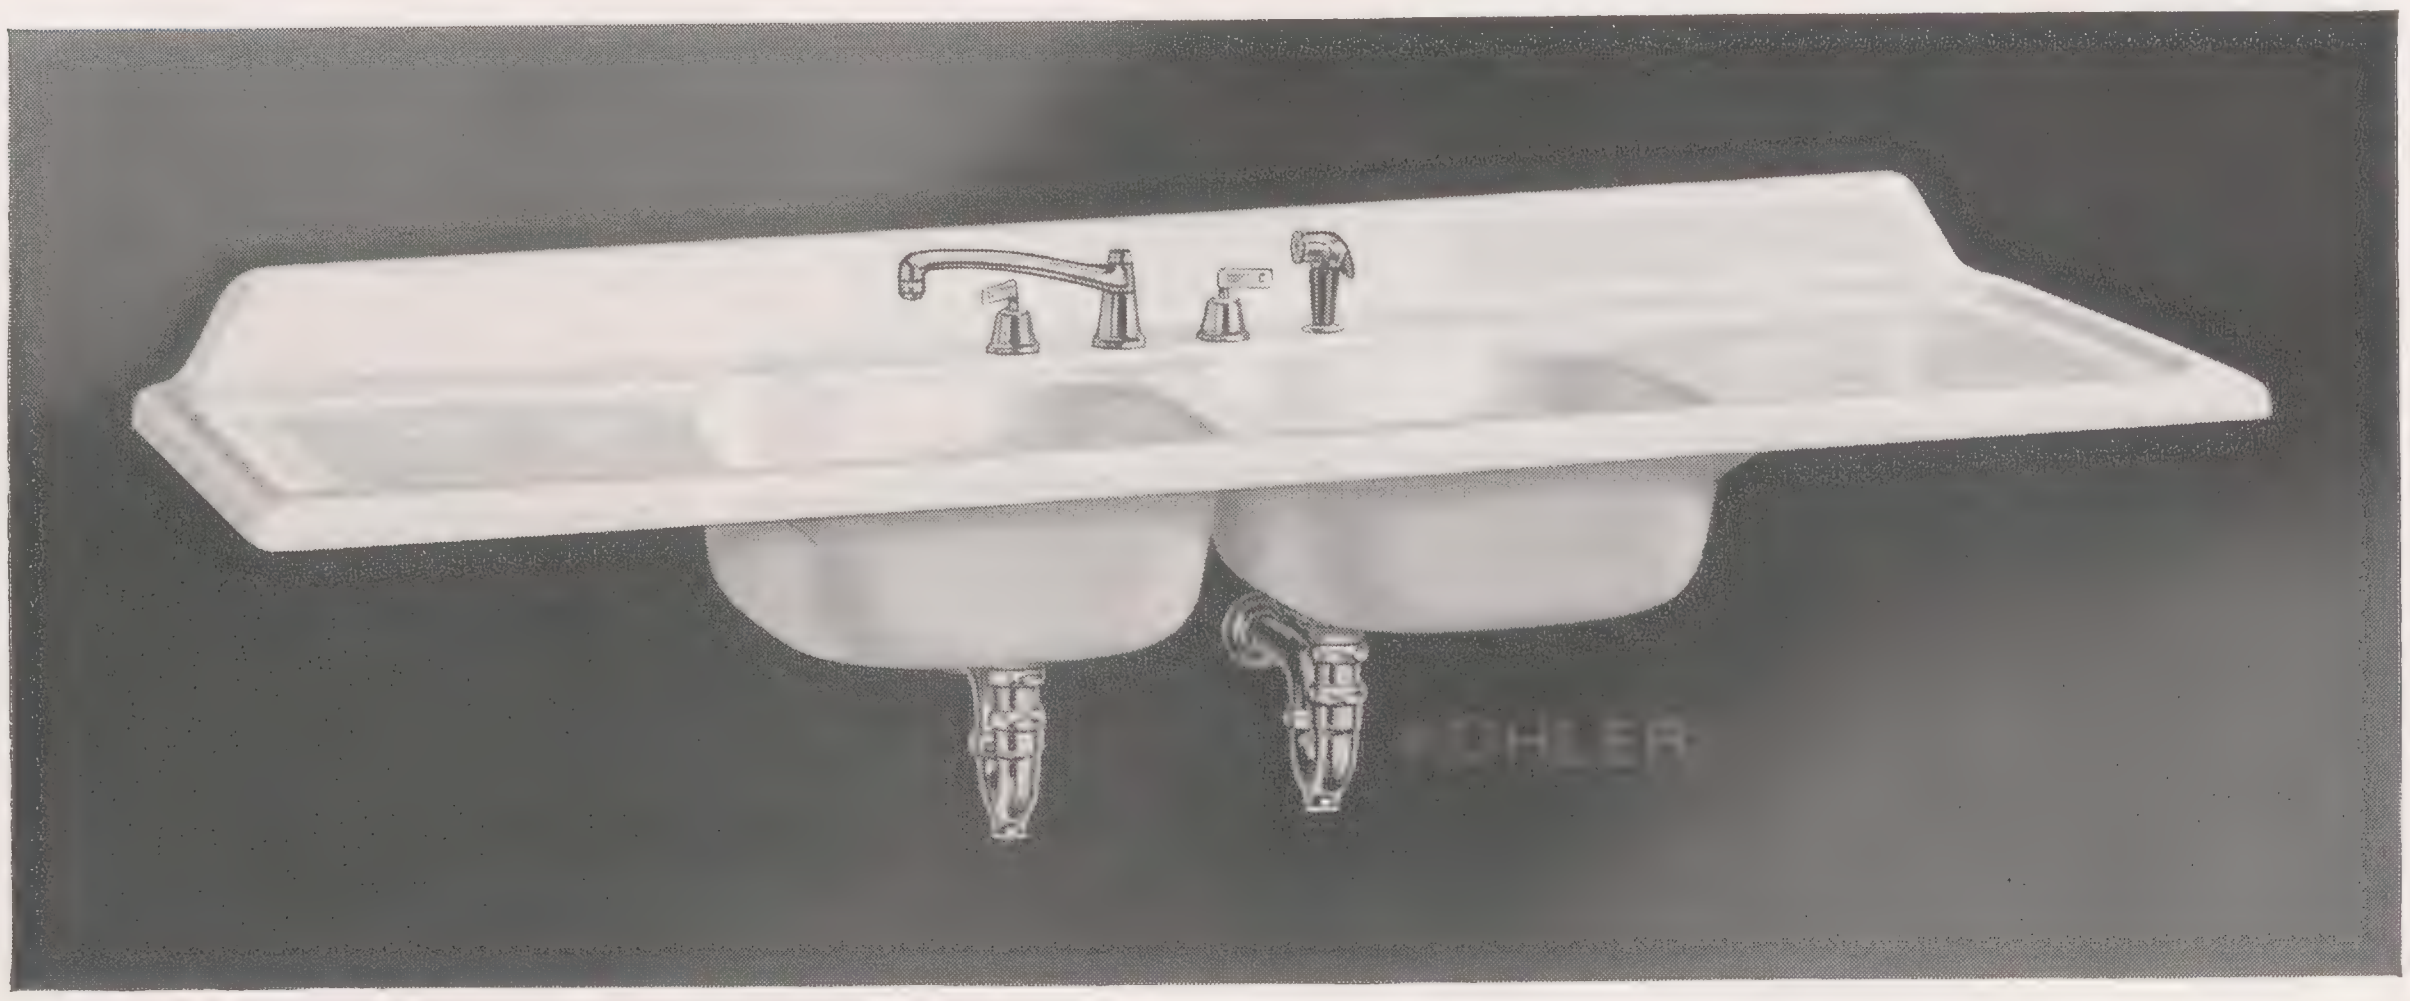

WILSHIRE K-5500-A Sizes 60x25", 72x25"

Sink Complete	K-5500-A
Sink Complete, Less Trap	K-5500-B
Sink	K-5500
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify K-8605
Strainers	Two **K-8801** Duostrainers
Traps	Two **K-9000** 1½"

SIZES	60x25"	72x25"
SINK COMPARTMENTS	14x18x8"	16¼x18x8"
BACK	4"	4"
WIDTH OF LEDGE	3⅜"	3⅜"

WILSHIRE SINKS WITH METAL CABINETS

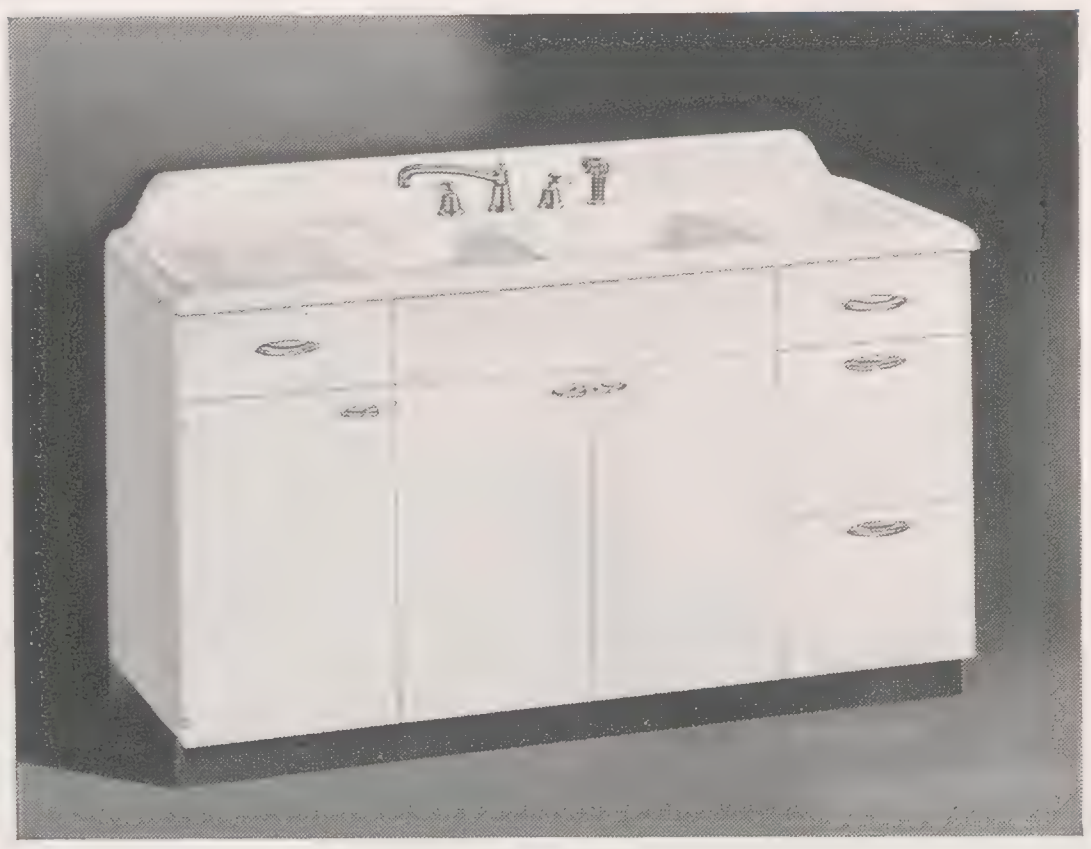

WILSHIRE K-5500-AC
Wilshire **K-5500-A** 60" sink
Lyon **No. 8018-L** 60x24" cabinet

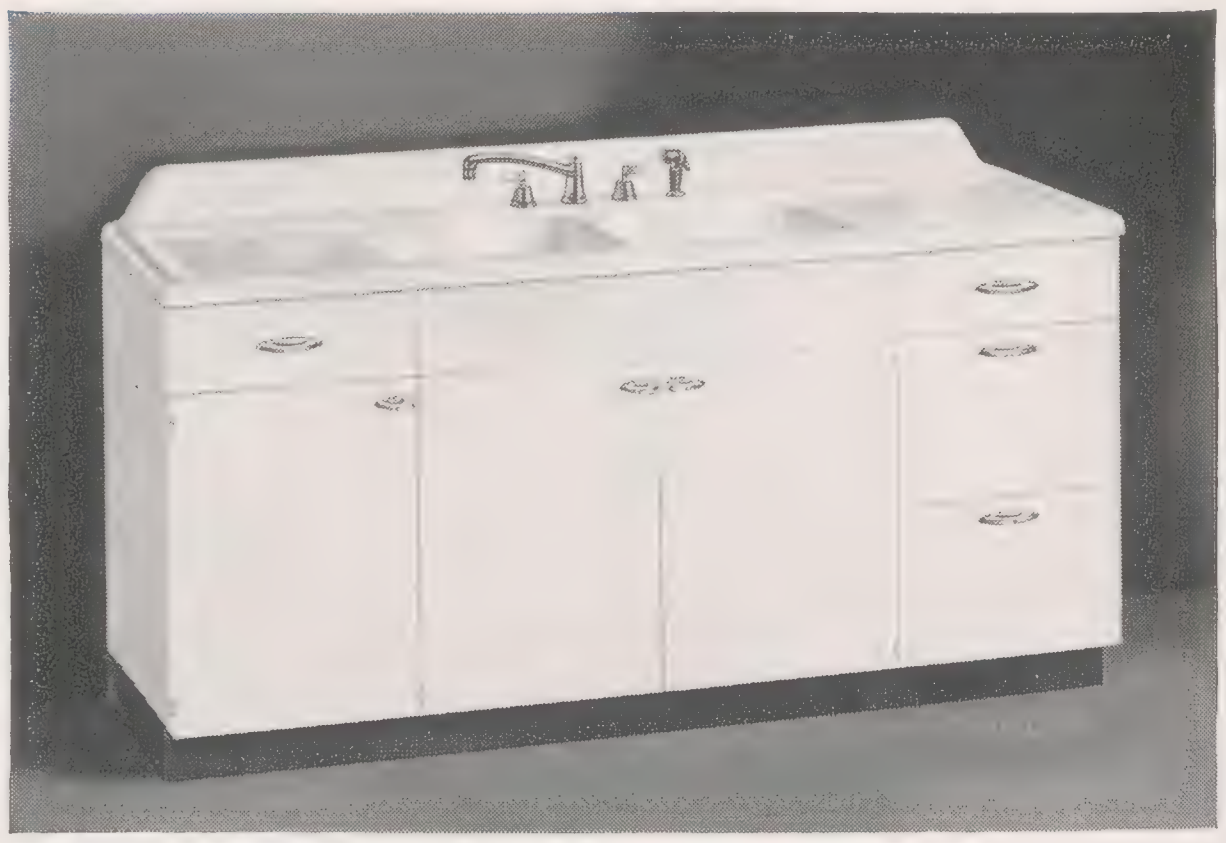

WILSHIRE K-5500-AC
Wilshire **K-5500-A** 72" sink
Lyon **No. 8019-L** 72x24" cabinet

CLEARFIELD ACID-RESISTING ENAMELED CAST IRON DOUBLE COMPARTMENT, DOUBLE DRAINBOARD FLAT RIM LEDGE SINK

For Building In

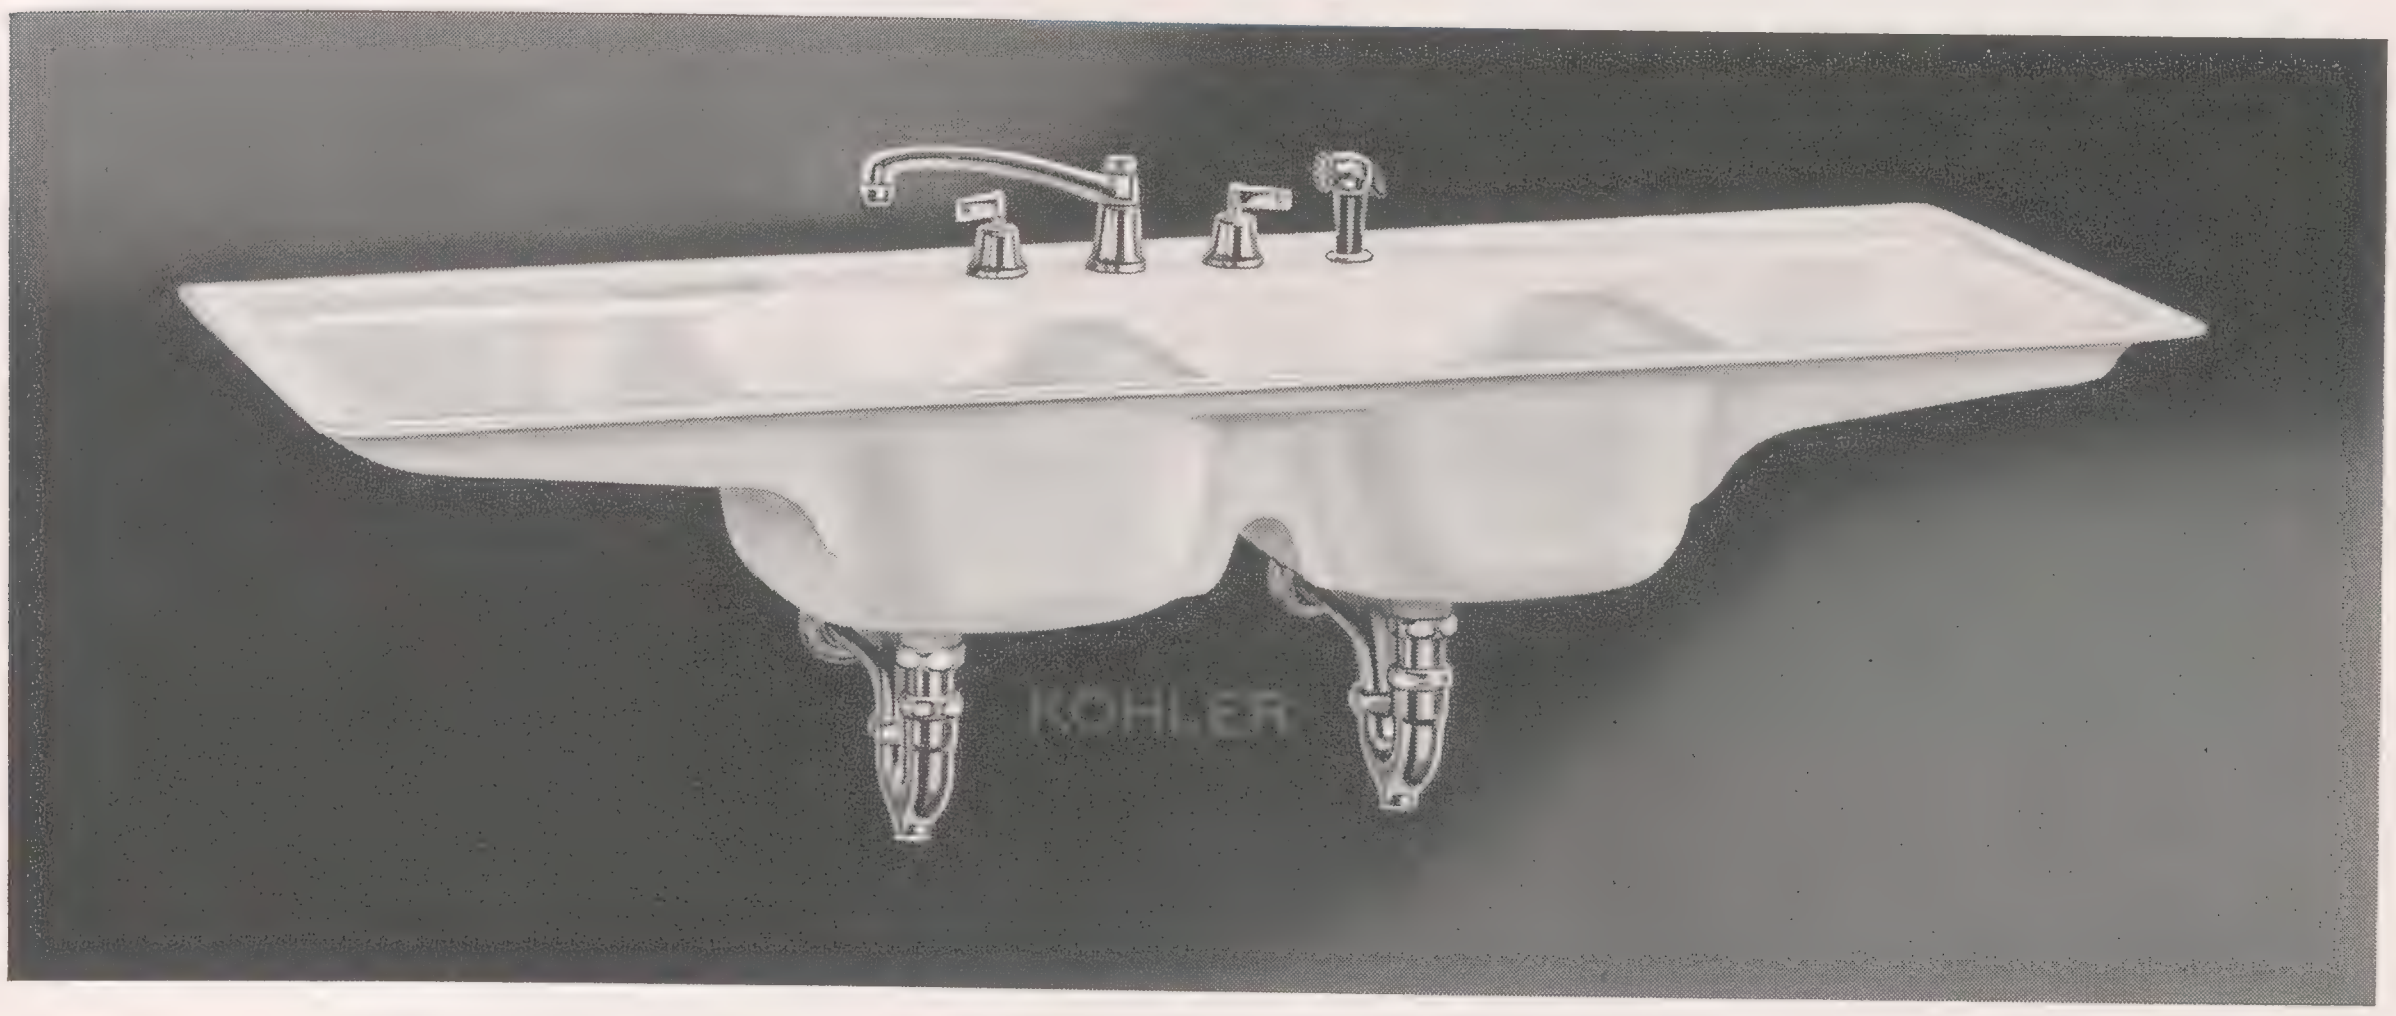

CLEARFIELD K-5520-A Size 60x21"

Sink Complete	K-5520-A
Sink Complete, Less Trap	K-5520-B
Sink	K-5520
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**
Strainers	Two **K-8801** Duostrainers
Traps	Two **K-9000** 1½"
Metal Frame, If Specified	K-6699

SIZE	60x21"
SINK COMPARTMENTS	14x15⅜x8"
WIDTH OF LEDGE	3⅛"

CLEARFIELD SINK WITH METAL CABINETS

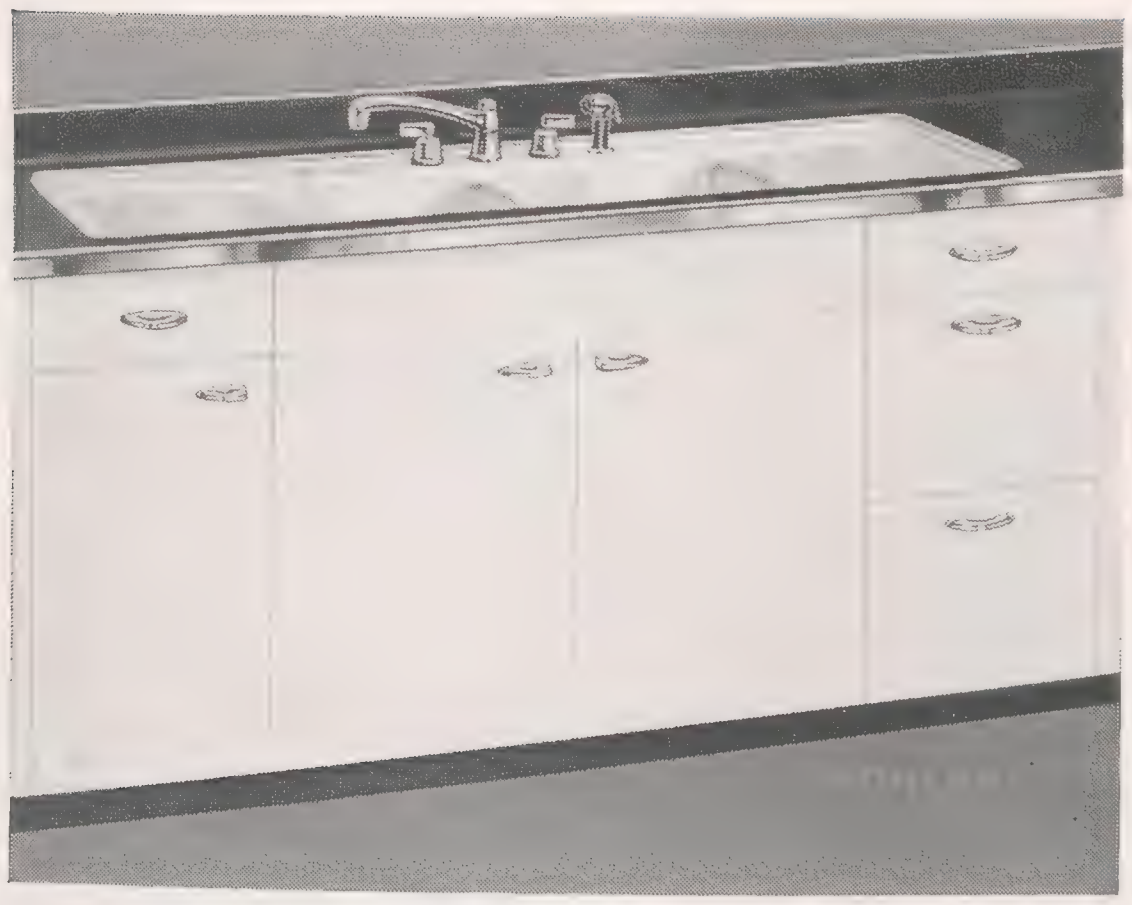

CLEARFIELD K-5520-AC

Clearfield **K-5520-A** sink
Lyon **No. 8041-L** 36" sink front
Lyon **No. 8080-L** 15x24" base cabinet at left
Lyon **No. 8170-L** 15x24" base cabinet at right
(Counter top not furnished.)

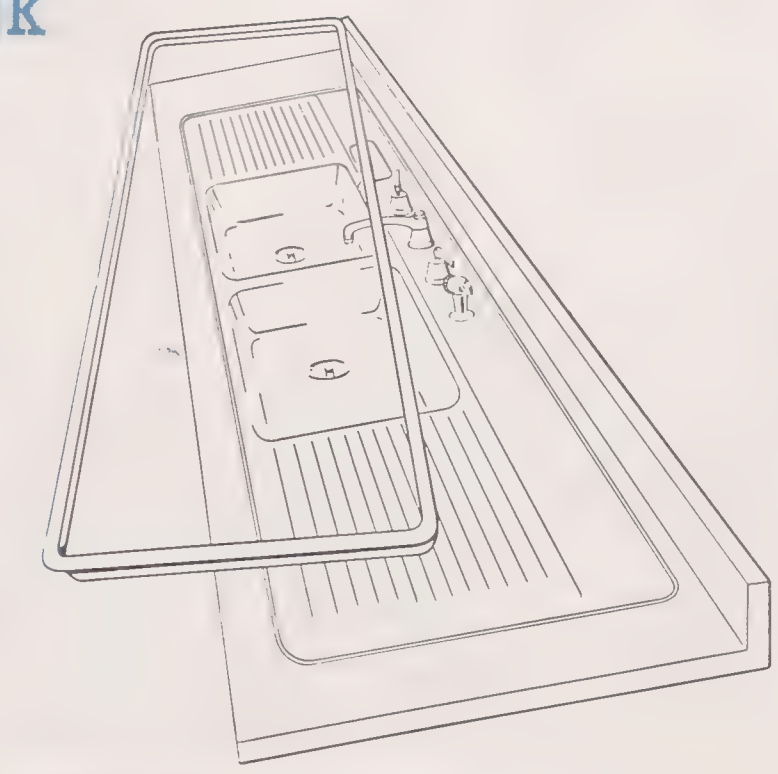

K-6699 Metal Frame ready to be placed around sink after sink is in place.

CAMBERLEY ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT, DOUBLE DRAINBOARD LEDGE SINK

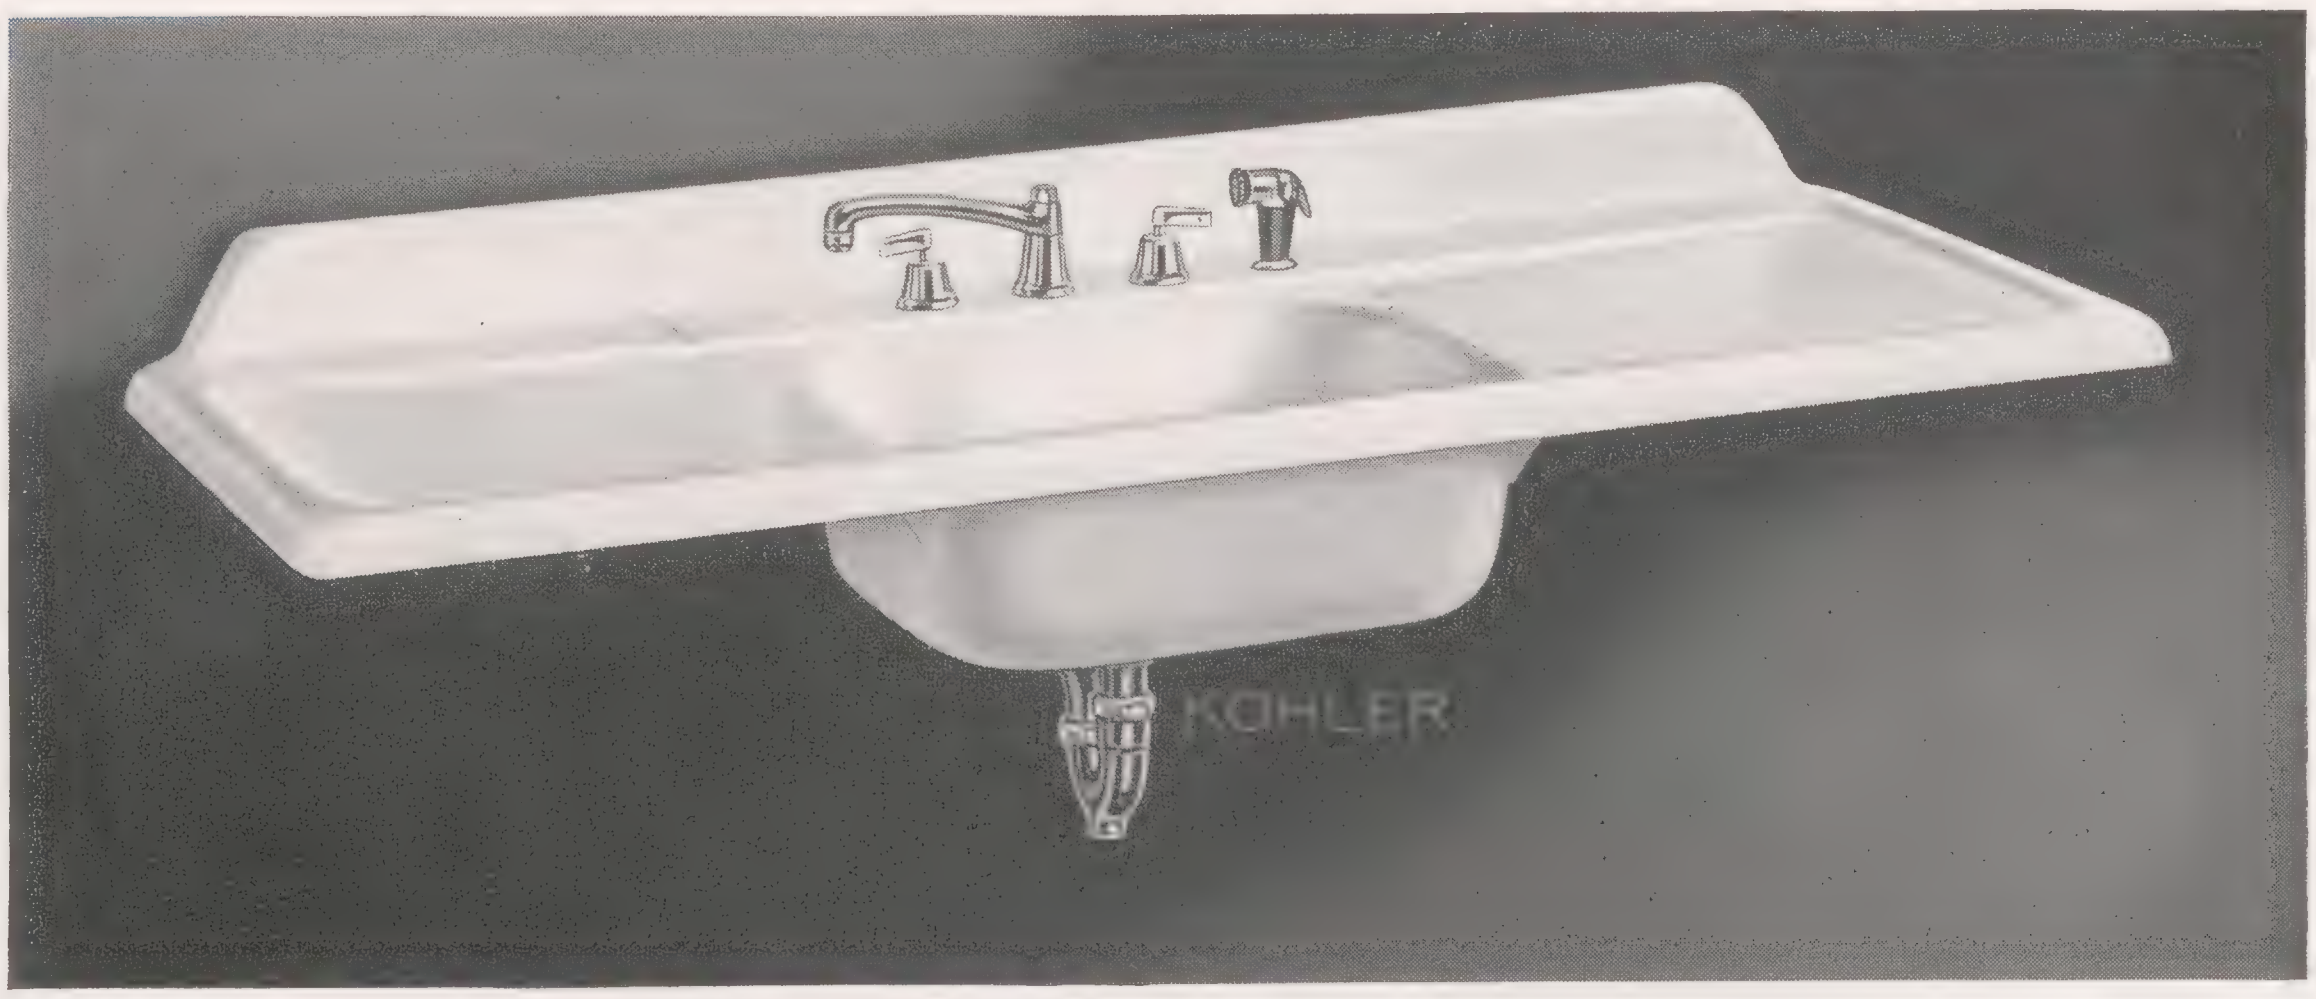

CAMBERLEY K-5550-A Sizes 54x25", 60x25"

Sink Complete	**K-5550-A**
Sink Complete, Less Trap	**K-5550-B**
Sink	**K-5550**
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**
Strainer	**K-8801** Duostrainer
Trap	**K-9000** 1½"

SIZES	54x25"	60x25"
SINK COMPARTMENT	20x18x8"	20x18x8"
BACK	4"	4"
WIDTH OF LEDGE	3⅜"	3⅜"

CAMBERLEY SINKS WITH METAL CABINETS

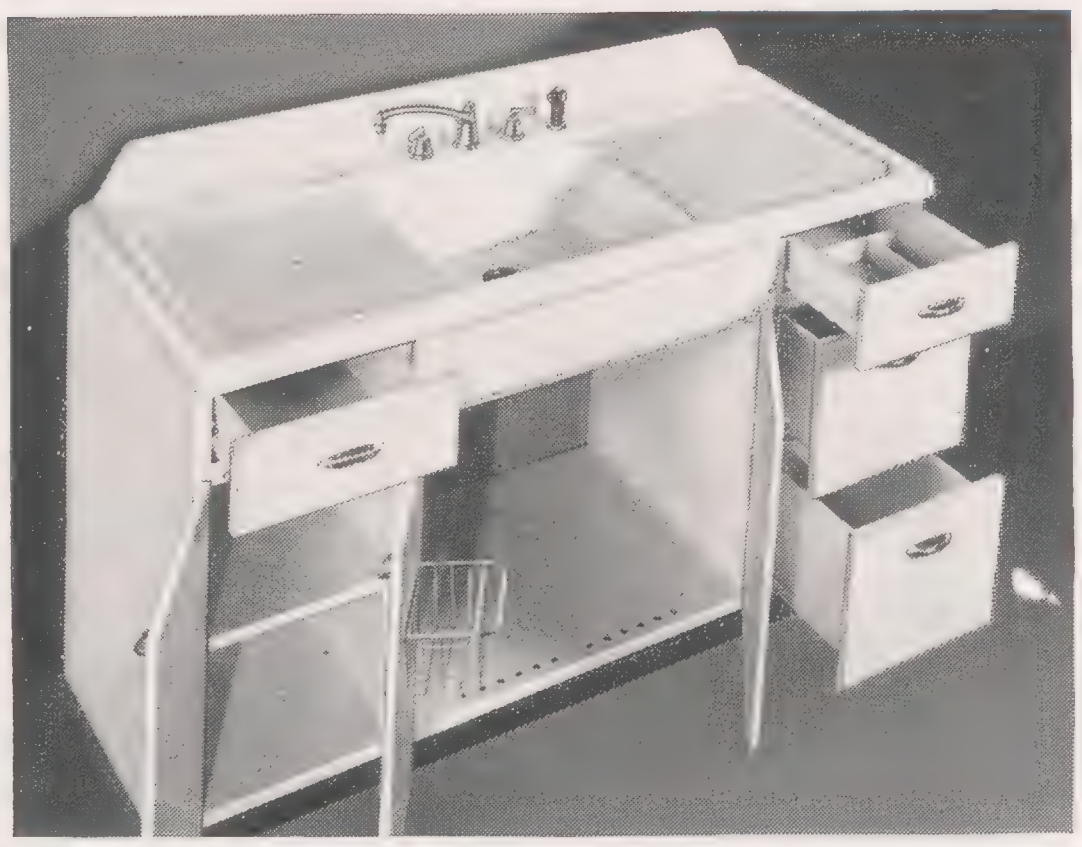

Lyon **No. 8018-L** 60x24" cabinet

CAMBERLEY K-5550-AC

Camberley **K-5550-A** 54" sink
Lyon **No. 8016-L** 54x24" cabinet
Camberley **K-5550-A** 60" sink
Lyon **No. 8018-L** 60x24" cabinet

WINFIELD ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT, DOUBLE DRAINBOARD FLAT RIM LEDGE SINK

For Building In

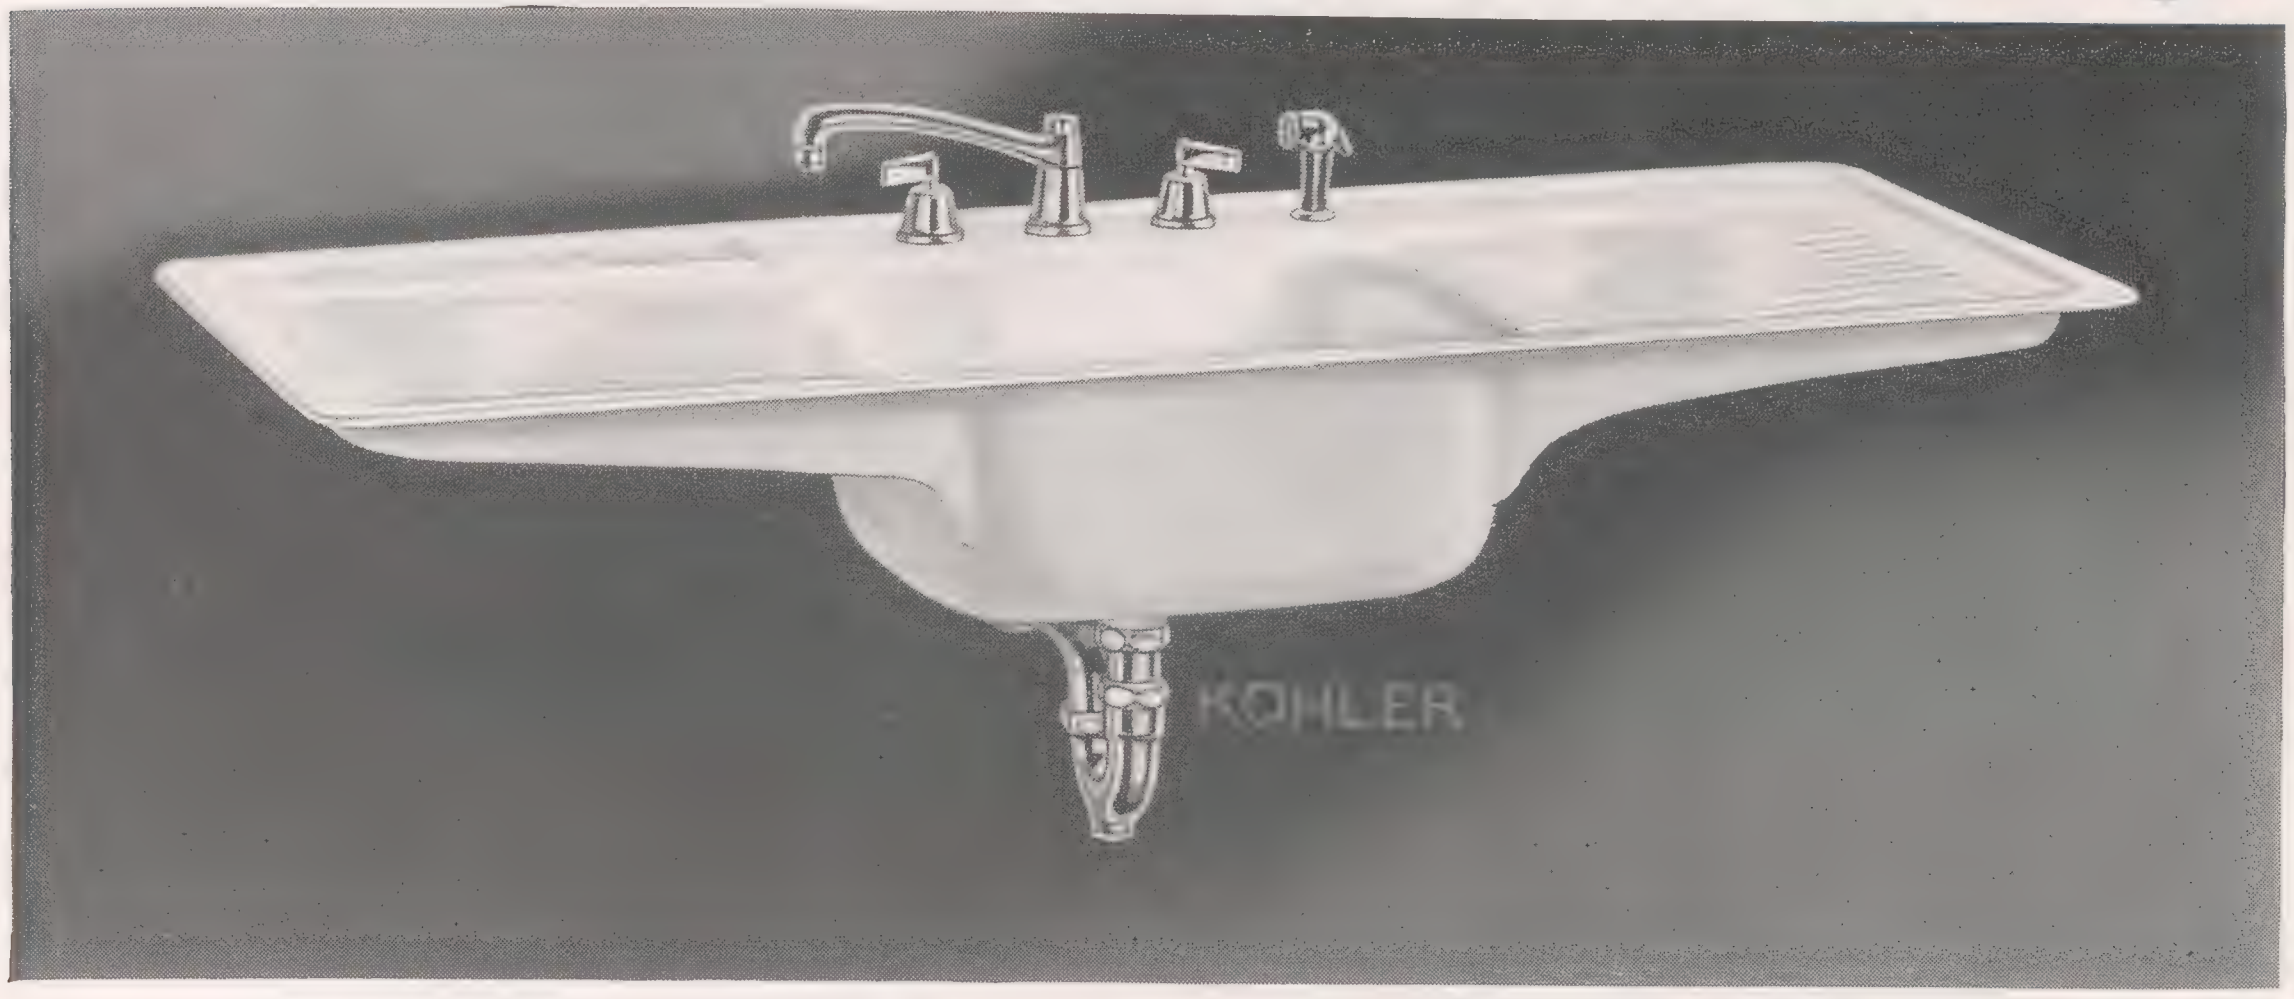

WINFIELD K-5560-A Size 54x21″

Sink Complete	K-5560-A
Sink Complete, Less Trap	K-5560-B
Sink	K-5560
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**
Strainer	**K-8801** Duostrainer
Trap	**K-9000** 1½″
Metal Frame, If Specified	K-6699

SIZE	54x21″
SINK COMPARTMENT	18½x15⅜x8″
WIDTH OF LEDGE	3⅛″

WINFIELD K-5560-AC

Winfield **K-5560-A** 54″ sink
Lyon **No. 8018-L** 60x24″ cabinet
(Counter top not furnished.)

WINFIELD SINK WITH METAL CABINET

Integral drainboards afford utmost utility in convenient self-draining work areas.

CYMBRIA ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT, SINGLE DRAINBOARD LEDGE SINK

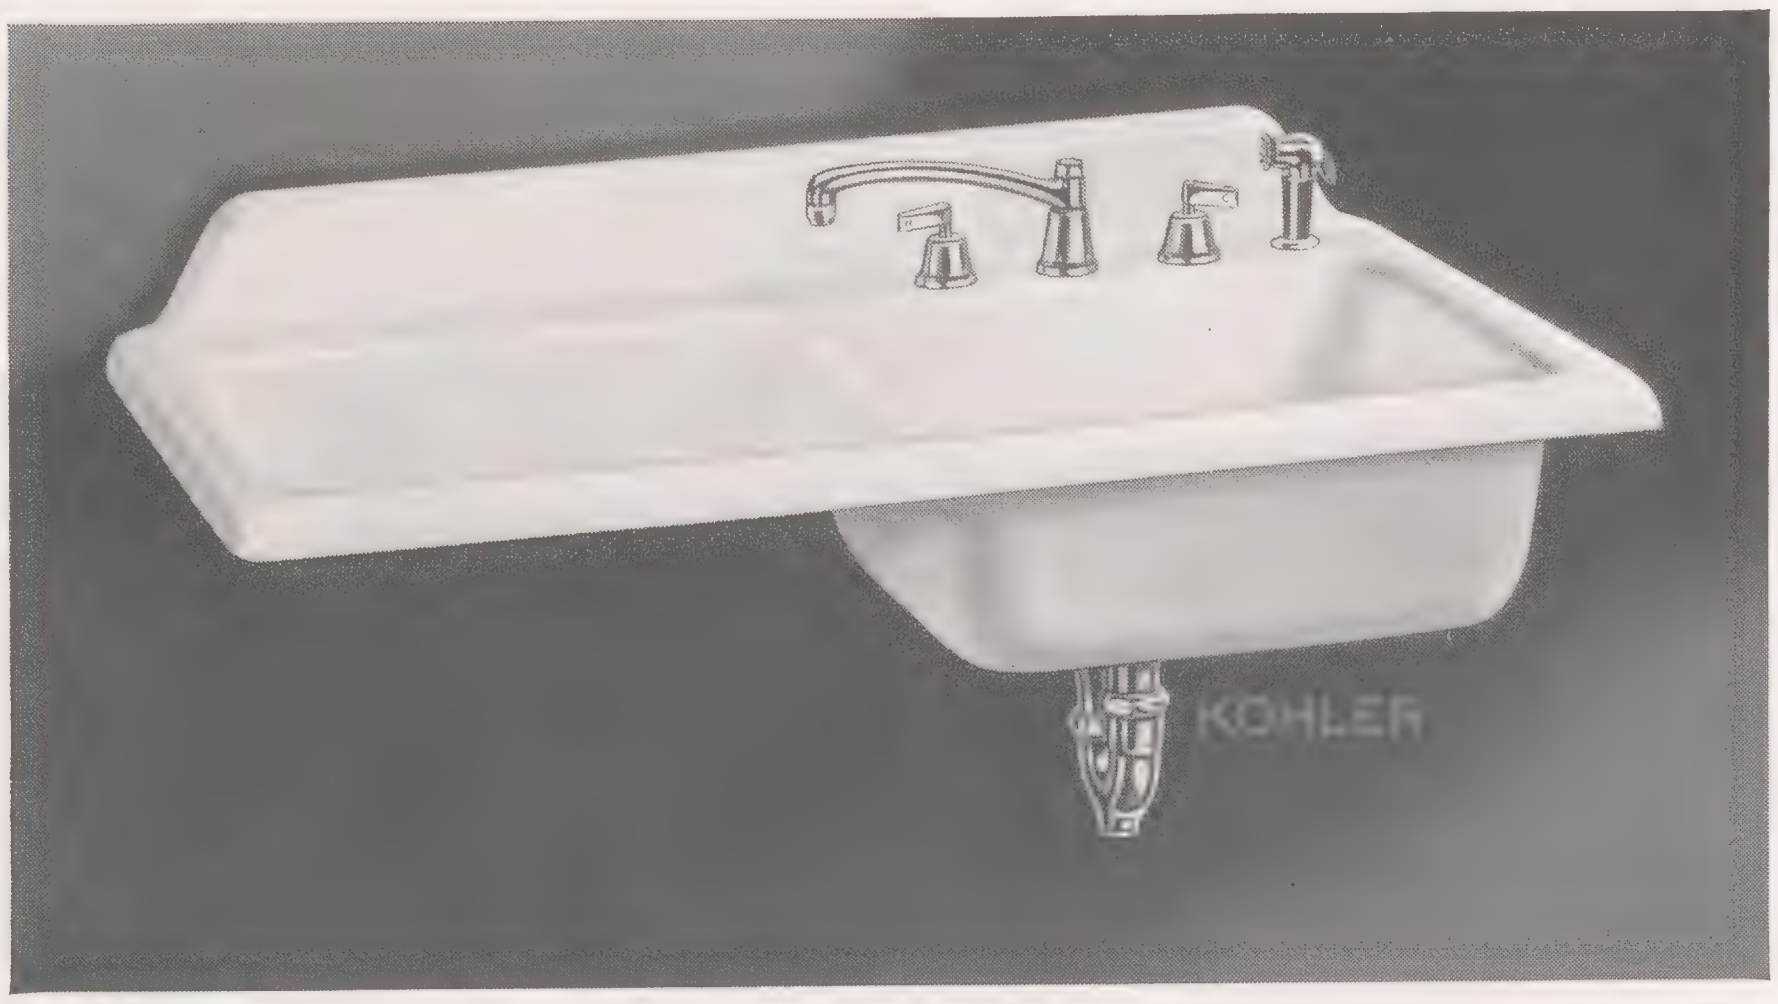

CYMBRIA K-5570-A Size 42x25″

Sink Complete	**K-5570-A** Drainboard at left (Illustrated)	**K-5569-A** Drainboard at right
Sink Complete, Less Trap	**K-5570-B**	**K-5569-B**
Sink	**K-5570**	**K-5569**
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**
Strainer	**K-8801** Duostrainer	**K-8801** Duostrainer
Trap	**K-9000** 1½″	**K-9000** 1½″

SIZE	42x25″
SINK COMPARTMENT	18¾″x18x8″
BACK	4″
WIDTH OF LEDGE	3⅜″

CYMBRIA SINKS WITH METAL CABINETS

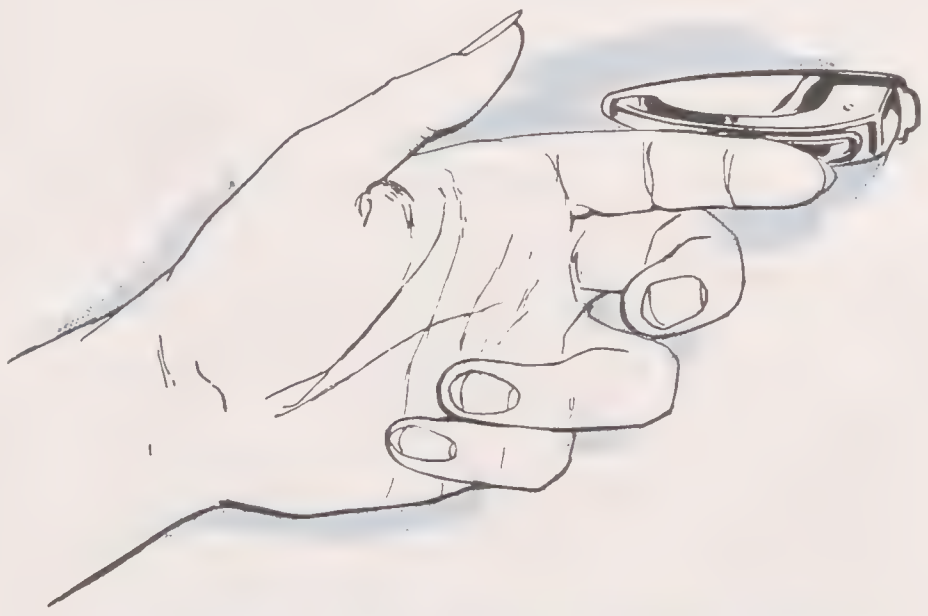

Cabinet doors open with a tap.

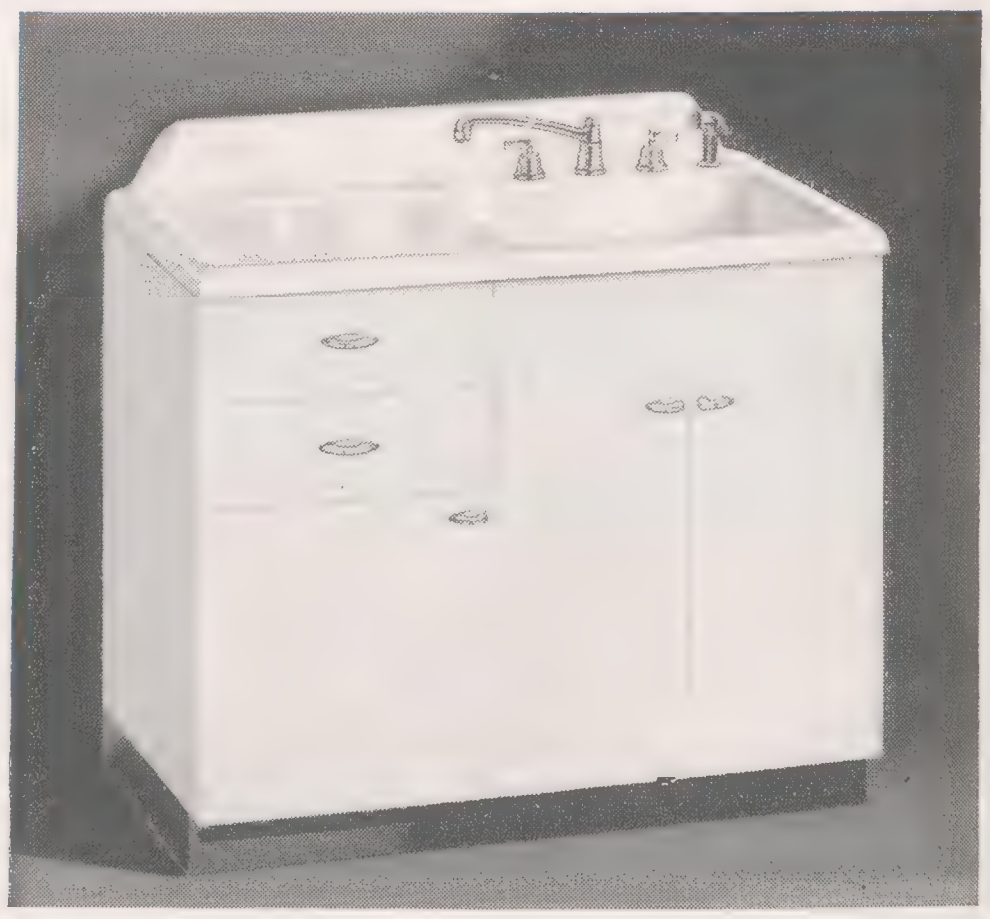

CYMBRIA K-5570-AC
Cymbria **K-5570-A** 42″ sink with drainboard at left
Lyon **No. 8132-L** 42x24″ cabinet

CYMBRIA K-5569-AC
Cymbria **K-5569-A** 42″ sink with drainboard at right
Lyon **No. 8133-L** 42x24″ cabinet

CHATFIELD ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT, SINGLE DRAINBOARD FLAT RIM LEDGE SINK

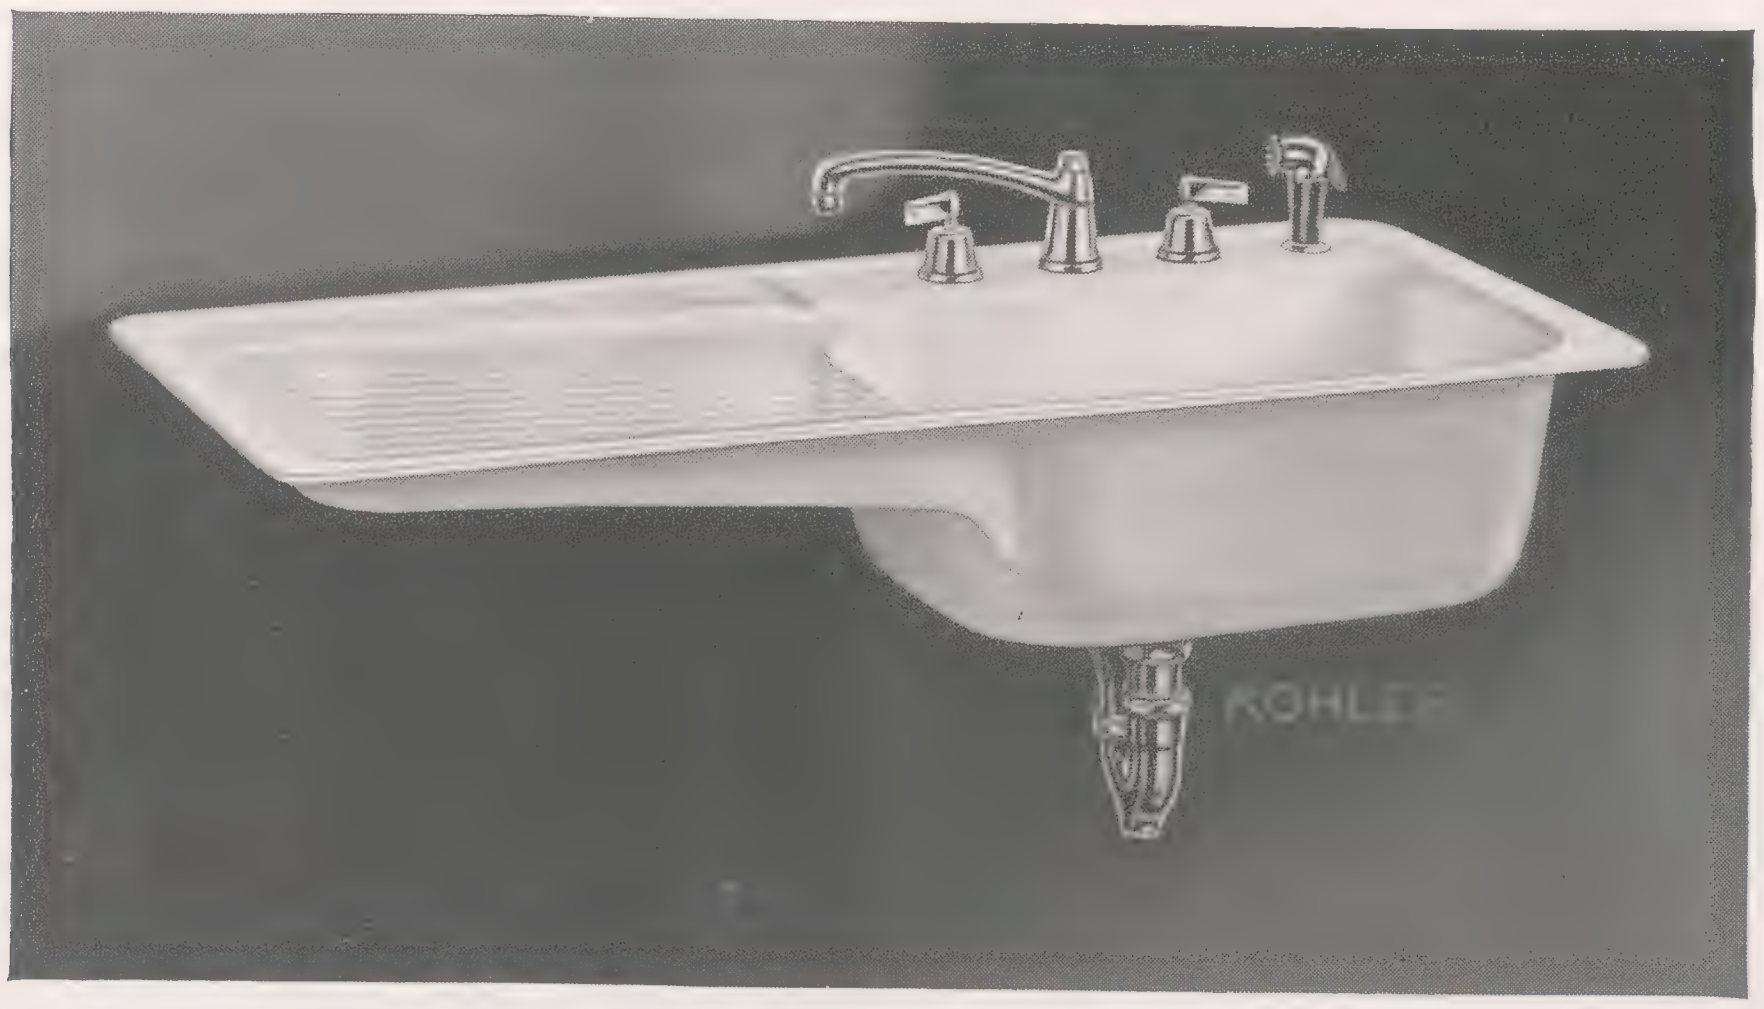

For Building In

CHATFIELD K-5580-A

Size 42x21″

Sink Complete	**K-5580-A** Drainboard at left (Illustrated)	**K-5579-A** Drainboard at right
Sink Complete, Less Trap	**K-5580-B**	**K-5579-B**
Sink	**K-5580**	**K-5579**
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**
Strainer	**K-8801** Duostrainer	**K-8801** Duostrainer
Trap	**K-9000** 1½″	**K-9000** 1½″
Metal Frame, If Specified	**K-6699**	**K-6699**

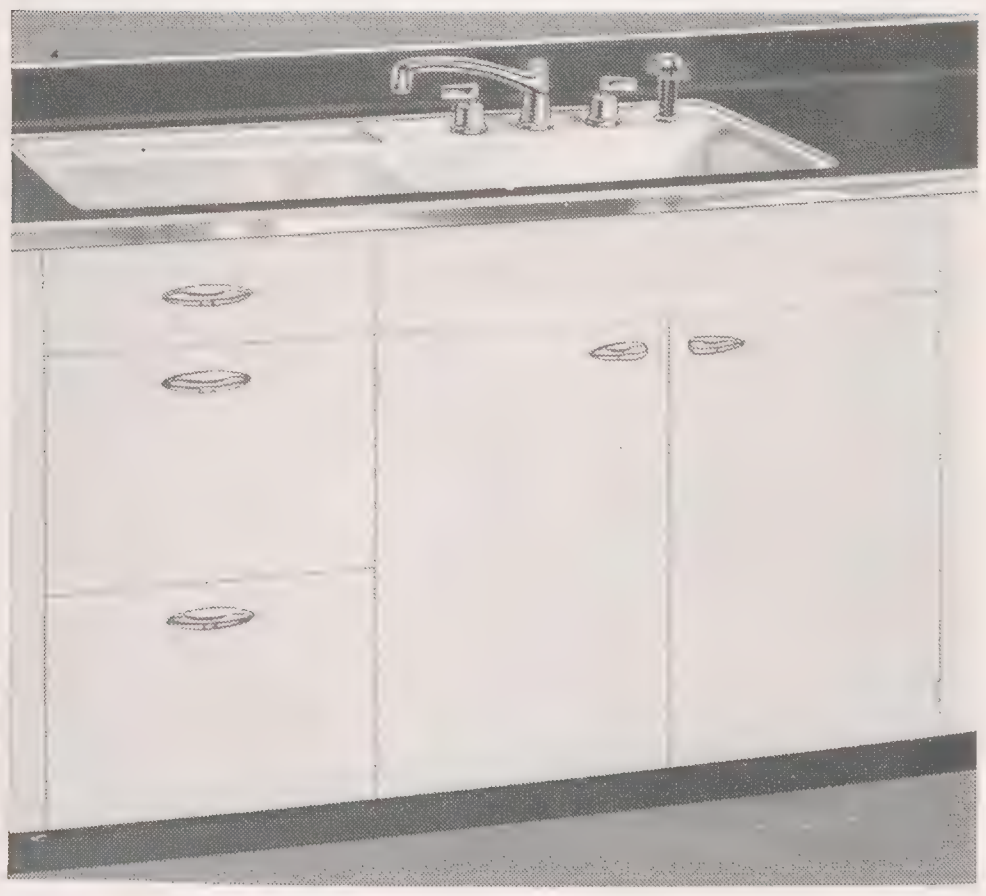

CHATFIELD SINK WITH METAL CABINET

SIZE	42x21″
SINK COMPARTMENT	20x15⅜x8″
WIDTH OF LEDGE	3⅛″

CHATFIELD K-5580-AC

Chatfield **K-5580-A** 42″ sink with drainboard at left
Lyon **No. 8042-L** 30″ sink front
Lyon **No. 8093-L** 18x24″ base cabinet

Chatfield **K-5579-A** 42″ sink with drainboard at right
Lyon **No. 8042-L** 30″ sink front
Lyon **No. 8093-L** 18x24″ base cabinet
(Counter top not furnished)

Cup strainer collects solid matter for disposal.

DOUBLEDAY ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT, DOUBLE DRAINBOARD SINK WITH BACK

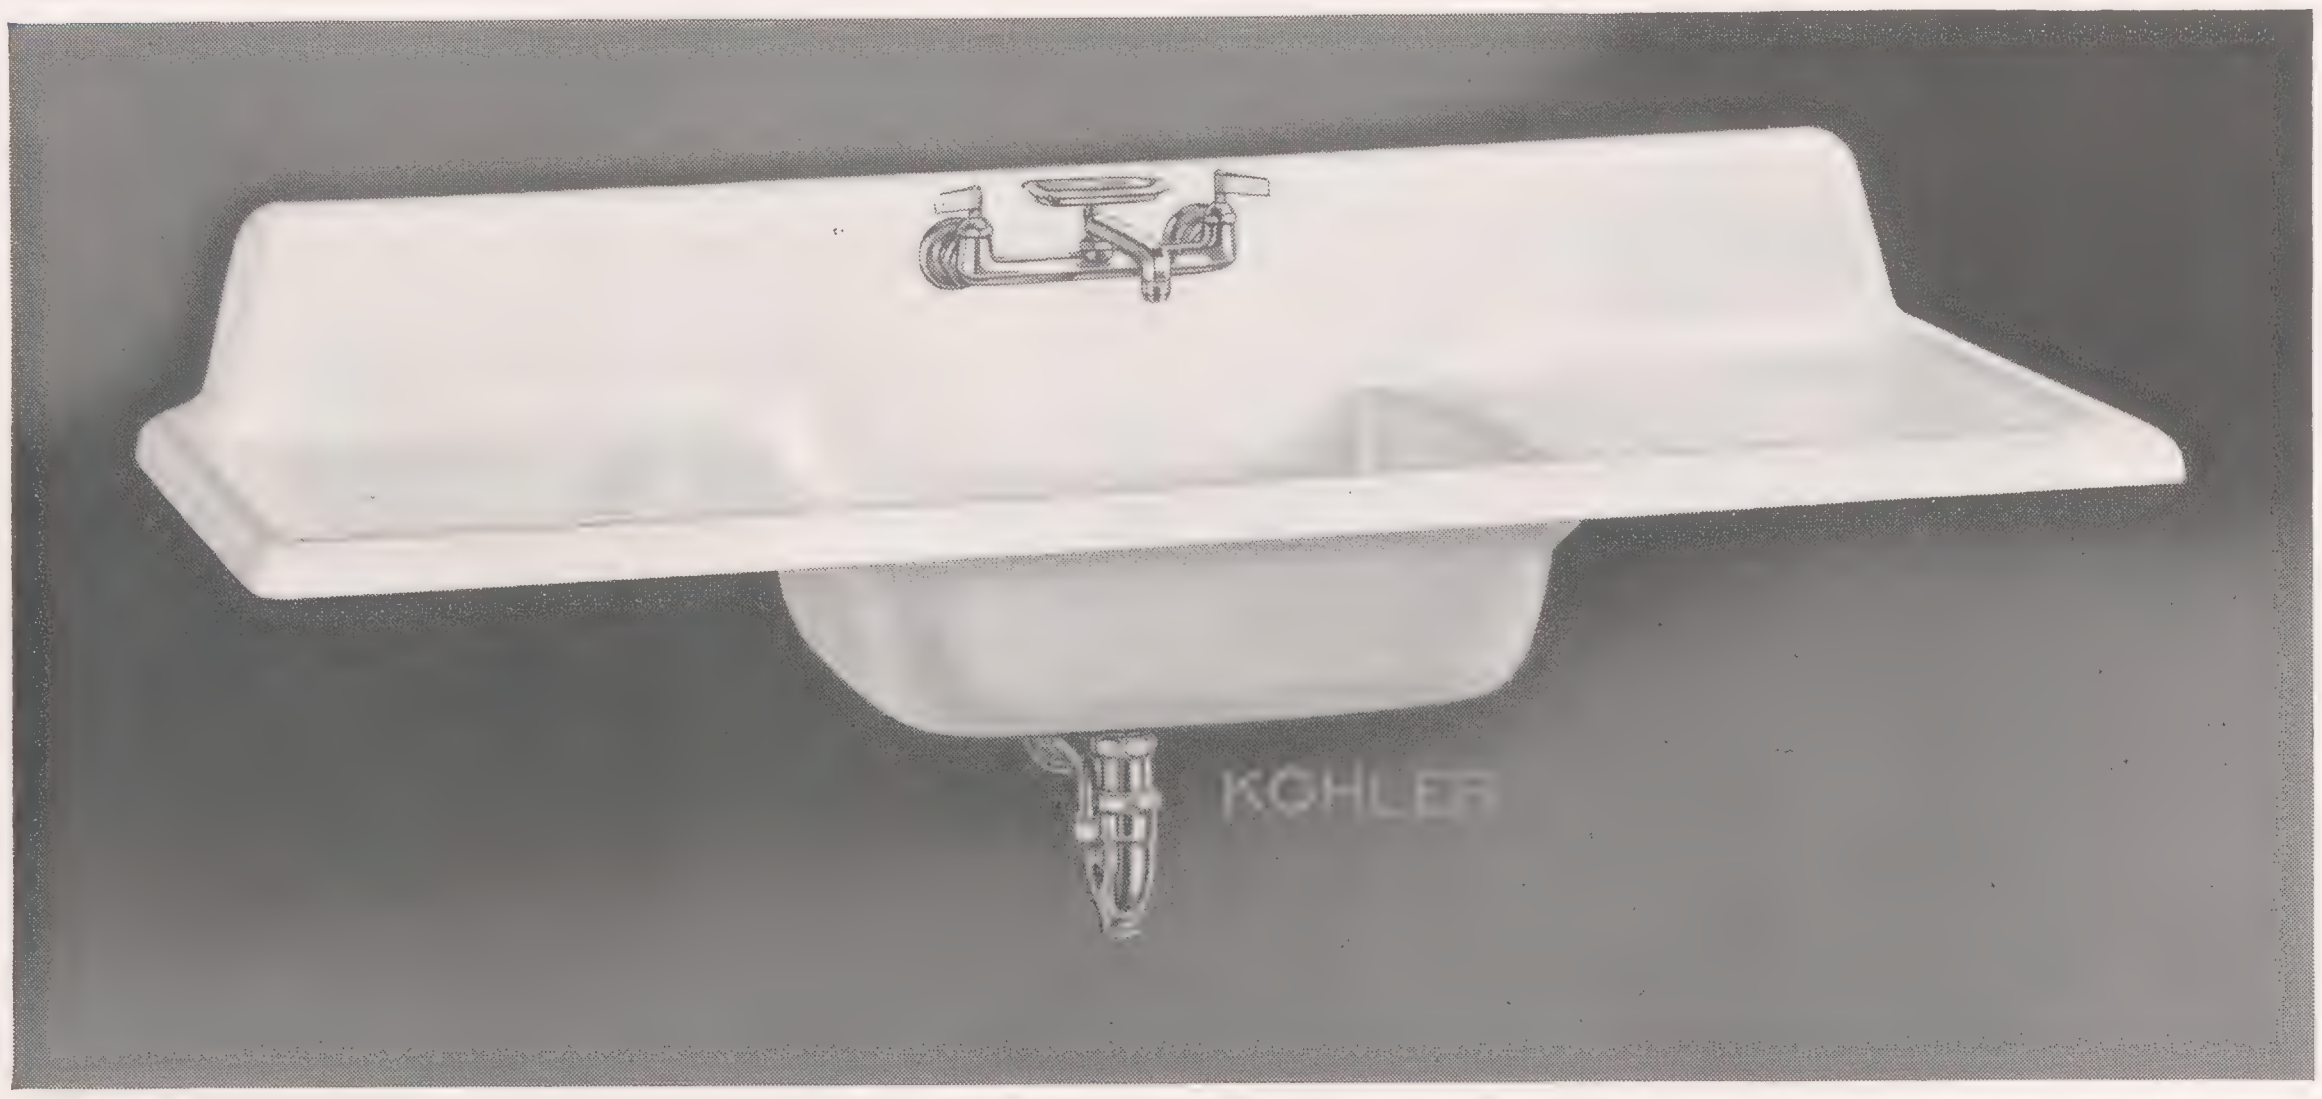

DOUBLEDAY K-5900-A Size 60x22"

Sink Complete	**K-5900-A**
Sink	**K-5900**
Supply Fitting	**K-8655-A** Clearwater with aerator For Clearwater fitting less aerator, specify **K-8655**
Strainer	**K-8801** Duostrainer
Trap	**K-9000** 1½"

SIZE	**60x22"**
SINK COMPARTMENT	**22x17¾x8"**
BACK	**6½"**

The enamel on all Kohler sinks, acid-resisting clear through, has a sparkling, smiling hue and finish, easy to clean and clean-looking.

This superior enamel is safeguarded from strain because it is fused to a strong, rigid base of cast iron.

Chromium plated fittings match the fixtures in style and quality.

HOLIDAY ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT, SINGLE DRAINBOARD SINK WITH BACK

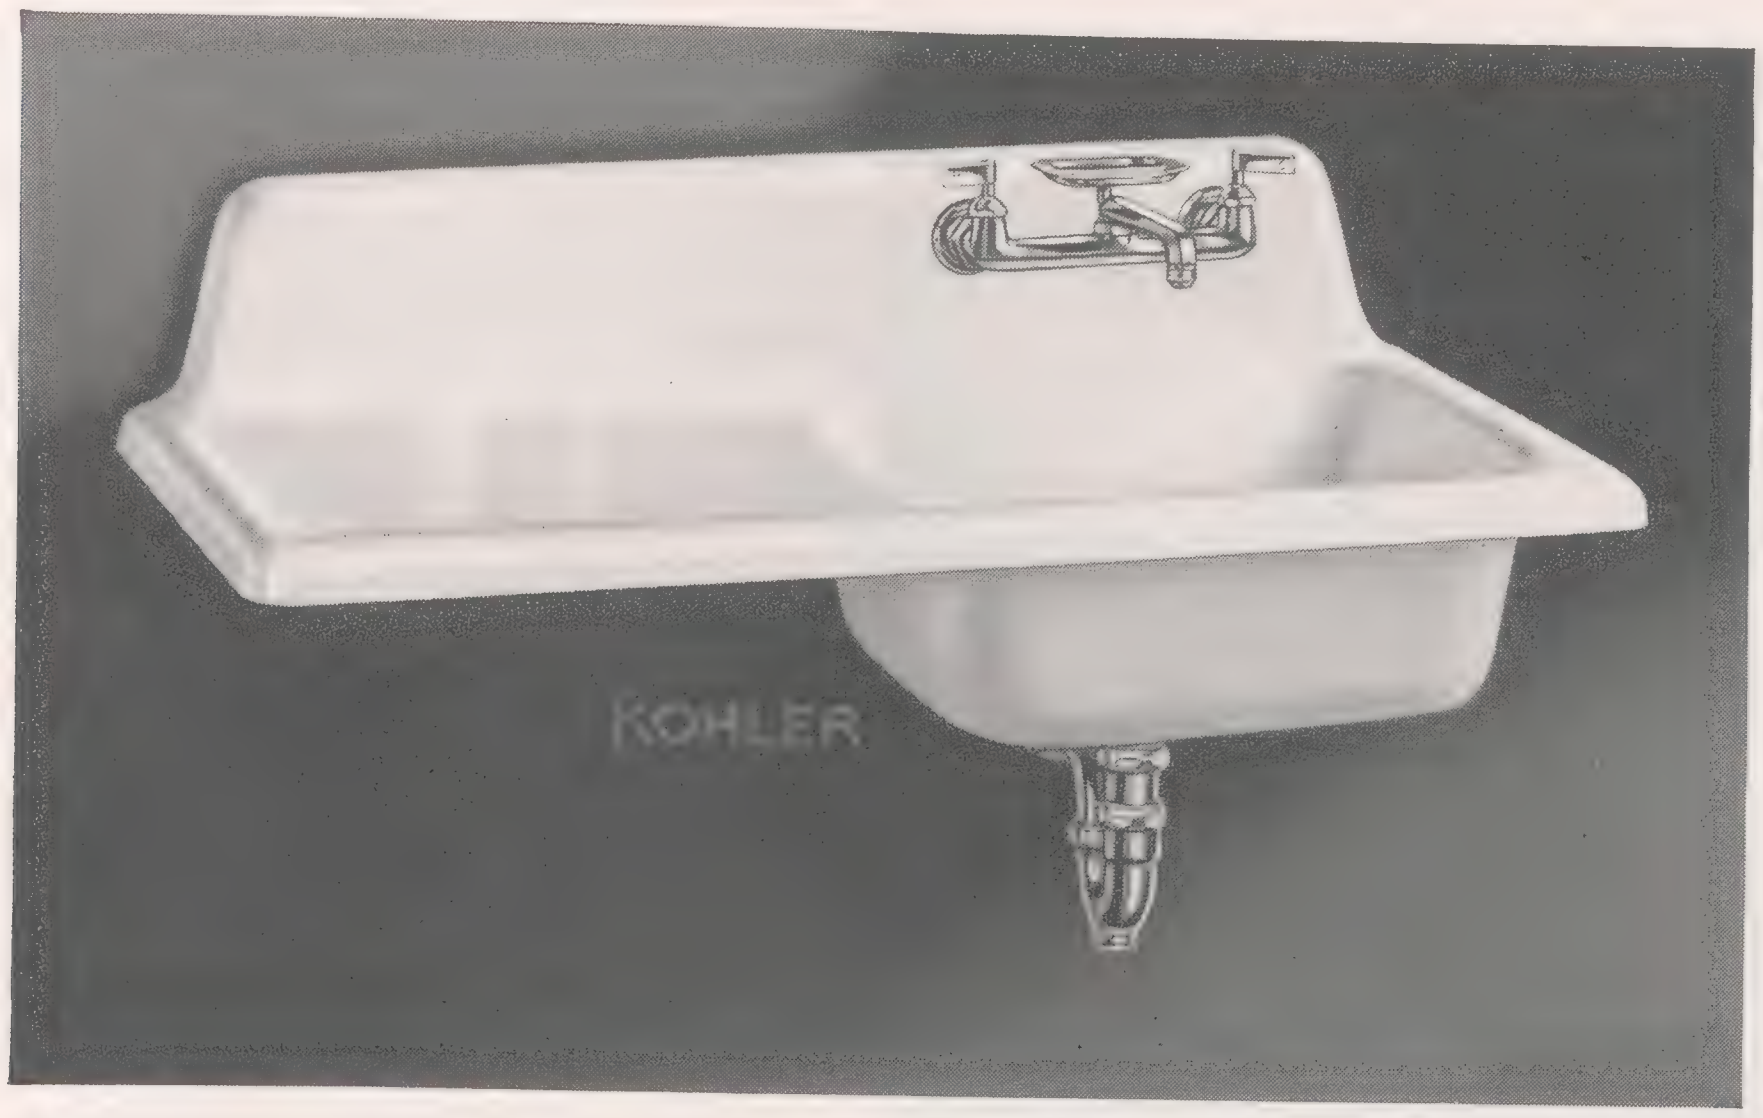

HOLIDAY K-5910-A

Size 42x20"

Sink Complete	**K-5910-A** Drainboard at left (Illustrated)	**K-5909-A** Drainboard at right
Sink	**K-5910**	**K-5909**
Supply Fitting	**K-8655-A** Clearwater with aerator For Clearwater fitting less aerator, specify **K-8655**	**K-8655-A** Clearwater with aerator For Clearwater fitting less aerator, specify **K-8655**
Strainer	**K-8801** Duostrainer	**K-8801** Duostrainer
Trap	**K-9000** 1½"	**K-9000** 1½"

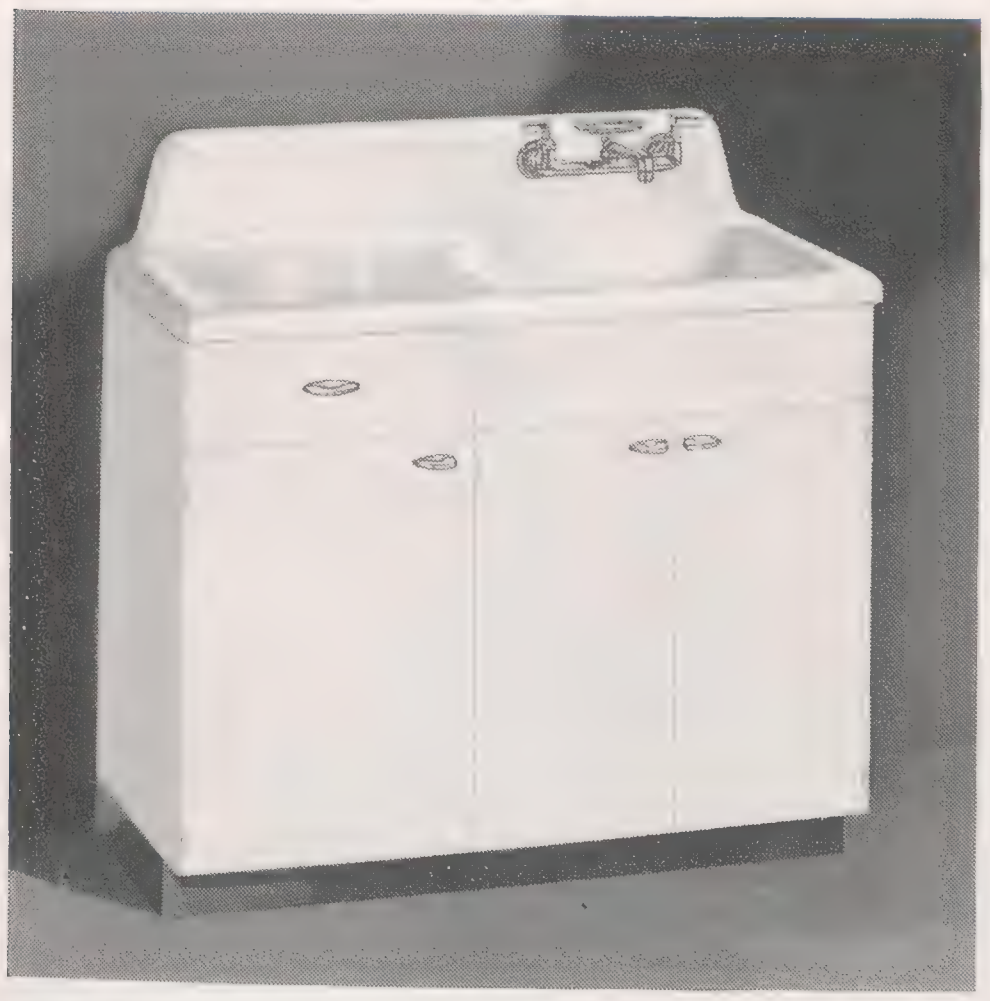

HOLIDAY K-5910-AC

Holiday **K-5910-A** 42" sink with drainboard at left
Lyon **No. 8130-L** 42x19" cabinet

Holiday **K-5909-A** 42" sink with drainboard at right
Lyon **No. 8131-L** 42x19" cabinet

HOLIDAY SINKS WITH METAL CABINETS

SIZE	42x20"
SINK COMPARTMENT	18¾x15¾x8"
BACK	6½"

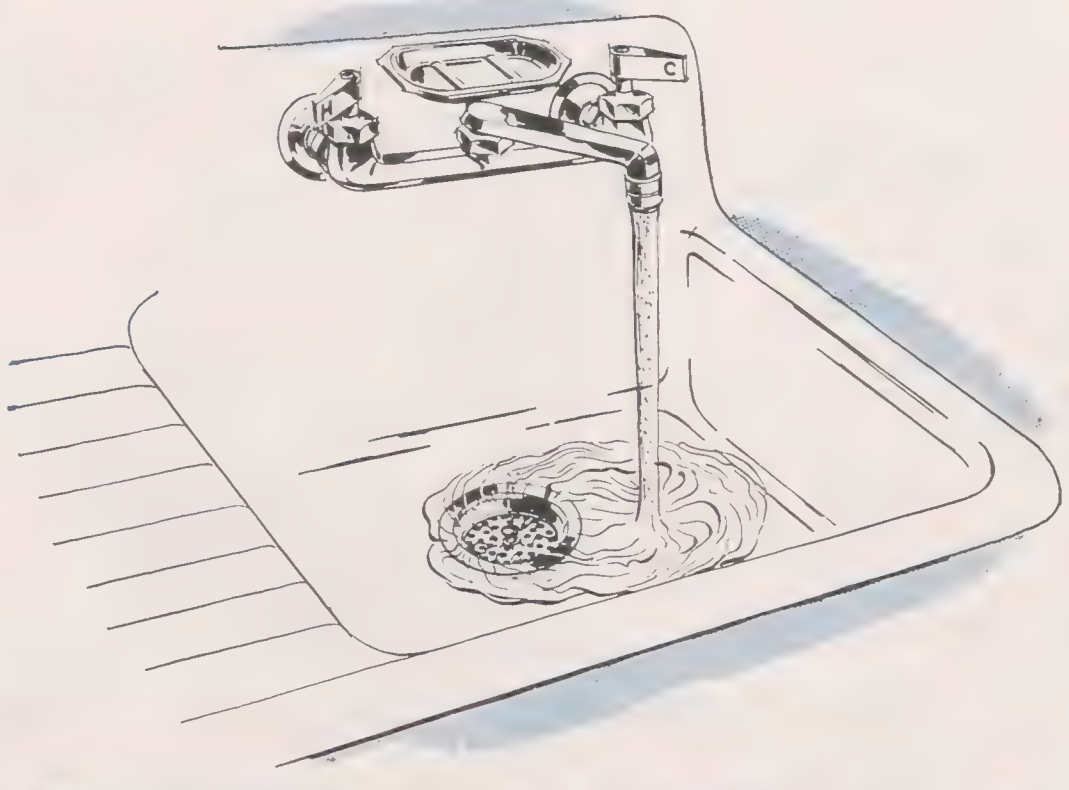

Water-saving aerator produces an air-activated stream, prevents splashing.

ALAMEDA ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT FLAT RIM SINK WITH BACK

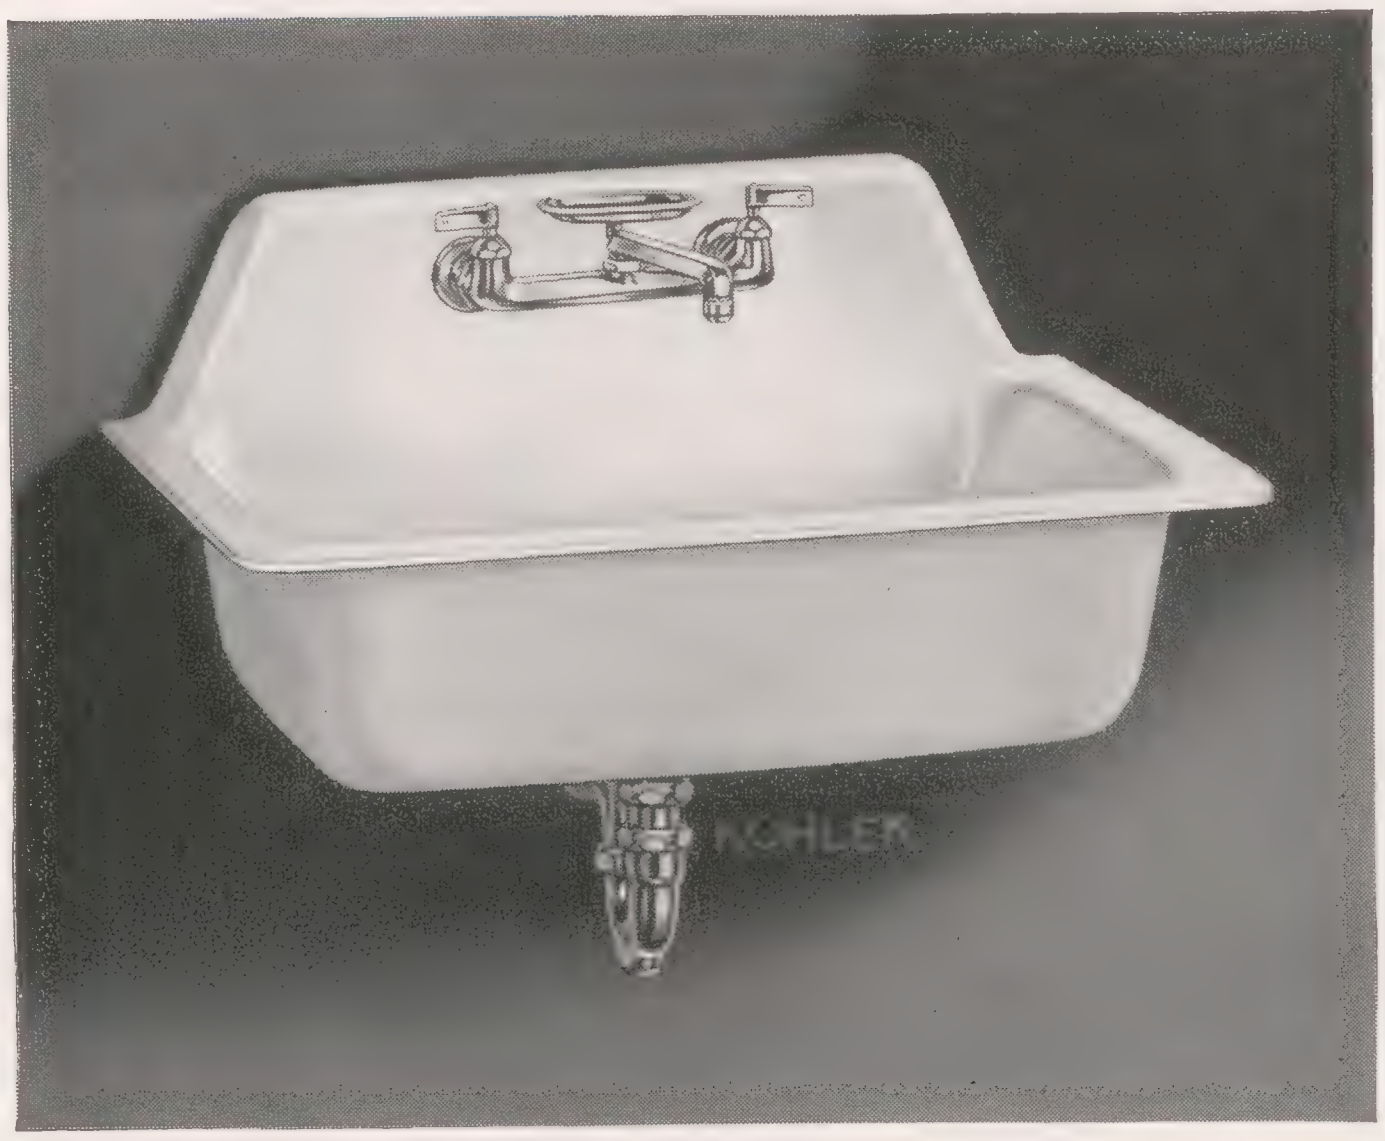

ALAMEDA K-5920-A Size 30x20"

Sink Complete	K-5920-A
Sink	K-5920
Supply Fitting	**K-8655-A** Clearwater with aerator For Clearwater fitting less aerator, specify **K-8655**
Strainer	**K-8801** Duostrainer
Trap	**K-9000** 1½"

SIZE	30x20"
SINK COMPARTMENT	26x16x8"
BACK	6½"

SUTTON ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT ROLL RIM SINK WITH BACK

Sink Complete	K-5930-A
Sink	K-5930
Supply Fitting	**K-8655-A** Clearwater with aerator For Clearwater fitting less aerator, specify **K-8655**
Strainer	**K-8801** Duostrainer
Trap	**K-9000** 1½"

SIZES	24x18"	30x20"
SINK COMPARTMENT	19x13½x6"	25x15½x6"
BACK	8"	8"

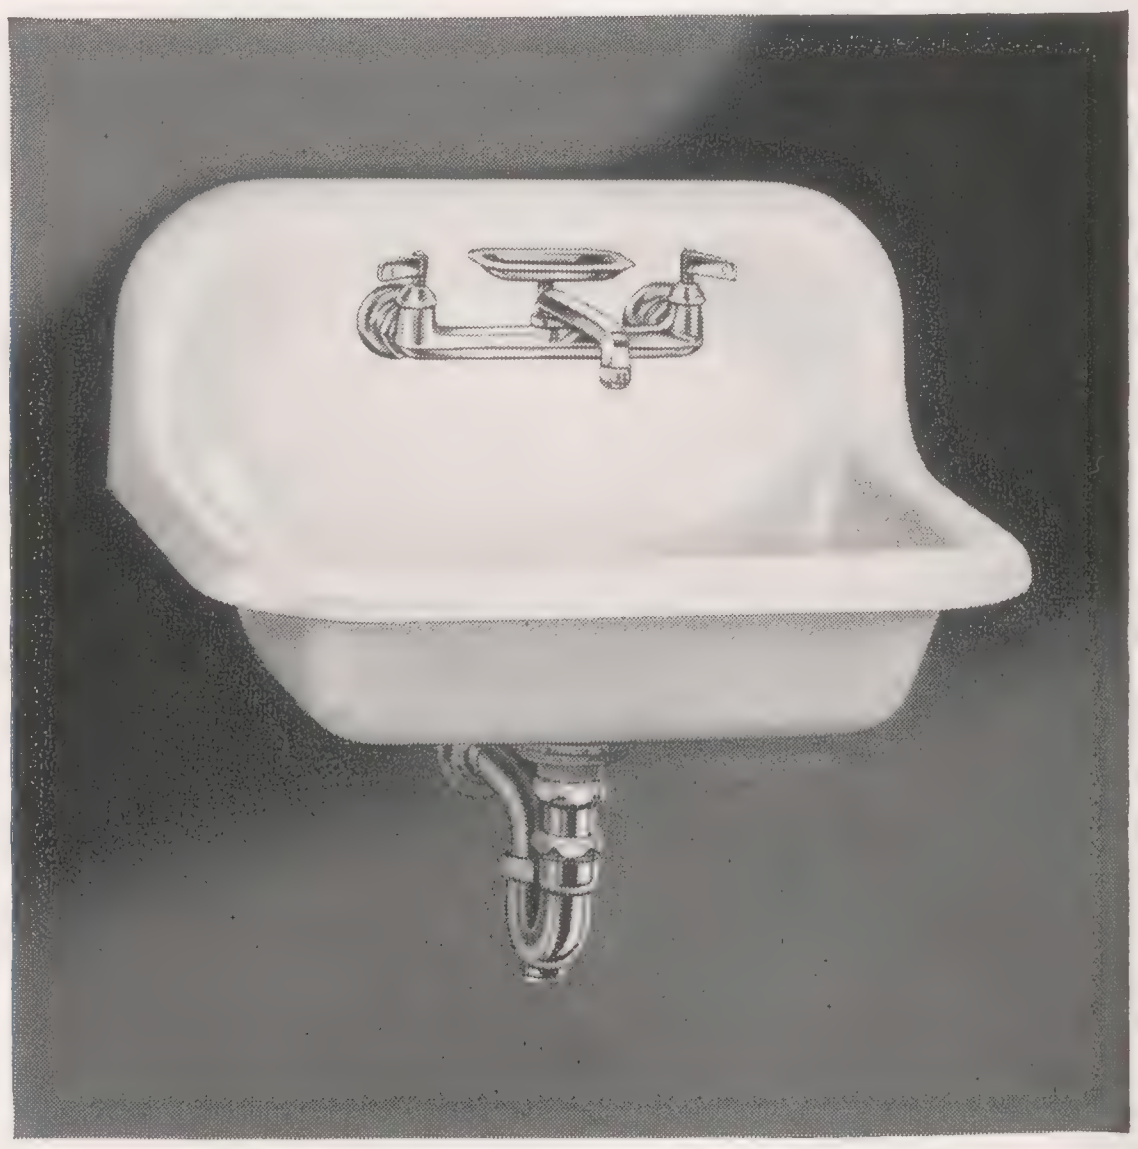

SUTTON K-5930-A Sizes 24x18", 30x20"

WELLWIN ACID-RESISTING ENAMELED CAST IRON DOUBLE COMPARTMENT LEDGE SINK

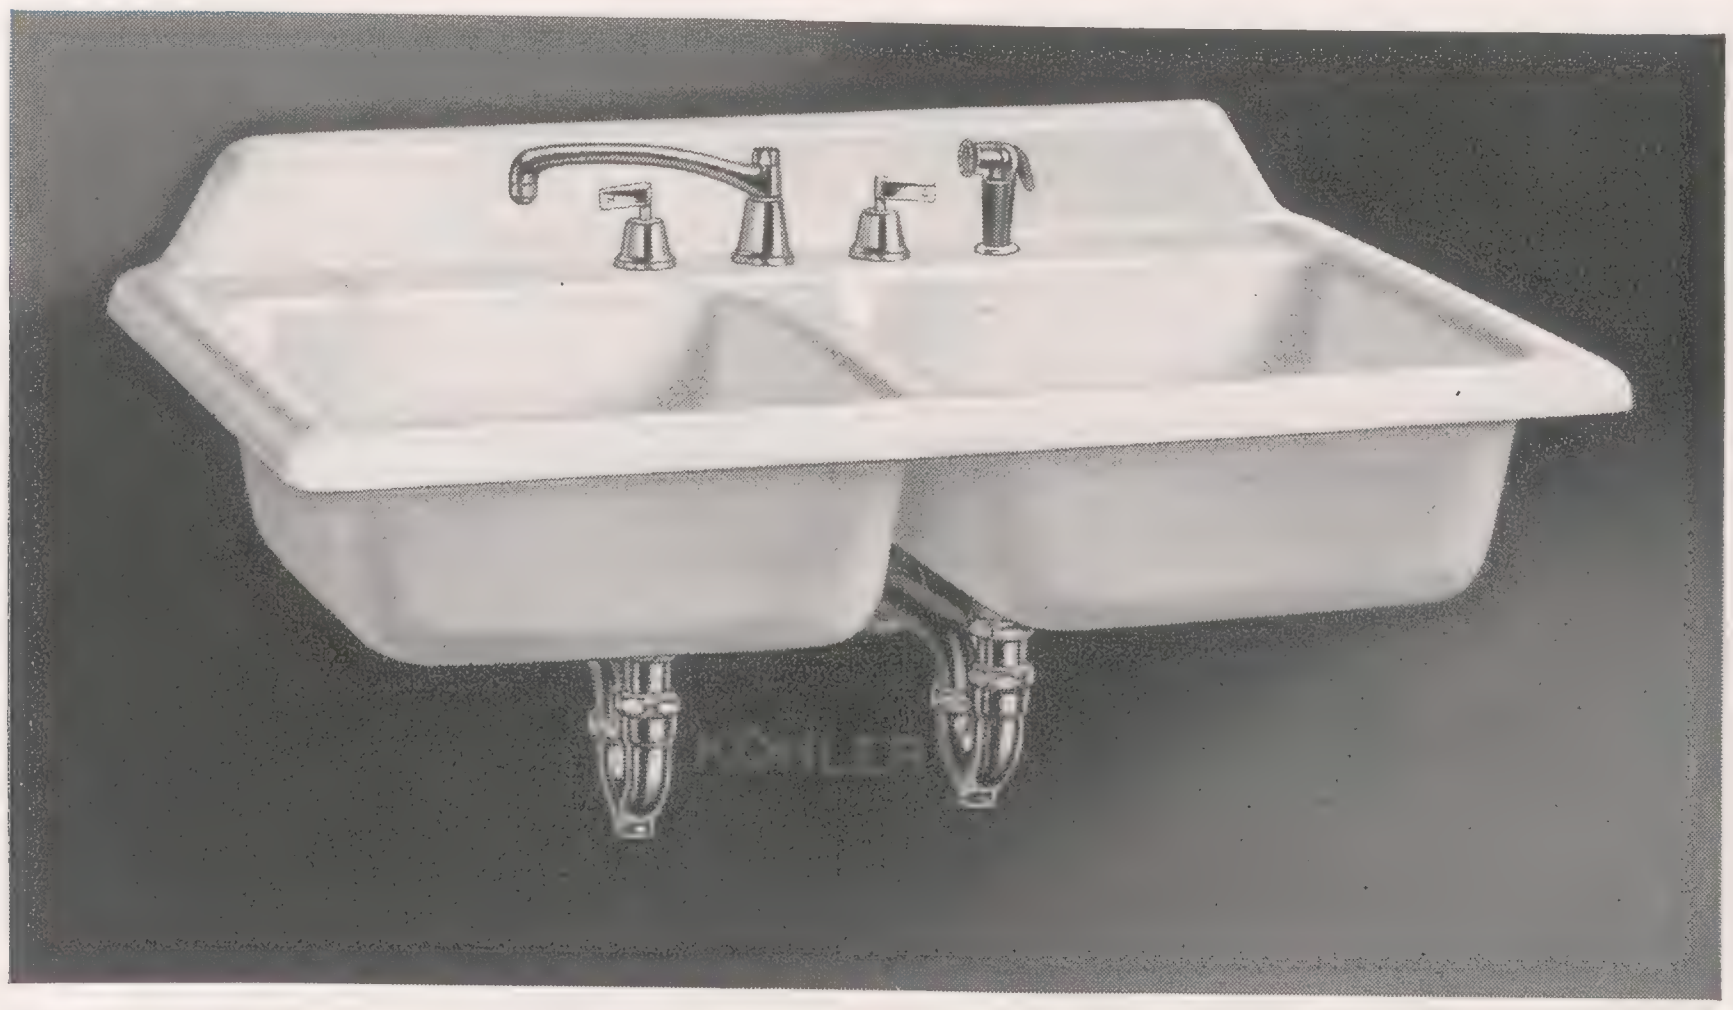

WELLWIN K-5940-A Size 42x25"

Sink Complete	**K-5940-A**
Sink Complete, Less Traps	**K-5940-B**
Sink	**K-5940**
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**
Strainers	Two **K-8801** Duostrainers
Traps	Two **K-9000** 1½"

SIZE	42x25"
SINK COMPARTMENTS	17½x18x8"
BACK	4"
WIDTH OF LEDGE	3⅜"

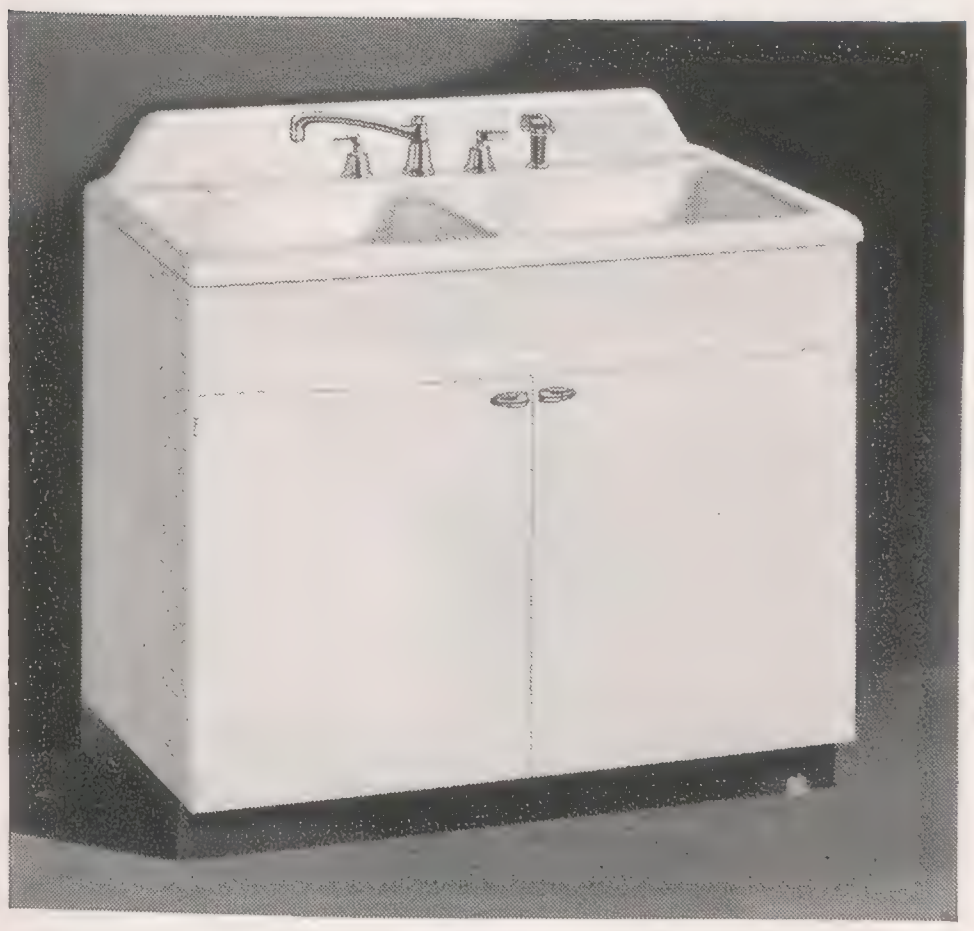

WELLWIN K-5940-AC

Wellwin **K-5940-A** 42" sink
Lyon **No. 8017-L** 42x24" cabinet

WELLWIN SINK WITH METAL CABINET

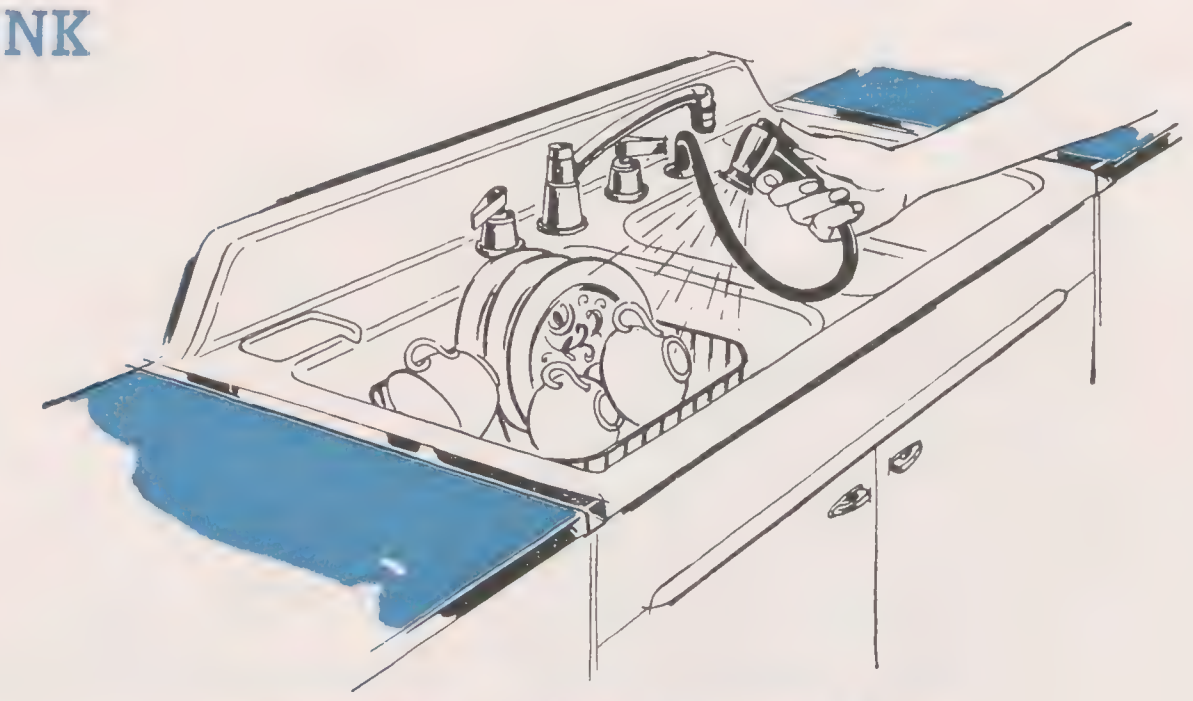

Sprayer with lever control for rinsing dishes and washing vegetables.

DELAFIELD ACID-RESISTING ENAMELED CAST IRON DOUBLE COMPARTMENT FLAT RIM LEDGE SINK *For Building In*

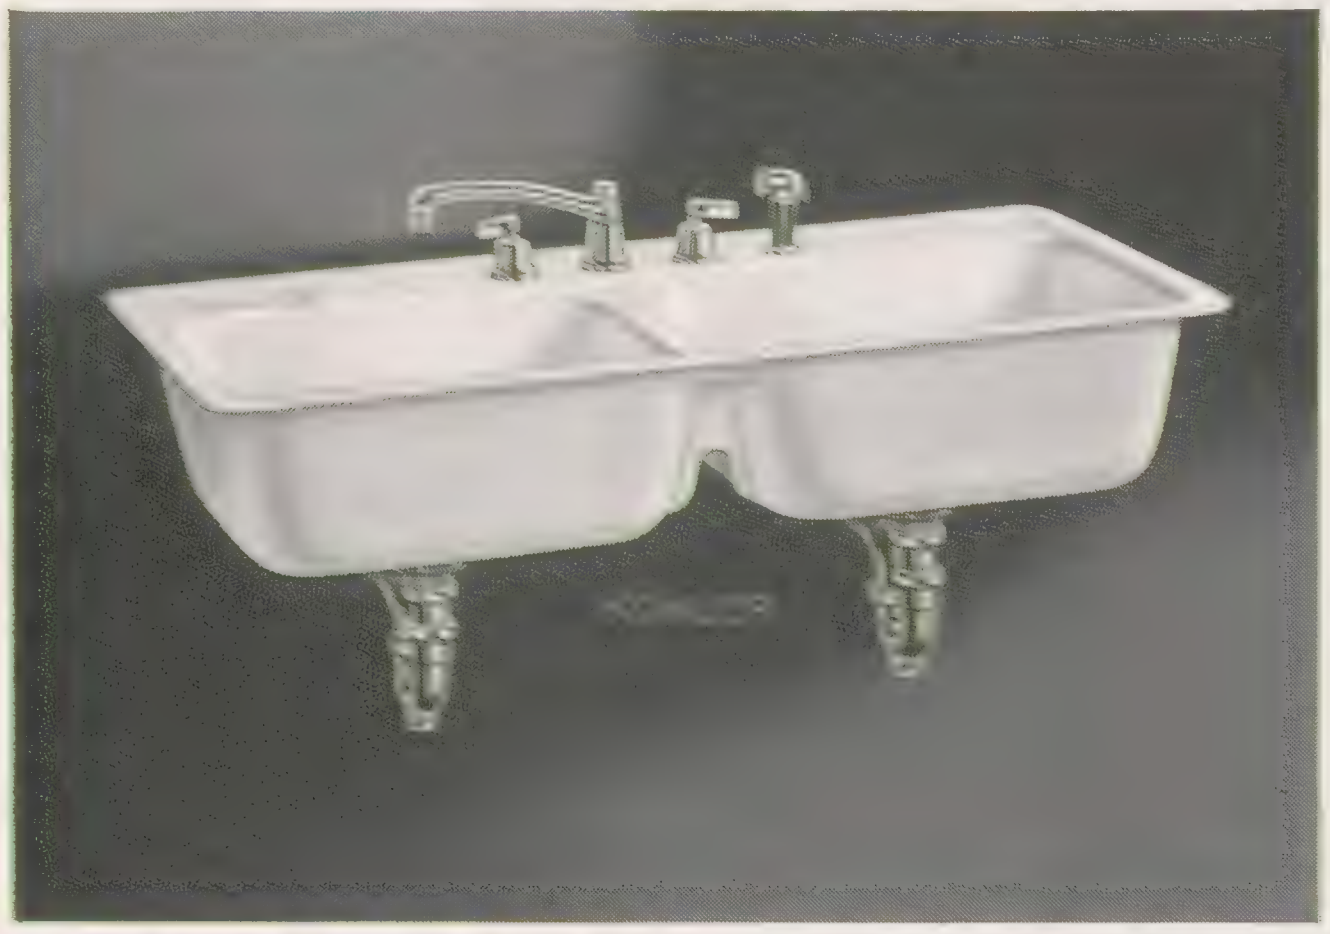

DELAFIELD K-5950-A Sizes 32x21", 42x21"

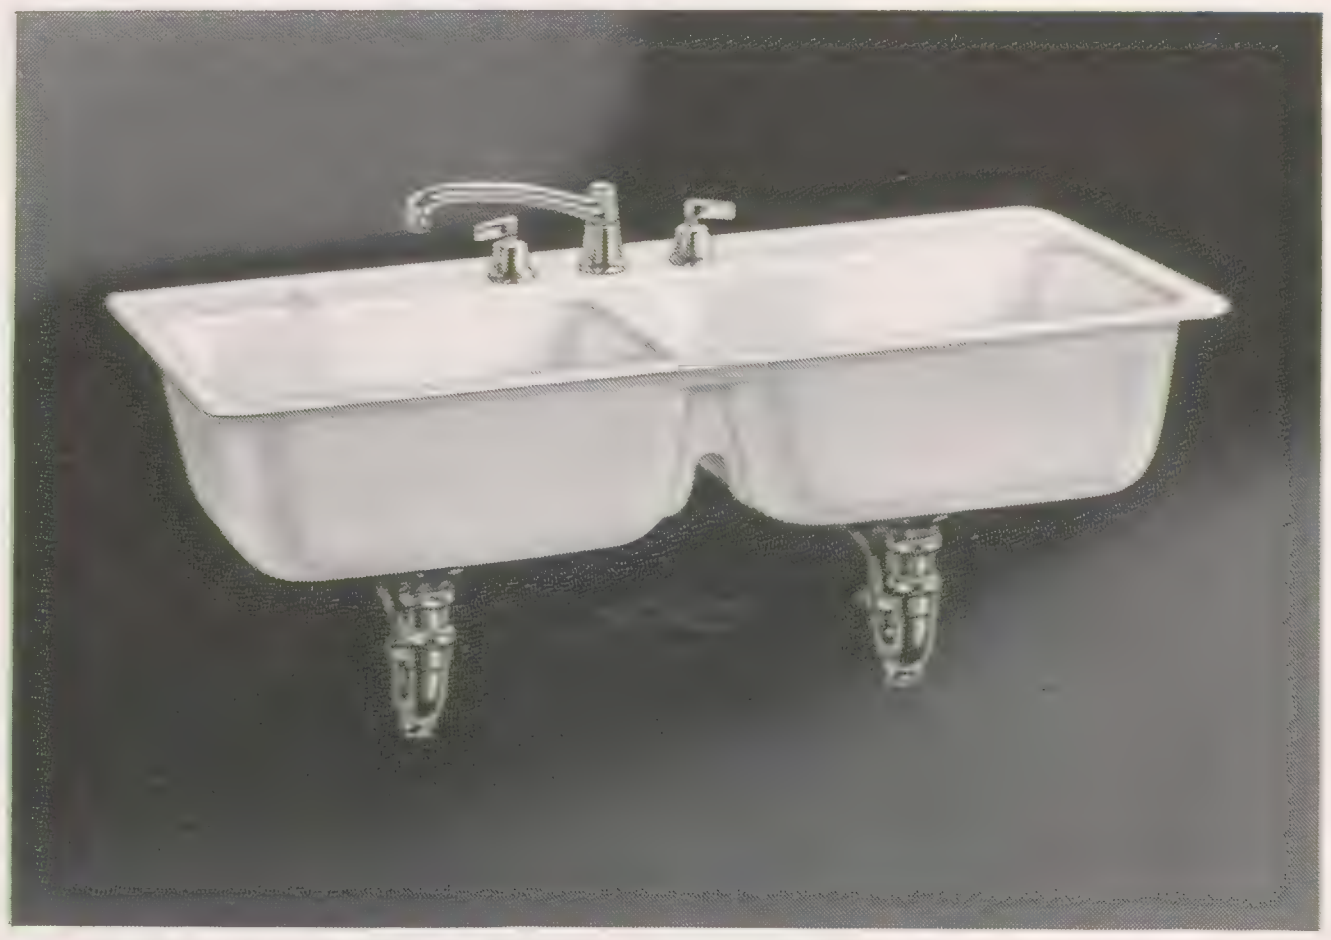

DELAFIELD K-5951-A Sizes 32x21", 42x21"

Sink Complete	**K-5950-A**	**K-5951-A**
Sink Complete, Less Trap	**K-5950-B**	**K-5951-B**
Sink	**K-5950**	**K-5951**
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**	**K-8601-A** Edgewater with aerator For Edgewater fitting less aerator, specify **K-8601**
Strainers	Two **K-8801** Duostrainers	Two **K-8801** Duostrainers
Traps	Two **K-9000** 1½"	Two **K-9000** 1½"
Metal Frame, If Specified	**K-6699**	**K-6699**

SIZES	32x21"	42x21"
SINK COMPARTMENTS	13½x15½x8"	18½x15½x8"
WIDTH OF LEDGE	3⅛"	3⅛"

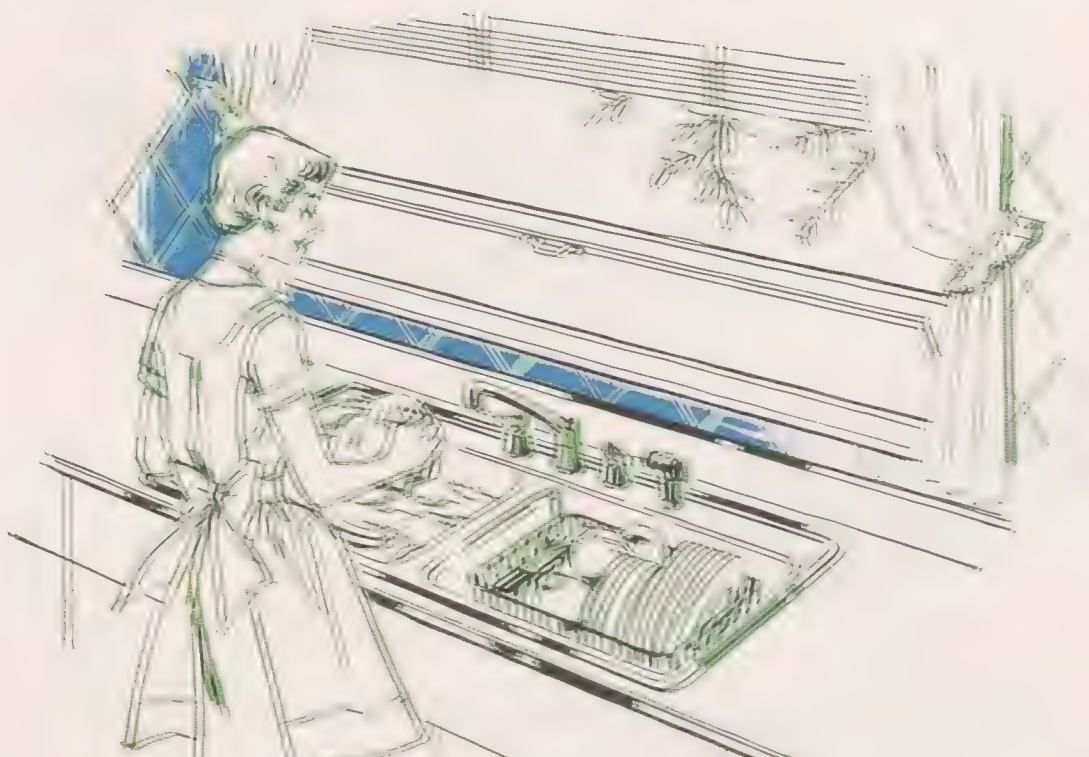

DELAFIELD SINK WITH METAL CABINET

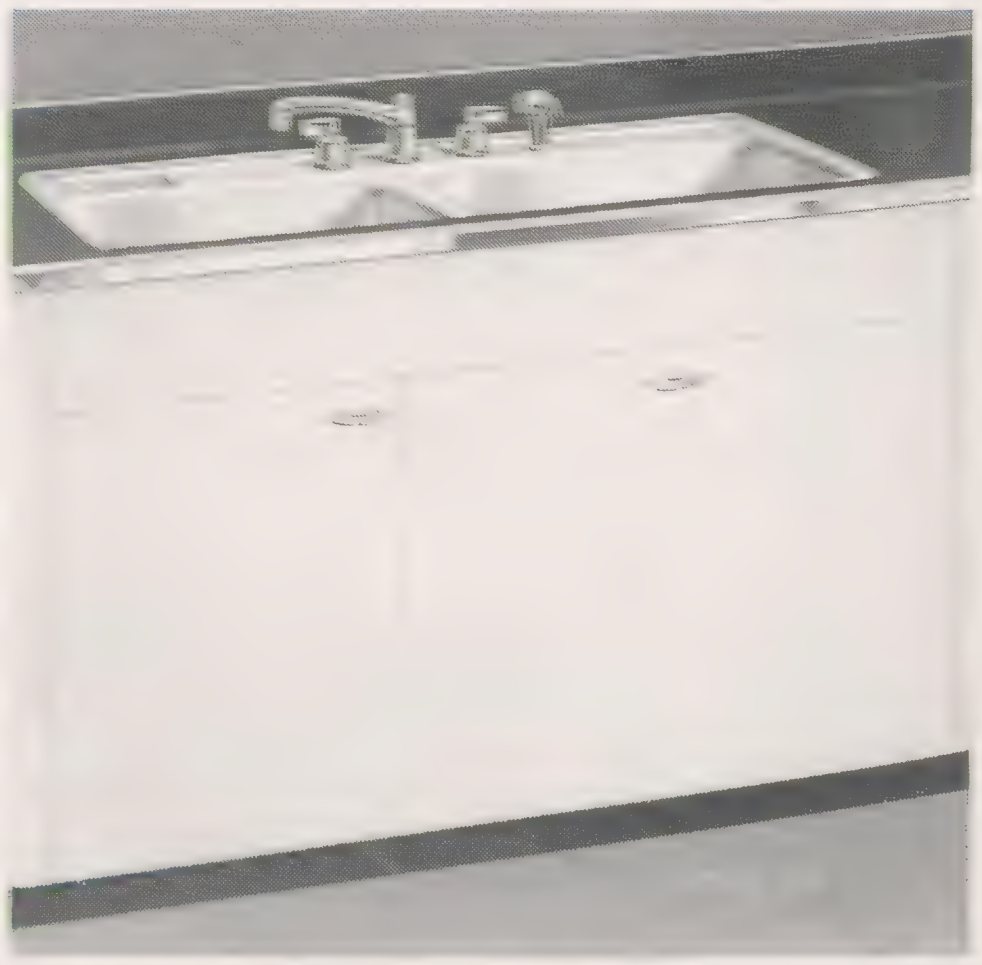

DELAFIELD K-5950-AC

Delafield **K-5950-A** 42x21" sink
Lyon **No. 8573-L** 48x24" base cabinet

Delafield **K-5950-A** 32x21" sink
Lyon **No. 8041-L** 36" sink front

(Counter top not furnished.)

MAYFIELD ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT FLAT RIM LEDGE SINK

For Building In

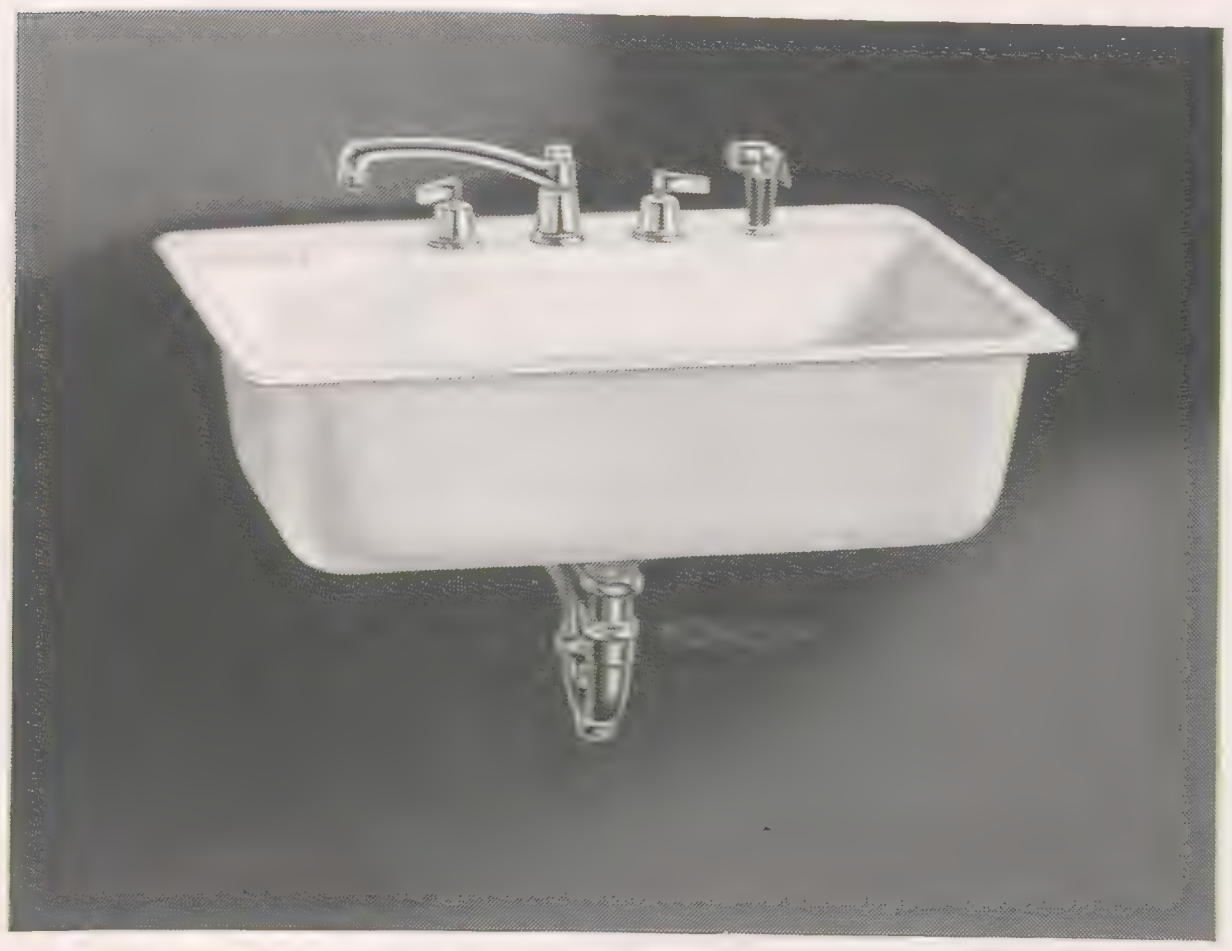

MAYFIELD K-5960-A Sizes 24x21", 30x21"

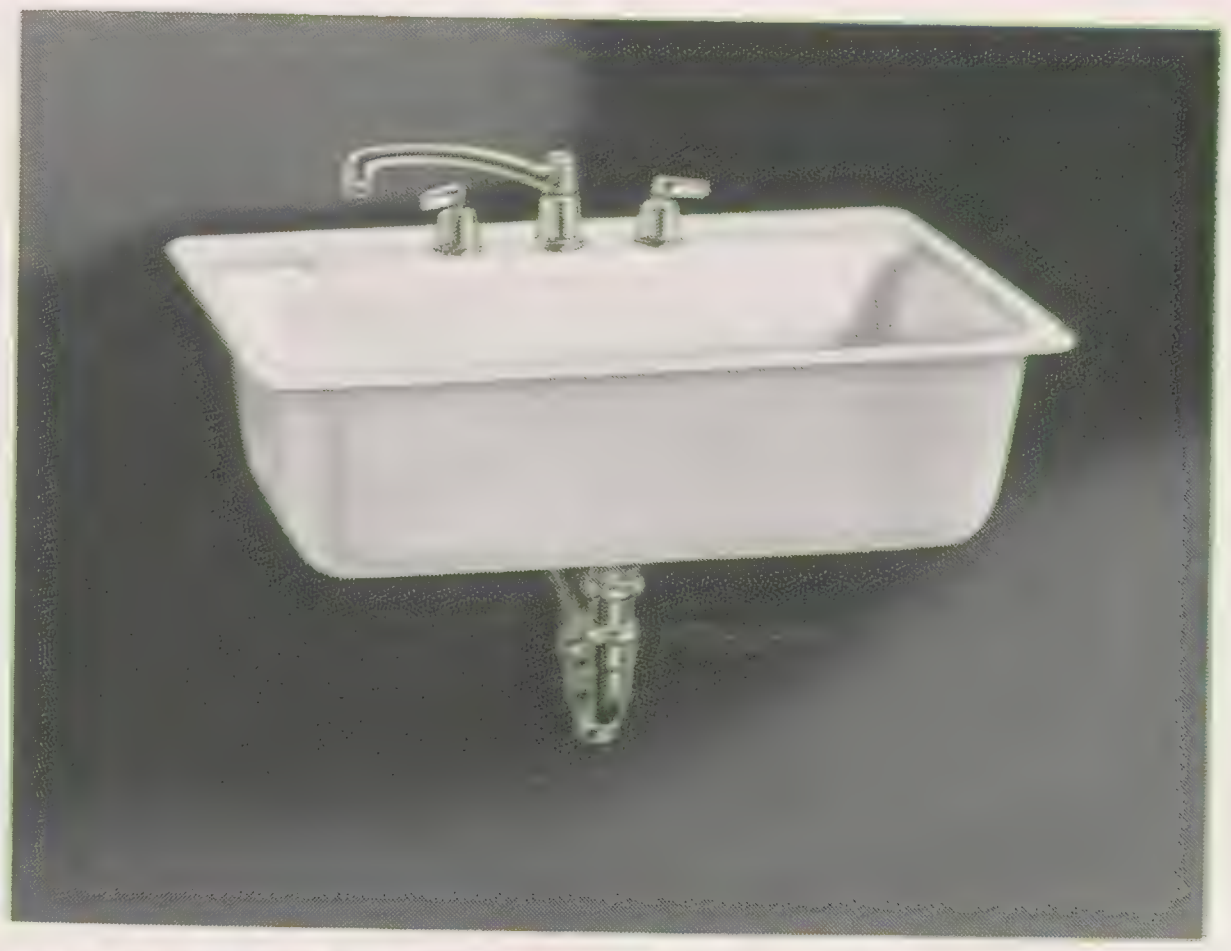

MAYFIELD K-5961-A Sizes 24x21", 30x21"

Sink Complete	**K-5960-A**	**K-5961-A**
Sink Complete, Less Trap	**K-5960-B**	**K-5961-B**
Sink	**K-5960**	**K-5961**
Supply Fitting	**K-8605-A** Edgewater with aerator and lever control sprayer For Edgewater fitting less aerator, specify **K-8605**	**K-8601-A** Edgewater with aerator For Edgewater fitting less aerator, specify **K-8601**
Strainer	**K-8801** Duostrainer	**K-8801** Duostrainer
Trap	**K-9000** 1½"	**K-9000** 1½"
Metal Frame, If Specified	**K-6699**	**K-6699**

SIZES	24x21"	30x21"
SINK COMPARTMENT	21½x15½x8"	27½x15½x8"
WIDTH OF LEDGE	3⅛"	3⅛"

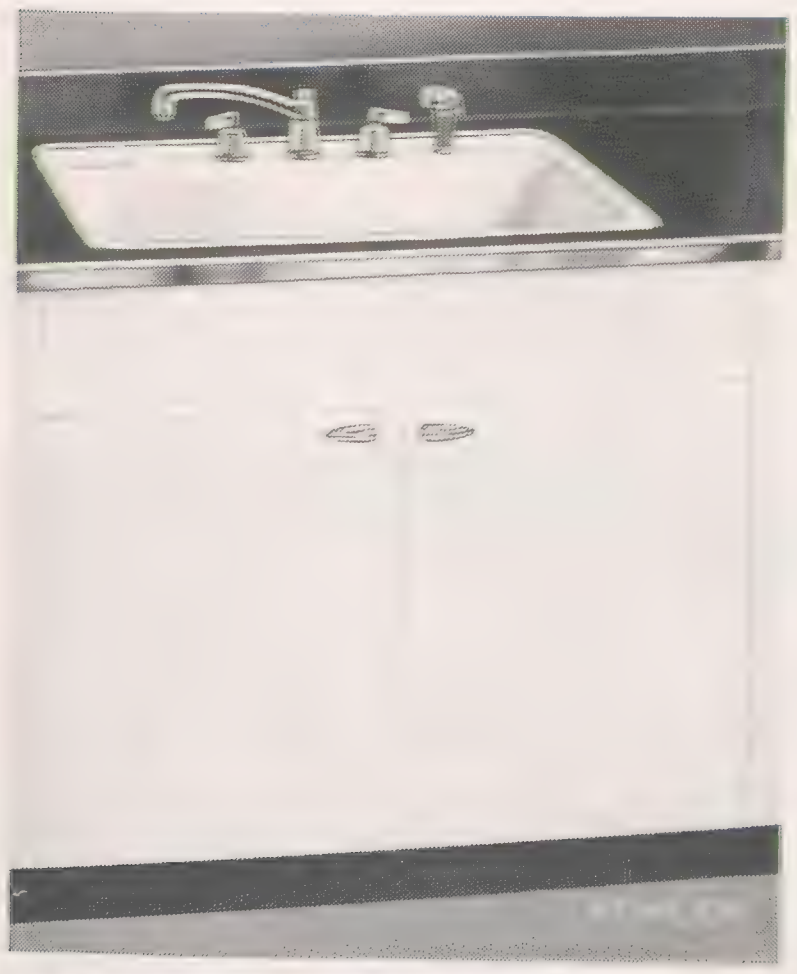

MAYFIELD K-5960-AC

Mayfield **K-5960-A** 30x21" sink
Lyon **No. 8041-L** 36" sink front

Mayfield **K-5960-A** 24x21" sink
Lyon **No. 8042-L** 30" sink front

(Counter top not furnished.)

MAYFIELD SINK WITH METAL CABINET

Large, deep cup with stopper makes sink water-retaining

ASHLEY ACID-RESISTING ENAMELED CAST IRON DOUBLE COMPARTMENT FLAT RIM SINK

For Building Into Counters

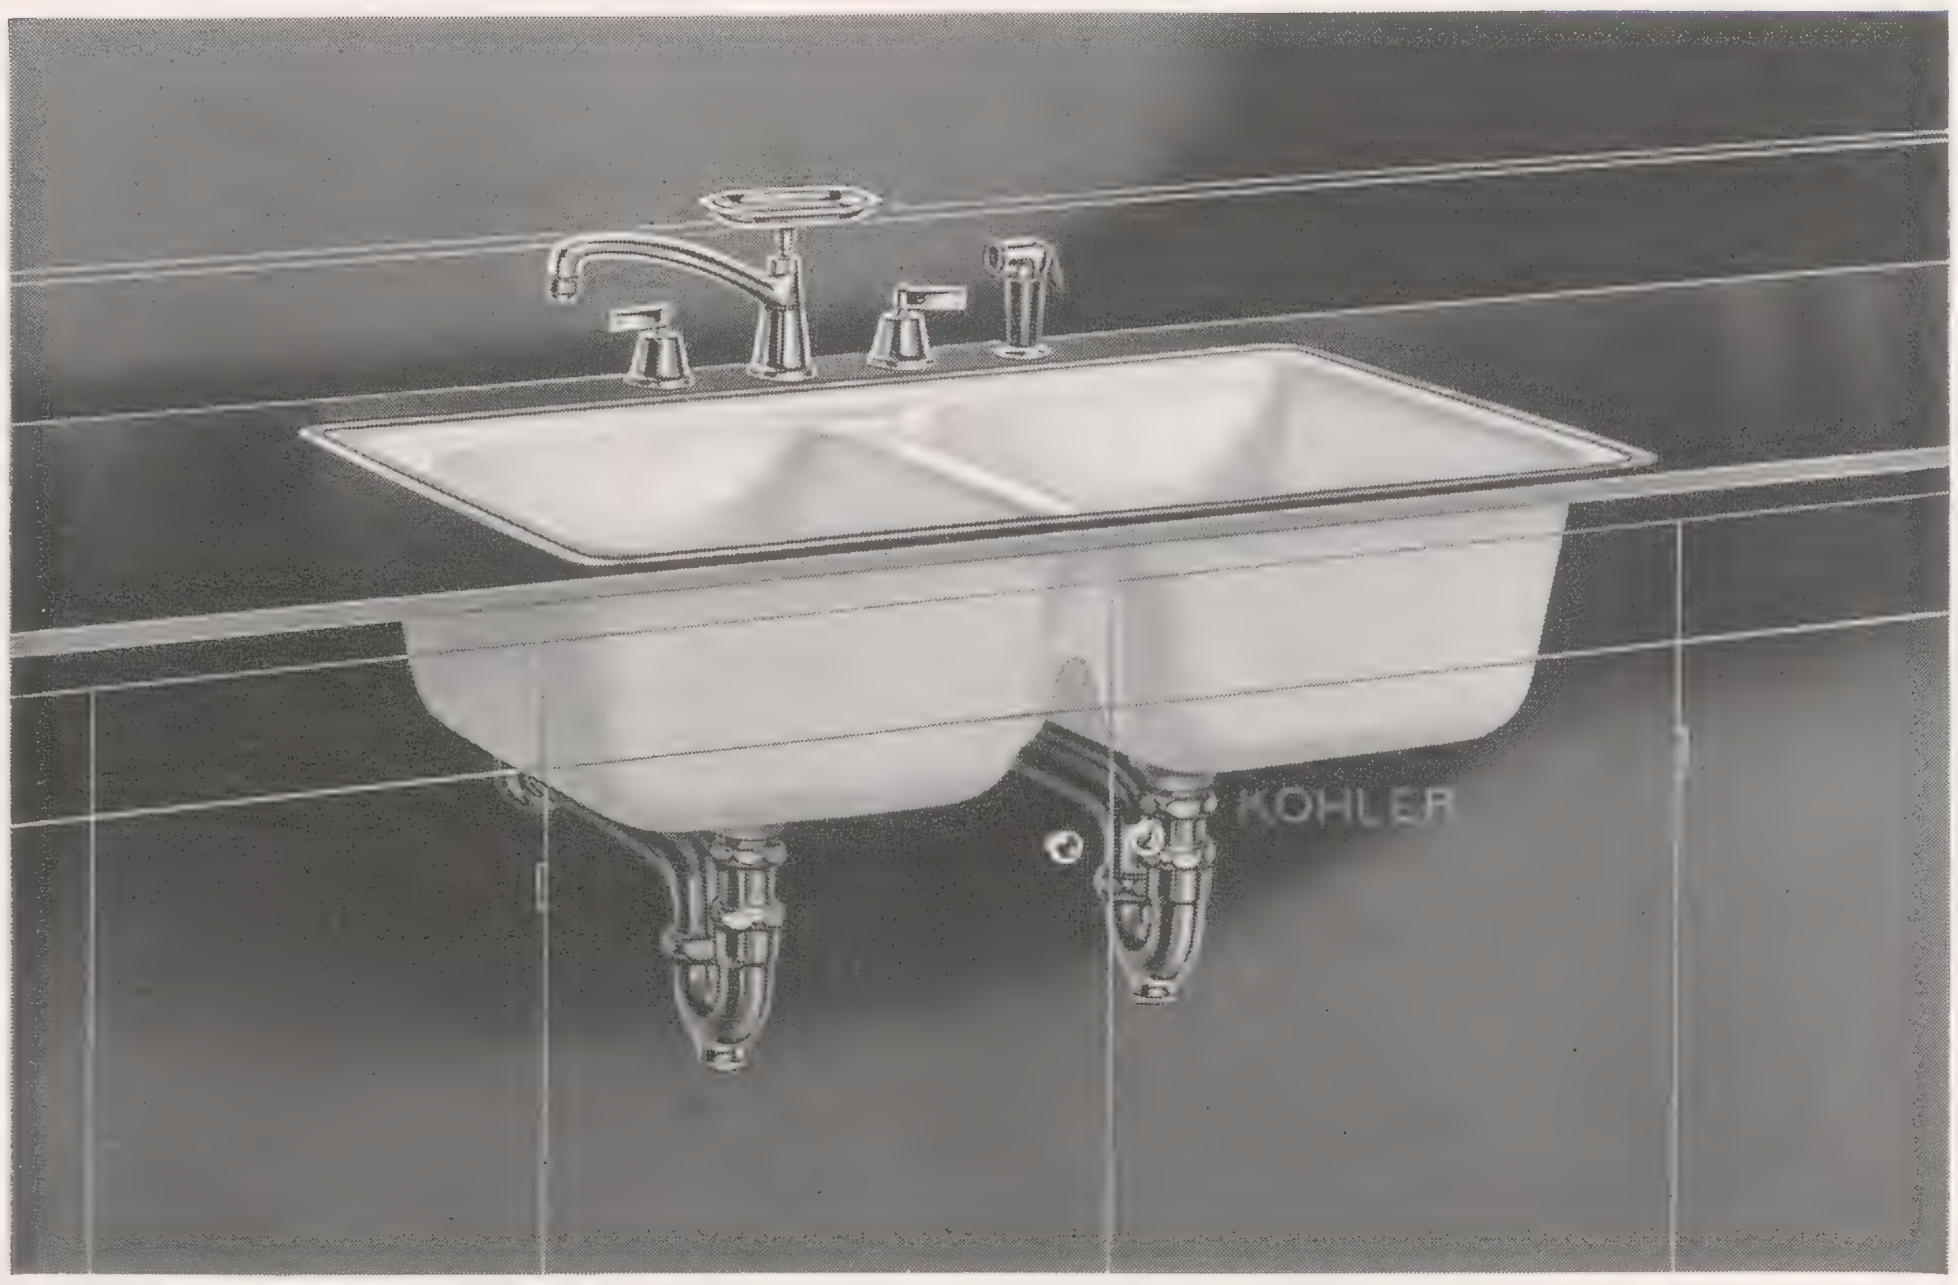

ASHLEY K-6500-C

Sizes 32x20", 42x20"

Sink Complete	**K-6500-C**
Sink	**K-6500**
Supply Fitting	**K-8605-AD** Edgewater with aerator, soap dish and lever control sprayer For Edgewater fitting less aerator, specify **K-8605-D**
Strainers	Two **K-8801** Duostrainers
Traps	Two **K-9000** 1½"
Metal Frame, If Specified	**K-6699**

SIZES	32x20"	42x20"
SINK COMPARTMENTS	13½x17½x8"	18⅞x17½x8"

Sink Complete	**K-6500-A**
Sink	**K-6500**
Strainers	Two **K-8801** Duostrainers
Metal Frame, If Specified	**K-6699**

SIZES	32x20"	42x20"

ASHLEY K-6500-A

ADDISON ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT FLAT RIM SINK

For Building Into Counters

Sink Complete	K-6550-C
Sink	K-6550
Supply Fitting	K-8601-AD Edgewater with aerator and soap dish For Edgewater fitting less aerator, specify **K-8601-D**
Strainer	K-8801 Duostrainer
Trap	K-9000 1½″
Metal Frame, If Specified	K-6699

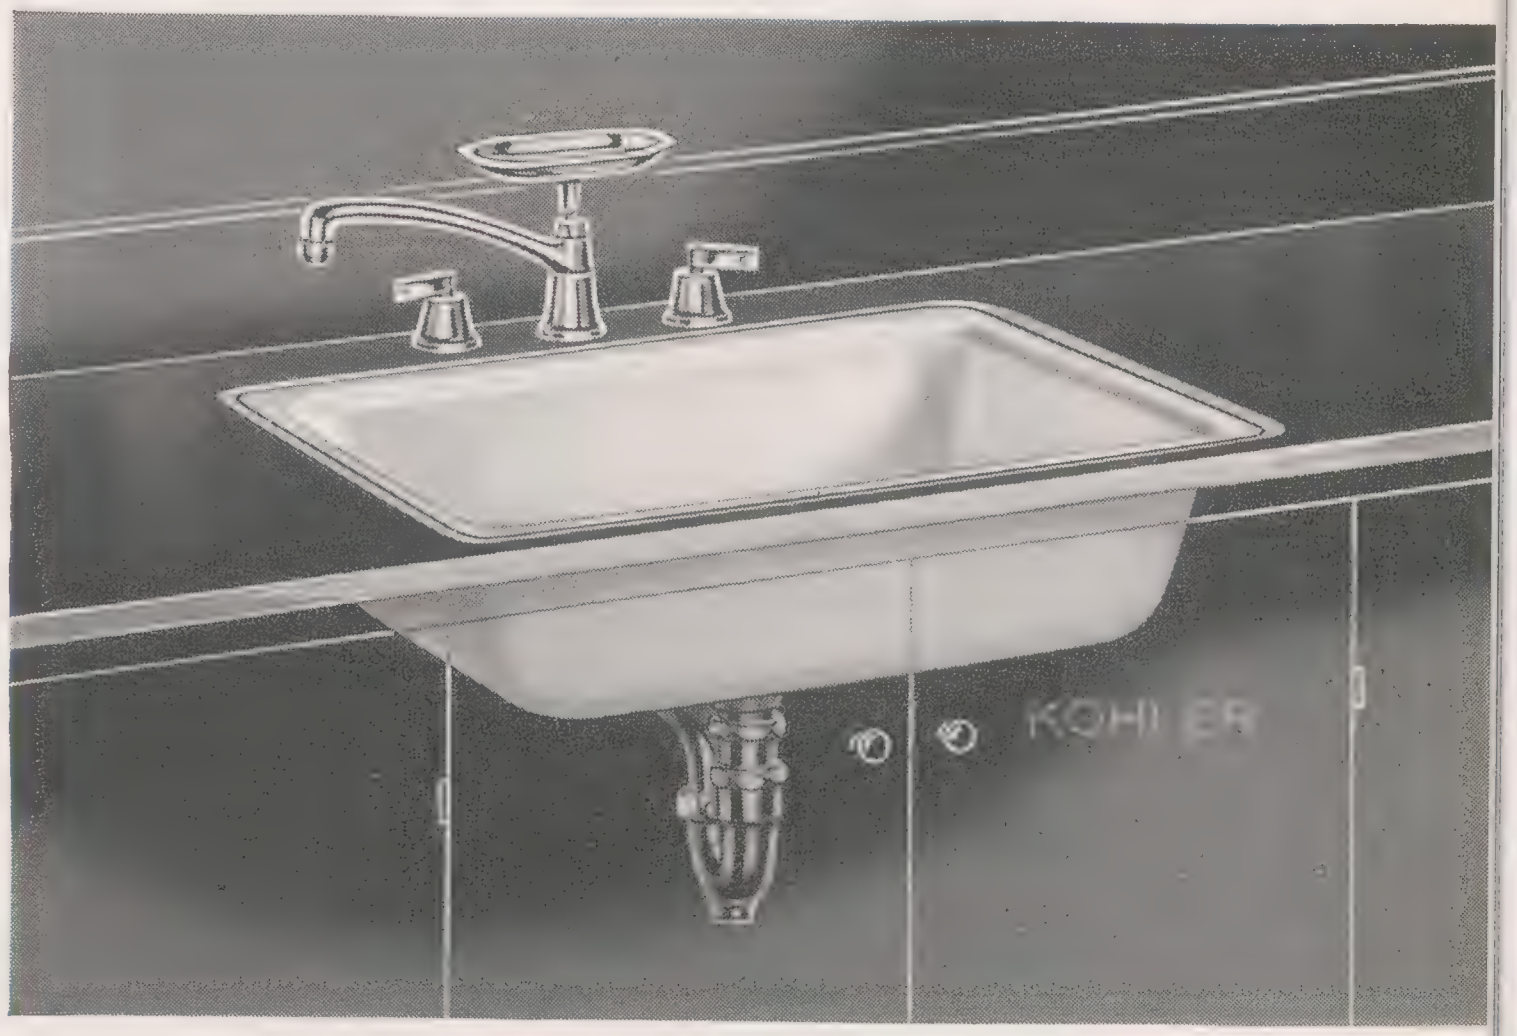

ADDISON K-6550-C Center Outlet

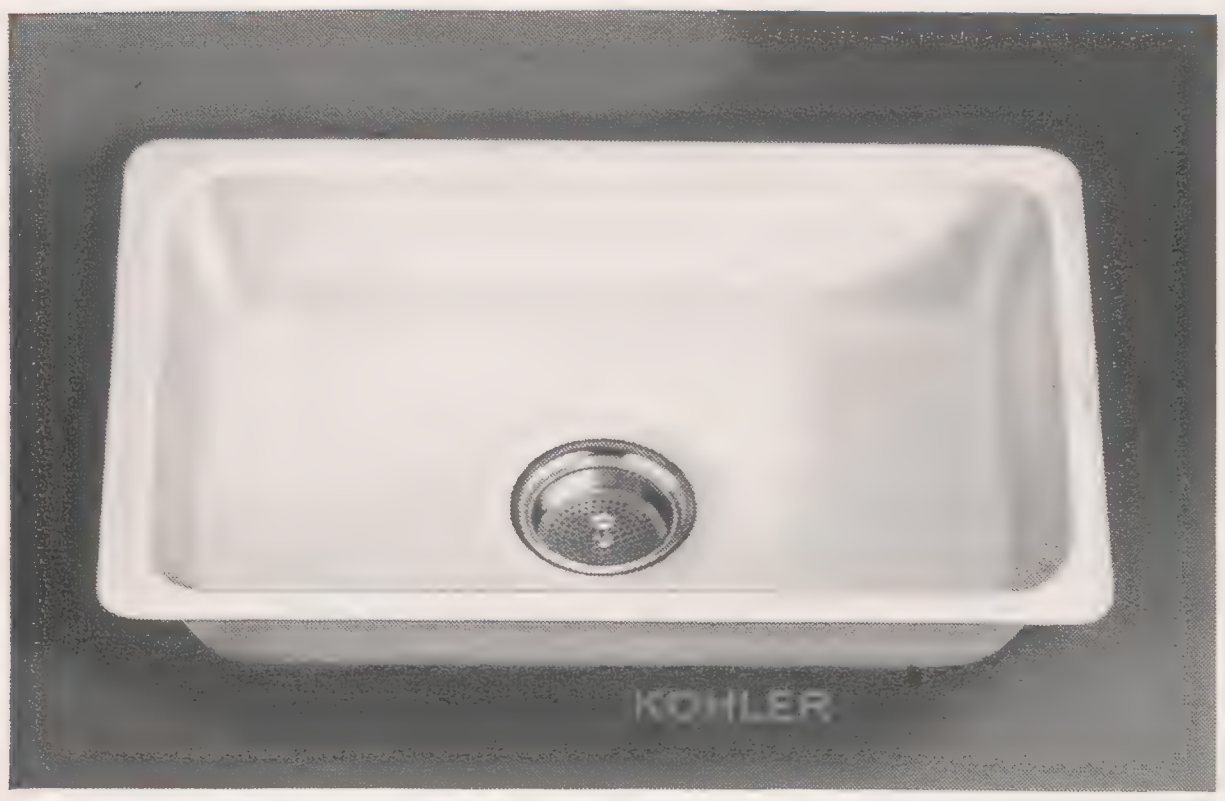

ADDISON K-6550-A Center Outlet

Sink Complete	K-6550-A
Sink	K-6550
Strainer	K-8801 Duostrainer
Metal Frame, If Specified	K-6699

SIZES	12x12″,	18x12″,	24x16″,	24x18″,	24x20″,	30x18″,	30x20″
DEPTH	6″	6″	6″	6″	6″	6″	6″

FENTRESS ACID-RESISTING ENAMELED CAST IRON SINGLE COMPARTMENT FLAT RIM SINK

Sink Complete	K-6570-A
Sink	K-6570
Strainer	K-8801 Duostrainer
Metal Frame, If Specified	K-6699

SIZES	30x18″	30x20″
DEPTH	6″	6″

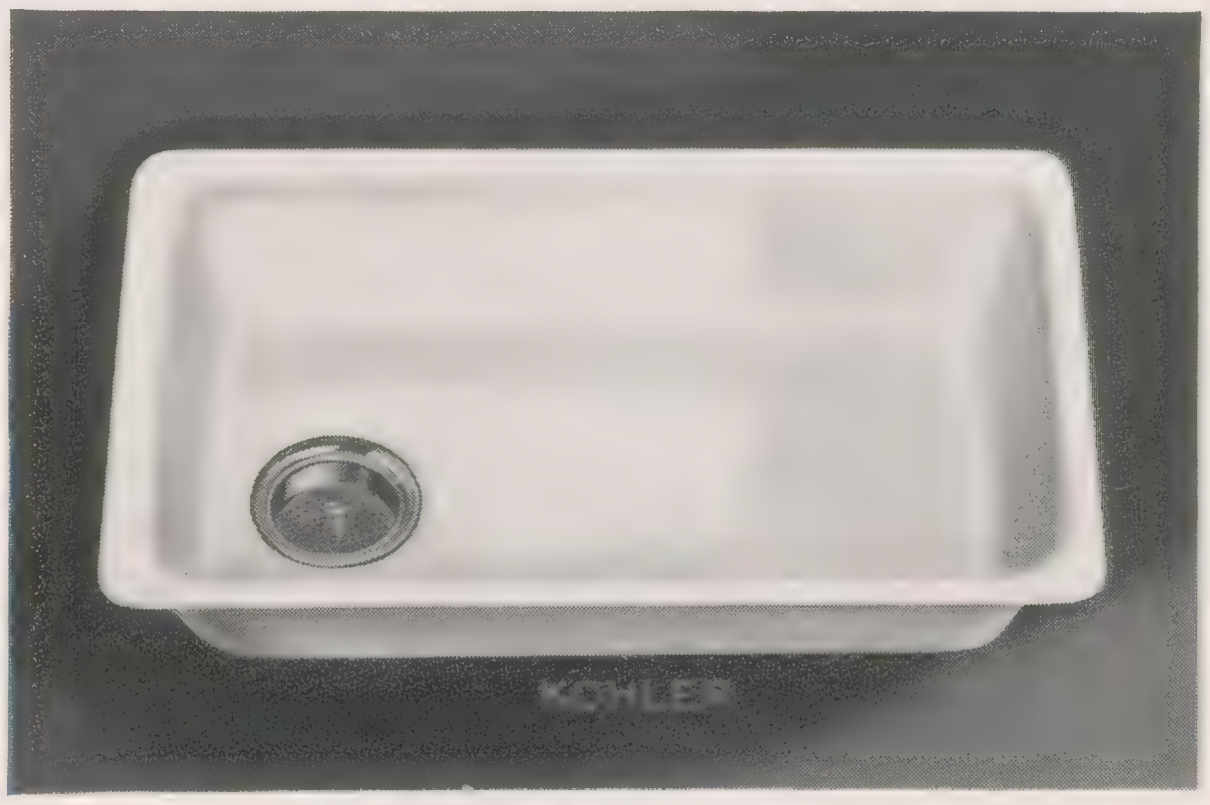

FENTRESS K-6570-A End Outlet

SEA CLIFF

ACID-RESISTING ENAMELED CAST IRON LEDGE SINK AND TRAY AND MOVABLE COVER

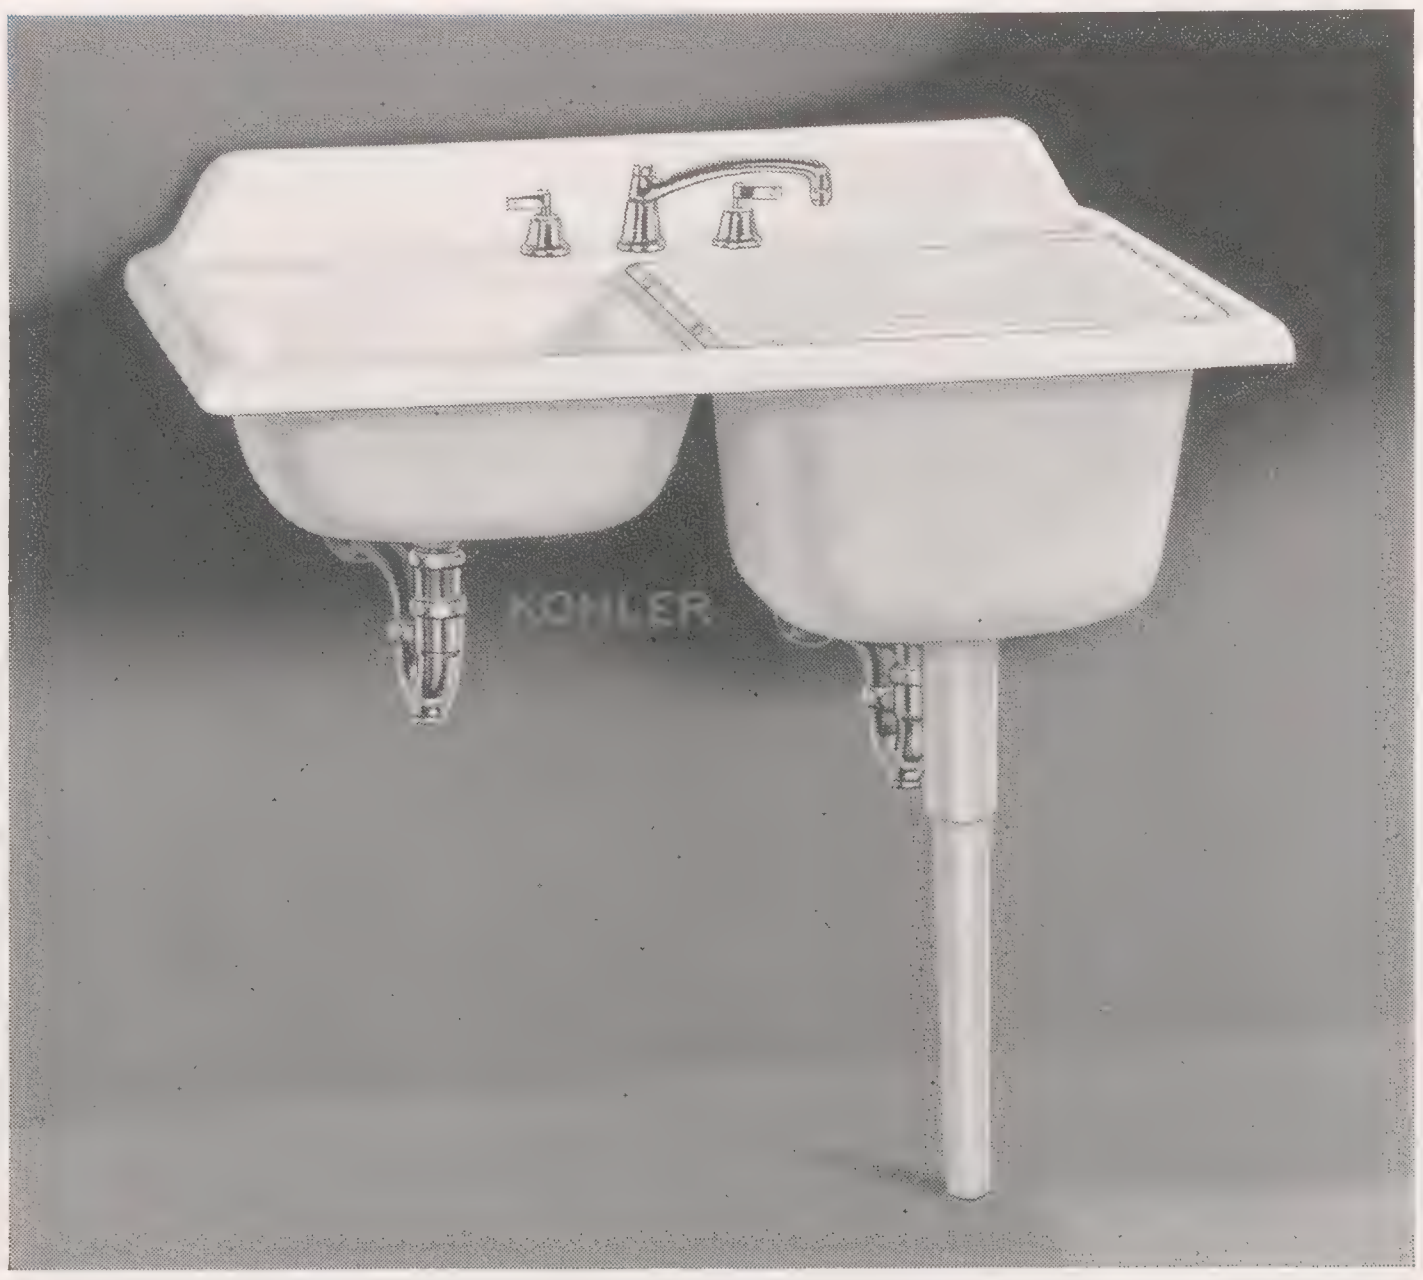

SEA CLIFF K-6609-A Size 42x25″

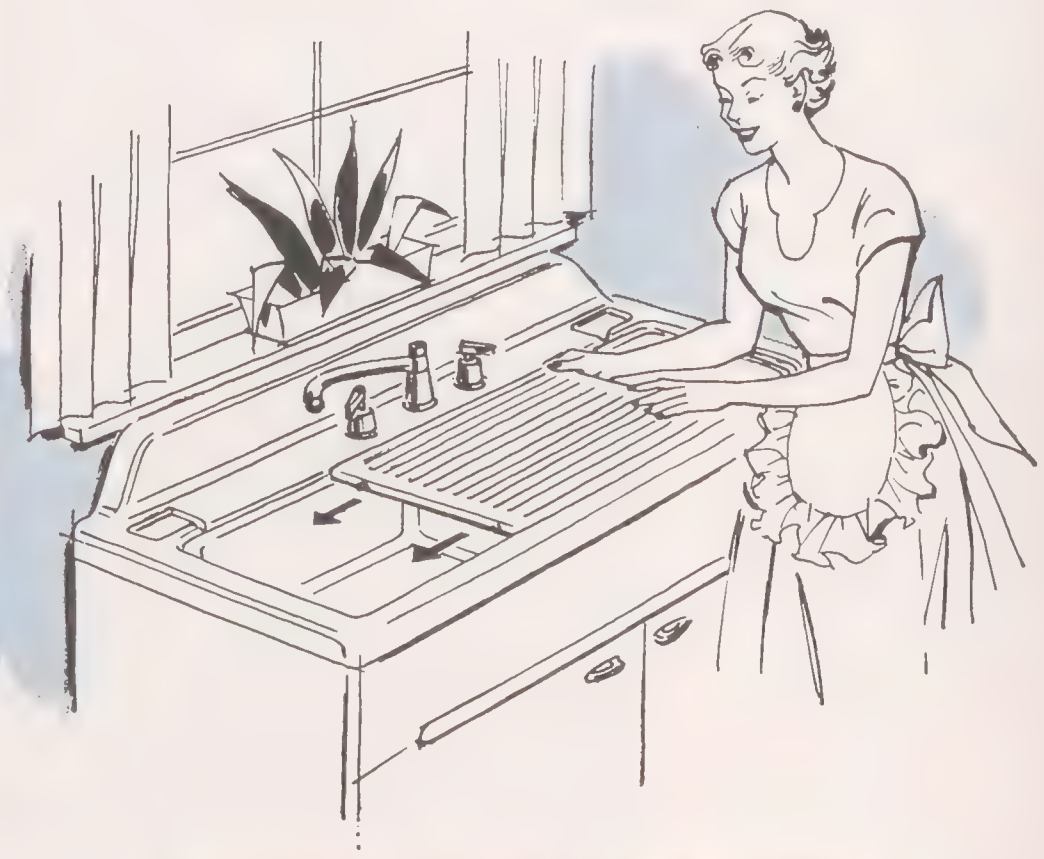

Movable cover slides easily —no lifting is necessary

Sink and Tray Complete	**K-6609-A** Sink at left (Illustrated)	**K-6610-A** Sink at right
Sink and Tray with Supply Fitting, Less Leg, Cover, Strainers, and Traps	**K-6609-B**	**K-6610-B**
Sink and Tray	**K-6609**	**K-6610**
Support	**K-6735** enameled leg	**K-6735** enameled leg
Supply Fitting	**K-8601-A** Edgewater with aerator For Edgewater fitting less aerator, specify **K-8601**	**K-8601-A** Edgewater with aerator For Edgewater fitting less aerator, specify **K-8601**
Strainers	**K-8801** Duostrainer **K-8821** with stopper	**K-8801** Duostrainer **K-8821** with stopper
Traps	Two **K-9000** 1½″	Two **K-9000** 1½″
Movable Cover	**K-6705**	**K-6705**

SEA CLIFF SINK AND TRAY WITH METAL CABINET

SIZE	42x25″
SINK COMPARTMENT	17½x17x8″
LAUNDRY TRAY COMPARTMENT	17½x17x13″
BACK	4″
WIDTH OF LEDGE	3⅜″
FLOOR TO TOP OF RIM ON LEG ADJUSTABLE FROM	36 to 39½″
FLOOR TO TOP OF RIM WITH CABINET	36″

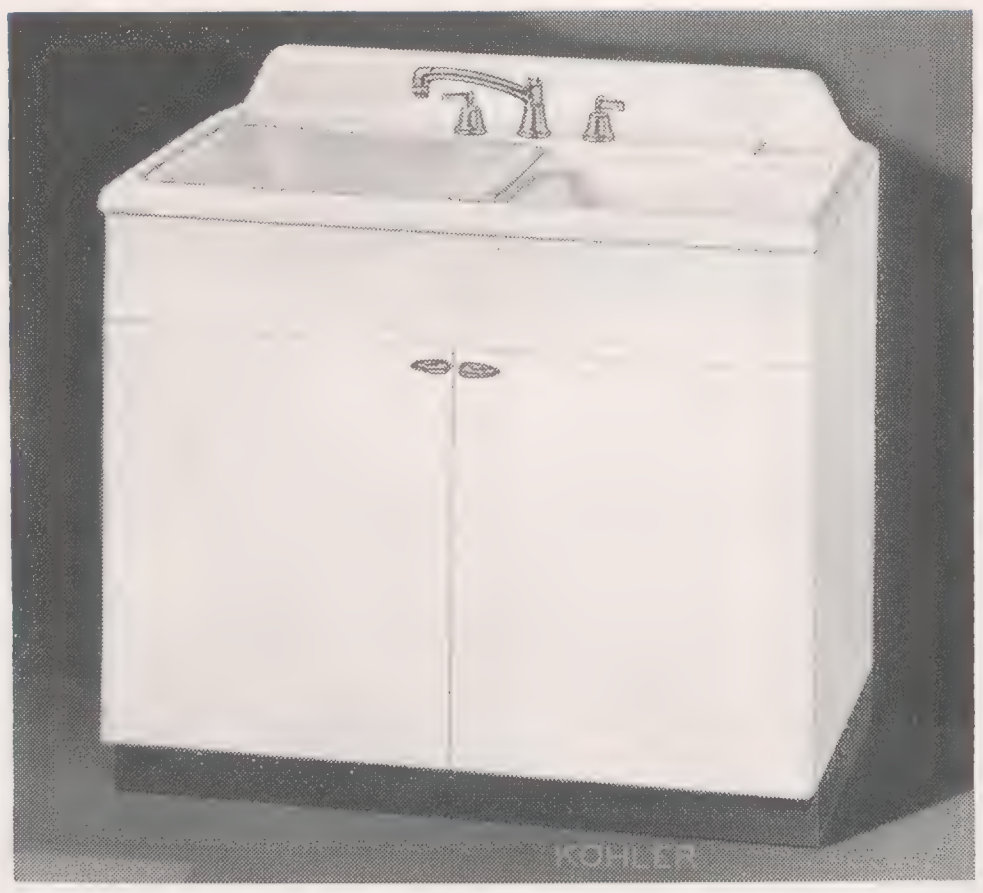

SEA CLIFF K-6609-AC

Sea Cliff **K-6609-B** 42″ sink and tray, with sink at left
Lyon **No. 8017-L** 42x24″ cabinet

Sea Cliff **K-6610-B** 42″ sink and tray, with sink at right
Lyon **No. 8017-L** 42x24″ cabinet

WESTOVER ACID-RESISTING ENAMELED CAST IRON FLAT RIM LEDGE SINK AND TRAY AND MOVABLE COVER

For Building In

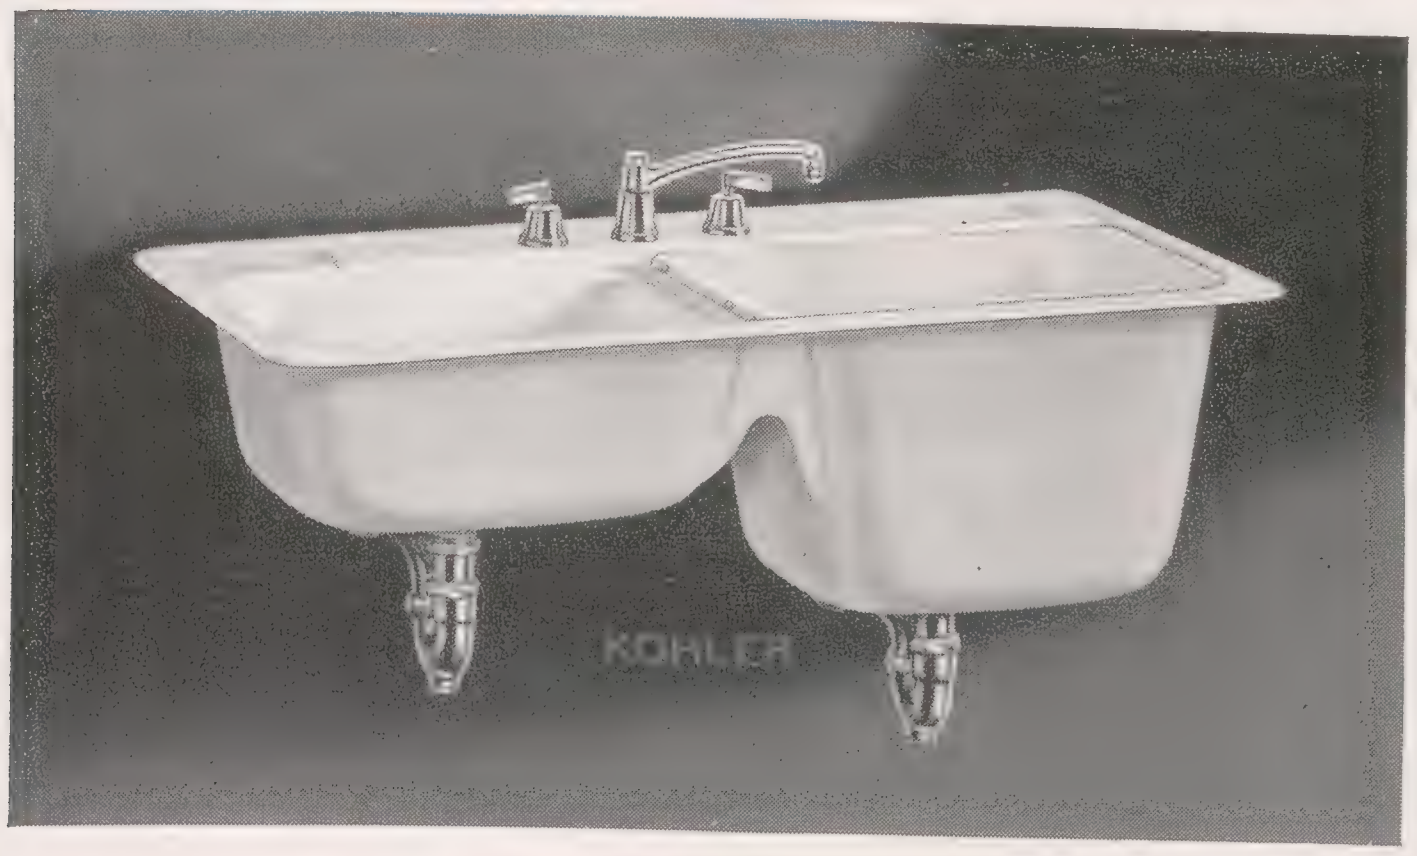

WESTOVER K-6629-A Size 42x21"

SIZE	42x21"
SINK COMPARTMENT	18⅝x14⅛x8"
LAUNDRY TRAY COMPARTMENT	18⅝x14⅛x13"

Sink and Tray Complete	**K-6629-A** Sink at left (Illustrated)	**K-6630-A** Sink at right
Sink and Tray Complete, Less Traps	**K-6629-B**	**K-6630-B**
Sink and Tray	**K-6629**	**K-6630**
Supply Fitting	**K-8601-A** Edgewater with aerator For Edgewater fitting less aerator, specify **K-8601**	**K-8601-A** Edgewater with aerator For Edgewater fitting less aerator, specify **K-8601**
Strainers	**K-8801** Duostrainer **K-8821** with stopper	**K-8801** Duostrainer **K-8821** with stopper
Traps	Two **K-9000** 1½"	Two **K-9000** 1½"
Movable Cover	**K-6706**	**K-6706**
Metal Frame, If Specified	**K-6699**	**K-6699**

ALLOWAY ACID-RESISTING ENAMELED CAST IRON FLAT RIM SINK AND TRAY AND MOVABLE COVER

For Building In

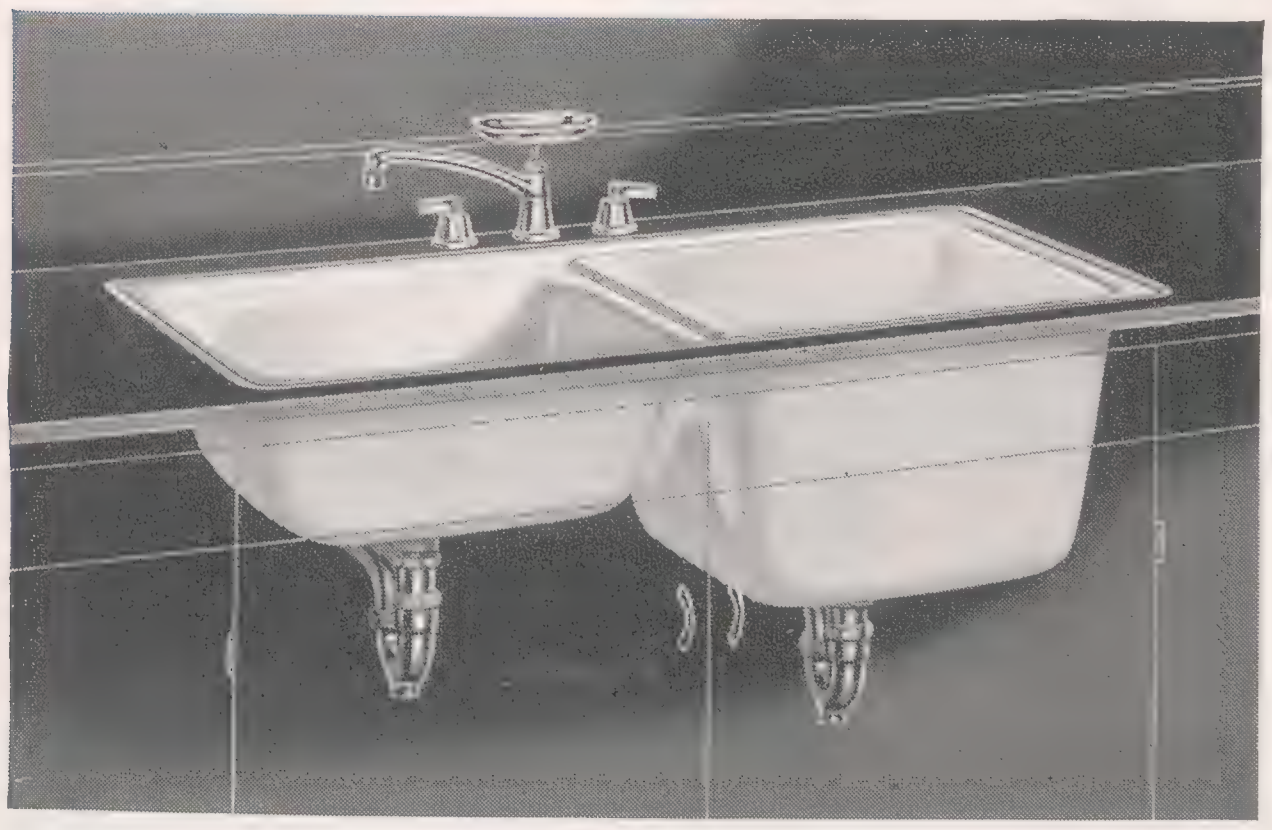

ALLOWAY K-6635-A Size 42x20"

Alloway sink and tray is reversible. Outlets are in center of compartments, permitting sink or tray to be installed at right or left as desired.

Sink and Tray Complete	**K-6635-A**
Sink and Tray	**K-6635**
Supply Fitting	**K-8601-AD** Edgewater with aerator and soap dish For Edgewater fitting less aerator, specify **K-8601-D**
Strainers	**K-8801** Duostrainer **K-8821** with stopper
Traps	Two **K-9000** 1½"
Movable Cover	**K-6706**
Metal Frame, If Specified	**K-6699**

SIZE	42x20"
SINK COMPARTMENT	18⅝x14⅛x8"
LAUNDRY TRAY COMPARTMENT	18⅝x14⅛x13"

LYON METAL KITCHEN CABINETS

All door and drawer fronts are made from zinc coated steel; the rest of the cabinet is specially Bonderized; next, two additional coats of enamel are electrostatically applied and baked on—producing a finish that will give long and satisfactory service.

Doors are insulated to eliminate metallic noises. The drawers roll quietly on nylon bearings.

All doors have Tap-O-Matic handles—a light tap with hand, elbow, wrist or knee will open doors.

Lyon cabinets have rounded corners, are easy to install, and easy to clean.

Adjustable shelves are easy to remove for cleaning purposes; have platter grooves for large plates, etc.

There is a complete line of cabinets for any room of any size or shape, including special cabinets for corners and for hard-to-store items.

When both hands are full, just tap handle with elbow and door pops open. A tap with the knee will open base cabinets.

Tap-O-Matic Handles

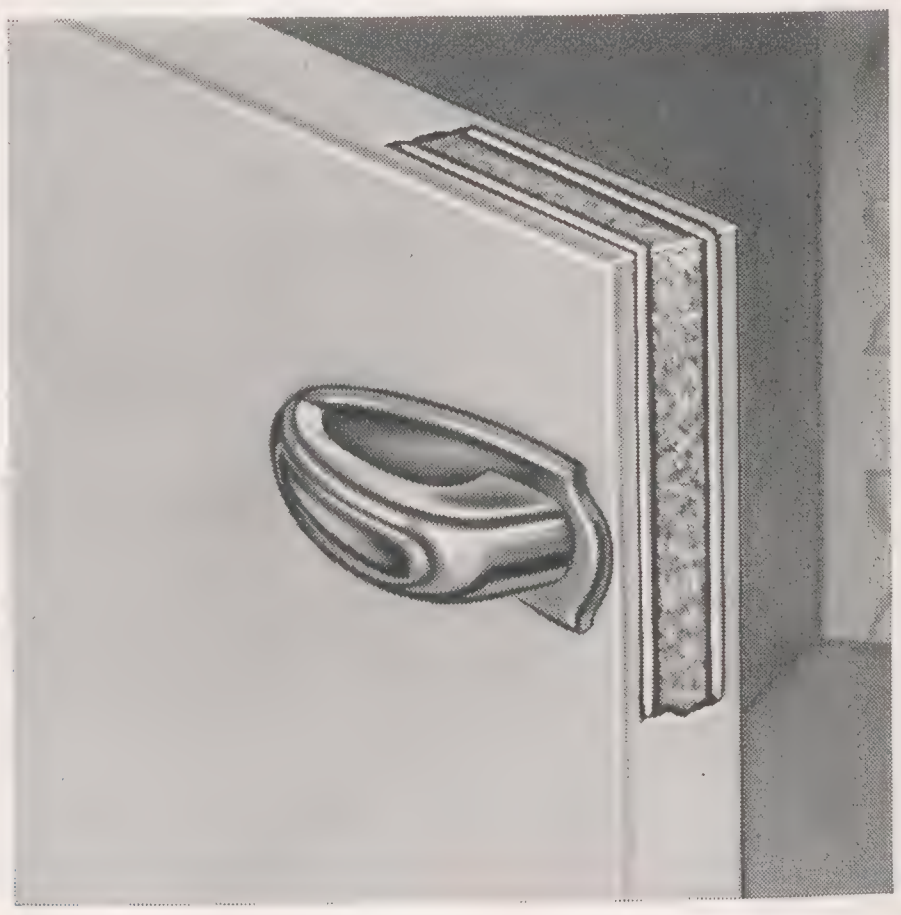

All doors and drawer fronts and end finishing panels are insulated. Rubber bumpers and roller mounted drawers assure quiet operation.

Insulated Doors

METAL BASE CABINETS

34½″ High
24″ Deep

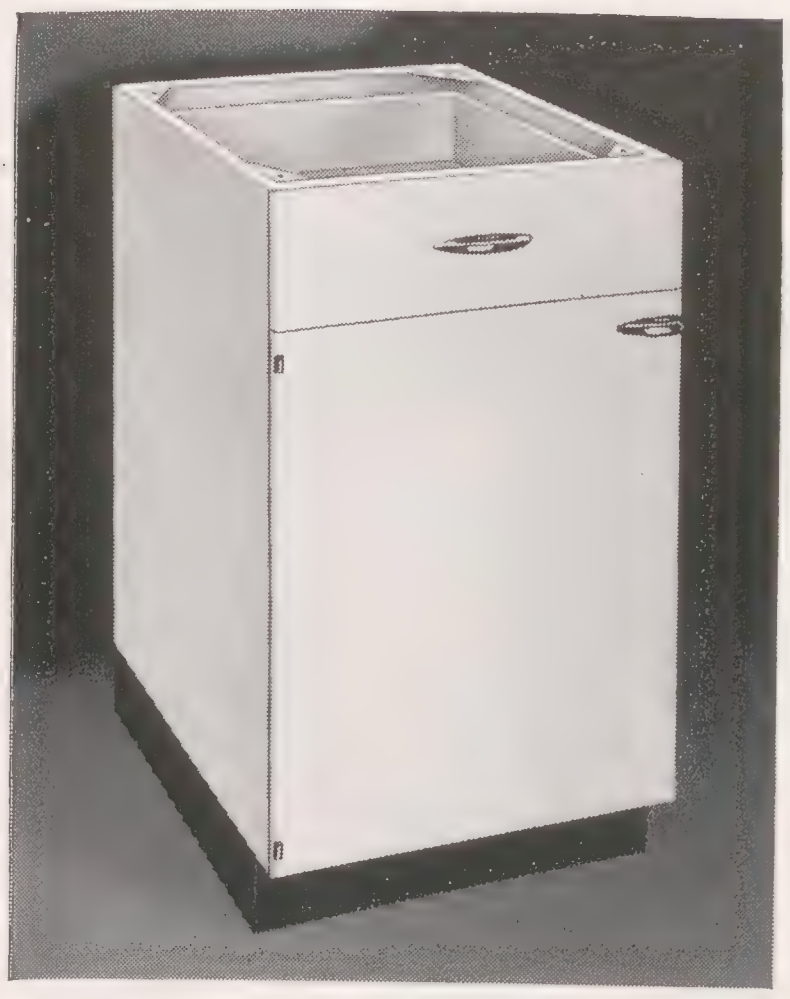

No. 8082-L

No. 8082-L Base Cabinet with Single Door and Drawer

Door available swinging either to right or to left. Has standard drawer at top.

Left Swinging Door
- **No. 8080-L**—15″ wide
- **No. 8082-L**—18″ wide

Right Swinging Door
- **No. 8081-L**—15″ wide
- **No. 8083-L**—18″ wide

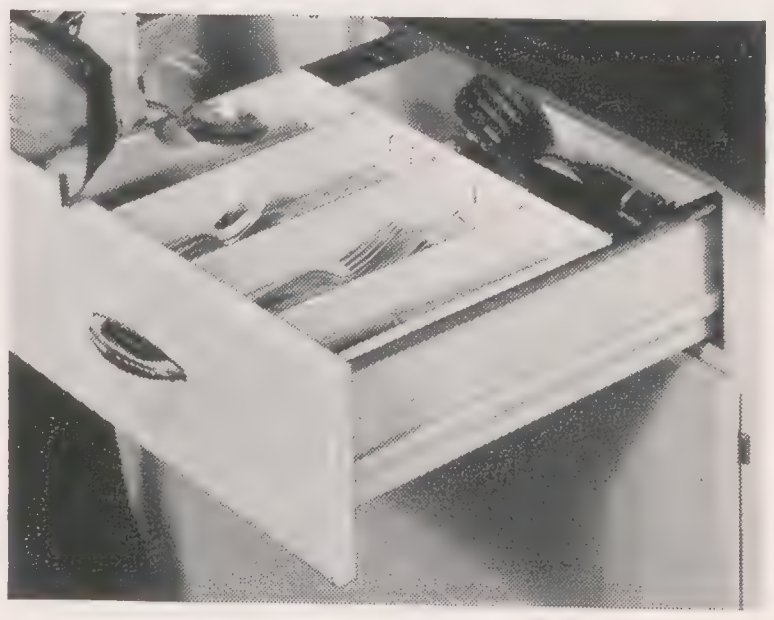

No. 8259-L

Cutlery Tray with Convenient Partitions.

No. 8259-L—for 15″ cabinet drawer.

No. 8260-L—for 18″ cabinet drawer.

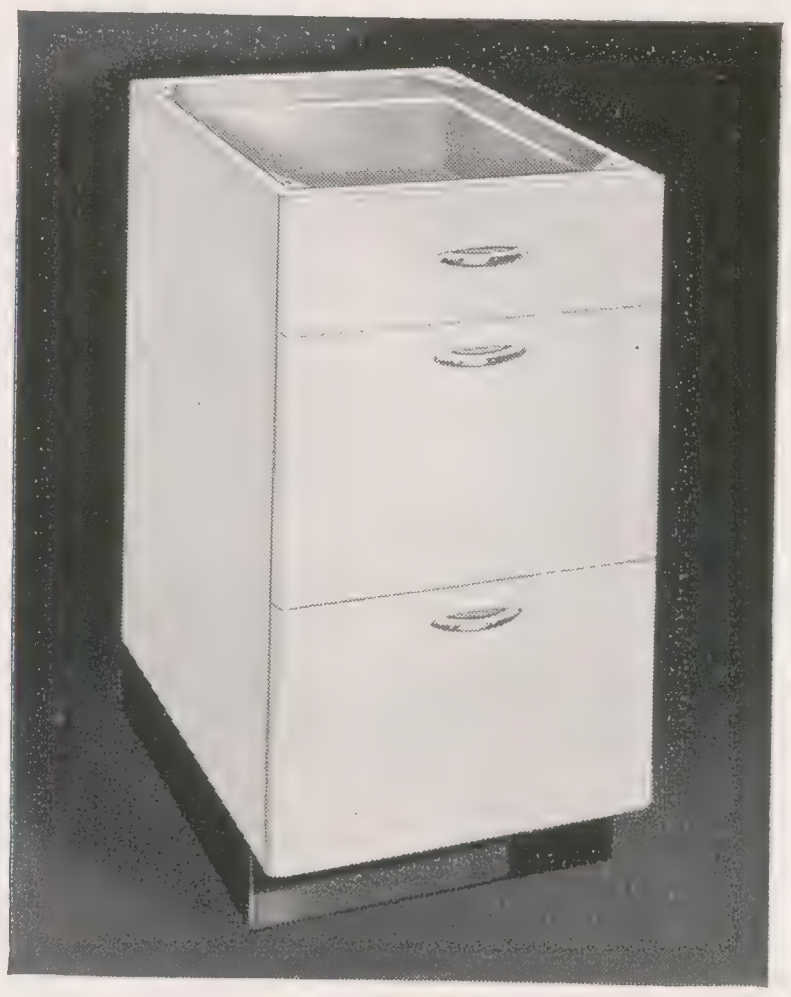

No. 8093-L

No. 8093-L Base Cabinet with Three Drawers

Standard drawer and two deep drawers below.

- **No. 8170-L**—15″ wide
- **No. 8093-L**—18″ wide
- **No. 8172-L**—21″ wide
- **No. 8173-L**—24″ wide

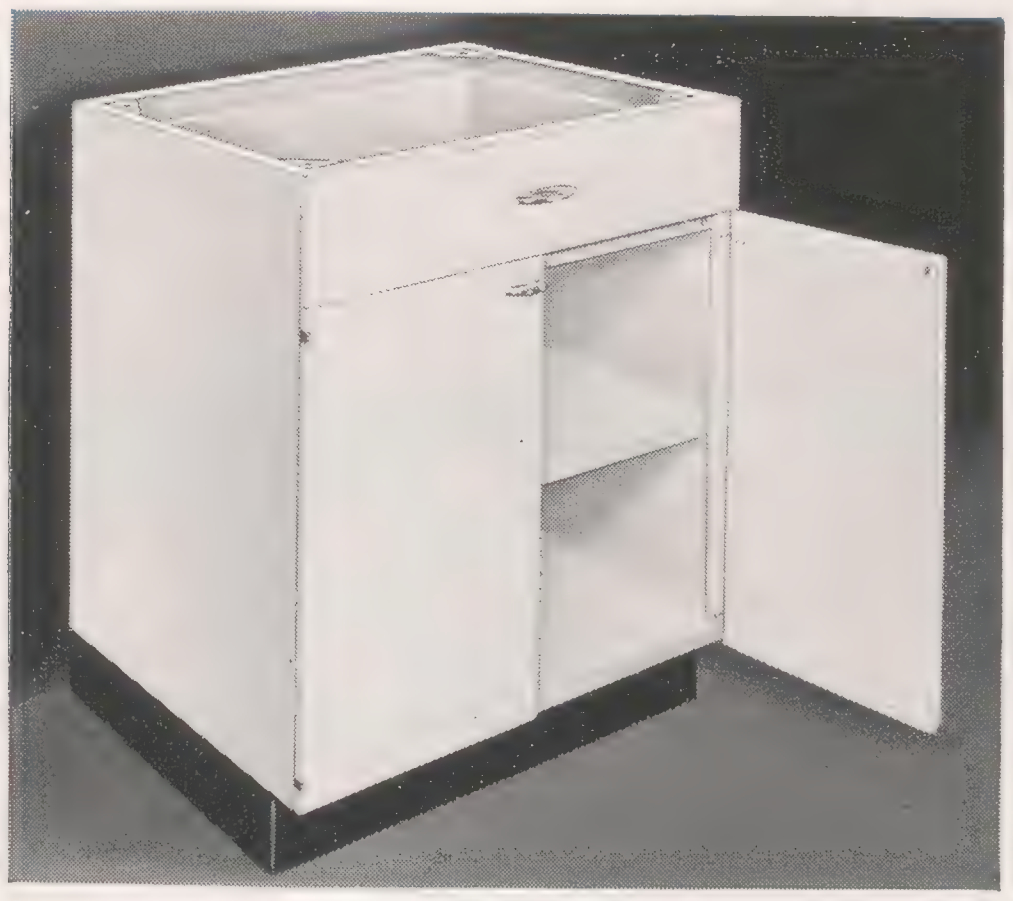

No. 8084-L

No. 8084-L Double Door Base Cabinet with Drawer

Double door gives full access to storage compartment. Shelf adjustable on 2″ centers.

- **No. 8084-L**—21″ wide
- **No. 8085-L**—24″ wide
- **No. 8086-L**—27″ wide
- **No. 8087-L**—30″ wide
- **No. 8088-L**—36″ wide with 2 drawers

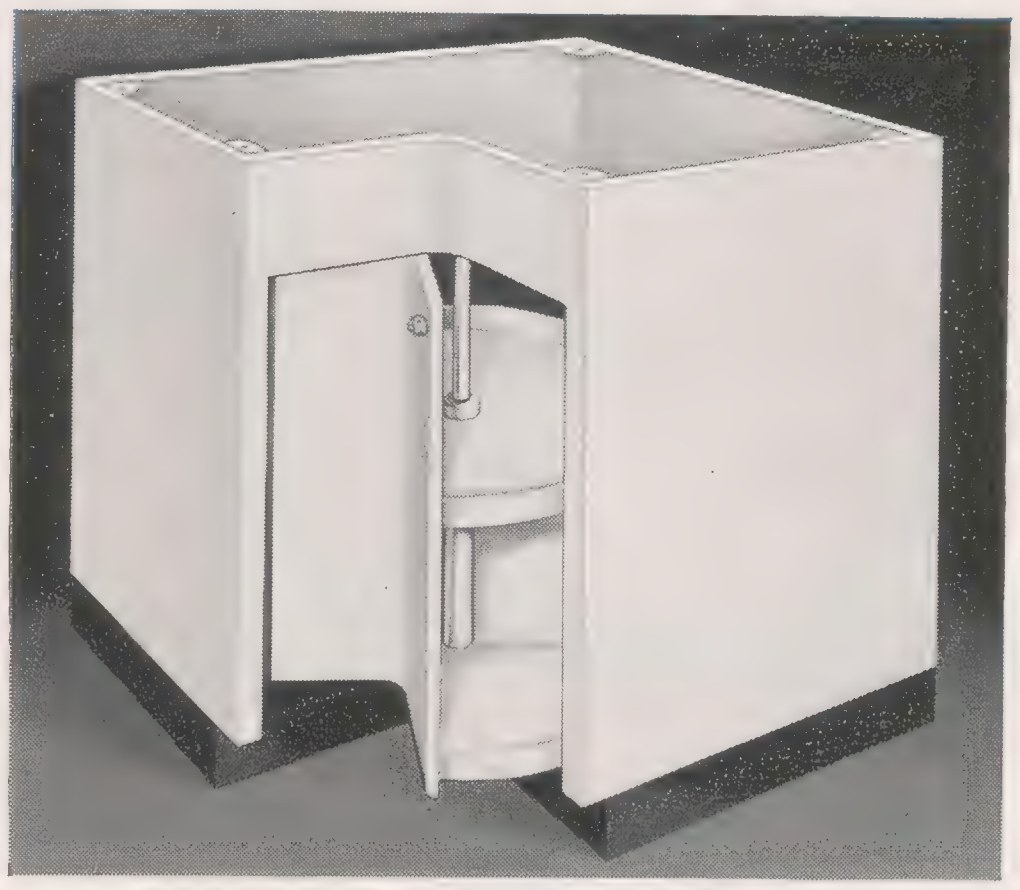

No. 8098-L

No. 8098-L Corner Base Cabinet

Door swings open either direction and circular shelves move outward, placing stored material at finger-tips.

Requires 36″ of wall space both directions from corner.

No. 8098-L—36″ wide

Note: Above base cabinets are furnished without counter tops.

METAL WALL CABINETS

All Shelves in Wall Cabinets Have Platter Grooves

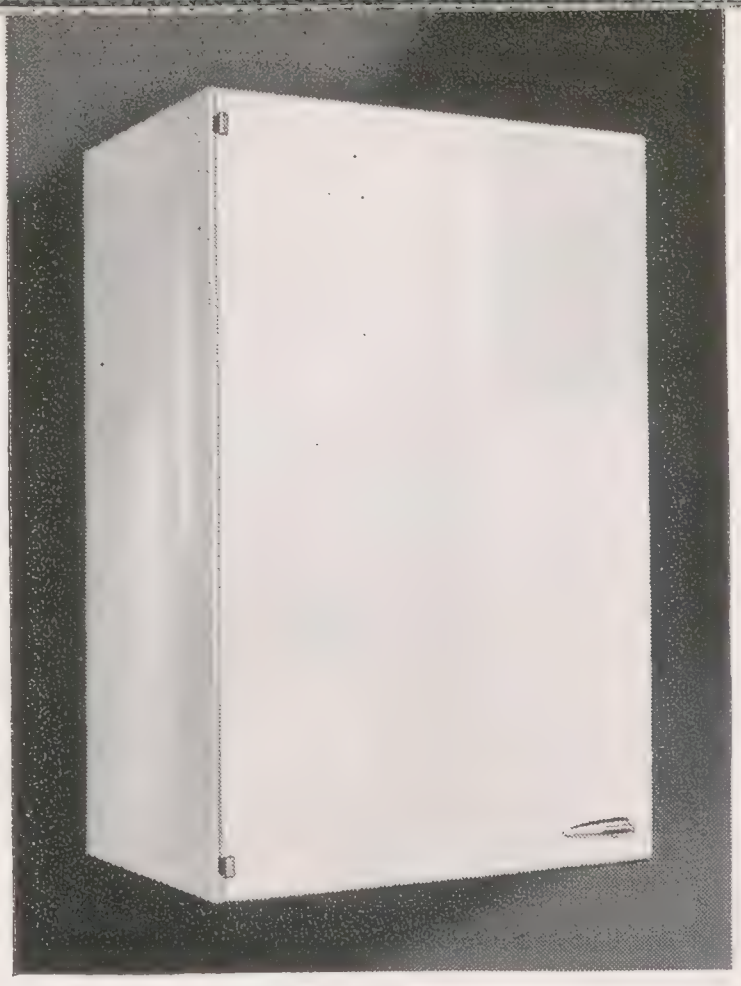

No. 8110-L

No. 8110-L Single Door Wall Cabinet

Single door wall cabinet, available in two widths with left or right swinging doors. Two adjustable shelves.

Left Swinging Door
No. 8110-L—15"W x 13"D x 30"H
No. 8112-L—18"W x 13"D x 30"H

Right Swinging Door
No. 8111-L—15"W x 13"D x 30"H
No. 8113-L—18"W x 13"D x 30"H

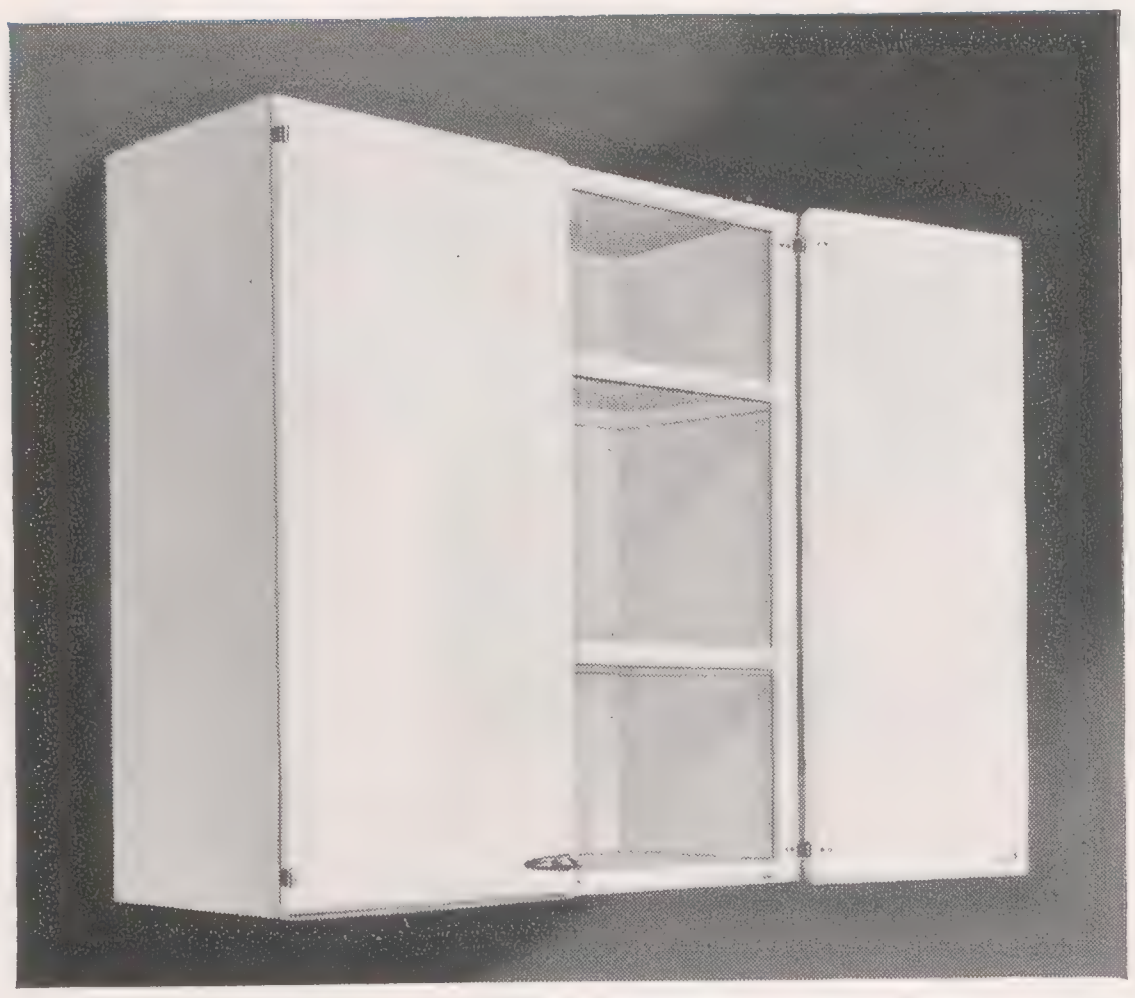

No. 8114-L

No. 8114-L Double Door Wall Cabinet

Double door wall cabinet, available in five widths. Cabinets equipped with two adjustable shelves.

No. 8114-L—21"W x 13"D x 30"H
No. 8115-L—24"W x 13"D x 30"H
No. 8116-L—27"W x 13"D x 30"H
No. 8117-L—30"W x 13"D x 30"H
No. 8118-L—36"W x 13"D x 30"H

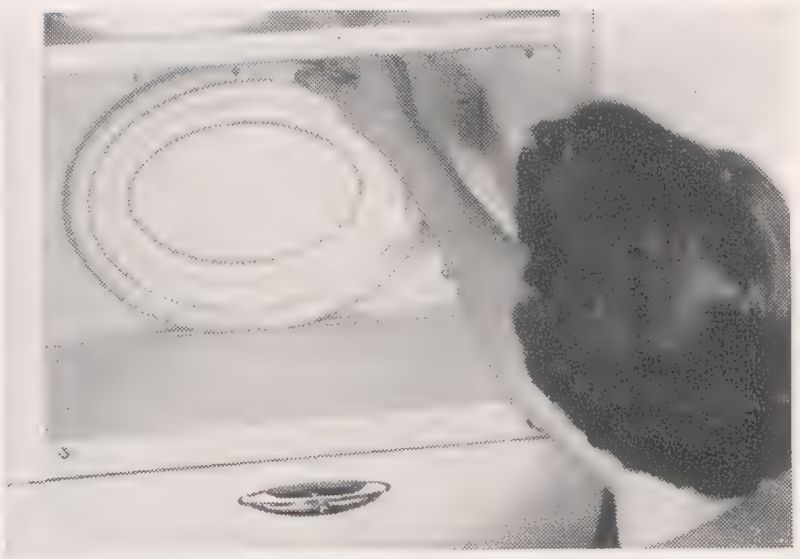

Platter grooves for storing large plates and platters on edge.

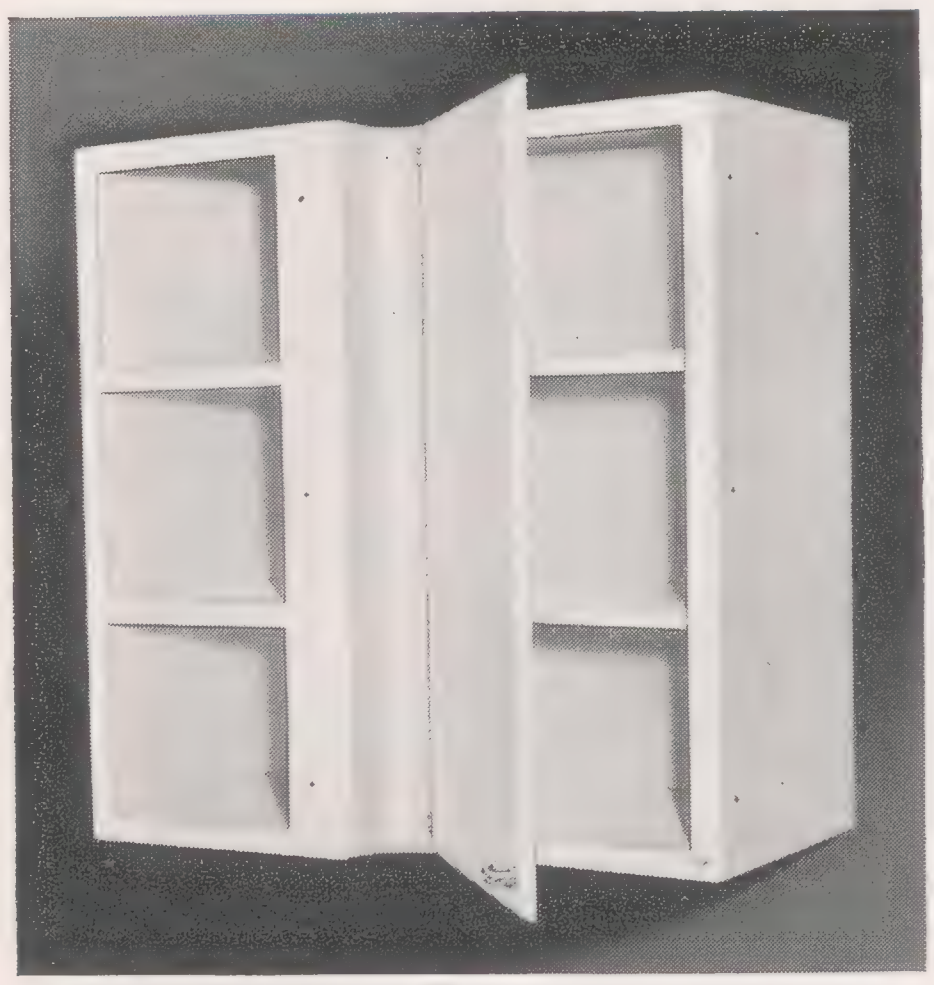

No. 8120-L

No. 8120-L Corner Wall Cabinet

Corner wall cabinet utilizes all space. Available with left or right swinging door. Equipped with two stationary shelves.

Left Swinging Door
No. 8120-L—27"W x 13"D x 30"H

Right Swinging Door
No. 8121-L—27"W x 13"D x 30"H

Note: Depth shown as 13"—space required from wall corner is 15" and 27".

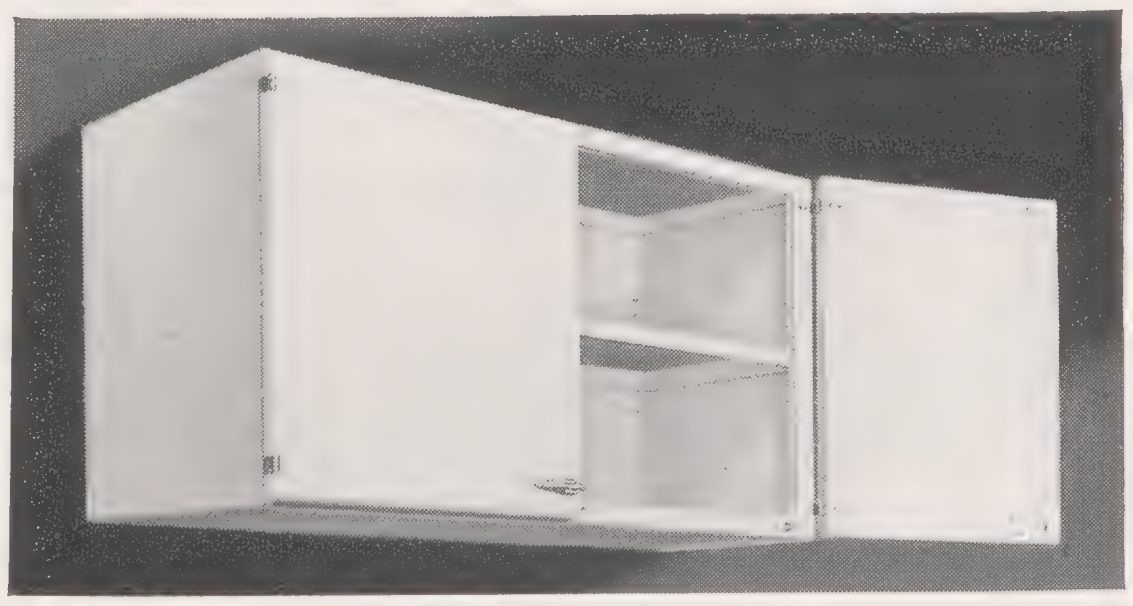

No. 8100-L

No. 8100-L Double Door Wall Cabinet

These cabinets may be used above kitchen range, refrigerator, or sink. The height permits ample headroom above working area. Available in four widths. Has one adjustable shelf.

No. 8100-L—21"W x 13"D x 18"H
No. 8101-L—24"W x 13"D x 18"H
No. 8102-L—30"W x 13"D x 18"H
No. 8103-L—36"W x 13"D x 18"H

METAL UTILITY CABINETS

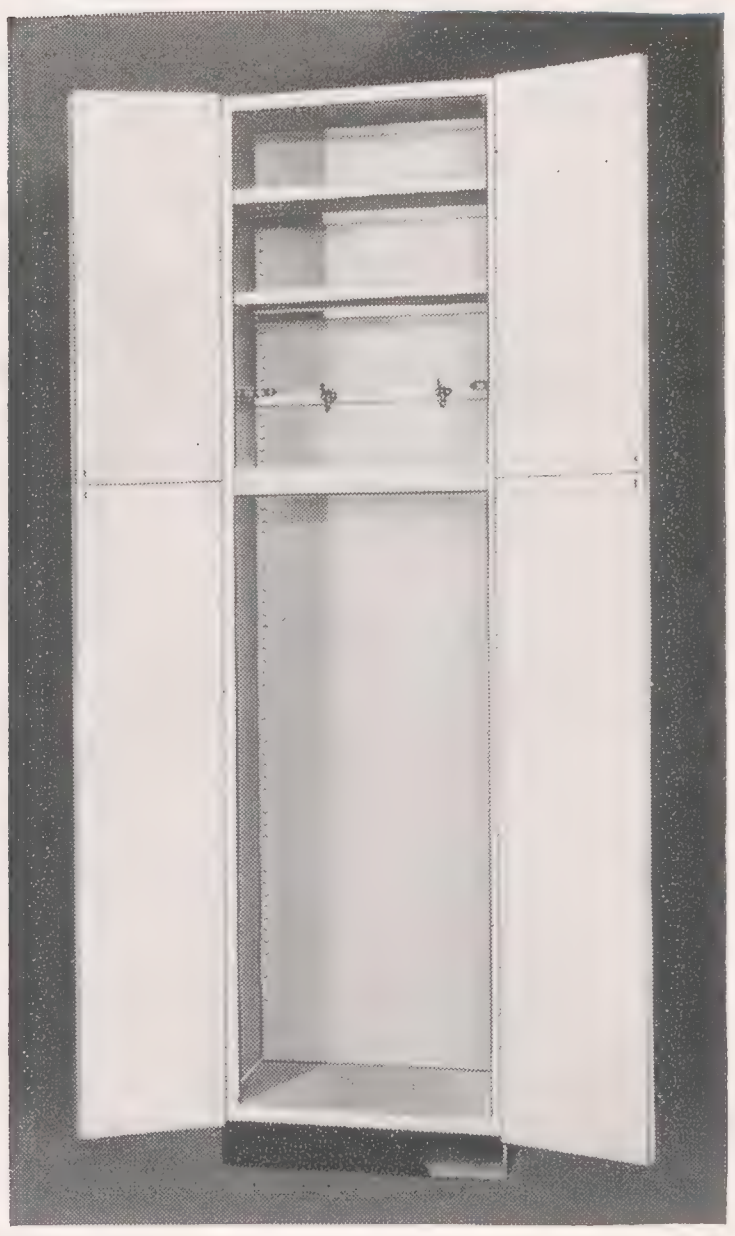
No. 8155-L

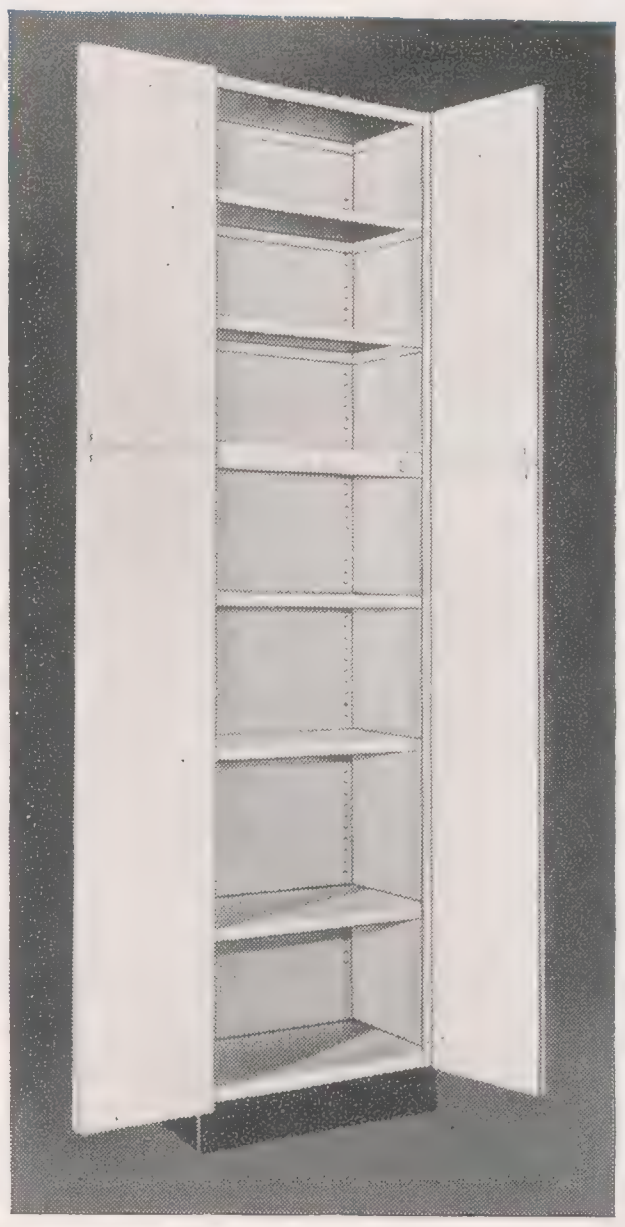
No. 8156-L

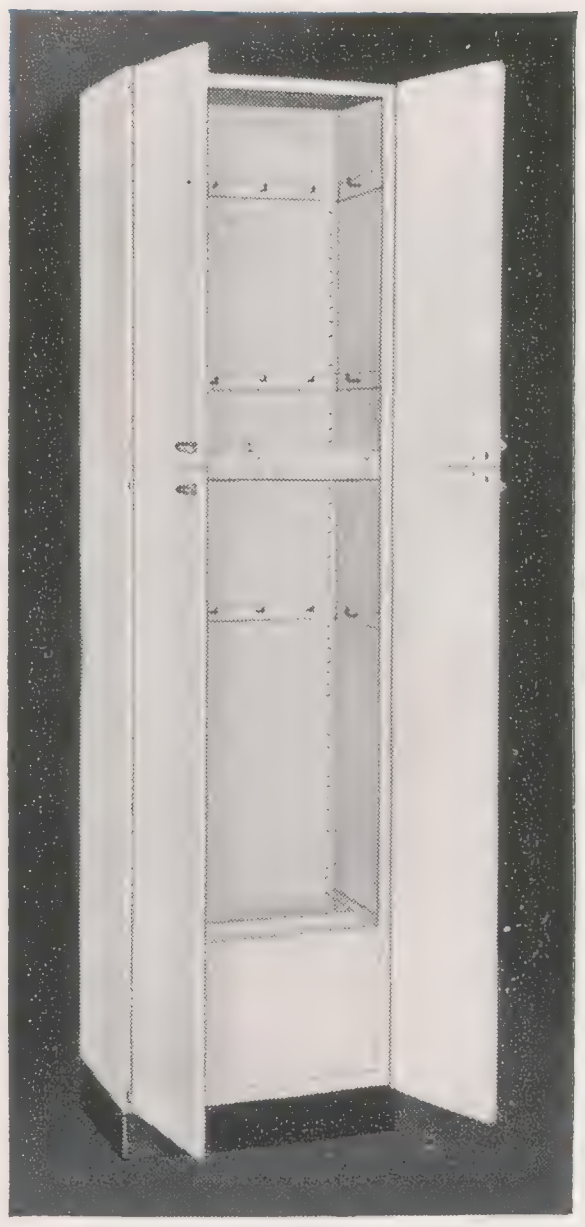
No. 8157-L

No. 8155-L Cleaning Implement Cabinet

No. 8155-L — For brooms, ironing board, mops, dust pan, furniture polish, cleaner, etc. Has two shelves, adjustable on 2" centers, an adjustable back strip with 2-prong hooks, two adjustable side strips with broom clamps and linoleum bottom mat.

No. 8156-L Linen or Dish Storage Cabinet

No. 8156-L — A storage space concentrated in a small area for linens, towels, and dishes. Has six shelves, adjustable on 2" centers. Shelves have a platter groove at the rear.

No. 8157-L Pot and Pan Cabinet

No. 8157-L—Provides quick and accessible storage for bulky pots and pans. Cabinet has three sets of adjustable strips, each with five adjustable hooks. Has two shelves used vertically at bottom for storing pan covers, pie tins, etc.

SIZES: 21"W x 13"D x 84"H

ACCESSORIES FOR METAL CABINETS

Base Scribing Fillers


No. 8226-L (R.H.)
3x34½"


No. 8225-L (L.H.)
3x34½"

Wall Scribing Fillers


No. 8228-L

No. 8228-L 3x13x18"
No. 8229-L 3x13x18"
No. 8235-L 3x13x84"
For Utility Cabinets


No. 8528-L (L.H.)
No. 8529-L (R.H.)
3x13x16¾"
Used with Dry Storage Cabinets

Base and Wall Corner Sections


No. 8211-L
Base Corner Section
3x3x34½"


No. 8215-L
Wall Corner Section 15x15x18"
No. 8216-L
15x15x30"

Scribing Filler Extension


No. 8527-L

No. 8527-L (R.H.) 3x13x3"
No. 8526-L (L.H.) 3x13x3"
Used with **No. 8229-L**

Corner Radius Filler

No. 8525-L 5" High
Used with **Nos.: 8216-L, 8120-L, 8121-L**


No. 8525-L

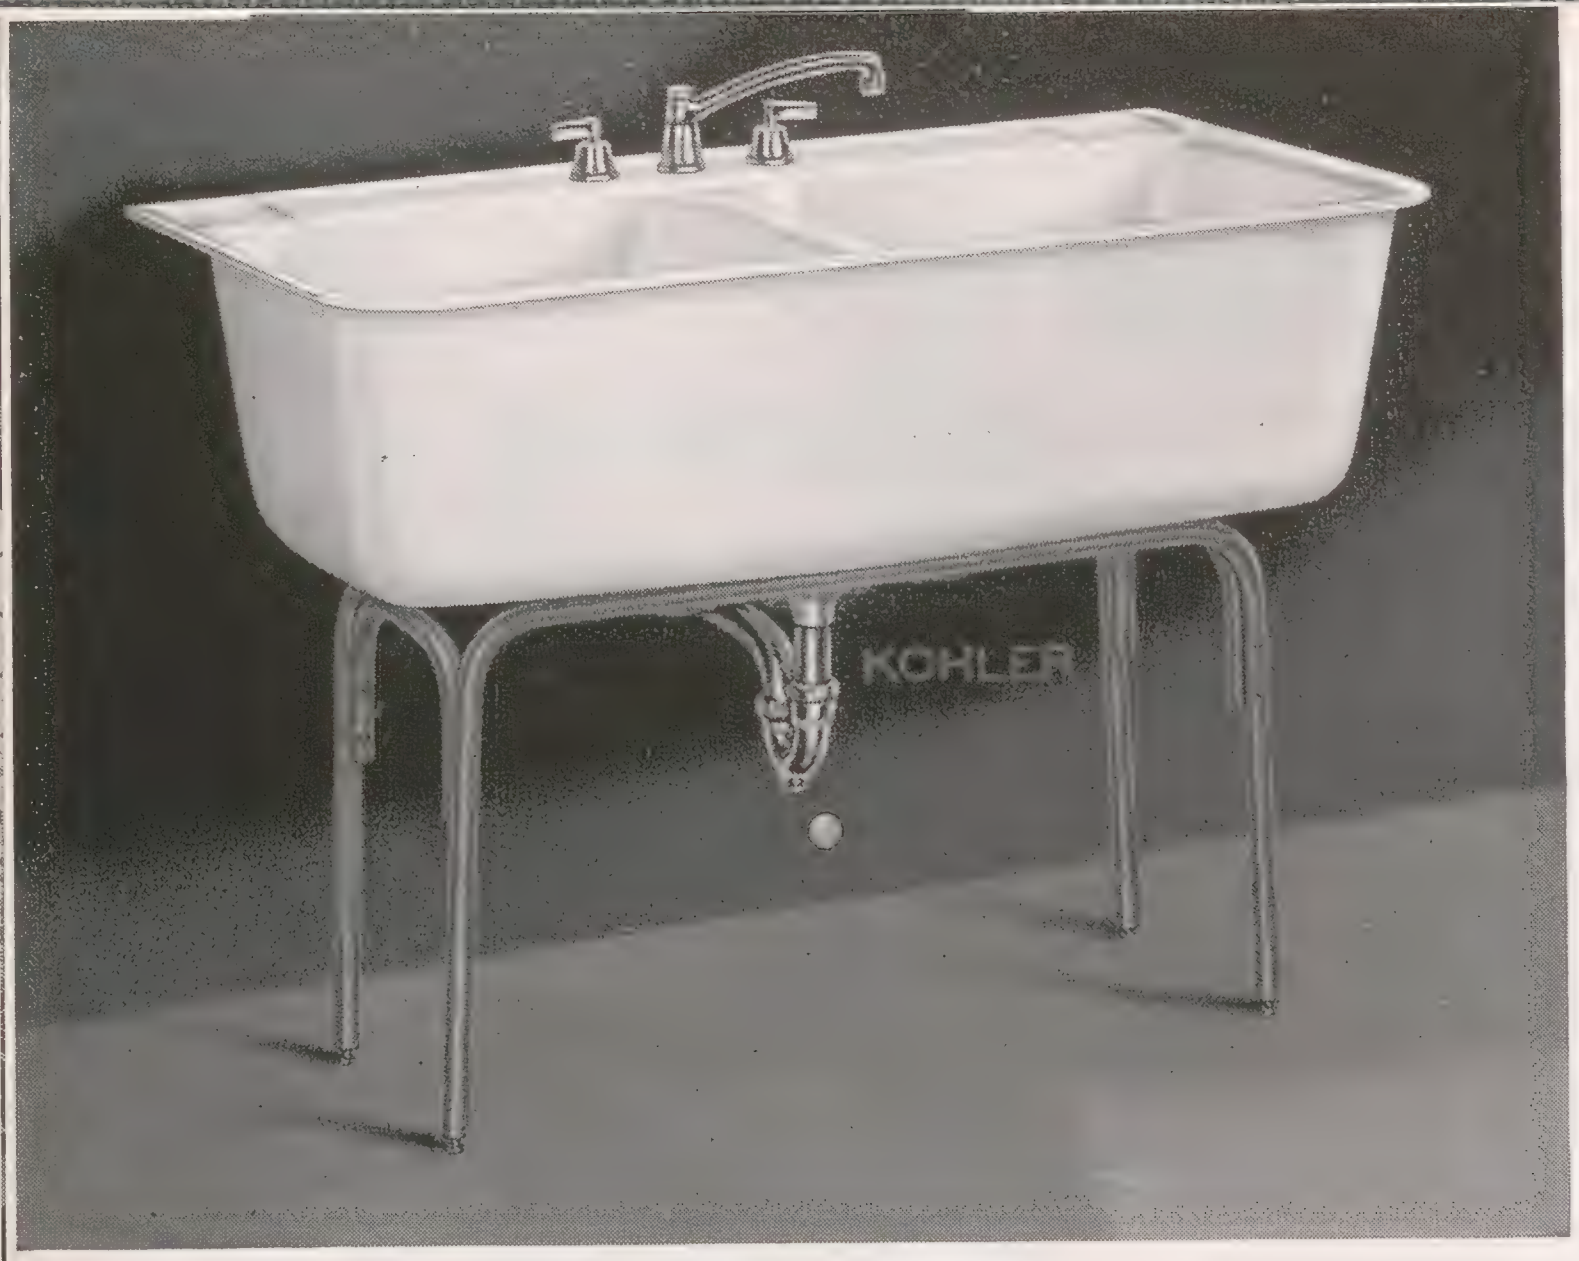

SENECA K-6748-A

SENECA ACID-RESISTING ENAMELED CAST IRON ONE-PIECE DOUBLE COMPARTMENT LEDGE LAUNDRY TRAY

Laundry Tray Complete	K-6748-A
Laundry Tray, Less Trap	K-6748-B
Laundry Tray	K-6748
Supply Fitting	**K-8601-M** with threaded spout
Continuous Drain and Strainers	K-9065
Trap	**K-9000** 1½″
Support	**K-6917** painted tubular
Approximate Water Capacity	17 gallons each compartment

All visible surfaces are finished with acid-resisting enamel.

SIZE	48x25″
TRAYS INSIDE	21½x19¾x13″
WIDTH OF LEDGE	3½″

TWIN FALLS ACID-RESISTING ENAMELED CAST IRON ONE-PIECE DOUBLE COMPARTMENT LEDGE LAUNDRY TRAY ON ANGLE SUPPORT

Laundry Tray Complete	K-6751-A
Laundry Tray, Less Trap	K-6751-B
Laundry Tray	K-6752
Supply Fitting	**K-8601-M** with threaded spout
Continuous Drain and Strainers	K-9065
Trap	**K-9000** 1½″
Support	**K-6920** painted angle
Approximate Water Capacity	17 gallons each compartment

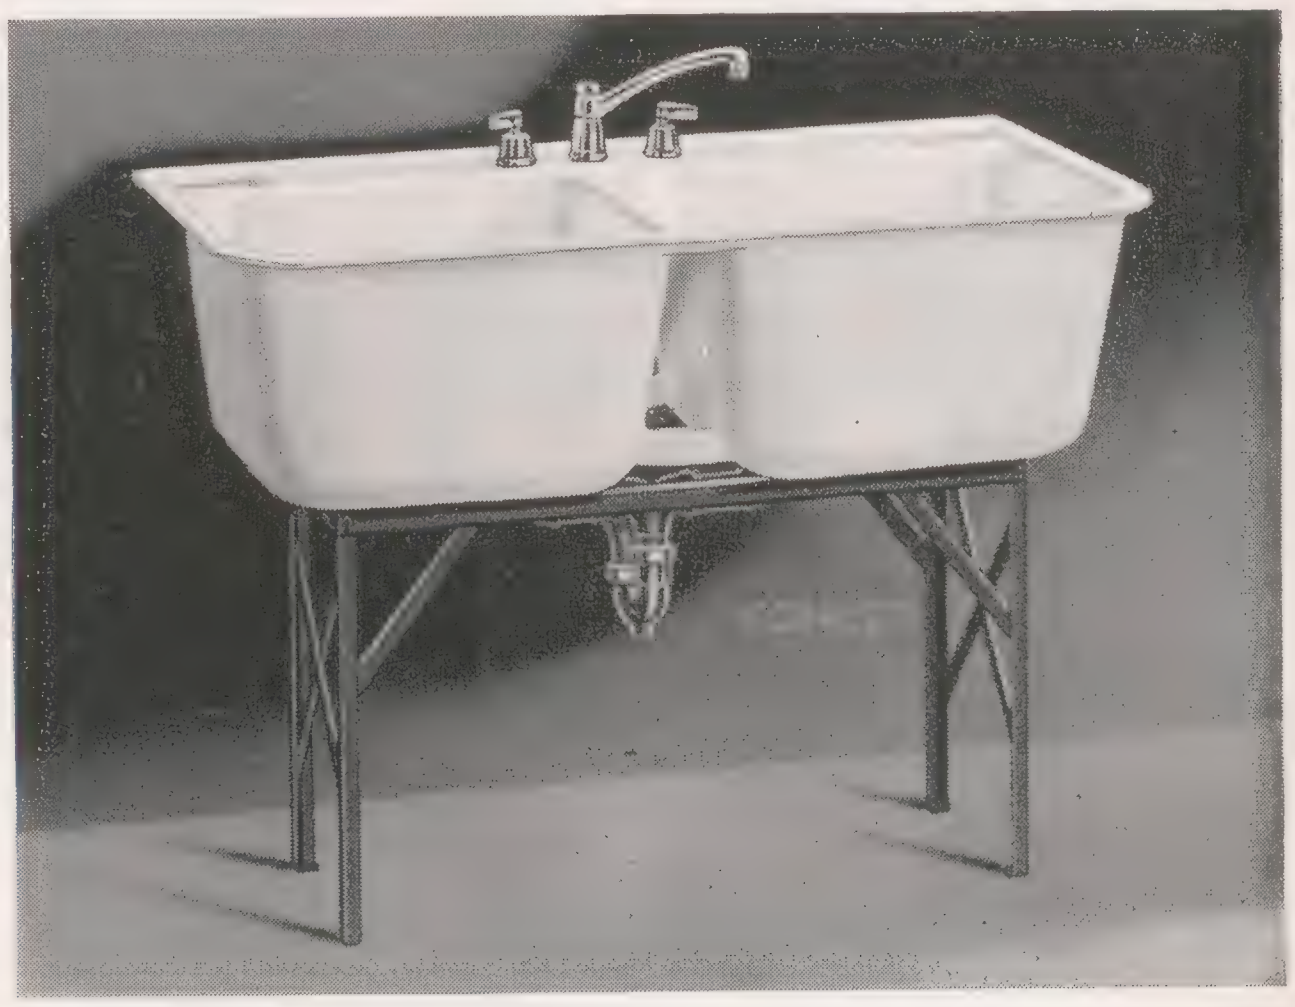

TWIN FALLS K-6751-A

For Building Into Counters and Cabinets

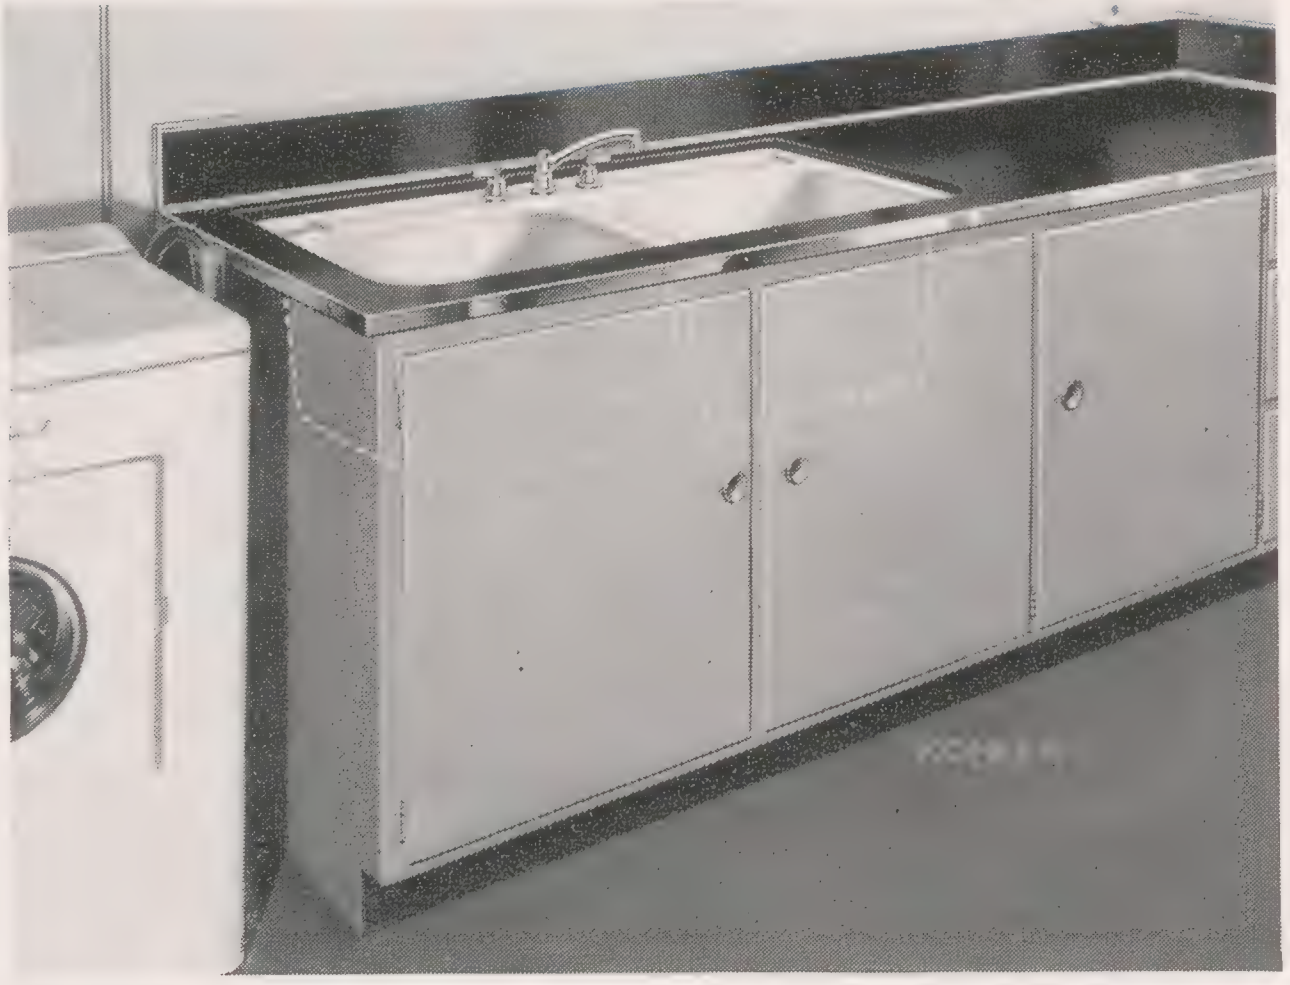

TWIN FALLS K-6752-A

Cabinets Illustrated
Not Furnished

Laundry Tray Complete	K-6752-A
Laundry Tray, Less Trap	K-6752-B
Laundry Tray	K-6752
Supply Fitting	**K-8601-M** with threaded spout
Continuous Drain and Strainer	K-9065
Trap	**K-9000** 1½″
Metal Frame, if Specified	K-6699
Approximate Water Capacity	17 gallons each compartment

Enameled Inside Only

SIZE	48x25″
TRAYS INSIDE	21½x19¾x13″
WIDTH OF LEDGE	3½″

GLEN FALLS

ACID-RESISTING ENAMELED CAST IRON LEDGE LAUNDRY TRAY

For Building Into Cabinets and Counters

Laundry Tray Complete	**K-6757-A**
Laundry Tray, Less Trap	**K-6757-B**
Laundry Tray	**K-6757**
Supply Fitting	**K-8601-M** with threaded spout
Strainer	**K-8821** with stopper
Trap	**K-9000** 1½"
Approximate Water Capacity	14 gallons
Metal Frame, if Specified	**K-6699**

Enameled Inside Only

SIZE **24x21"**
INSIDE DIMENSIONS **21½x15½x13"**

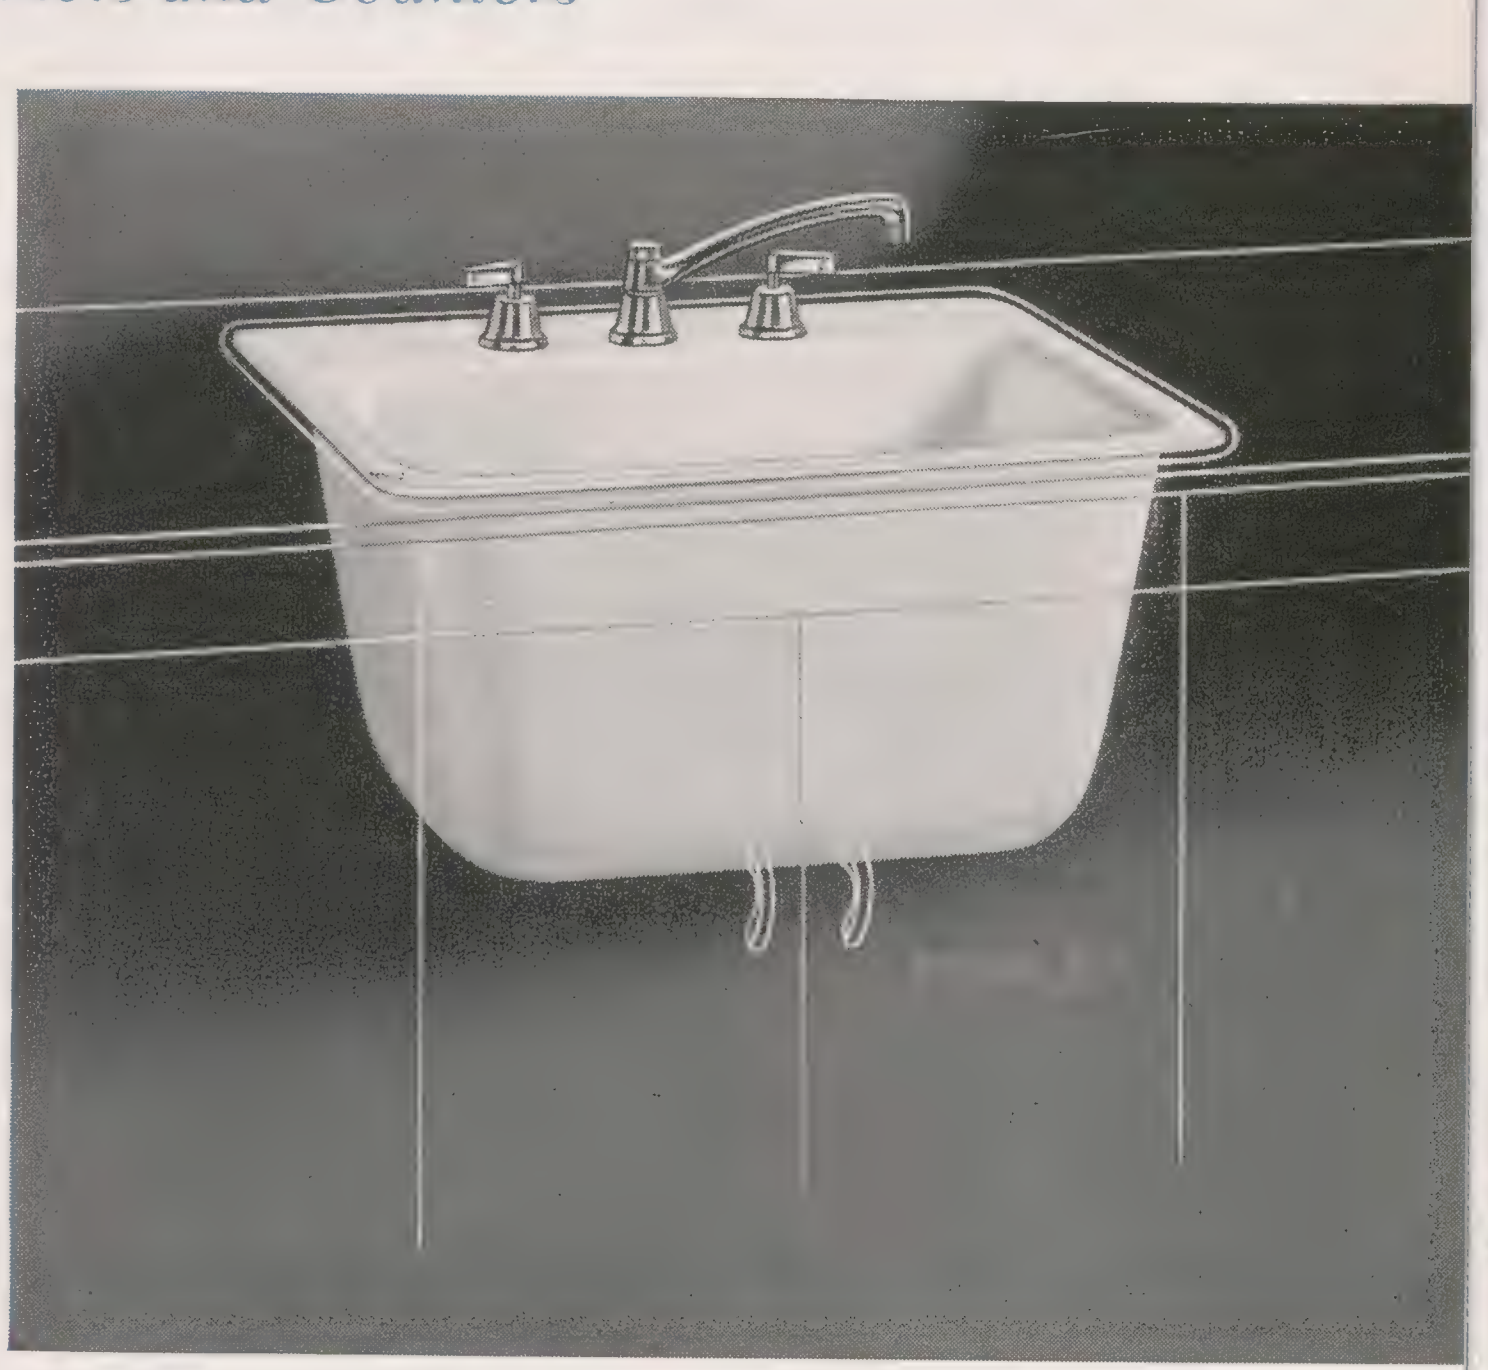

GLEN FALLS K-6757-A

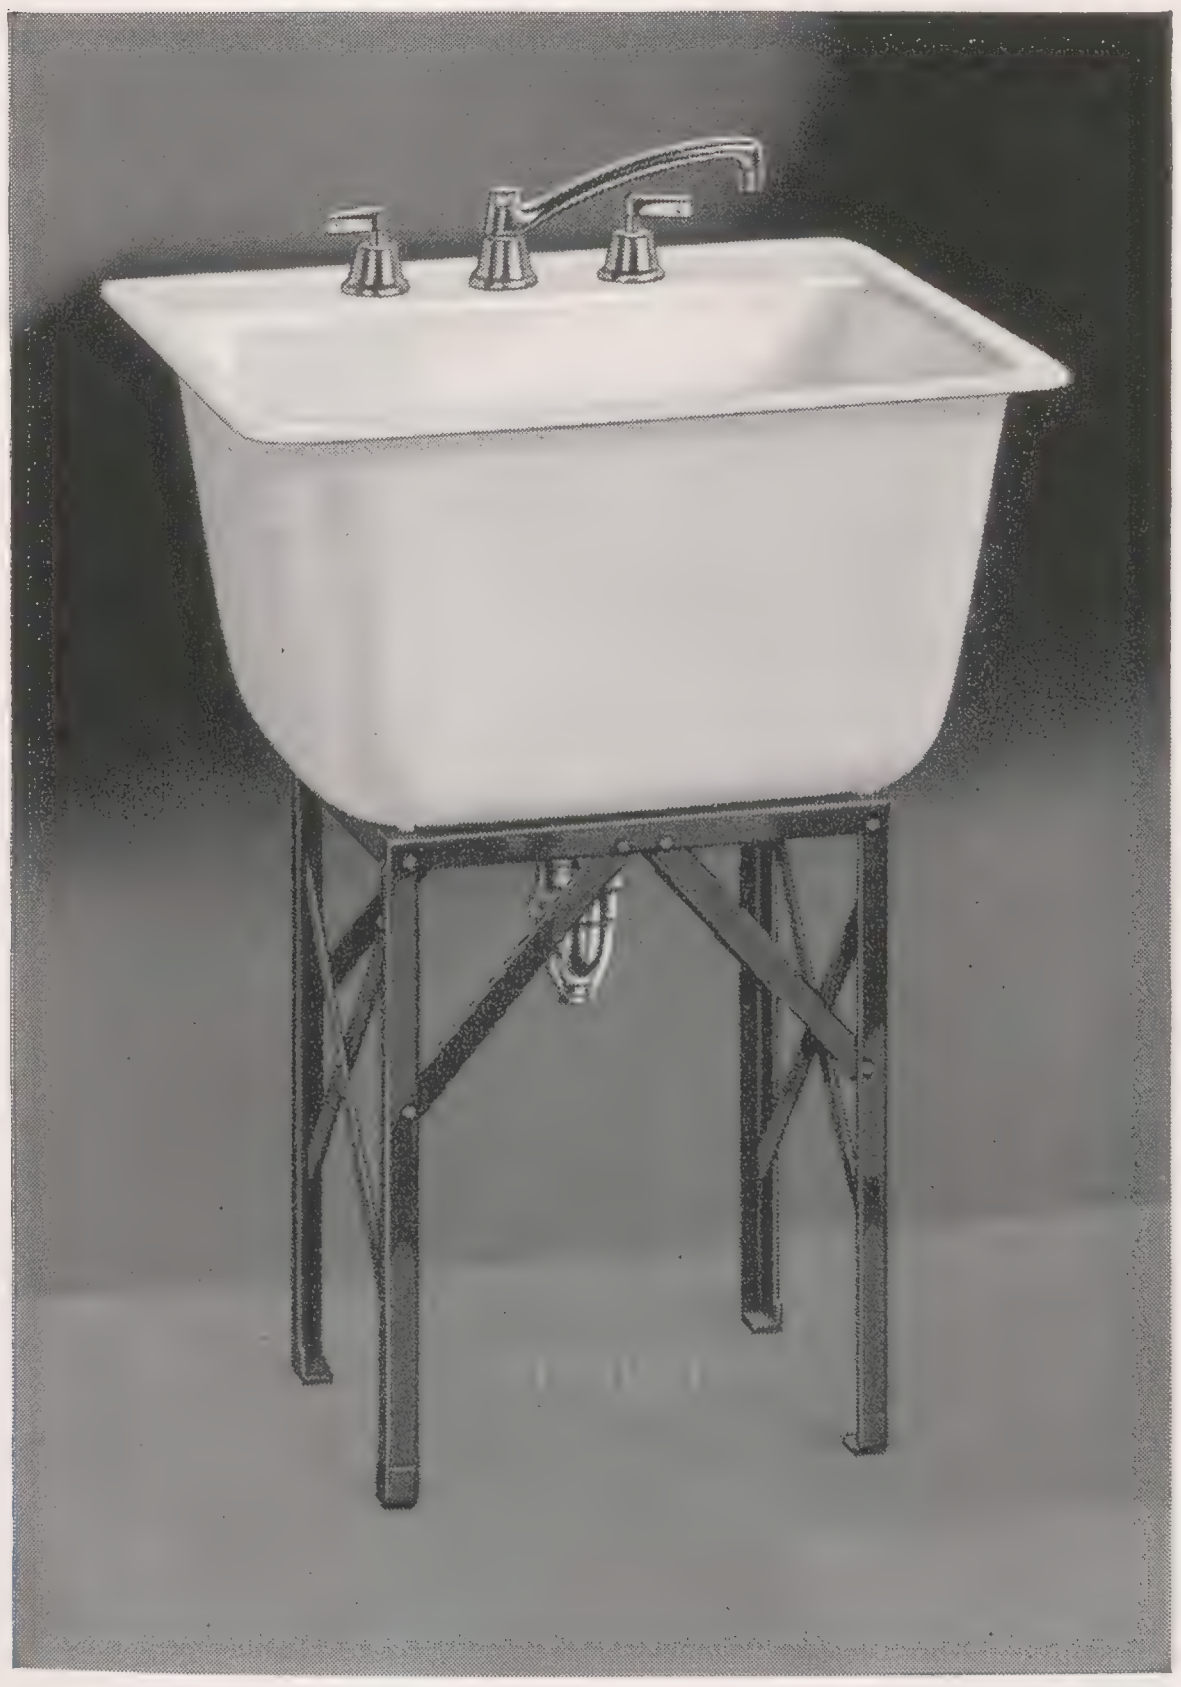

GLEN FALLS K-6756-A

GLEN FALLS

LAUNDRY TRAY ON ANGLE SUPPORT

Laundry Tray Complete	**K-6756-A**
Laundry Tray, Less Trap	**K-6756-B**
Laundry Tray	**K-6757**
Supply Fitting	**K-8601-M** with threaded spout
Strainer	**K-8821** with stopper
Trap	**K-9000** 1½"
Support	**K-6918** painted angle
Approximate Water Capacity	14 gallons
Metal Frame, if Specified	**K-6699**

Specify **K-6755-A** for Glen Falls on angle support with **K-8948** supply fitting and **K-8821** strainer.

Enameled Inside Only

SIZE **24x21"**
INSIDE DIMENSIONS **21½x15½x13"**

PATTEN ACID-RESISTING ENAMELED CAST IRON DOUBLE COMPARTMENT LAUNDRY TRAY ON ADJUSTABLE LEGS

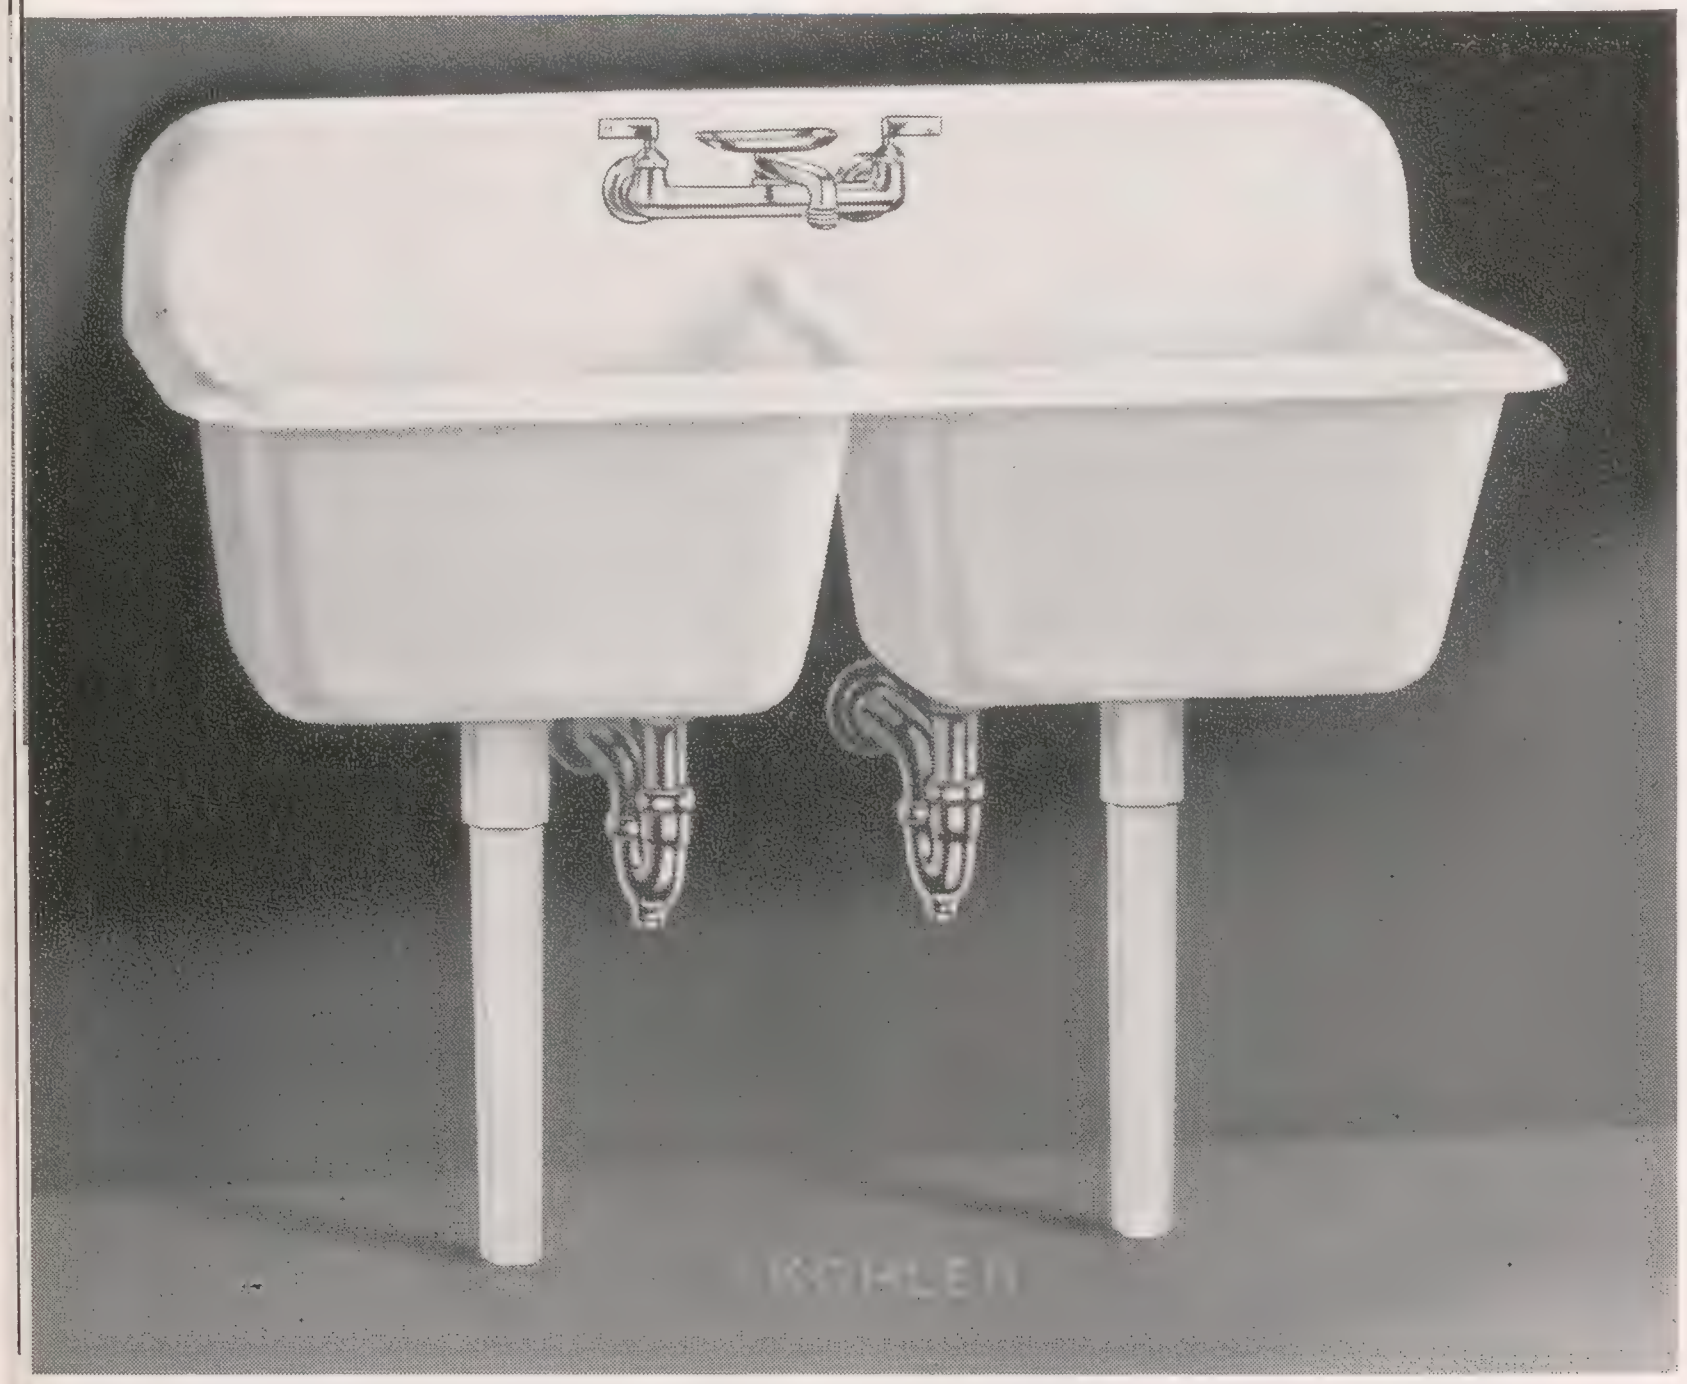

PATTEN K-6800-A

Laundry Tray Complete	**K-6800-A**
Laundry Tray with Legs	**K-6800**
Supply Fitting	**K-8657** with threaded spout
Strainers	Two **K-8821** with stoppers
Traps	Two **K-9000** 1½″
Supports	Two **K-6735** adjustable legs
Approximate Water Capacity	22 gallons each compartment

Enameled Inside Only

SIZE	52¾x26⅝
TRAY INSIDE	23x21¼x14¼″
BACK	8″
FLOOR TO TOP OF RIM ADJUSTABLE FROM	35½″ to 40″

STANWIX ACID-RESISTING ENAMELED CAST IRON LAUNDRY TRAY ON ADJUSTABLE LEG

Laundry Tray Complete	**K-6815-A**
Laundry Tray with Leg	**K-6815**
Supply Fitting	**K-8657** with threaded spout
Strainer	**K-8821** with stopper
Trap	**K-9000** 1½″
Support	**K-6735** adjustable leg
Approximate Water Capacity	21 gallons

Enameled Inside Only

SIZE	27½x26¾
TRAY INSIDE	22¾x22½x14¼″
BACK	8″
FLOOR TO TOP OF RIM ADJUSTABLE FROM	35½″ to 40″

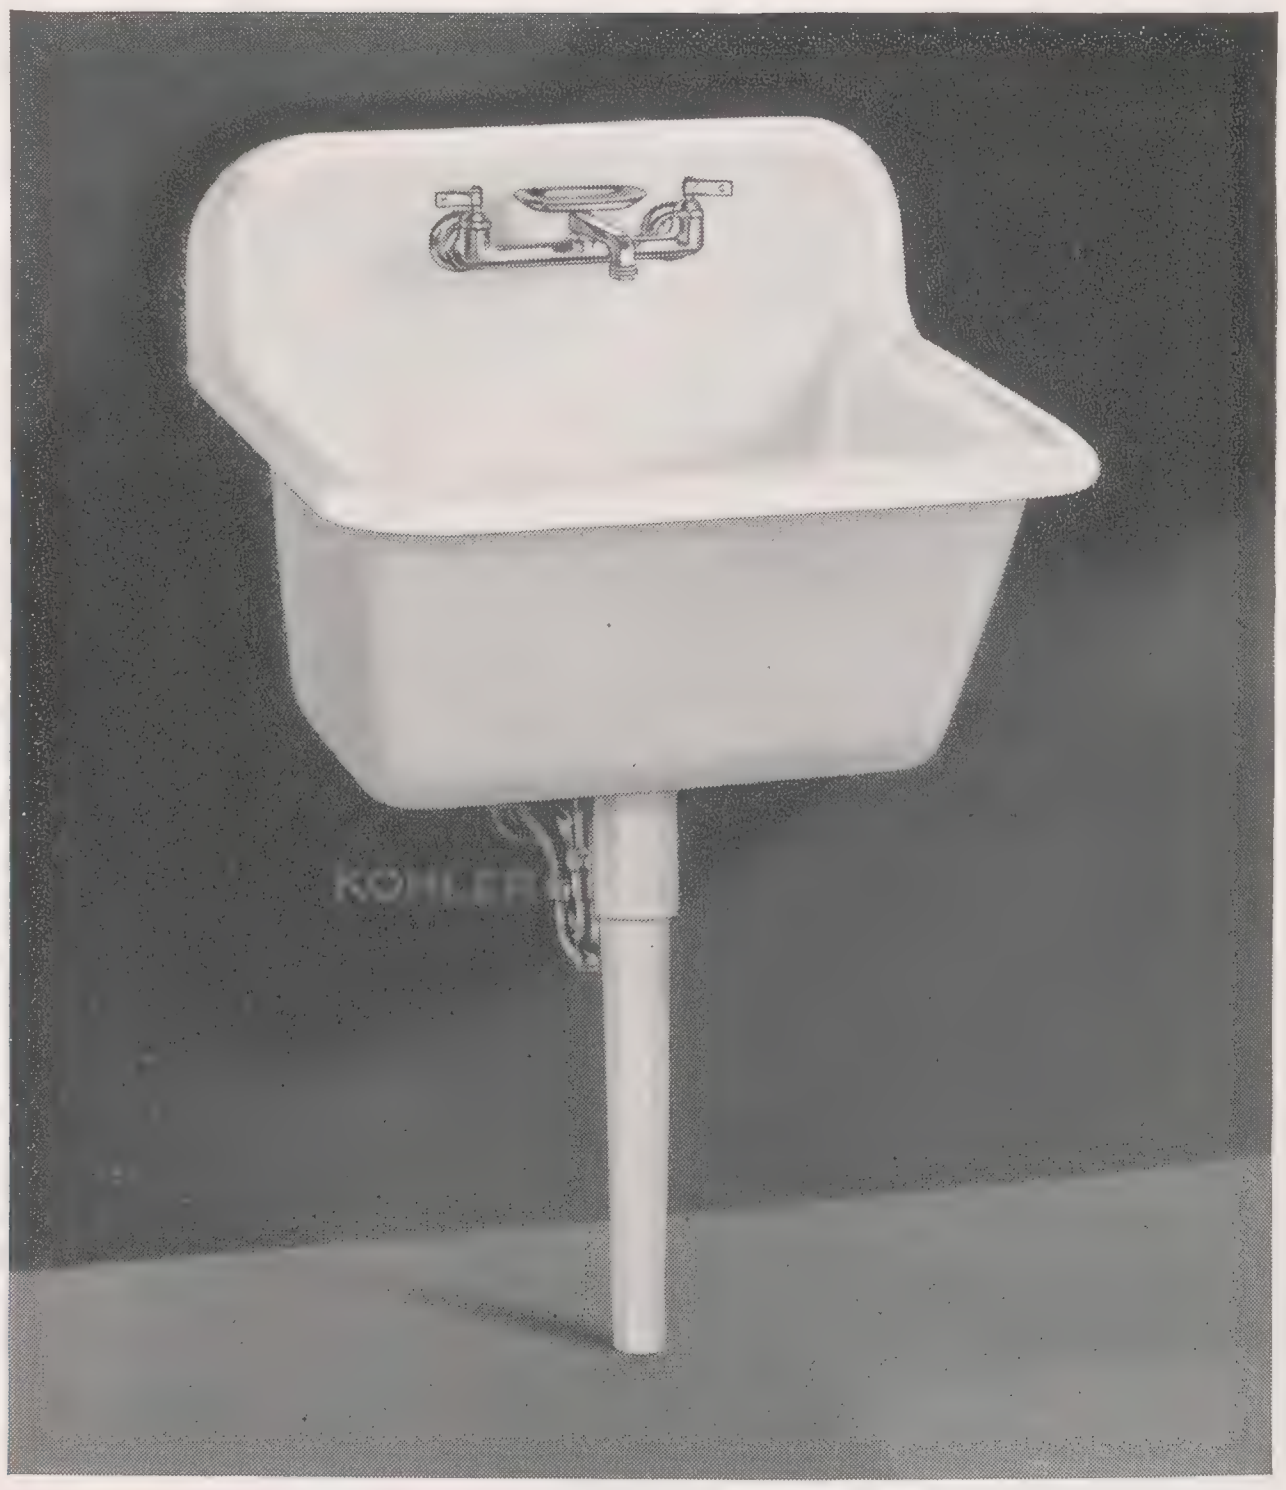

STANWIX K-6815-A

EMERY AND ELSWICK ACID-RESISTING ENAMELED CAST IRON LAUNDRY TRAYS ON SUPPORTS

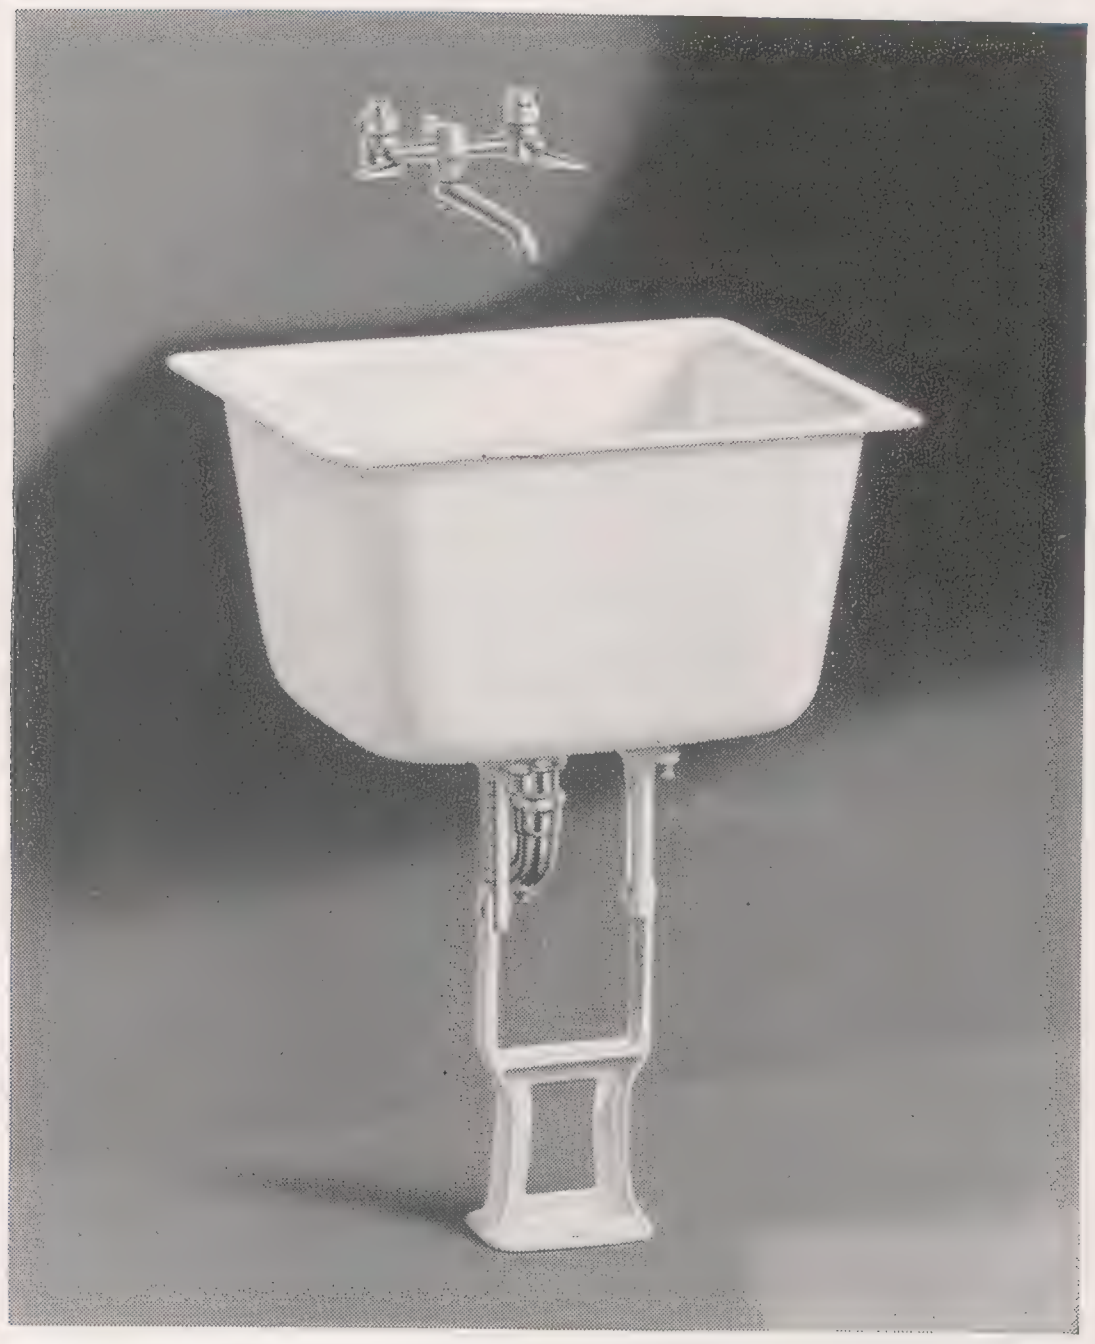
EMERY K-6866-A

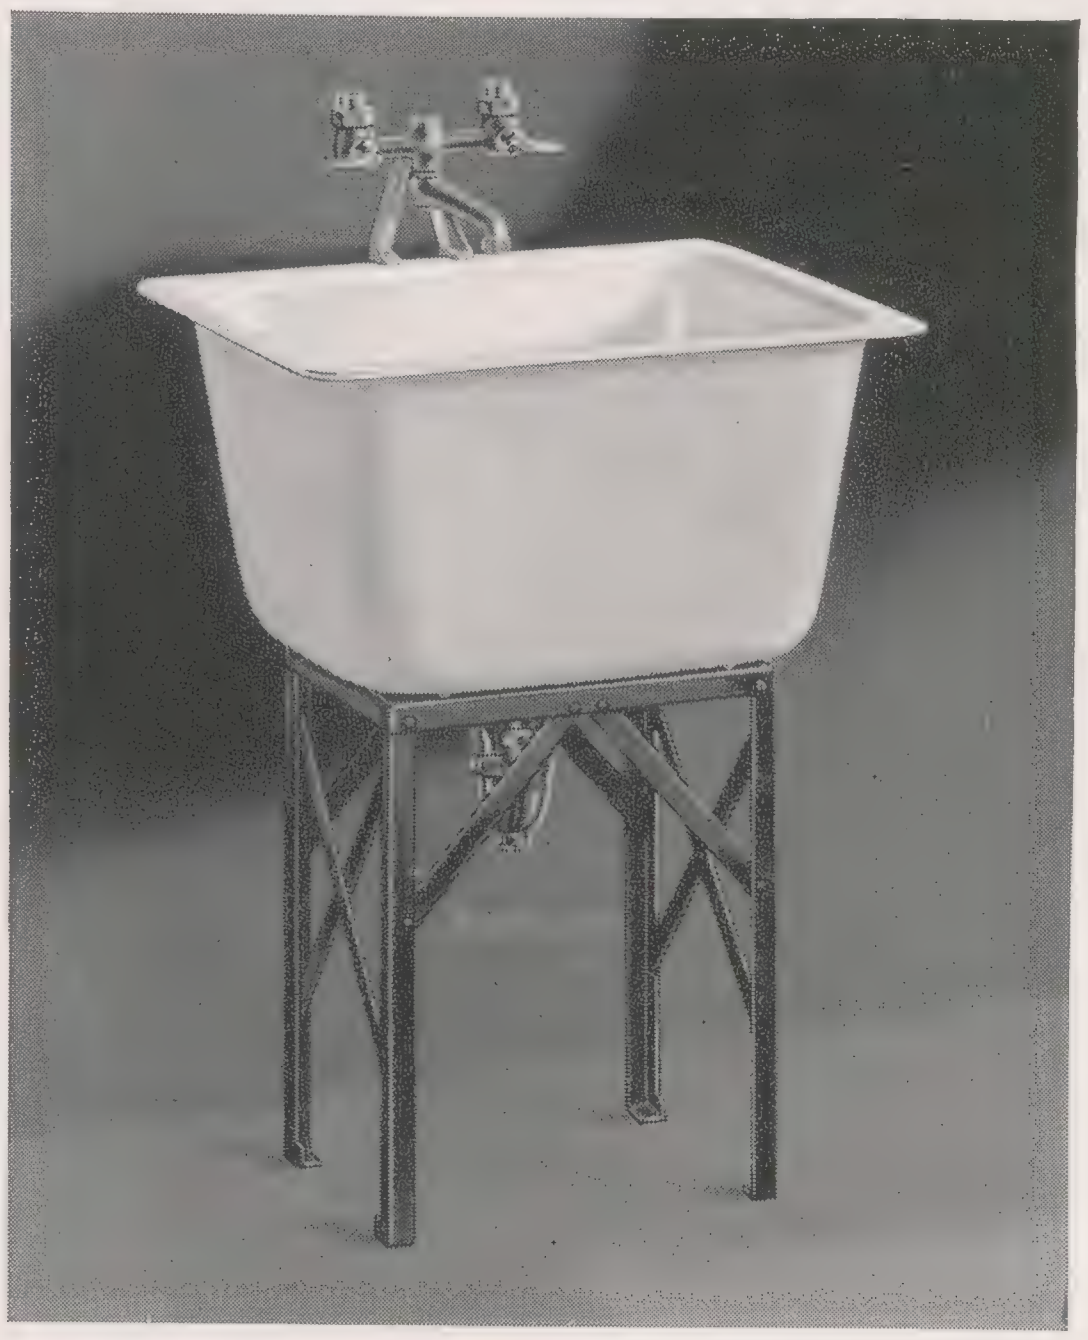
ELSWICK K-6870-A

Laundry Tray Complete	**K-6866-A** (Illustrated)	**K-6867-A** Wall hanging	**K-6870-A** (Illustrated)
Laundry Tray with Support	**K-6866**	**K-6867**	**K-6870**
Supply Fitting	**K-8970** with threaded spout	**K-8970** with threaded spout	**K-8948** with bracket
Strainer	**K-8821** with stopper	**K-8821** with stopper	**K-8821** with stopper
Trap	**K-9000** 1½″	**K-9000** 1½″	**K-9000** 1½″
Support	**K-6922** adjustable standard	Two wall hangers	**K-6918** painted angle iron
Approximate Water Capacity	17 gallons	17 gallons	17 gallons

Above Laundry Trays Enameled Inside Only

SIZE 24x20″
INSIDE 21¼x17¼x13¼″
FLOOR TO TOP OF RIM Adjustable from 29″ to 33″

SIZE 24x20″
INSIDE 21¼x17¼x13¼″
FLOOR TO TOP OF RIM 34″


FORDWICK K-8970

LAUNDRY TRAY SUPPLY FITTINGS

K-8970	Laundry tray fitting, rough plated, 7″ swing spout threaded for hose connection, renewable seats, ½″ I.P.S. unions.
K-8948	Laundry tray fitting, rough plated, 7″ swing spout threaded for hose connection, renewable seats, ½″ I.P.S. unions, bracket for attaching to enameled iron flat rim tray.


FARNLEY K-8948

KOHLER BRASS FITTINGS

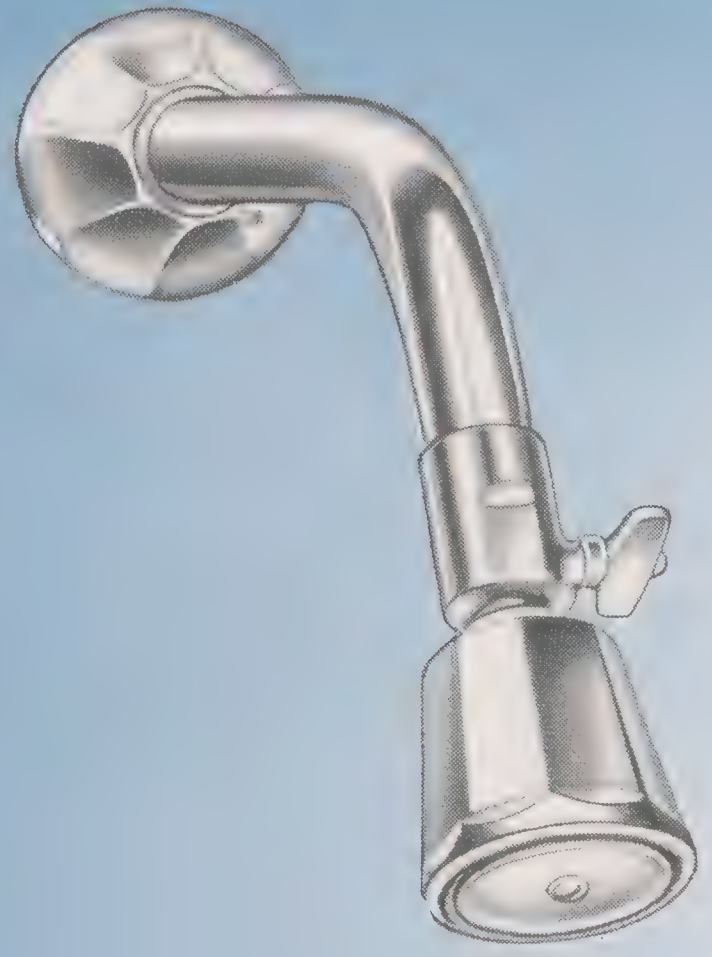

The function of Kohler brass fittings is to control the flow of water and to operate the drains in plumbing fixtures. This role is so important that the need for well designed, well engineered fittings cannot be overemphasized. Each unit is engineered to exacting tolerances and subjected to rigid inspections and tests, including plus-normal water pressure.

Brass castings, chromium plated over a coating of nickel, assure lustrous, smooth surfaces. Bodies are durable and full-size, with large waterways. Deep, double-action threads provide finger-tip pressure control of the water flow. The Remov unit, in all concealed fittings, confines wear to the unit instead of the valve body, for economical maintenance. Exposed fittings contain sturdy, renewable seats.

COLD
KOHLER U.S.A.
OFF
HOT



GS

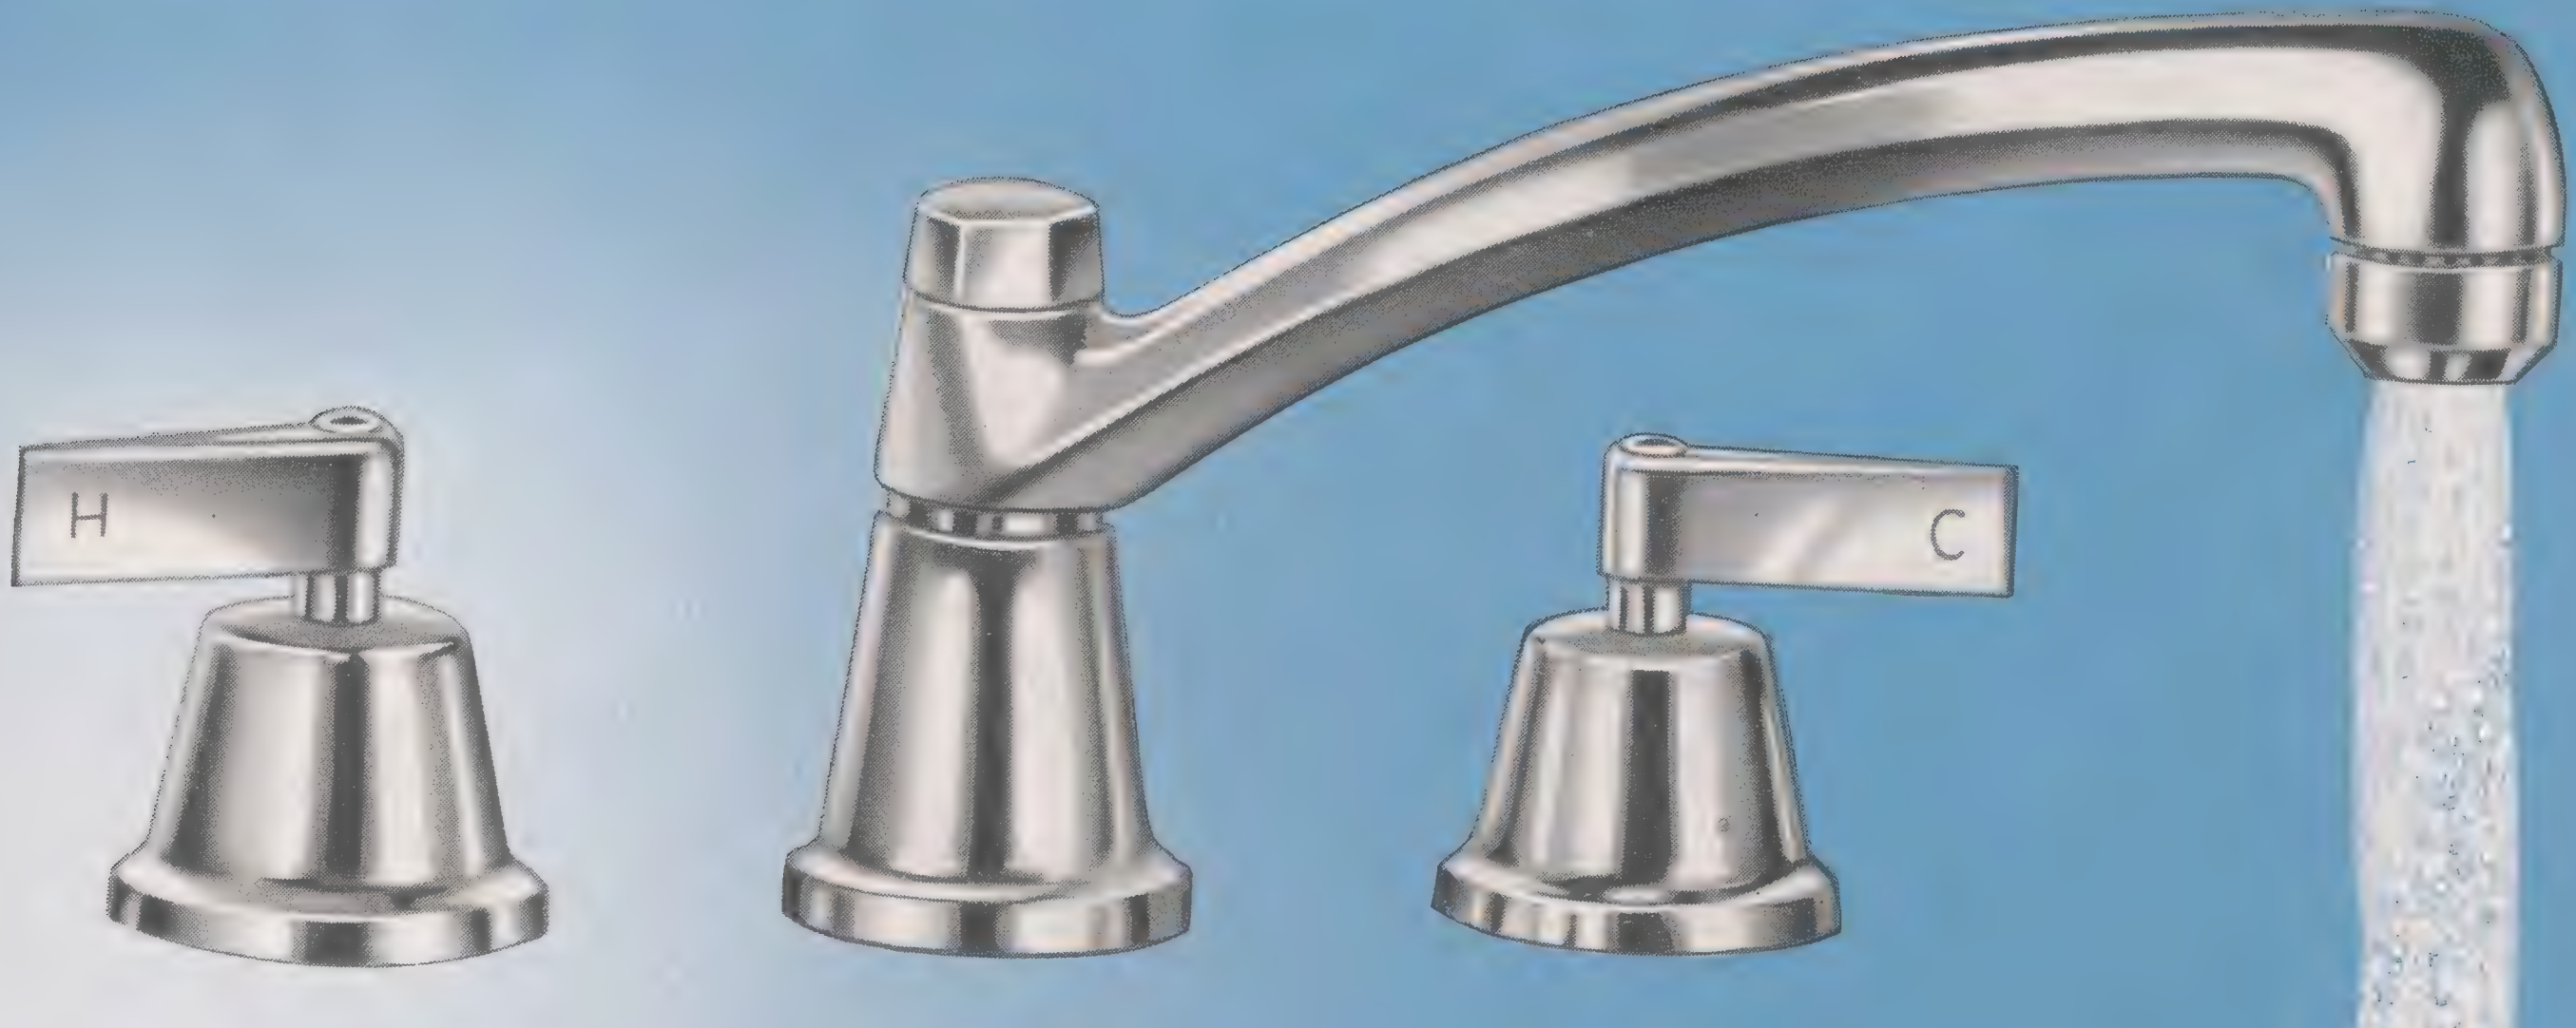

In style, character and quality, Kohler fittings match the fixtures for which they were specifically designed. Like the fixtures, they are distinguished by clean-cut appearance and proportion.

All Kohler brass fittings are trade-marked for ease of identification. Users of Kohler fixtures are urged, for maximum satisfactory service, to insist upon Kohler fittings.

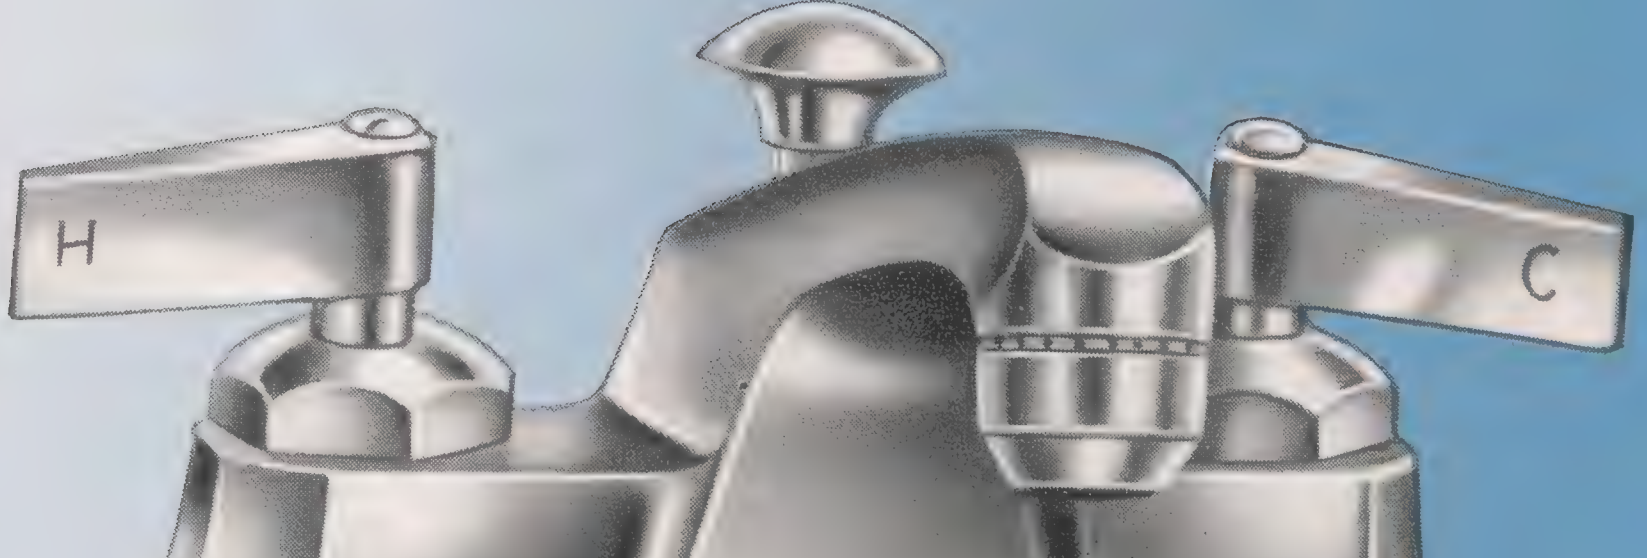

FITTINGS COMBINATION SHOWER AND BATH

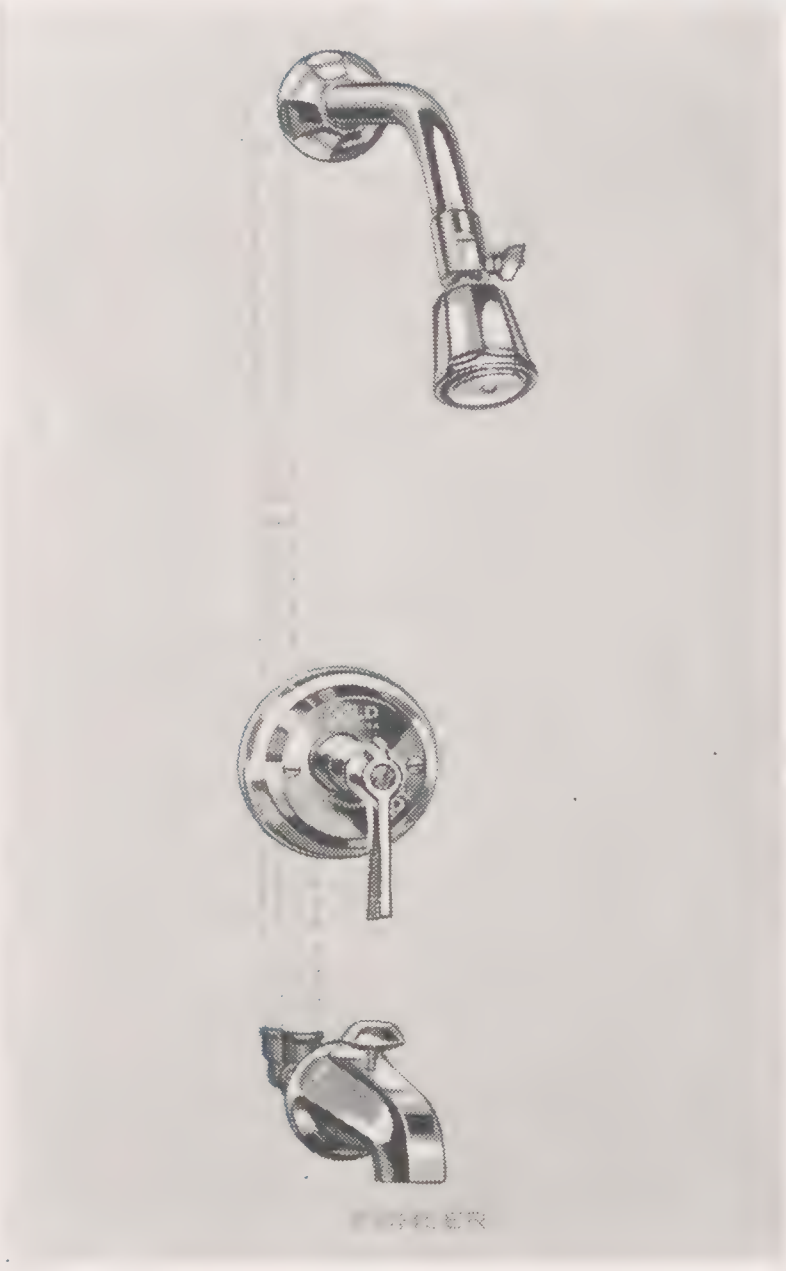

TRITON K-7027

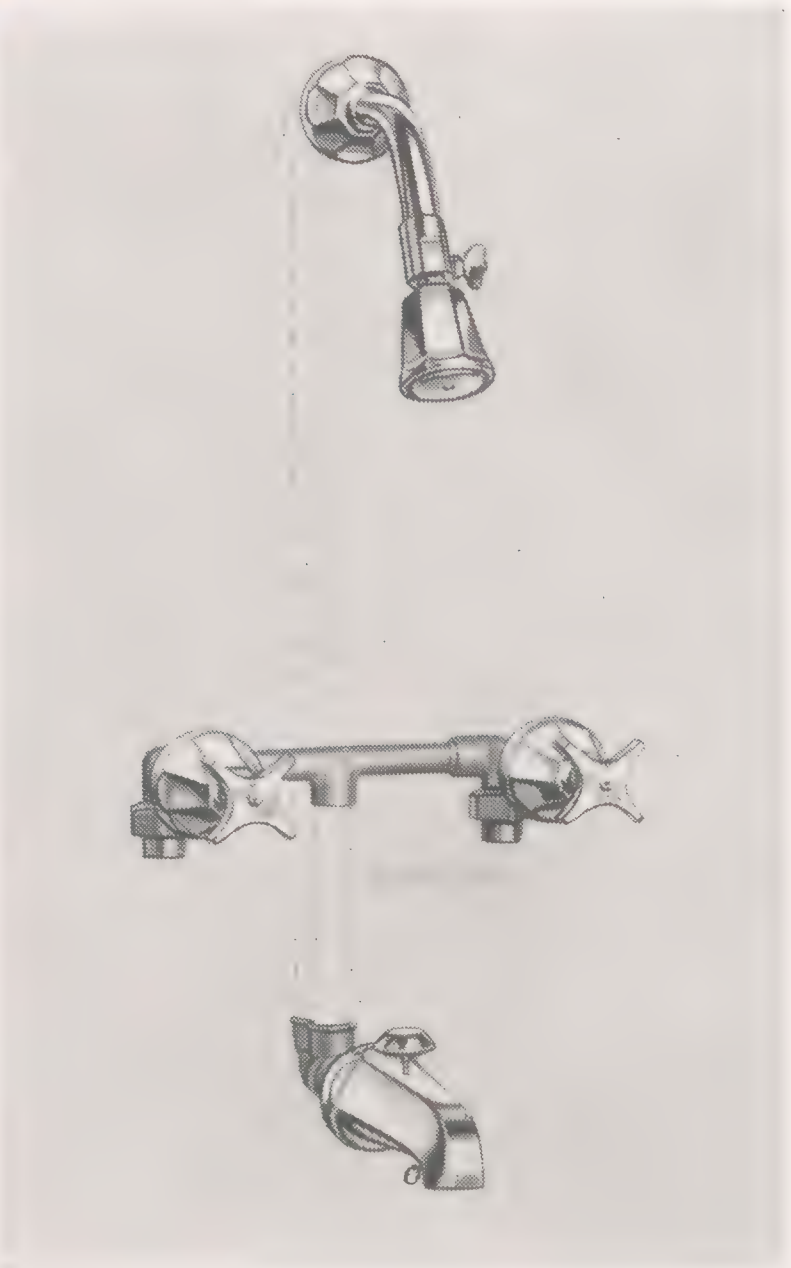

DALTON K-7032

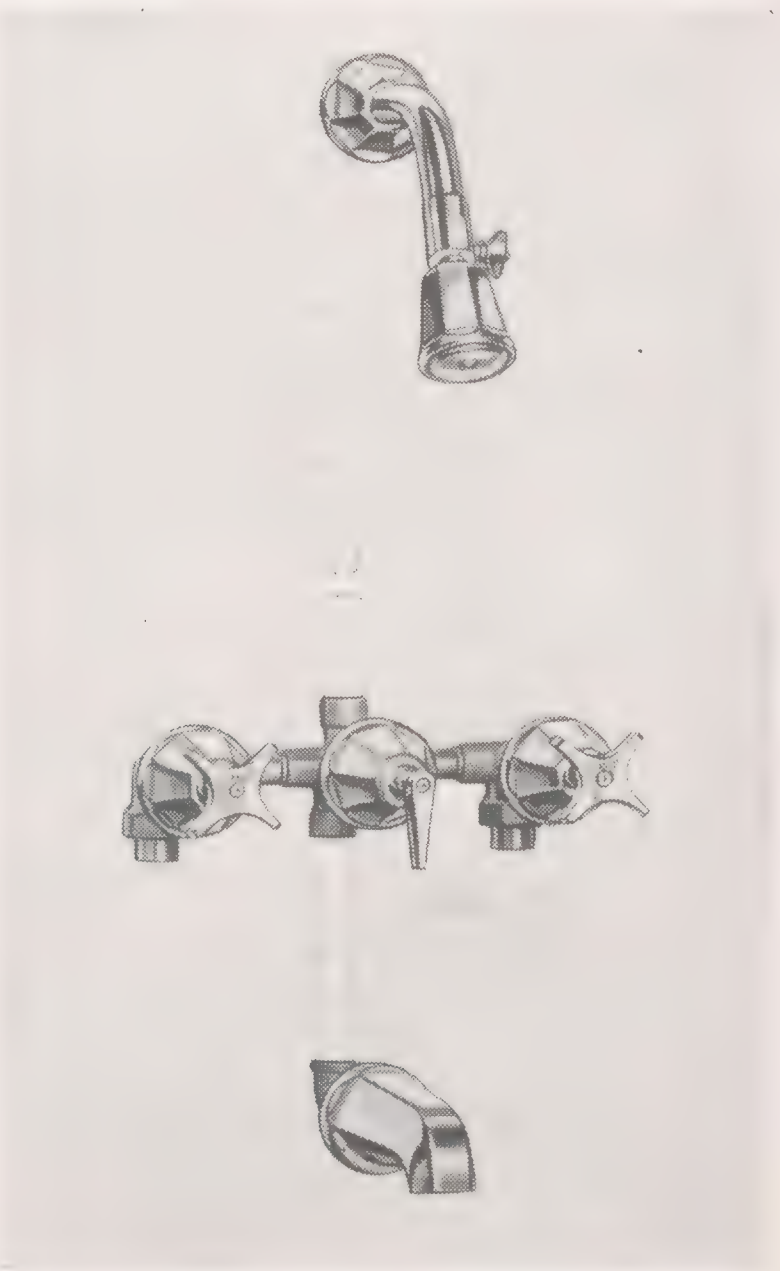

DALNEY K-7042

K-7027	Shower and bath fitting, ½" Niedecken compact mixer, over rim diverter spout, ball joint shower head with volume regulator.

K-7032	Shower and bath fitting, ½" valves with Remov units, over rim diverter spout, ball joint shower head with volume regulator.
K-7033	Same as **K-7032** except with adjustable escutcheons for variations in roughing-in.

K-7042	Diverter shower and bath fitting, ½" valves with Remov units, over rim spout, ball joint shower head with volume regulator.
K-7041	Same as **K-7042** except with adjustable escutcheons for variations in roughing-in.

If **K-7032** and **K-7042** bath valves are desired with unions for ⅝" copper tubing, add suffix "C".



K-7332

MULTI-SPRAY SHOWER HEAD

Add the suffix "M" to the above plate numbers if Multi-spray shower head is desired in place of the one illustrated.

DIVERTER SPOUTS

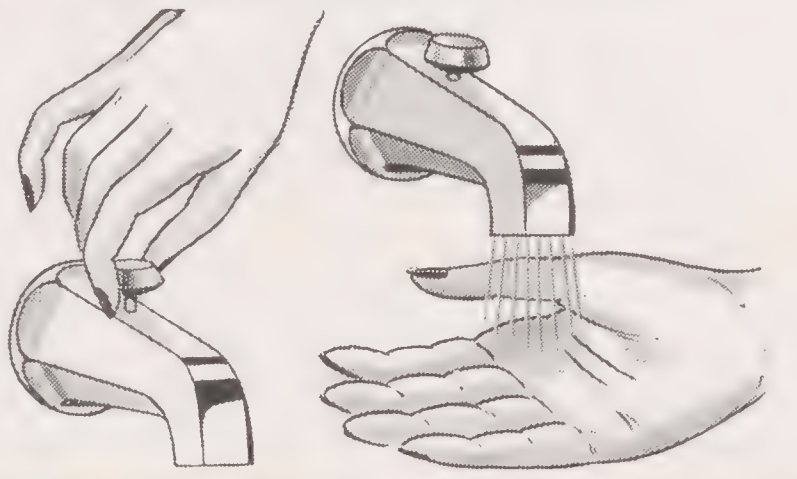

Diverter spouts on Kohler bath fittings operate automatically. By raising the knob, the water ceases to flow at spout and is diverted to the shower head.

When water is turned off, the knob drops back into place, permitting water to flow through the spout again when turned on.

Mechanism is extremely simple and will operate on any water pressure.

REMOV UNIT IN BATH VALVES



All Kohler built-in shower and bath valves furnished with Remov units. Wear is confined to the unit instead of valve-body. Unit can readily be replaced when a leak or excessive wear develops.

ADJUSTABLE ESCUTCHEON

Kohler bath valves are available with adjustable sliding escutcheons permitting a maximum roughing-in of 3" and a minimum of 1½".

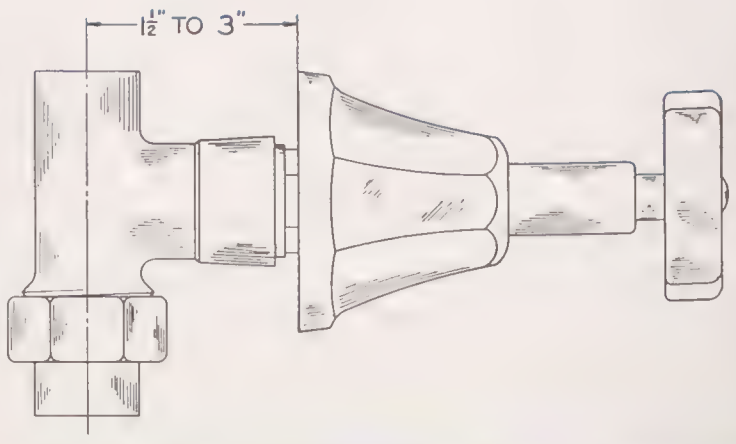

BATH FITTINGS

WITH MIXER

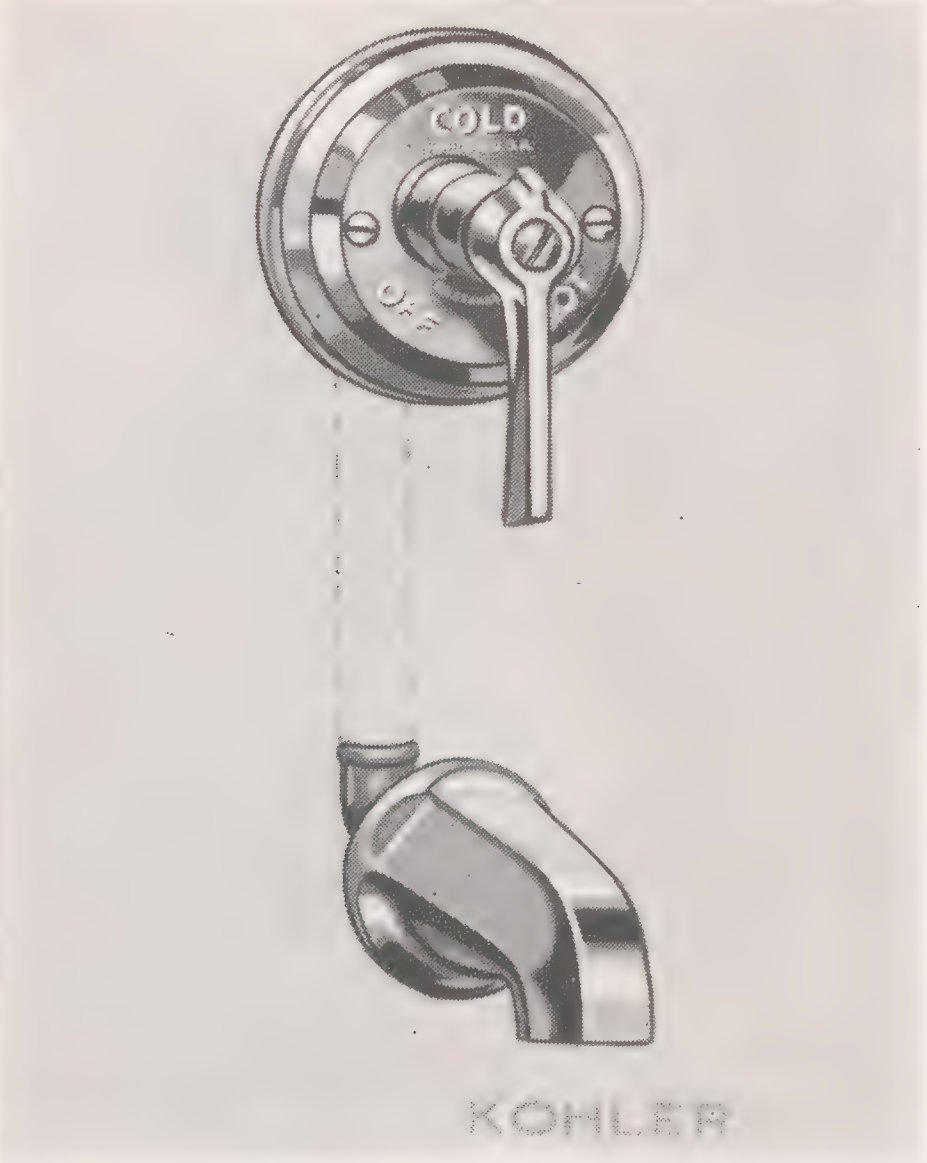

PAXTON K-7076

K-7076	Bath fitting, ½″ Niedecken compact mixer, over rim spout.

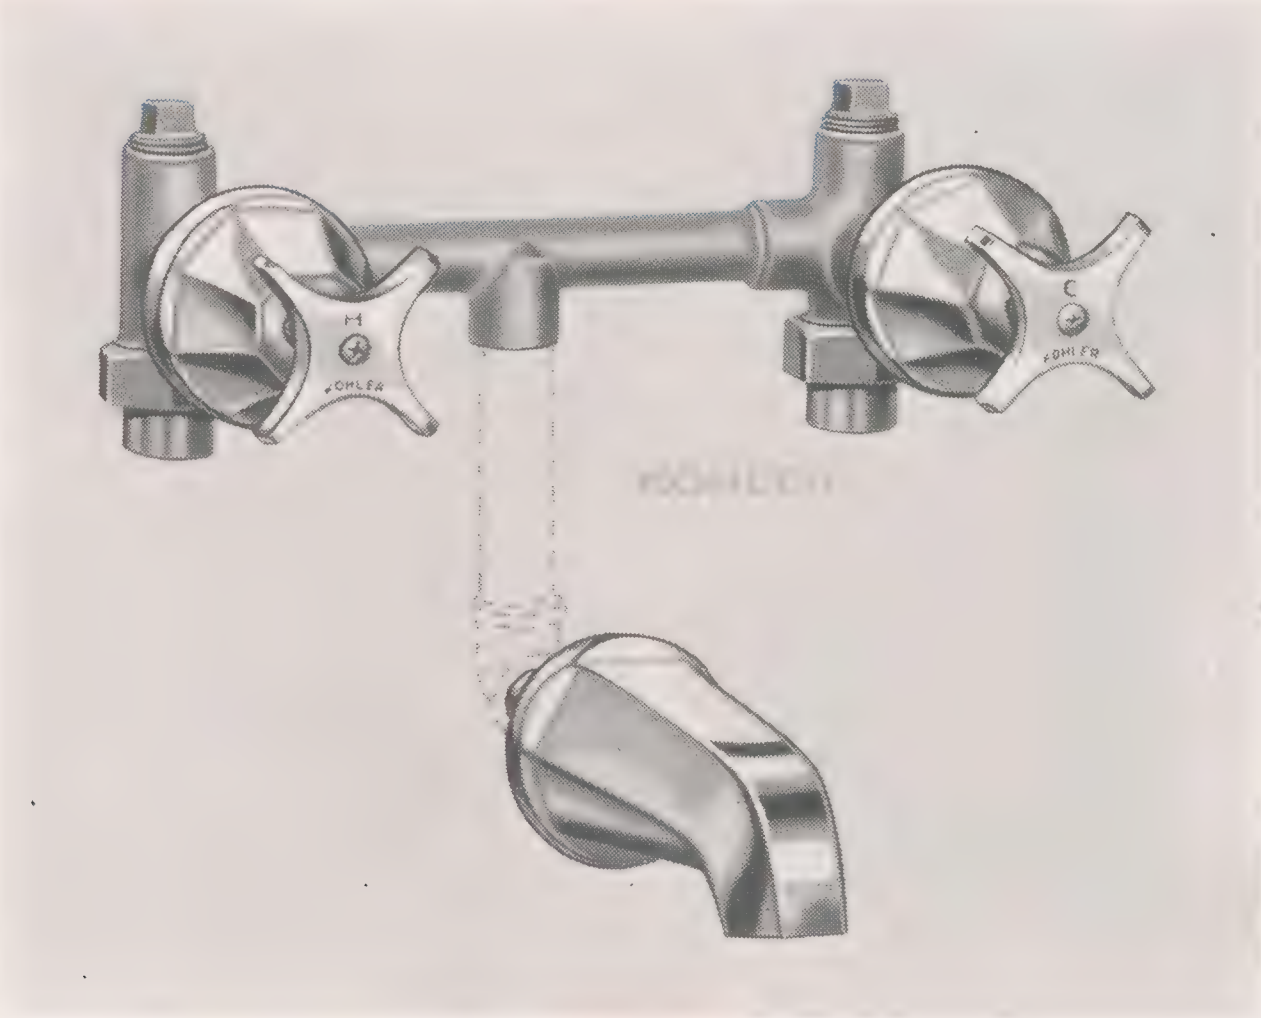

DENTON K-7100

K-7100	Bath supply fitting, valves with Remov units, over rim spout.
K-7099	Same as **K-7100** except with adjustable escutcheons for variations in roughing-in.

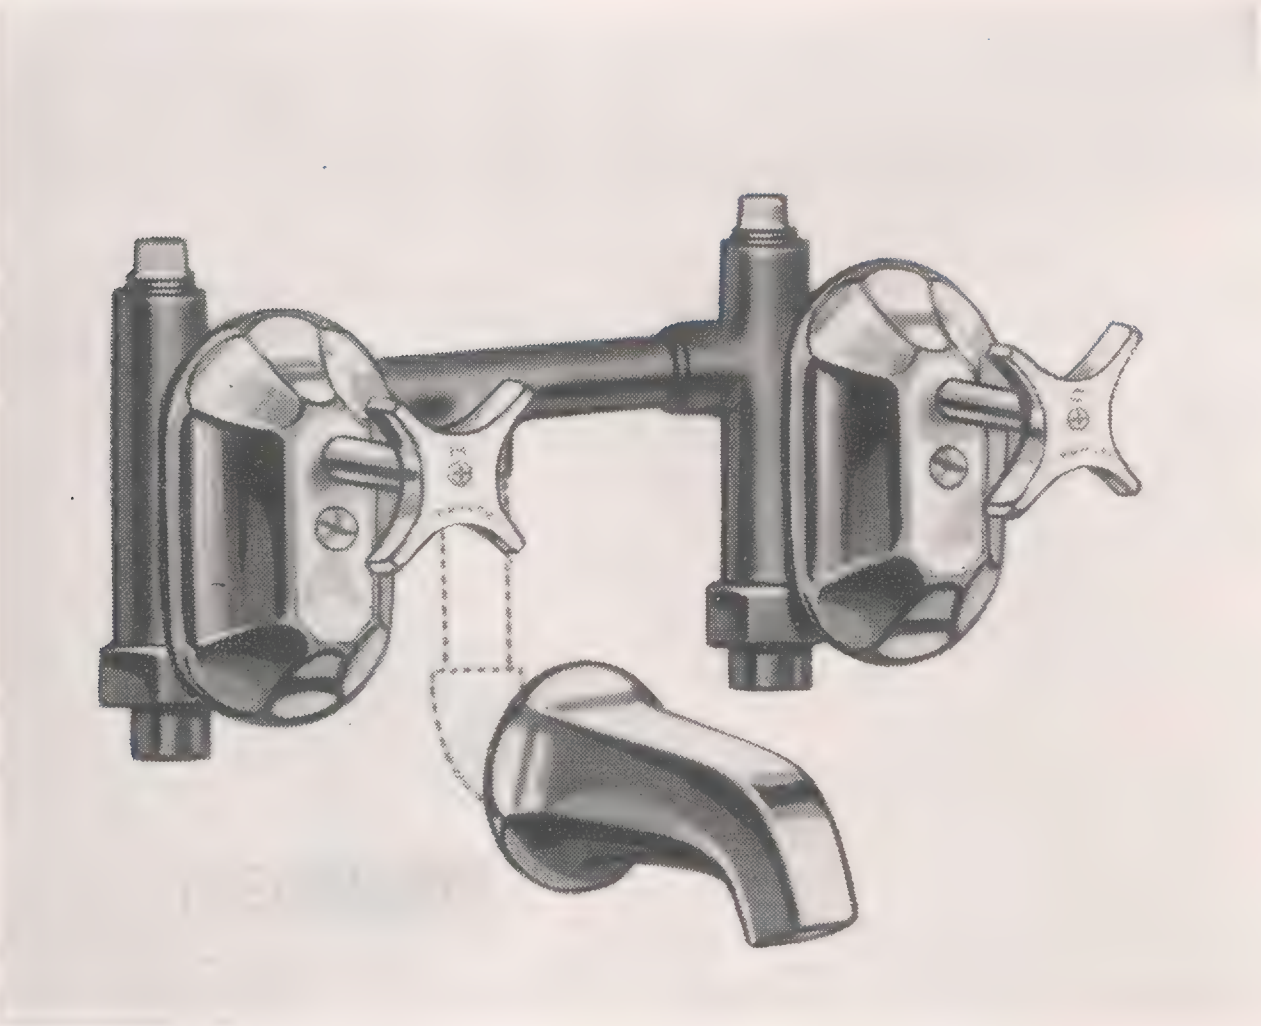

HADLEY K-7105

HADLEY
A Bath Fitting With Integral Stops

K-7105	Bath supply fittings with integral screw driver stops, valve with Remov units, over rim spout.

Integral stops are accessible by removing the escutcheons.

If **K-7100, K-7099** or **K-7105** are desired with unions for ⅝″ O.D. copper tubing, add suffix "C".

BATH VALVES



K-7120



K-7122



K-7127

K-7120	Built-in straight valve with Remov unit. (Specify if "C" or "H" index is desired.)
K-7122	By-pass valve with Remov unit. (Specify if right or left valve is desired.)
K-7127	Built-in screw driver check stop valve with Remov unit.

CLEARPASS CONCEALED POP-UP DRAINS FOR BATHS

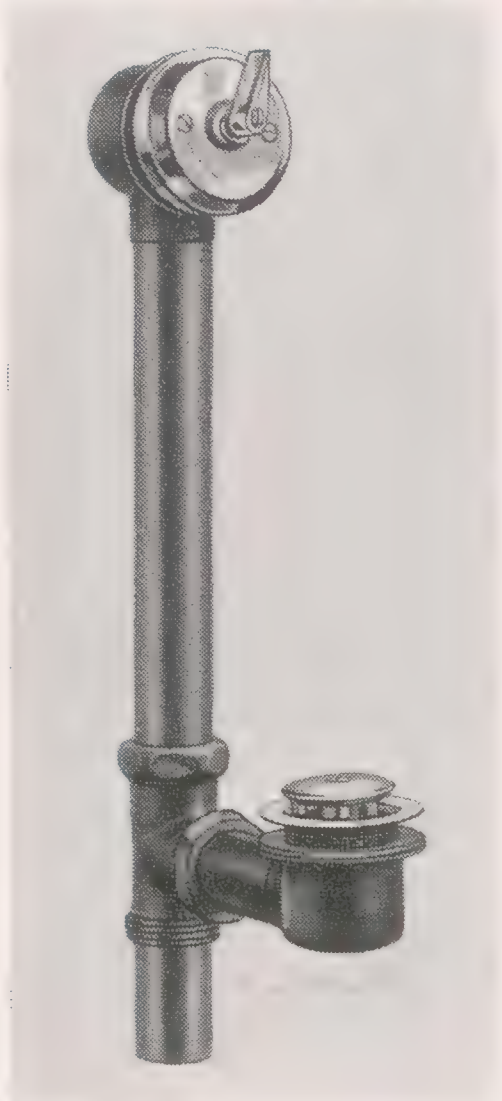
K-7150

For Cosmopolitan 16" high	For Standish & Minocqua 14" high	For Mayflower 14" high	Description
K-7150 (Illustrated)	K-7172	K-7176	With 1½" tailpiece
K-7151	K-7173	K-7177	With slip joint outlet on drain tee
K-7152	K-7174	K-7178	With outlet of drain tee tapped I.P.S.
K-7153 (Illustrated)	K-7175	K-7179	With tailpiece below strainer

SIZE 1½"

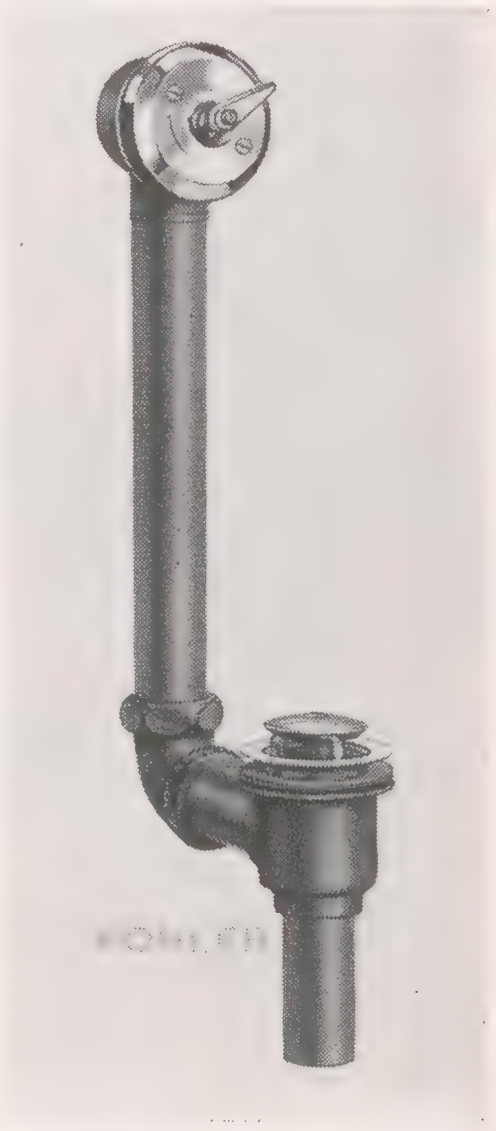
K-7153

ALDER CONCEALED CONNECTED DRAINS AND OVERFLOWS FOR BATHS

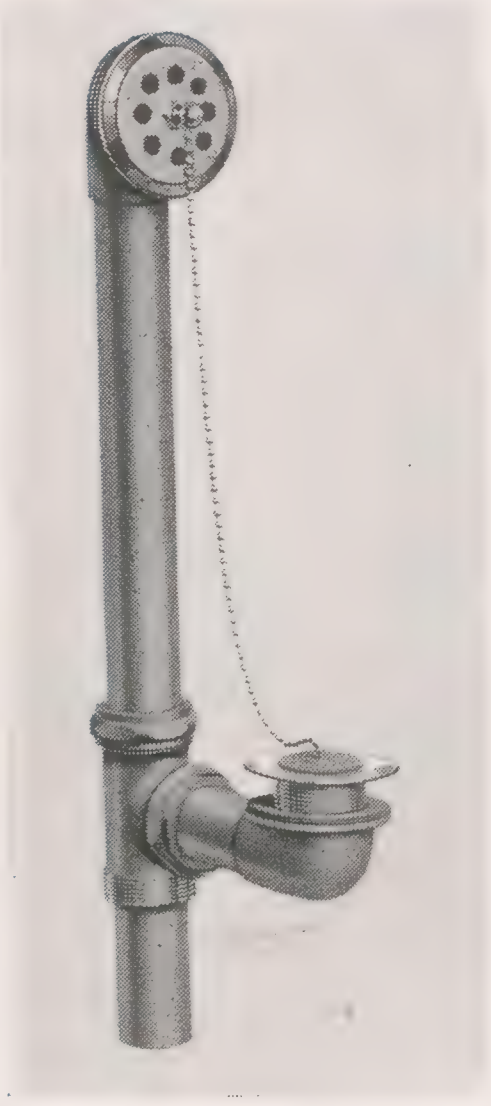
K-7180

For Cosmopolitan 16" high	For Standish & Minocqua 14" high	For Mayflower 14" high	Description
K-7180 (Illustrated)	K-7185	K-7190	With 1½" tailpiece
K-7181	K-7186	K-7191	With slip joint outlet on drain tee
K-7182	K-7187	K-7194	With outlet of drain tee tapped I.P.S.
K-7183 (Illustrated)	K-7188	K-7195	With tailpiece below strainer

SIZE 1½"

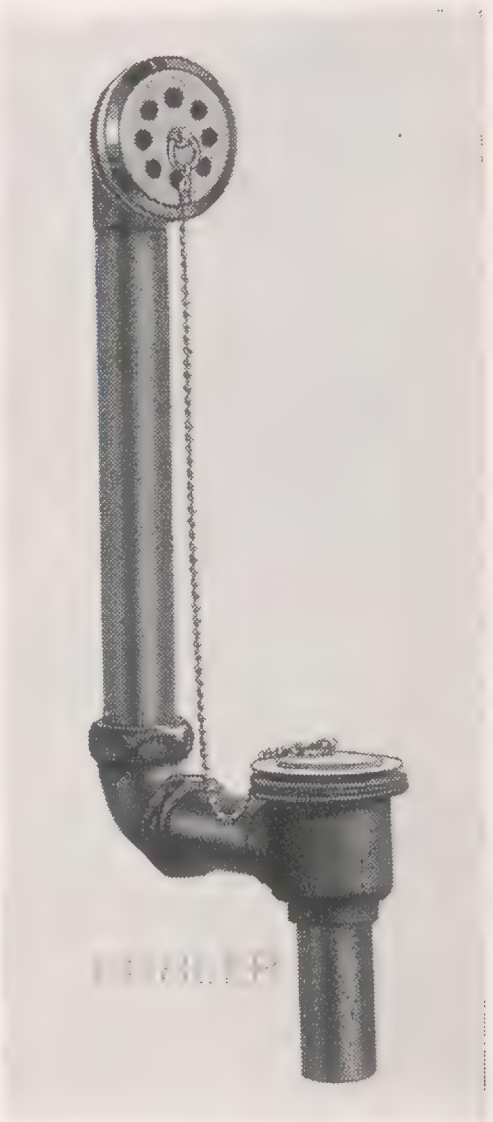
K-7183

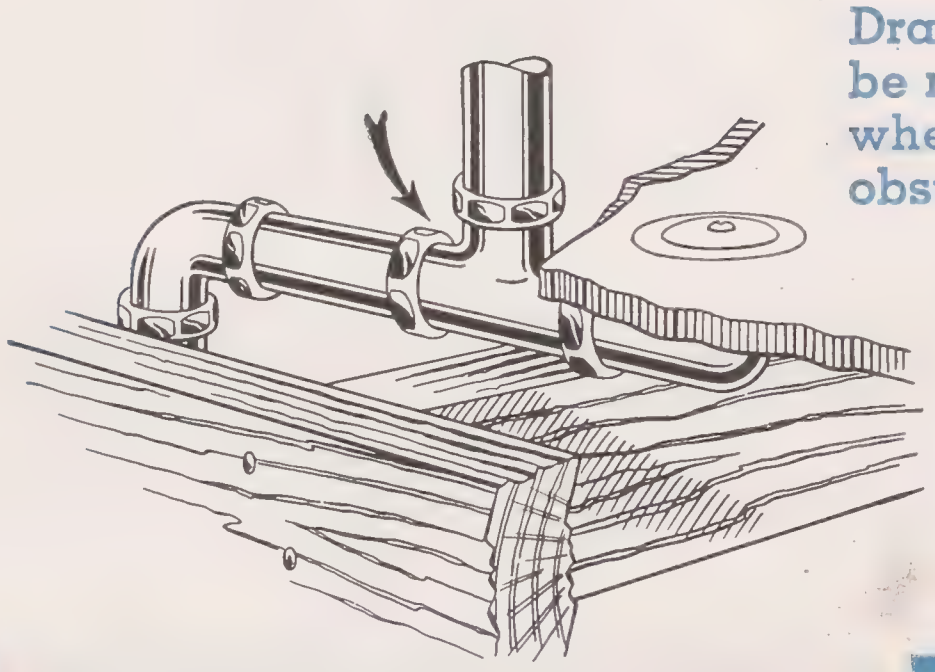

Drain tees on Kohler drains can be reversed for horizontal outlet when necessary, to avoid joist obstruction.

The Clearpass and Alder drains can have outlets directly under drain tee, to avoid cutting away the joist under floor.

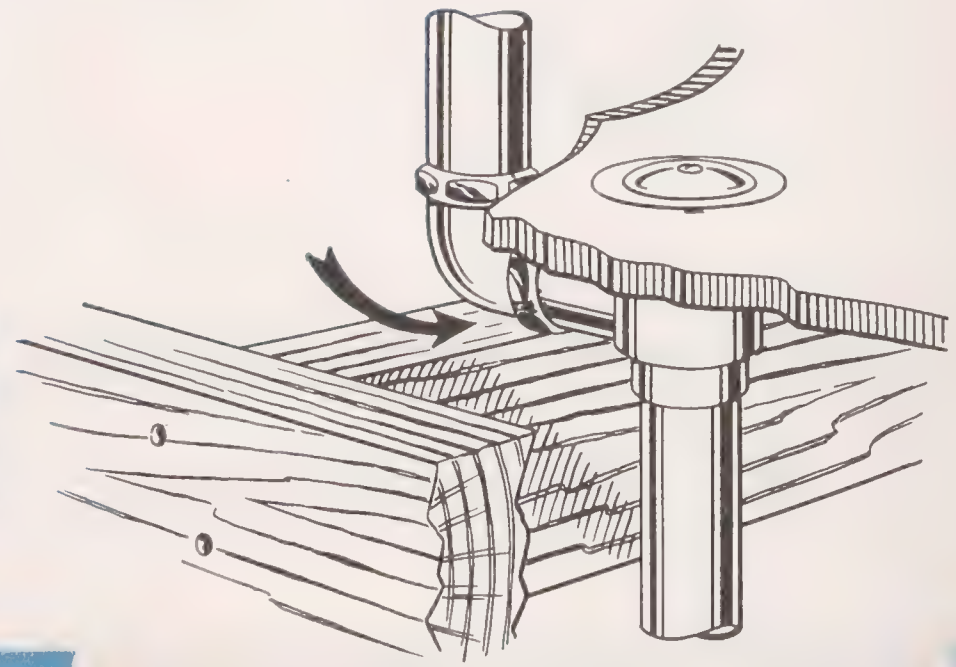

SHOWER FITTINGS

BUILT-IN *For Dwellings*

Plate No.	Description
K-7205	Built-in shower, ½″ compact Niedecken mixer, renewable seats, ball joint shower head with volume regulator.
K-7210	Built-in shower, ½″ valves with Remov units, ball joint shower head with volume regulator.
K-7209	Same as **K-7210** except with sliding escutcheon.

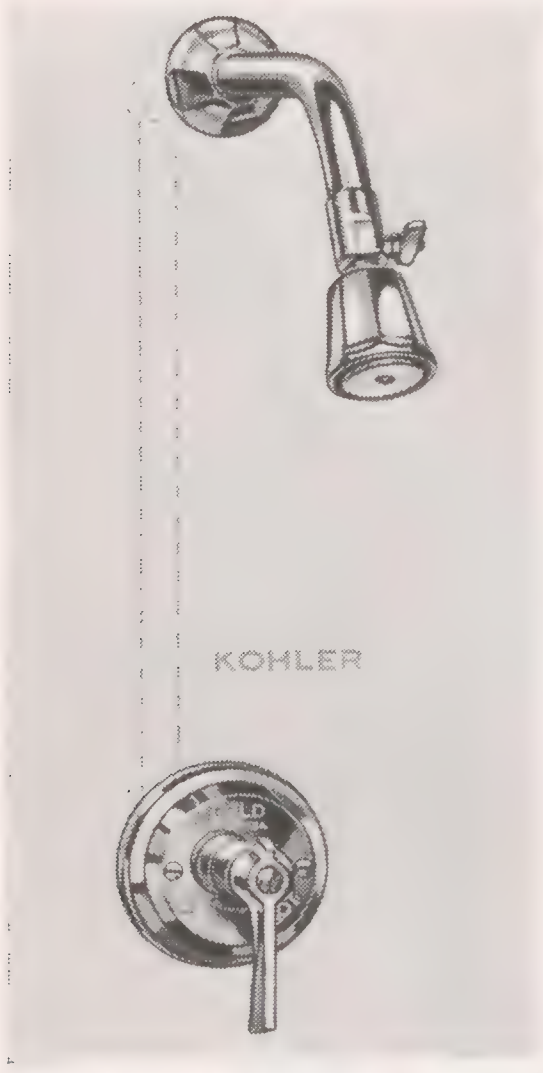

WENDRON K-7205

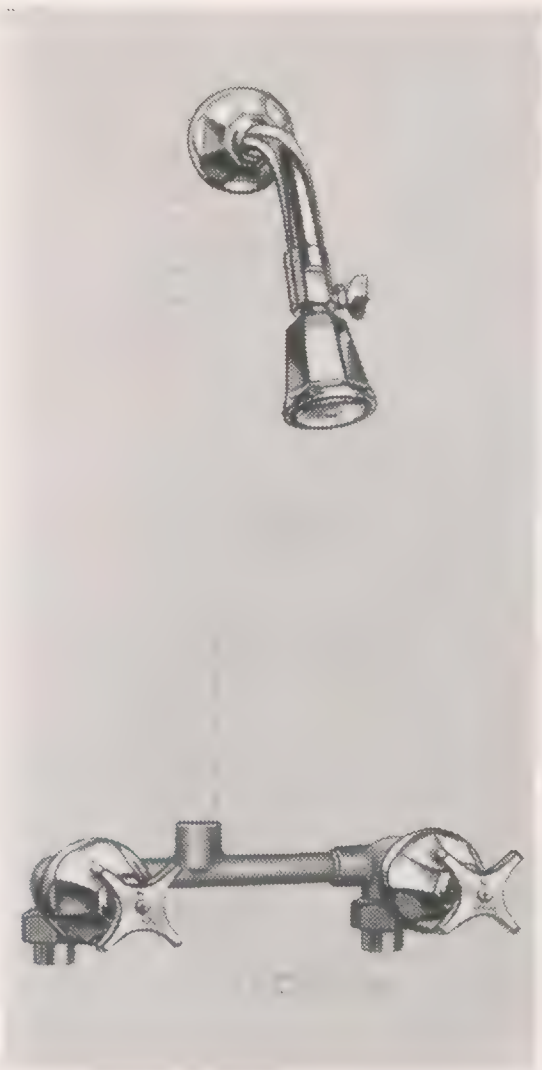

TIPTON K-7210

EXPOSED *For Schools and Clubs*

K-7215	Exposed shower, ½″ Niedecken mixer, ball joint shower head with volume regulator.
K-7216	Same as **K-7215** except with loose key check stops.
K-7217	Same as **K-7215** except with 36-inch supplies to ceiling.
K-7220	Exposed shower, ½″ valves, renewable seats, ball joint shower head with volume regulator.
K-7221	Same as **K-7220** except with 36″ supplies to ceiling.

Add the suffix "M" to above plate numbers if K-7332 Multi-Spray shower head is desired in place of the K-7325 shower head illustrated.

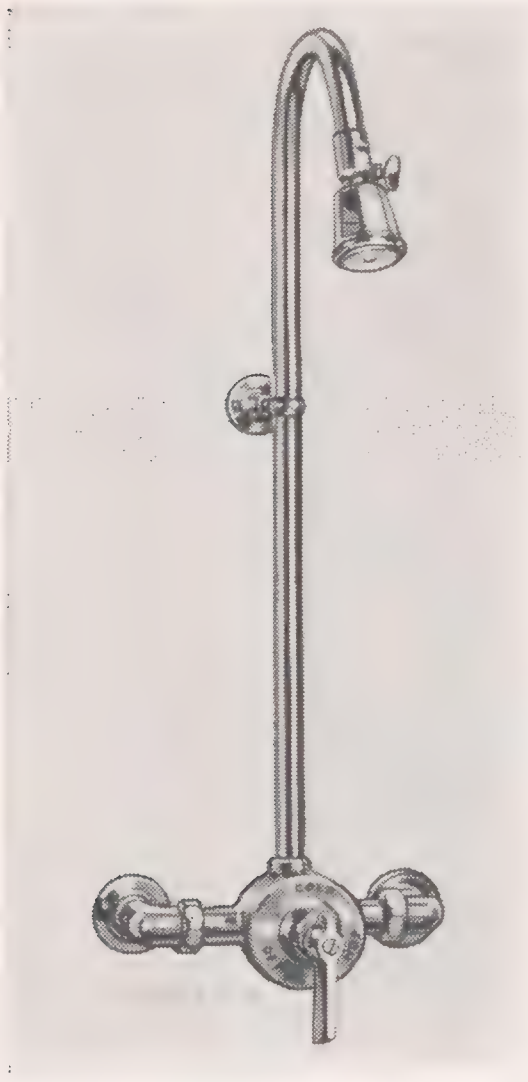

SEDLEY K-7215

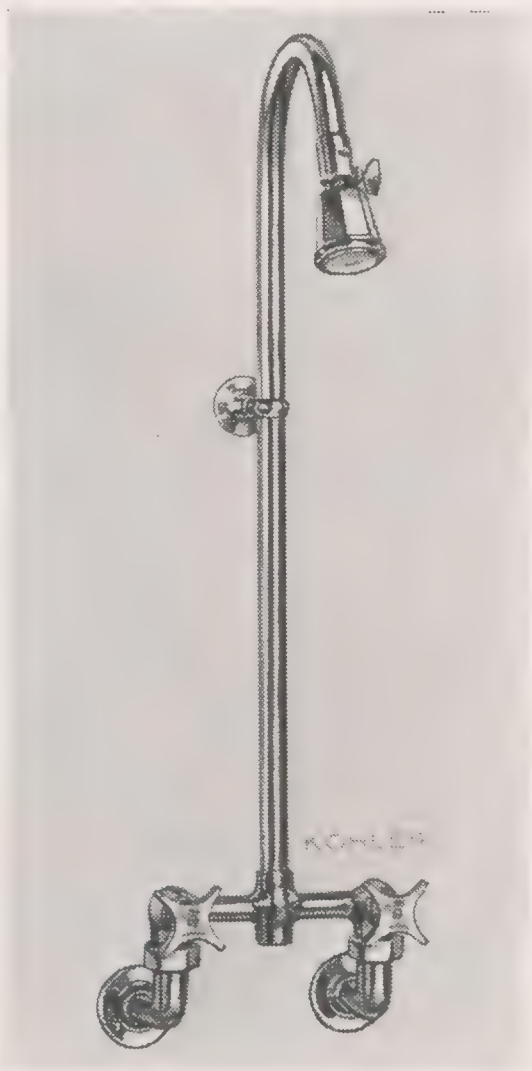

WATERFORD K-7220

EXPOSED *For Industry*

K-7250	Industrial exposed shower, ½″ rough plated Niedecken mixer, renewable seats, galvanized riser, rigid shower head with volume regulator.
	If Niedecken rough plated mixer only is desired, specify K-7365.
K-7255	Industrial exposed shower, ½″ valves, renewable seats, rough plated body, galvanized riser, rigid shower head, reversible for ceiling or floor supplies.

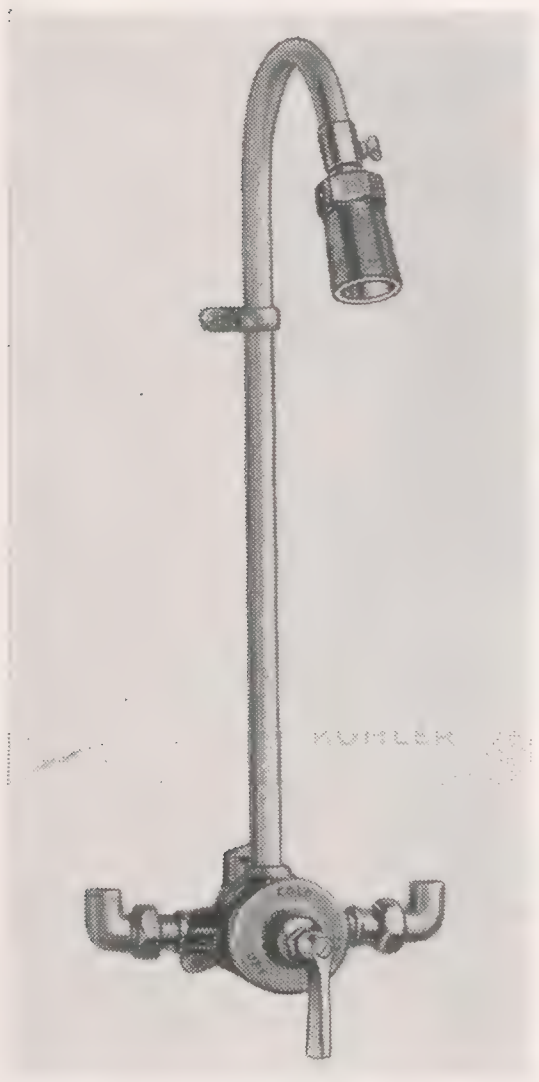

DALMUIR K-7250

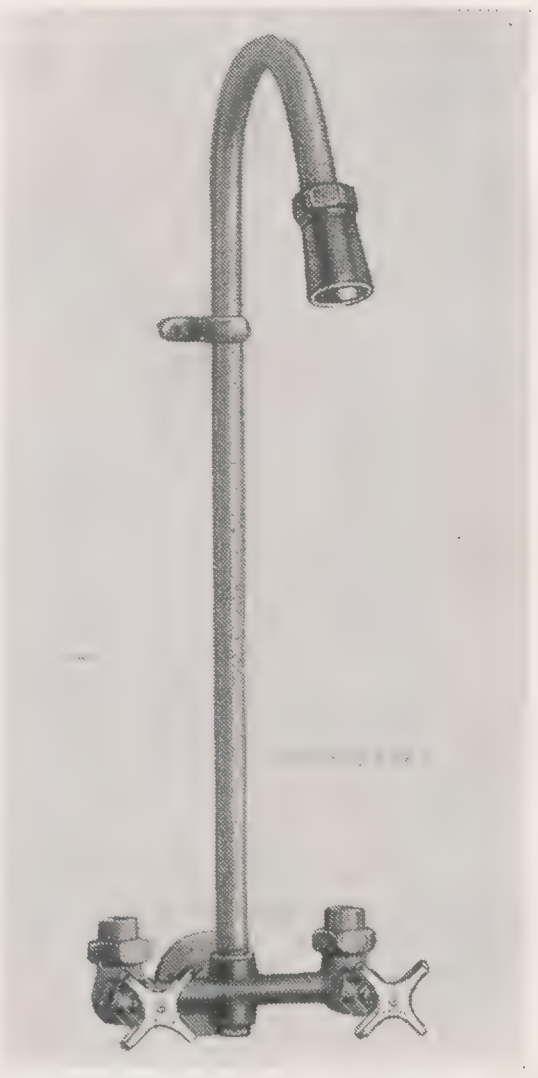

DALRY K-7255

NIEDECKEN MIXER BUILT-IN TYPE

For Dwellings, Apartments, Hotels, Clubs and Hospitals

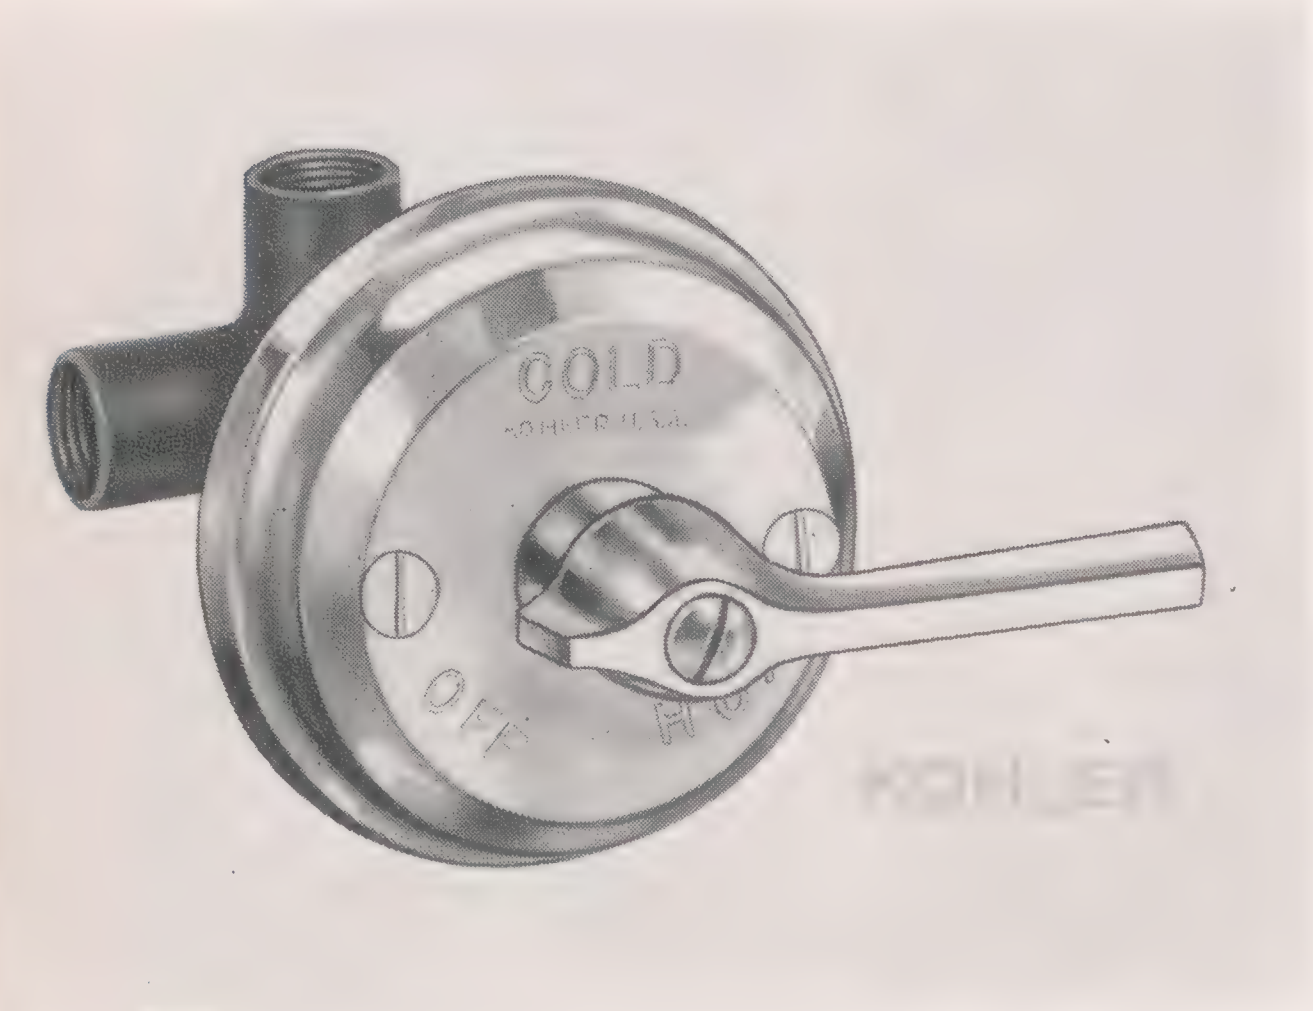

NIEDECKEN K-7300

1. Turn of handle delivers cold, tempered or hot water.
2. Quick "tuning in" assures economy in the use of water.
3. Mixer can be set to maintain water temperatures which are safe for bathing.
4. Necessary adjustments easily made from face of wall.

Check valves should be installed in supply lines, if a positive shut-off is placed in the discharge line from mixer.

It is important when planning a shower installation to have supply pipes of sufficient size to care not only for shower but other fixtures which may be in use at the same time.

K-7300	Niedecken compact built-in mixer, top outlet, renewable seats, metal dial and handle. Size ½".
K-7301	Same as **K-7300** except with bottom outlet.

For Dwellings and Clubs

MULTI-SPRAY SHOWER HEAD

A modern shower head which delivers either a fine needle spray, a normal stream or a drenching flood, as well as variations, all at a turn of a control handle on the head itself.

Self-cleansing.

Six plungers, each delivering eight streams.

Ball swivel to direct shower at angle desired.

Volume regulator controls water to shower.

K-7332	Shower head with volume regulator and adjustable ball joint. Head 3½" in diameter.

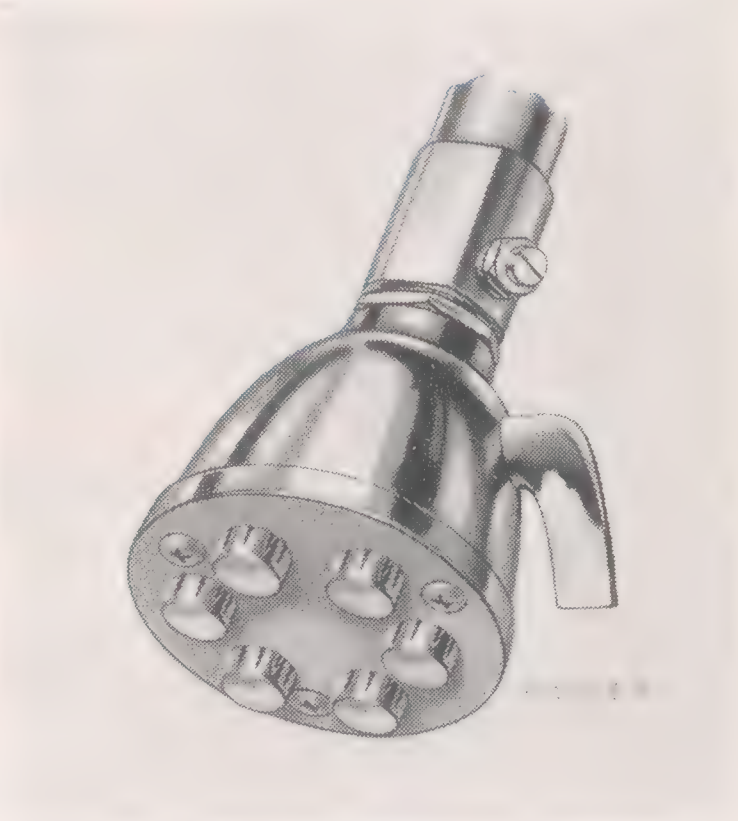

MULTI-SPRAY K-7332

SHOWER HEADS *For Homes, Schools, Club Buildings, and Gymnasiums*

K-7325

K-7335

K-7340

K-7325	Shower head with volume regulator and adjustable ball joint. 2" head.
K-7335	Shower head with volume regulator and adjustable ball joint. 4" head.
K-7340	Rough plated industrial non-clogging, rigid head. Also for home basements.

NEW KOHLER SHOWER HEADS

Every Purpose - Residential, Commercial, Industrial

Practical Design - Sturdy Construction - Economical in Use of Water.

Metal Parts Are All - Brass of High Copper Content - Corrosion Resistant.

Tension Spring on Ball Joint Holds Head at Any Desired Angle.

Volume Regulator - Controls Rate of Water Flow to Desired Amount.

Spray Pattern Provides a Full-Covering Stream For Thorough Cleansing.

Tamperproof - Cannot be Detached Without Tools.

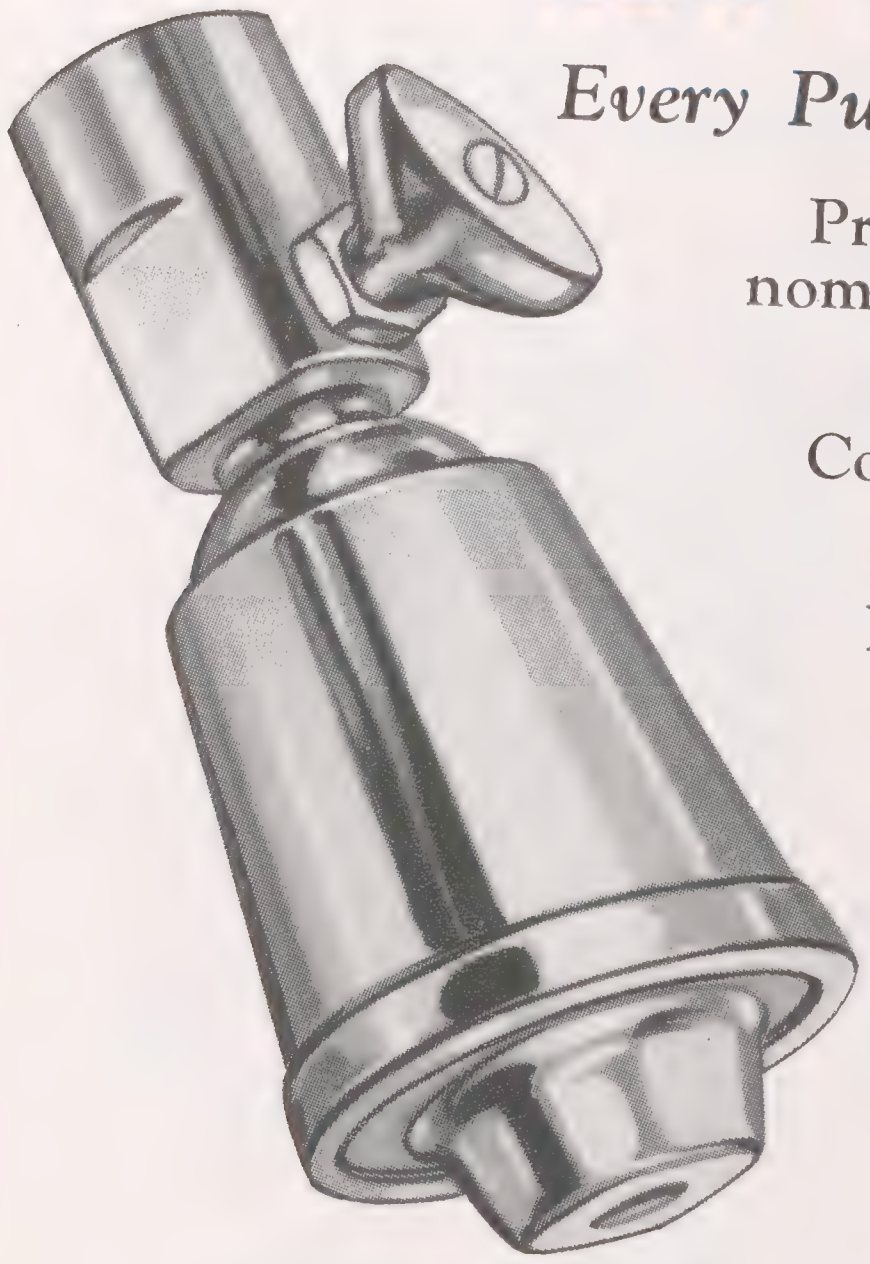

AUTEL K-7370

Has nylon face, highly resistant to corrosion and wear - Drains quickly when face nut is turned.

K-7370	2″ Shower head with ball joint and volume regulator.
K-7371	Same as **K-7370** except less volume regulator.

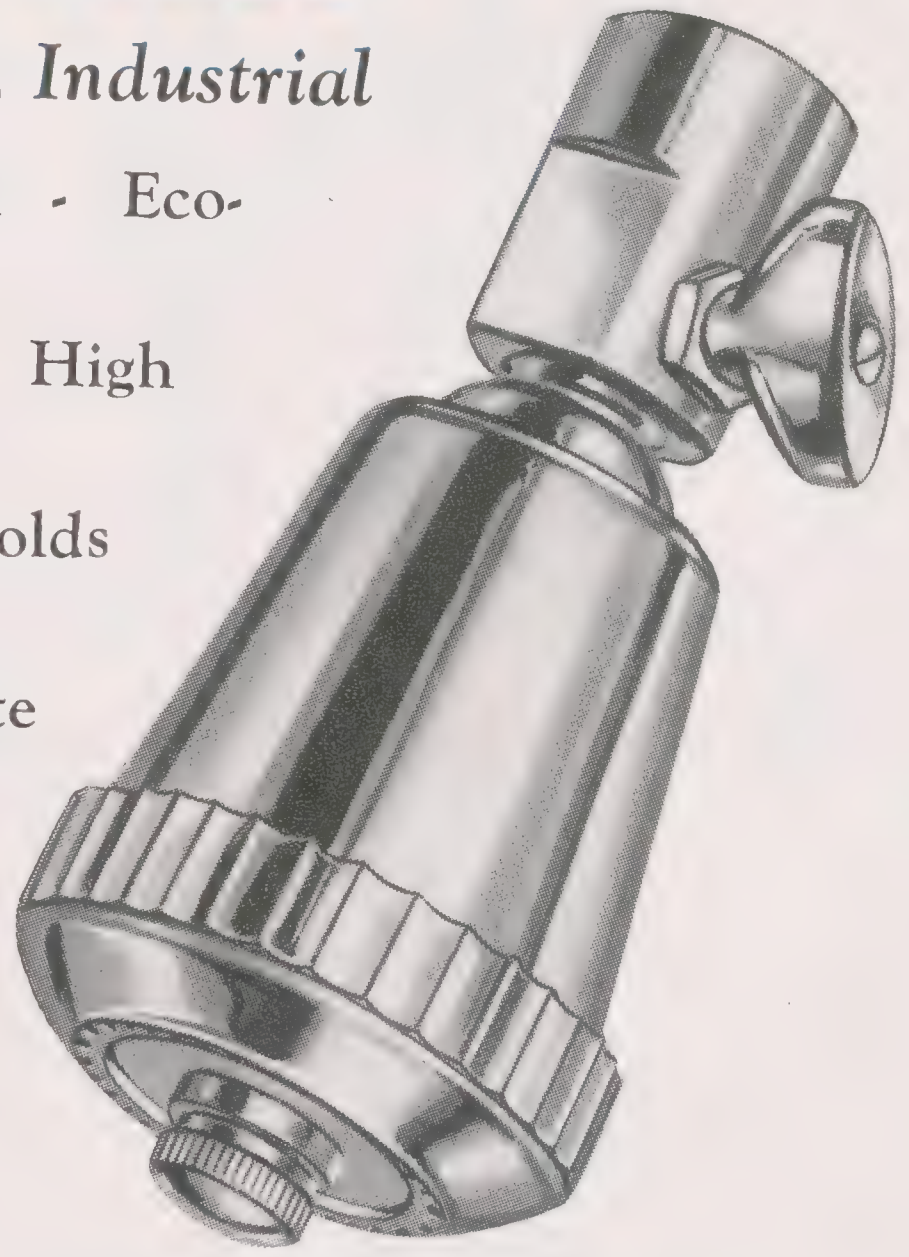

TOWN HOUSE K-7375

Has nylon face, highly resistant to corrosion and wear - Face retracts automatically when water is turned off - Self-cleansing and self-draining.

K-7375	2″ Shower head with ball joint and volume regulator.
K-7376	Same as **K-7375** except less volume regulator.





CITY CLUB K-7350

Multi-spray delivers needle spray, normal stream or drenching spray at turn of the handle which controls the six plungers - Self-cleansing.



GYM K-7360

Wide-spray pattern to cover a greater area - Has volume regulator.



INDUSTRIA K-7384

Compact, water-conserving - Knurled nozzle turns to enable user to get desired stream.

K-7350	2½″ Multi-spray shower head with ball joint and screwdriver volume regulator.

K-7360	3½″ Shower head with ball joint and volume regulator.
K-7361	Same as **K-7360** except less volume regulator.

K-7384	Rigid shower head with volume regulator.
K-7385	Shower head with ball joint less volume regulator.
K-7387	Rigid shower head less volume regulator.

Insert between pages 122 and 123 of K56 catalog.

110M-12-57 Printed in U. S. A.

CENTRA COMBINATION LAVATORY FITTING

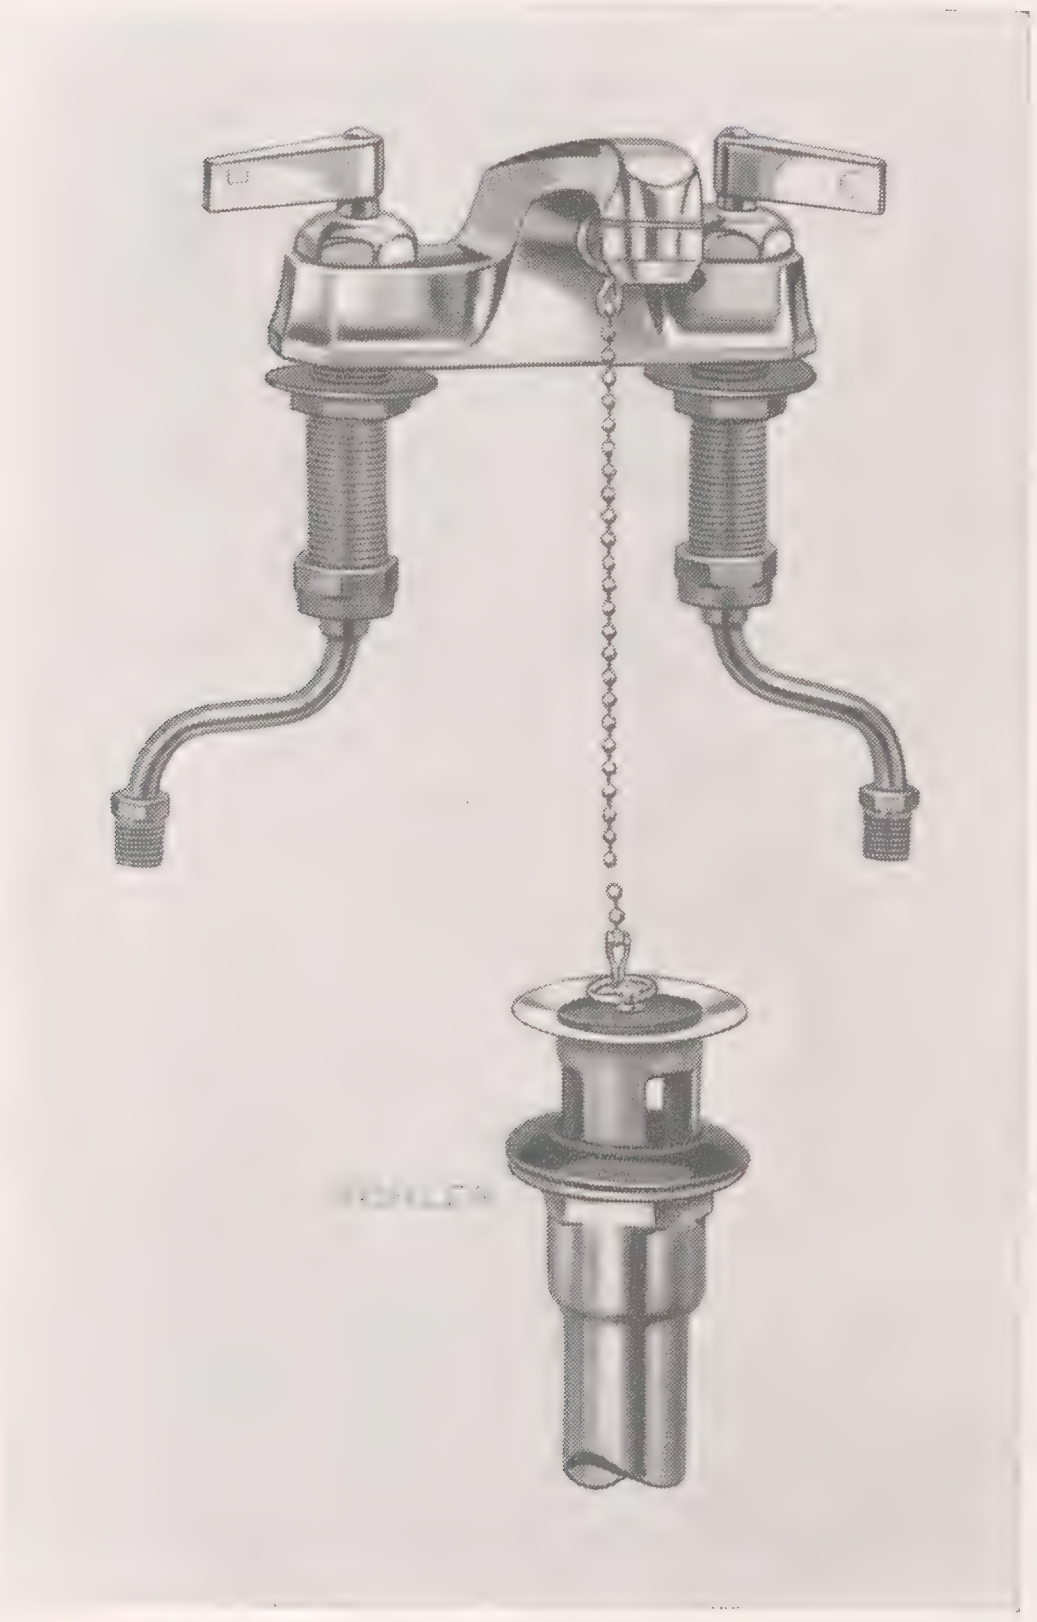

Compact,
Space-Saving
Spout
with
Aerator

•

Renewable Sleeve

•

"O" Ring
Stem Packing

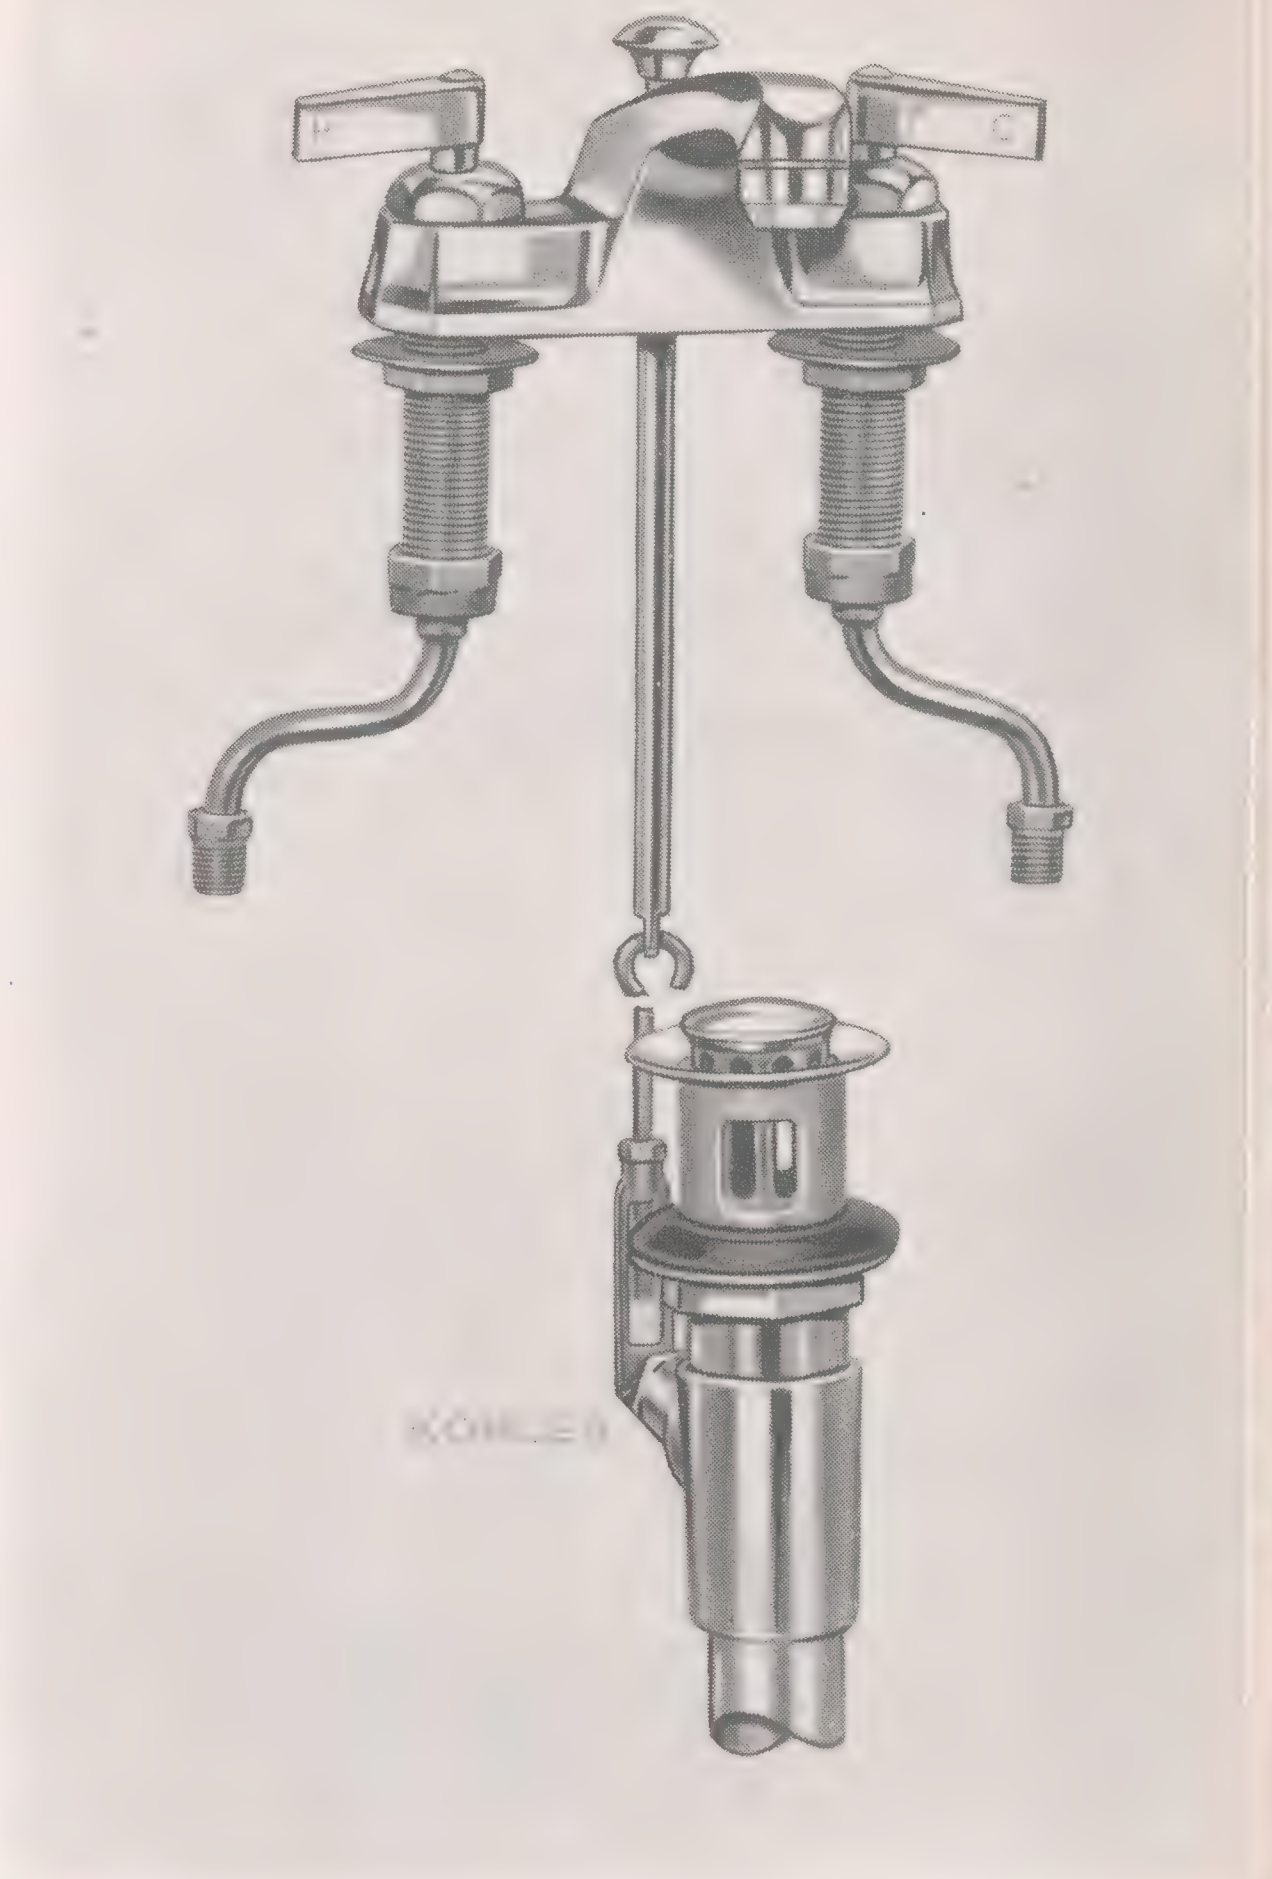

CENTRA K-8006-A

CENTRA K-8005-A

K-8006-A	Lavatory fitting with aerator, renewable seats and sleeves, drain with chain and stopper, 1¼" tailpiece; offset tailpieces on valves.	**K-8005-A**	Lavatory fitting with aerator, renewable seats and sleeves, pop-up drain and 1¼" tailpiece; offset tailpieces on valves.
K-8006	Same as **K-8006-A** except less aerator.	**K-8005**	Same as **K-8005-A** except less aerator.

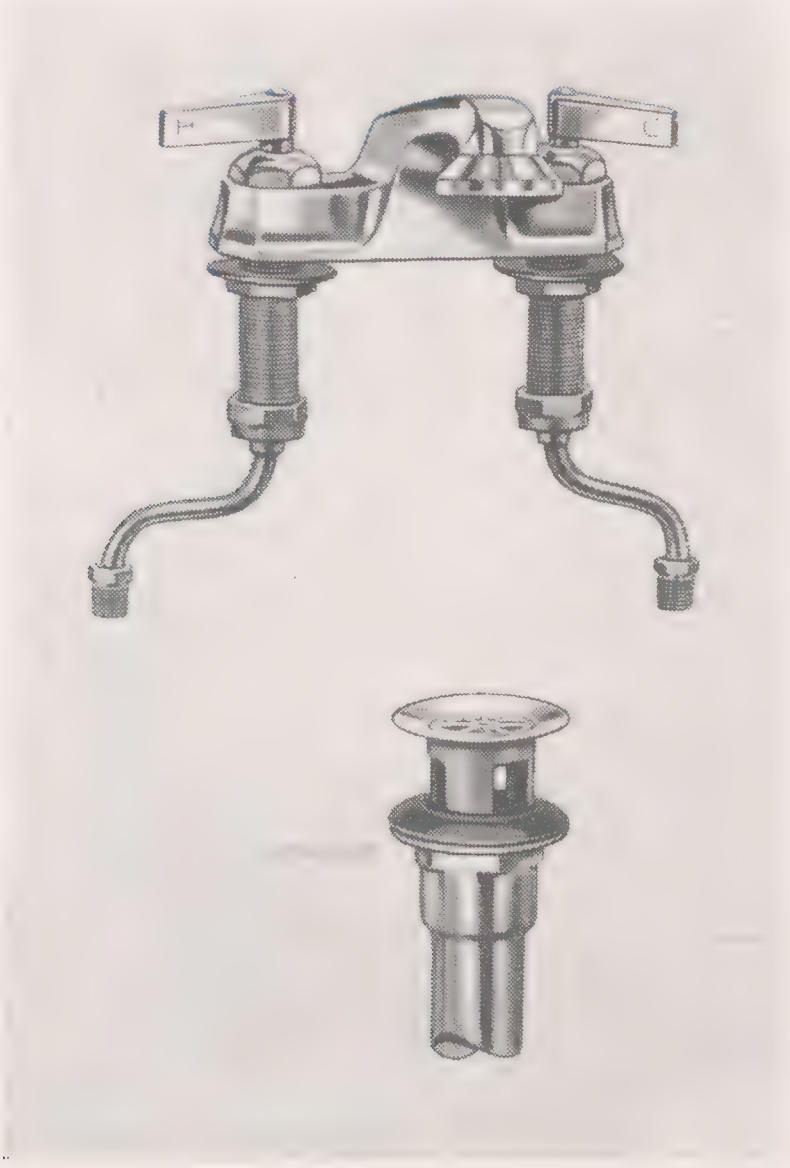

CENTRA K-8009

CENTRA

COMBINATION LAVATORY FITTING WITH SPRAY

K-8009	Lavatory fitting with spray, renewable seats and sleeves, open drain, 1¼" tailpiece; offset tailpieces on valves.

BANCROFT COMBINATION LAVATORY FITTINGS

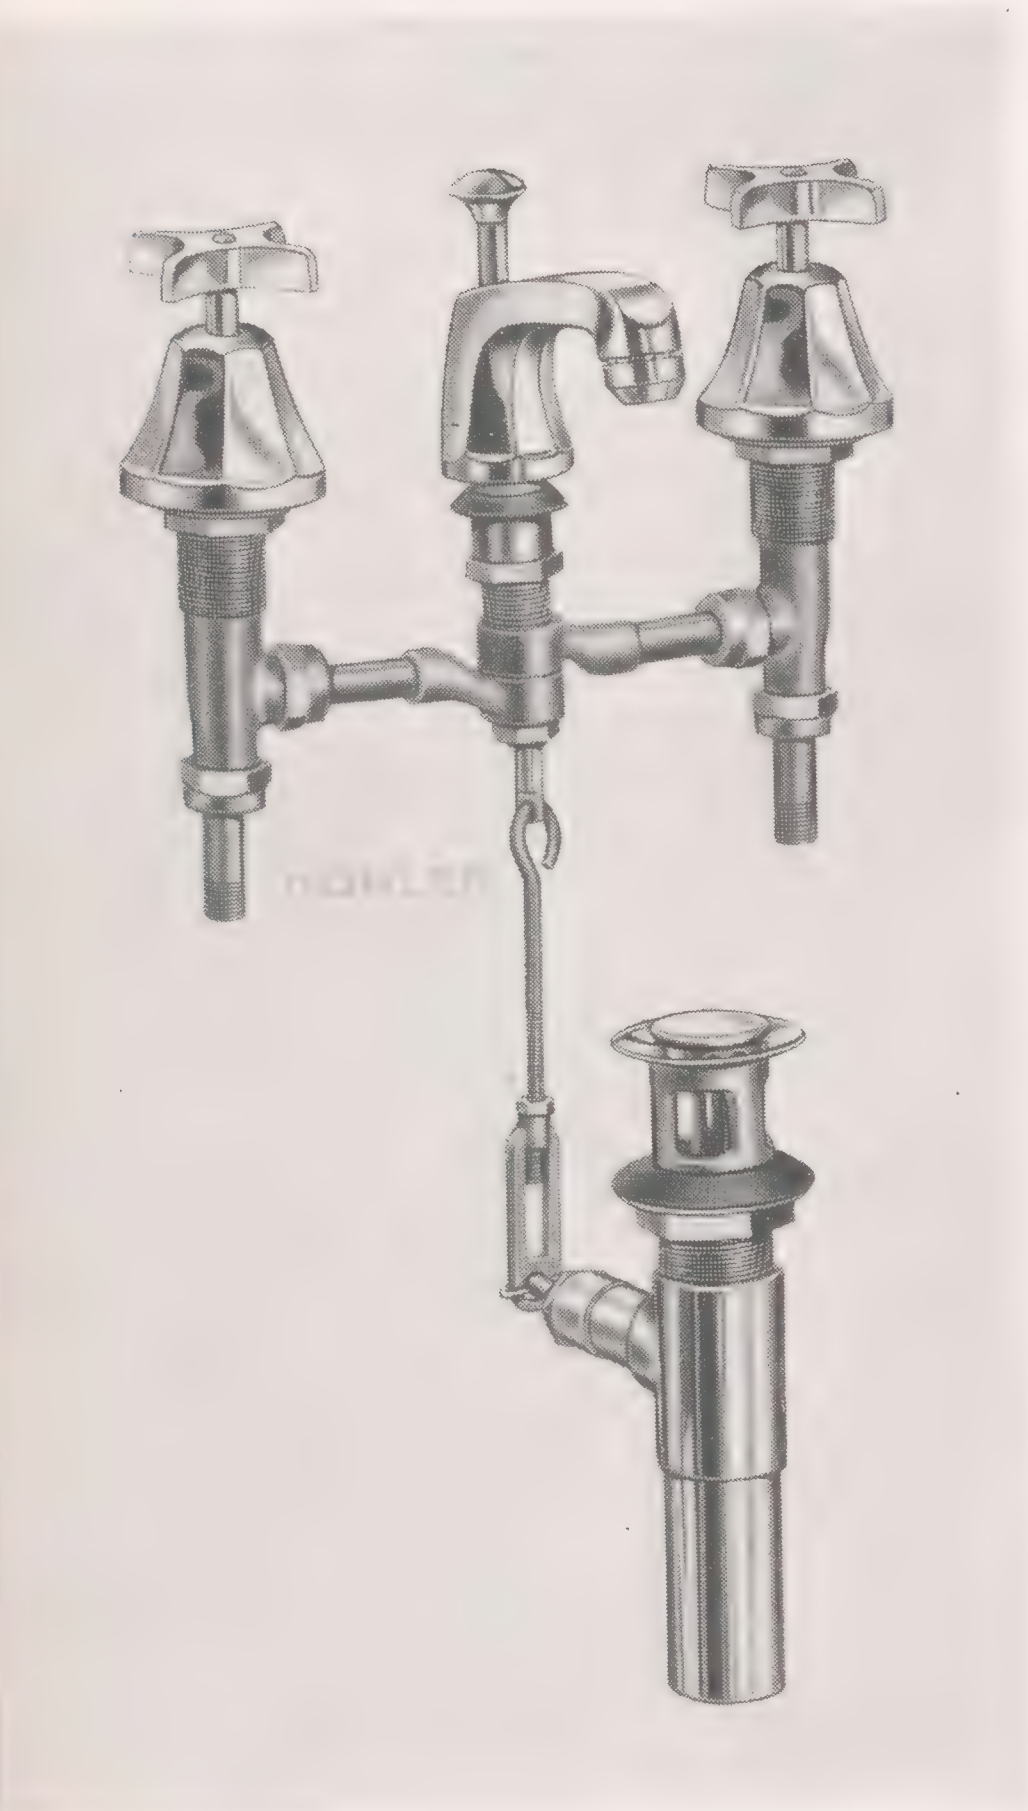

BANCROFT K-8010-A

K-8010-A	Lavatory fitting with aerator, renewable seats, pop-up drain and 1¼″ tailpiece.
K-8010	Same as **K-8010-A** except less aerator.

K-8011-A	Lavatory fitting with aerator, renewable seats, drain with chain and stopper and 1¼″ tailpiece.
K-8011	Same as **K-8011-A** except less aerator.

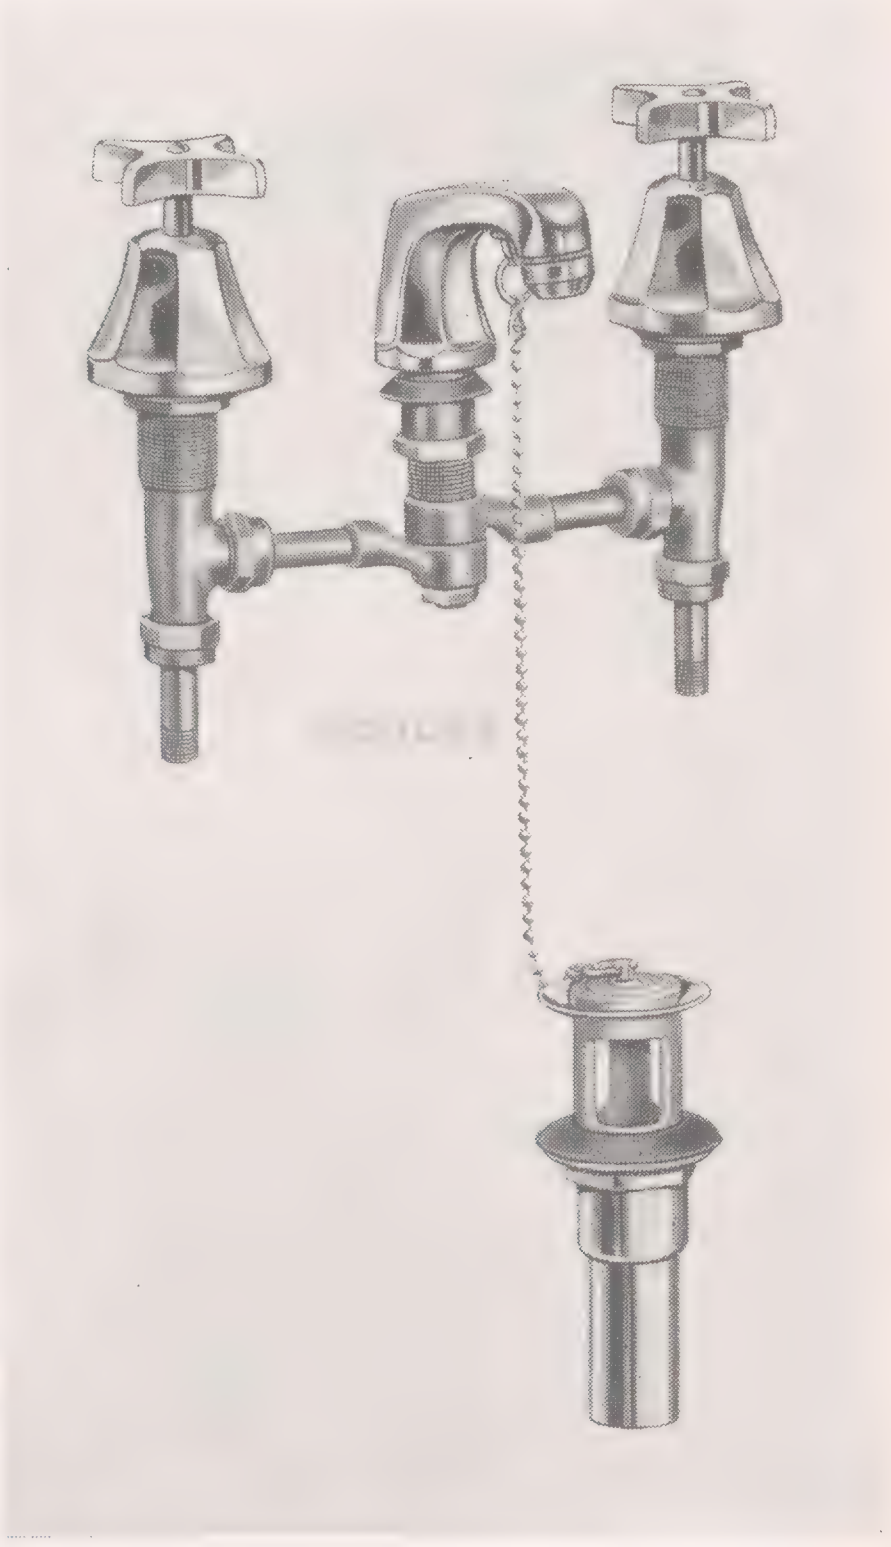

BANCROFT K-8011-A

THREE WATER FITTING

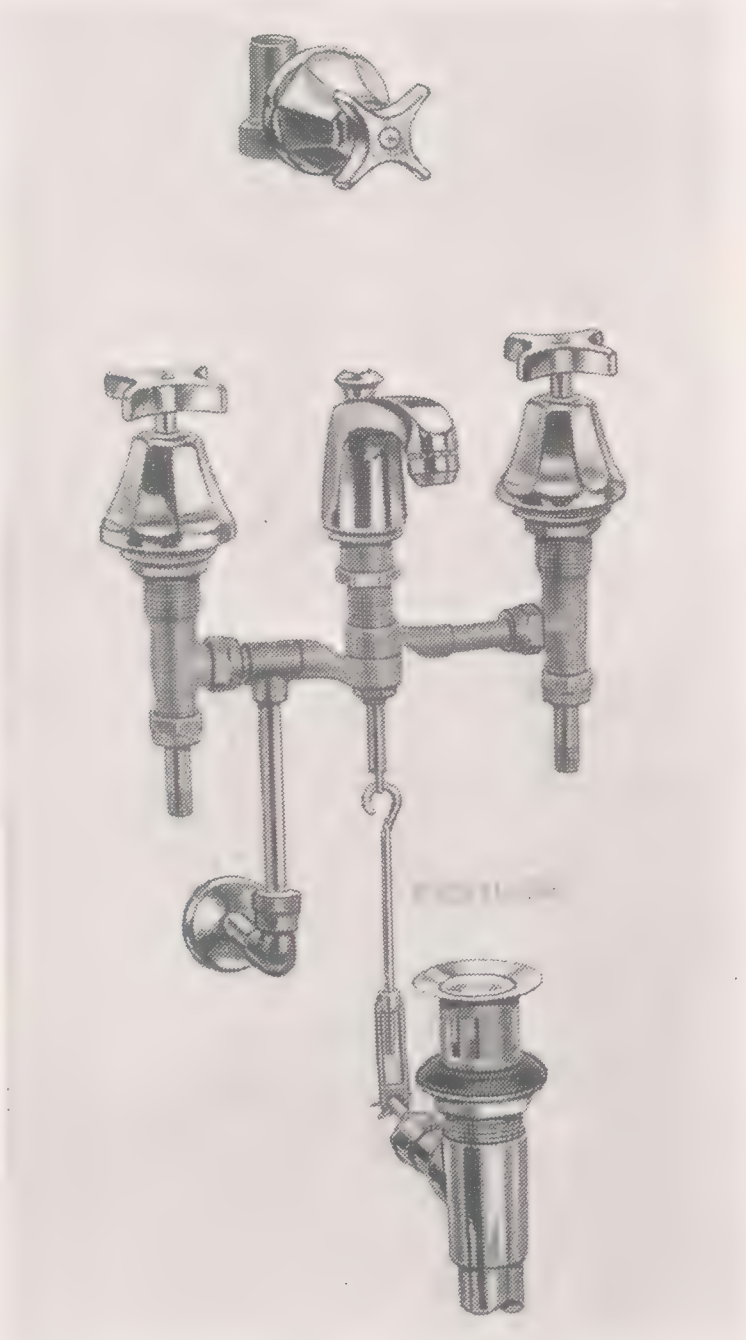

BANCROFT K-8015-A

K-8015-A	Lavatory fitting with aerator, renewable seats, built-in compression drinking water valve, pop-up drain and 1¼″ tailpiece.
K-8015	Same as **K-8015-A** except less aerator.

BARBER'S LAVATORY FITTING

K-8035-A	Combination lavatory supply and shampoo fitting with lever control sprayer and drain with hair catching strainer and 1¼″ tailpiece.
K-8035	Same as **K-8035-A** except less aerator.

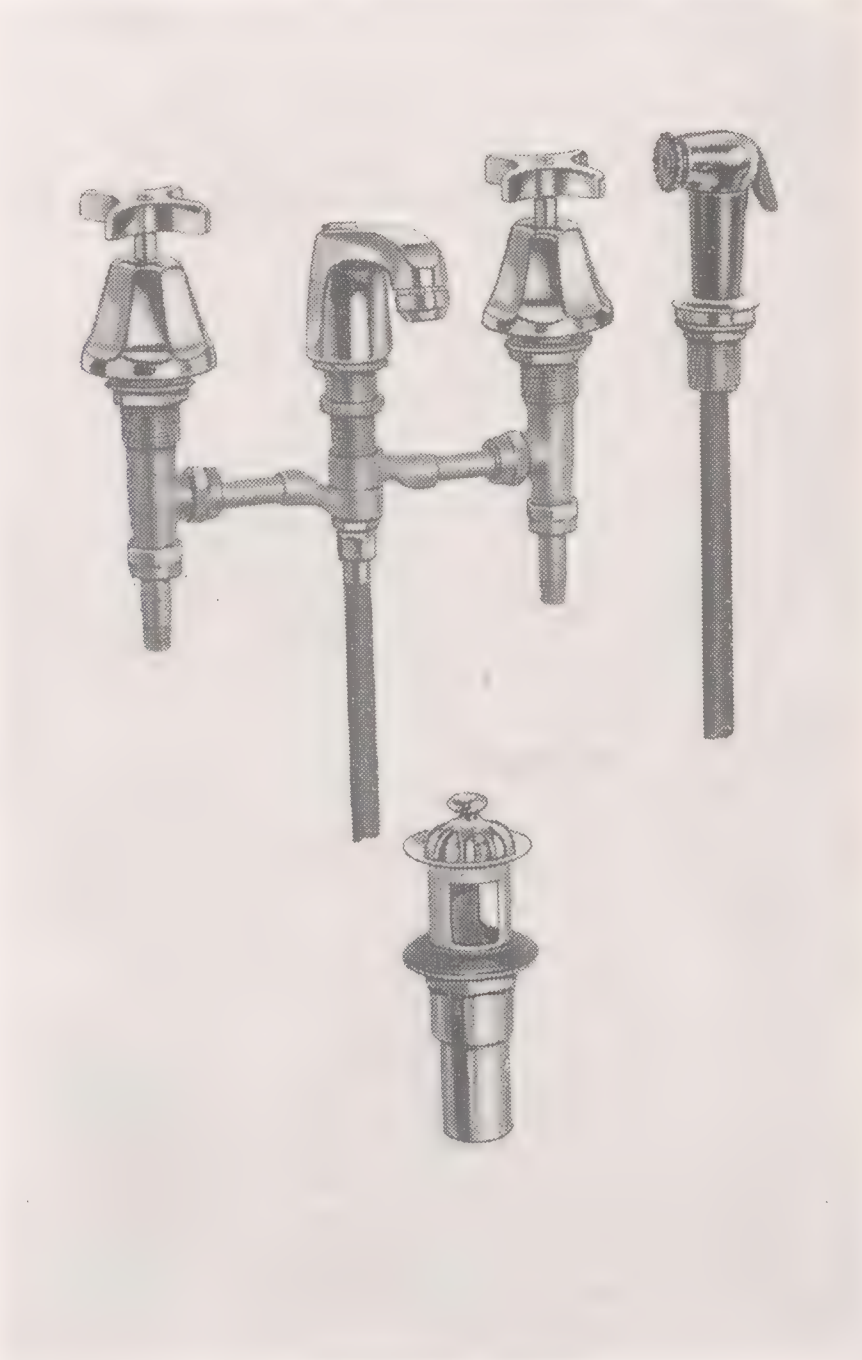

BANCROFT K-8035-A

LAVATORY FAUCETS

SELF-CLOSING TYPE

K-8186	Self-closing ball bearing faucet, 4-arm handle, Remov unit.
K-8190	Push button slow self-closing lavatory faucet.

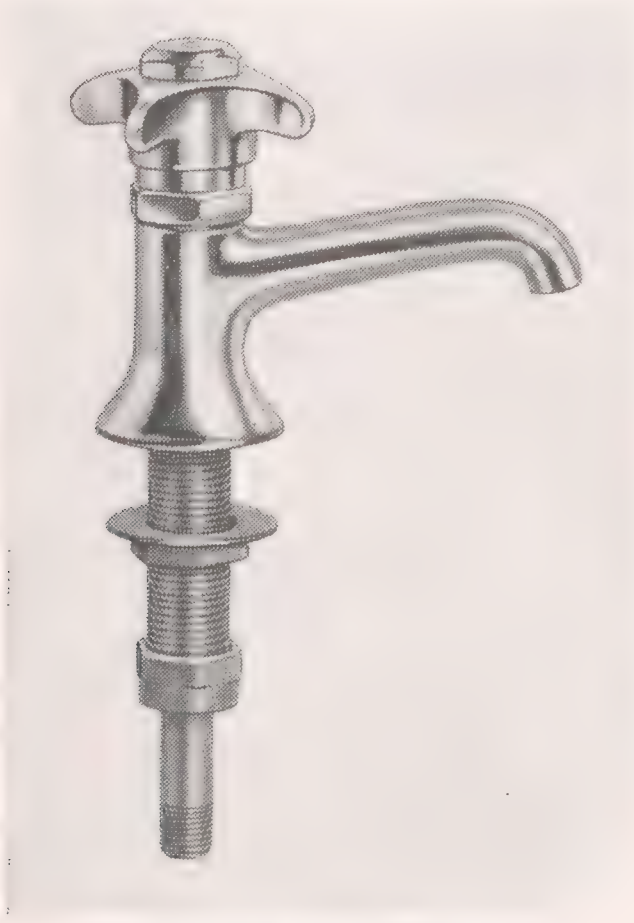
SENTRY K-8186

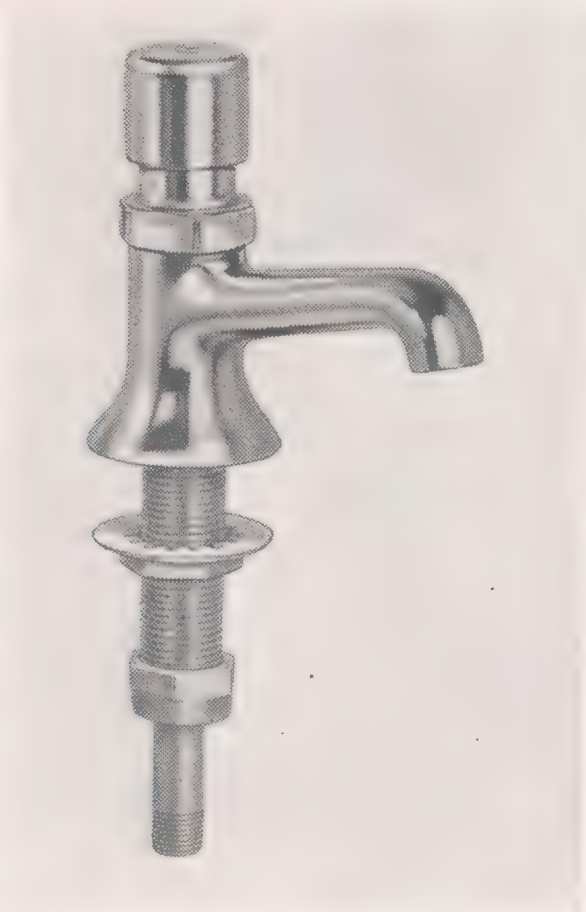
SIGNAL K-8190

COMPRESSION TYPE


SENTINEL K-8178

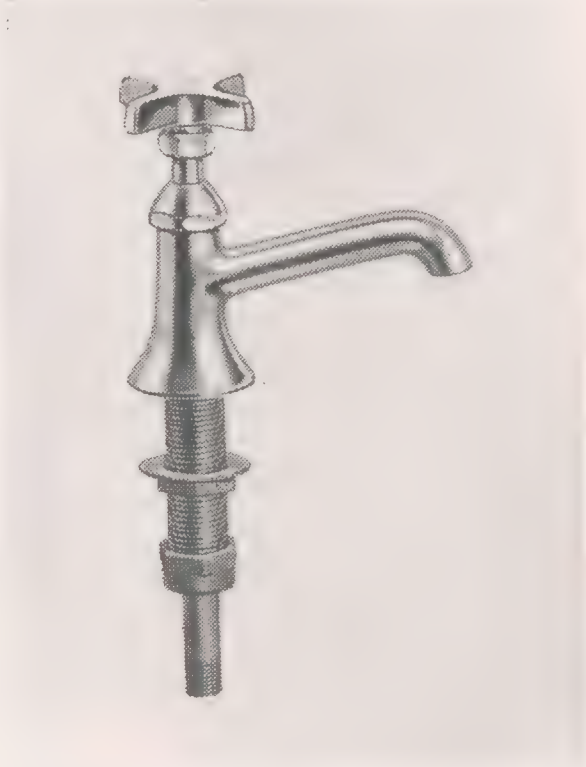
ARGYLE K-8182

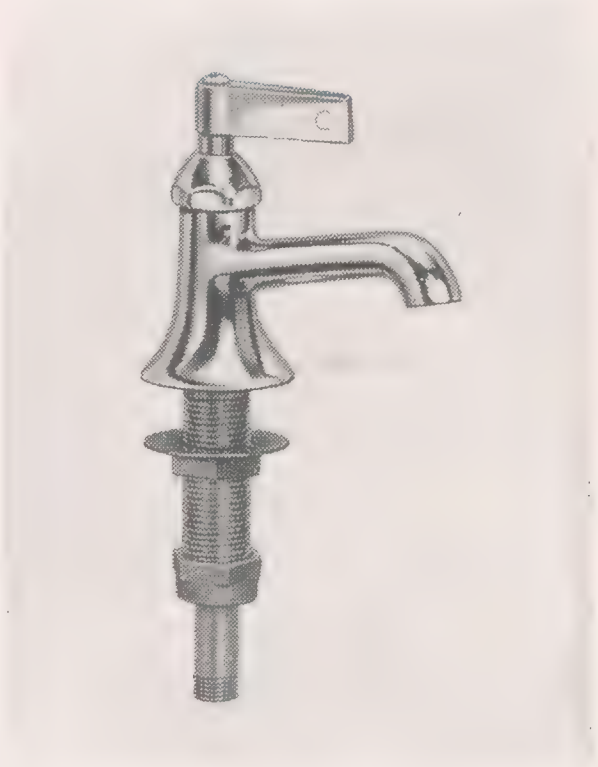
ARNETT K-8183

K-8178	Compression faucet, 4-arm handle, Remov unit.	K-8182	Compression faucet, 4-arm handle, renewable seat.	K-8183	Compression faucet, lever handle, renewable seat.

All above lavatory faucets have spout 1⅜" above base to prevent back siphonage.

STATION

LAVATORY FAUCET WITH BUBBLER

For Filling Stations and Public Washrooms

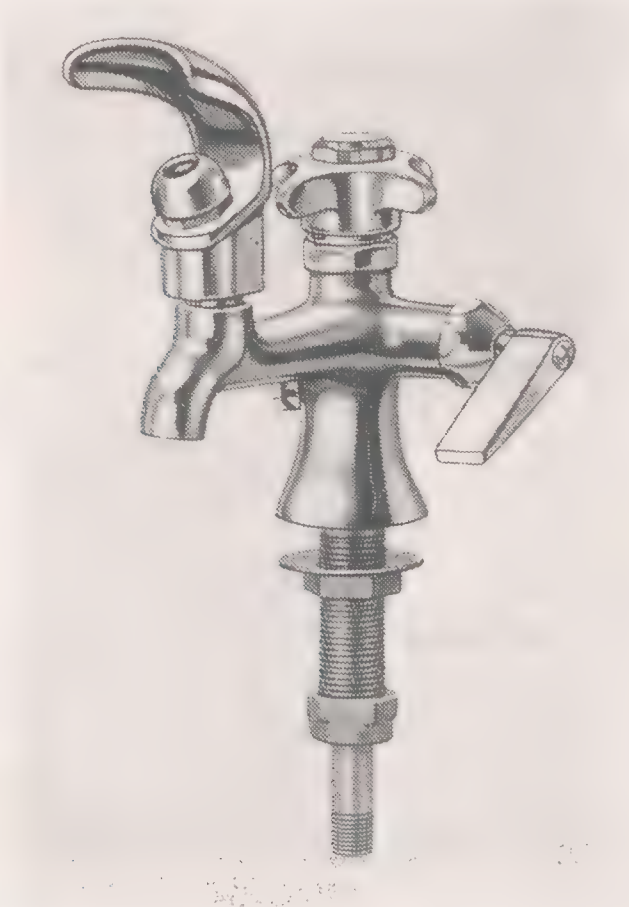
STATION K-8194

K-8194	Combination compression lavatory faucet with self-closing control valve for bubbler, spout 1½" above base; adjustable flow regulator for bubbler.

ICE WATER FAUCETS

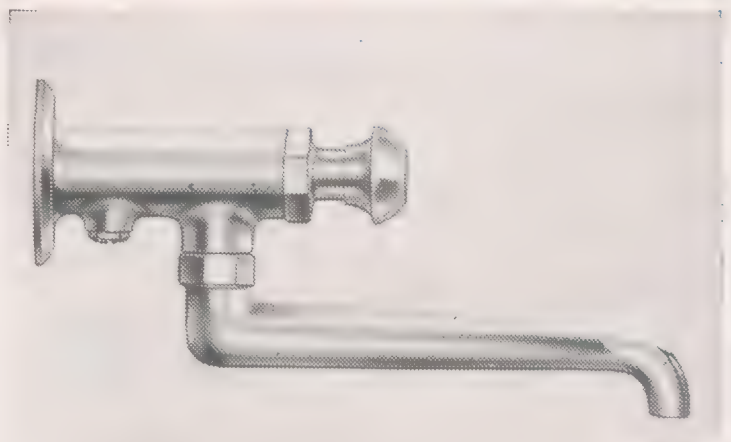
NEW YORKER K-8200


RAND K-8210

K-8200	Push button, self-closing ice water faucet, Remov unit, swing spout, flow regulator. Wall to center of spout outlet, 7¾". Inlet tapped for ⅜" I.P.
K-8210	Push button, self-closing ice water faucet. Inlet tapped for ⅜" I.P.


K-8258

LAVATORY SUPPLIES

WITH AND WITHOUT STOPS

K-8258	⅜" I.P.S. angle supply with stop, and annealed vertical tube for shelf lavatories.
K-8255	Same as **K-8258** except with loose key stop.
K-8256	Same as **K-8258** except for use with Centra fitting.
K-8259	⅜" I.P.S. angle supply with annealed vertical tube, less stop, for shelf lavatories.


K-8259


K-8264


K-8278


K-8315

K-8264	⅜" I.P.S. angle supply with stop.	**K-8278**	⅜" I.P.S. angle supply with stop and annealed vertical tube.	**K-8315**	⅜" I.P.S. floor supply with stop, for shelf lavatory.
K-8268	Same as **K-8264** except with loose key stop.	**K-8294**	Same as **K-8278** except less stop.		

CLOSET TANK SUPPLIES WITH AND WITHOUT STOPS


K-8334


K-8342


K-8350

K-8334	⅜" angle supply with stop for Placid, Channel, Bolton, Wellworth and Trylon closets.	**K-8342**	⅜" floor supply with stop for Placid, Channel, Bolton, Wellworth and Trylon closets.	**K-8350**	⅜" floor supply without stop for Wellworth and Trylon closets.
K-8336	⅜" angle supply with stop for Juvenile, Primary, Brooklands and Trent closets.	**K-8344**	⅜" floor supply with stop for Primary, Brooklands and Trent closets; also **K-4508-A** Winslow tank.	**K-8351**	⅜" floor supply without stop for Brooklands, Trent and Primary closets; also **K-4508-A** Winslow tank.
		K-8345	⅜" floor supply with stop for Juvenile and Downing closets; also for **K-4502-A** Winslow tank.	**K-8352**	⅜" floor supply without stop for Juvenile and Downing closets; also **K-4502-A** Winslow tank.

SYNCHRO LAVATORY POP-UP DRAIN

Enclosed ball action mechanism—positive action.
Removable stopper—metal to metal seal.
Rapid draining.
Large overflow opening in strainer body avoids trapping of water.
Connecting rod adjustable.

K-8415	Lavatory pop-up drain with 1¼″ tailpiece.

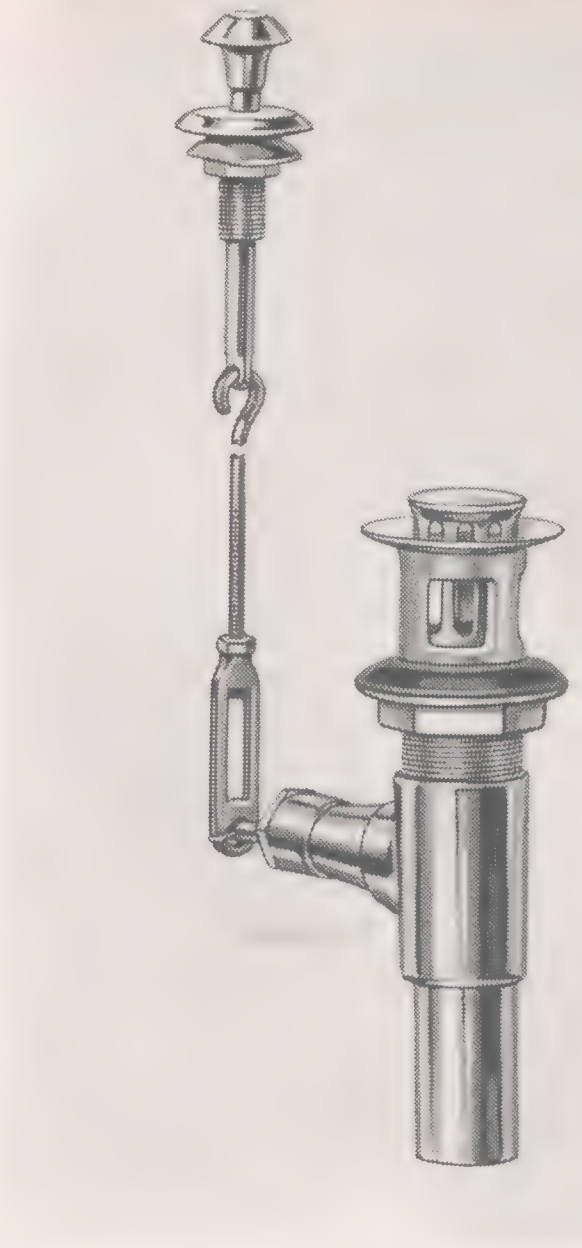

SYNCHRO K-8415

CAST BRASS LAVATORY DRAINS



K-8424



K-8426



K-8428

K-8424	Lavatory drain with metal stopper, 1¼″ tailpiece.	**K-8426**	Lavatory drain, chain and stopper, 1¼″ tailpiece.	**K-8428**	Lavatory drain, open strainer, 1¼″ tailpiece.



K-8460

CHAIN STAY BOLT

FAUCET HOLE COVER

K-8460	Lavatory chain stay bolt for 1⅛″ drilling.	**K-8462**	Faucet hole cover for lavatories and sinks.



K-8462

ANGLE AND STRAIGHT STOPS



K-8400



K-8402



K-8404



K-8406

K-8400	Angle stop with four arm handle.	**K-8402**	Angle stop with loose key.	**K-8404**	Straight stop with four arm handle.	**K-8406**	Straight stop with loose key.

NOTE: If desired with exposed stuffing-box, add suffix "S" to above numbers.

SIZES—⅜″ and ½″ I.P.

EDGEWATER

COUNTER TOP SINK FITTINGS

K-8601-A	Ledge sink fitting with 8″ swing spout, aerator, renewable seats.
K-8601	Same as **K-8601-A** except less aerator.
K-8601-M	Same as **K-8601** except with threaded spout.
K-8603-A	Ledge sink fitting with 8″ swing spout, aerator, third water valve, renewable seats.

For fitting with soap dish, add suffix "D."

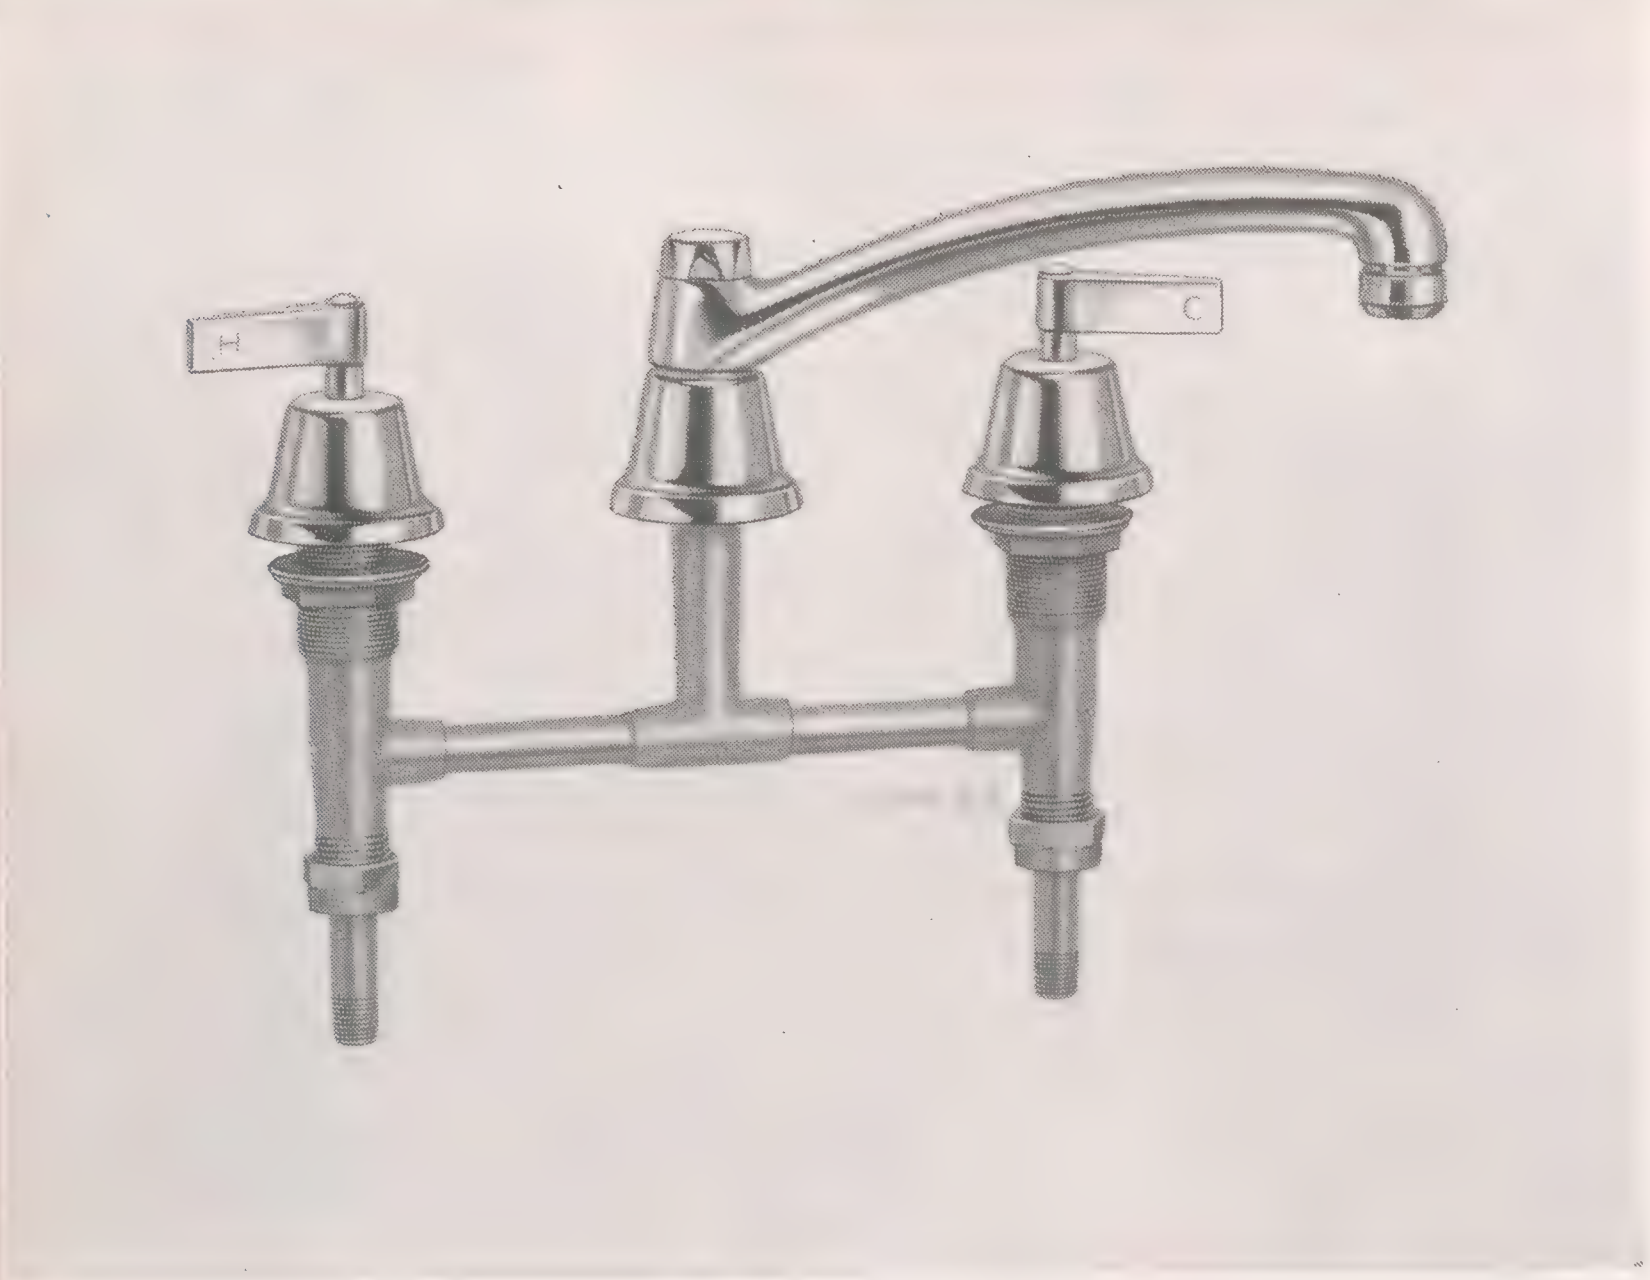

EDGEWATER K-8601-A

Soap dish mounted on **K-8601-AD** counter top fitting.



With Lever Control Sprayer and Third Water Valve

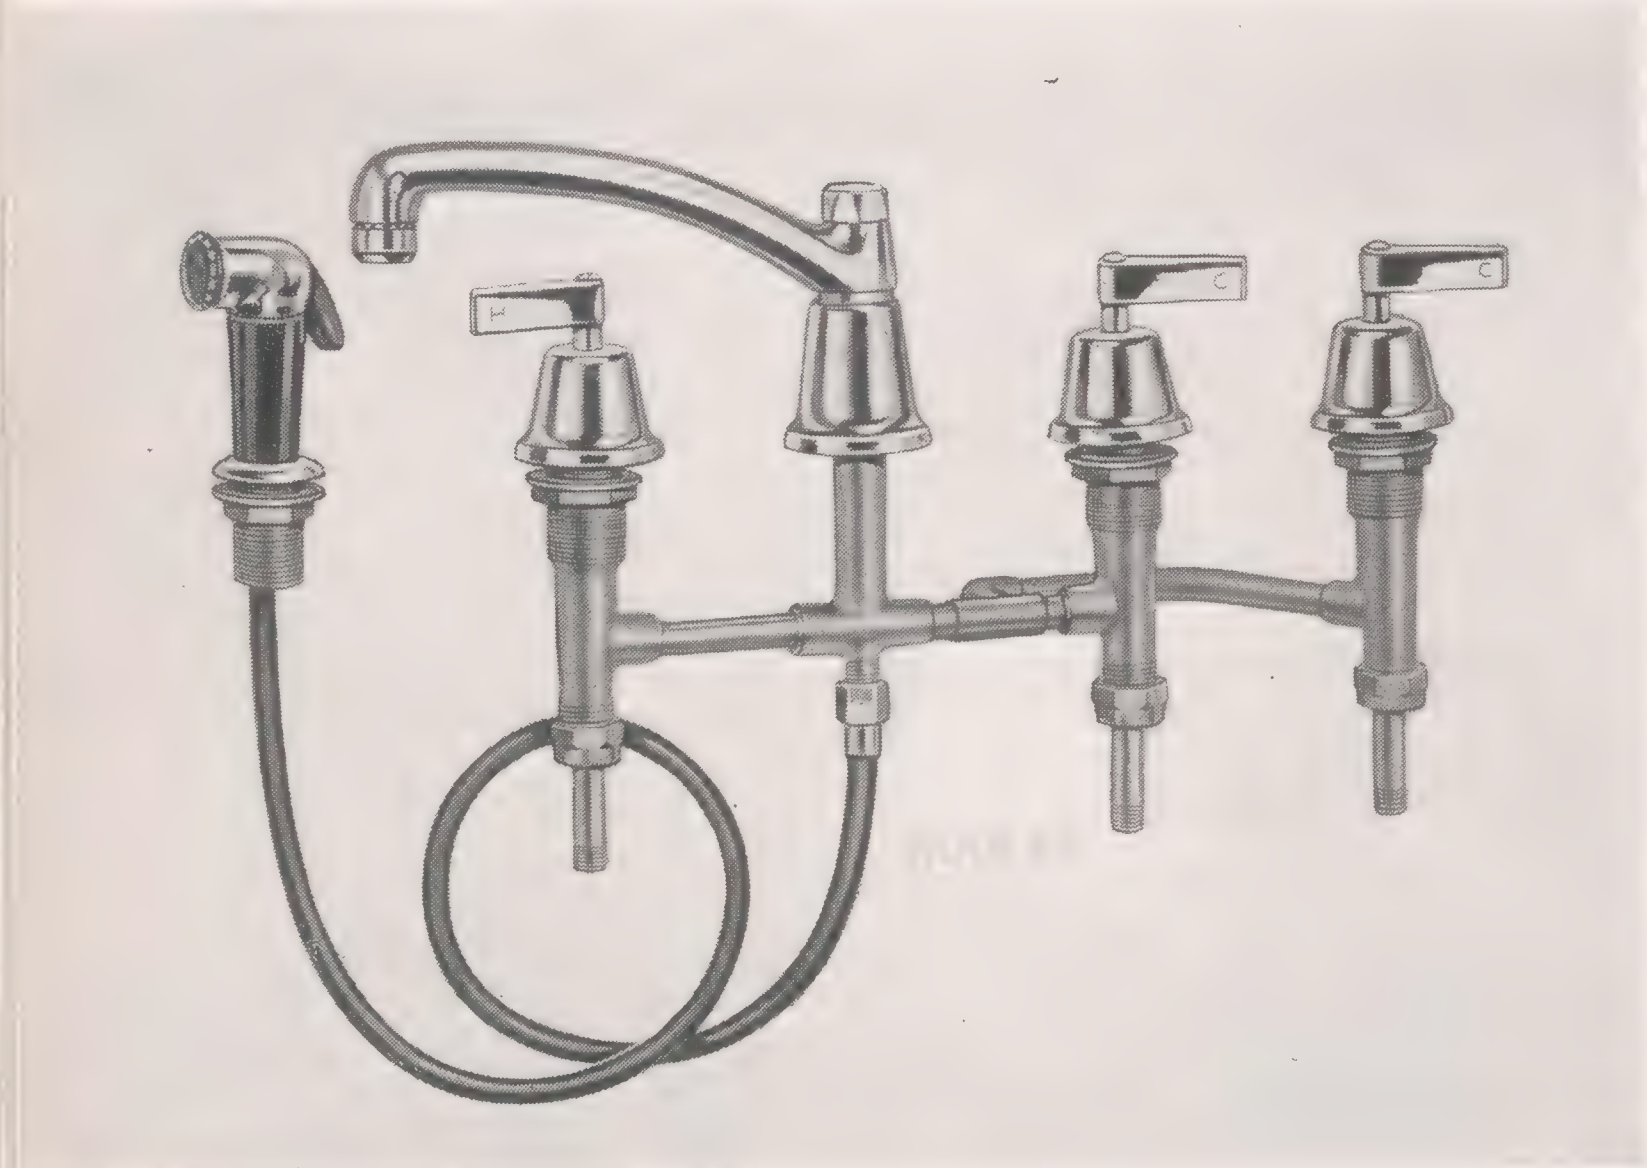

EDGEWATER K-8607-A

K-8607-A	Ledge sink fitting with 8″ swing spout, aerator, third water valve, renewable seats, lever control sprayer.

For fitting with soap dish, add suffix "D."

With Lever Control Sprayer

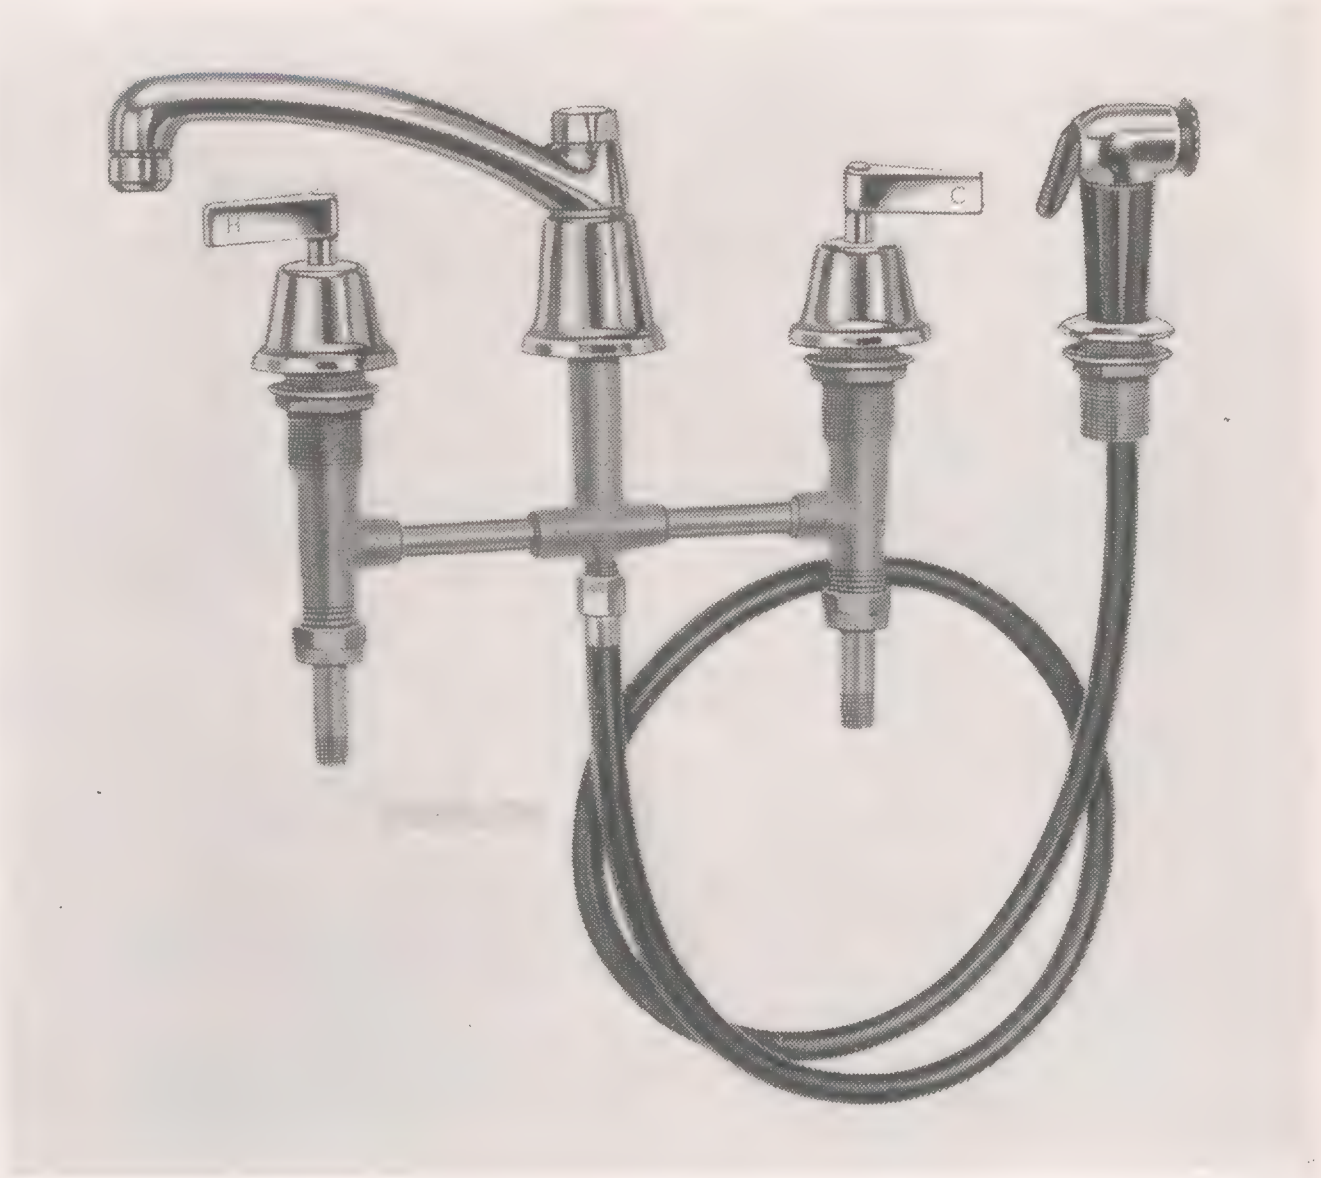

EDGEWATER K-8605-A

K-8605-A	Ledge sink fitting with 8″ swing spout, aerator, renewable seats, lever control sprayer.
K-8605	Same as **K-8605-A** less aerator.

For fitting with soap dish, add suffix "D."

CLEARWATER SINK SUPPLY FITTING

K-8655-A	Sink supply fitting, soap dish, 5" swing spout with aerator, renewable seats, inside threaded couplings.
K-8656-A	Same as above less soap dish.
K-8657	Same as **K-8655** except spout threaded for hose connection.
K-8659-A	Same as **K-8655-A** except with 9" spout.

For fitting less aerator, omit suffix "A."

For above fittings with outside threaded couplings, add suffix "E" to the plate numbers.

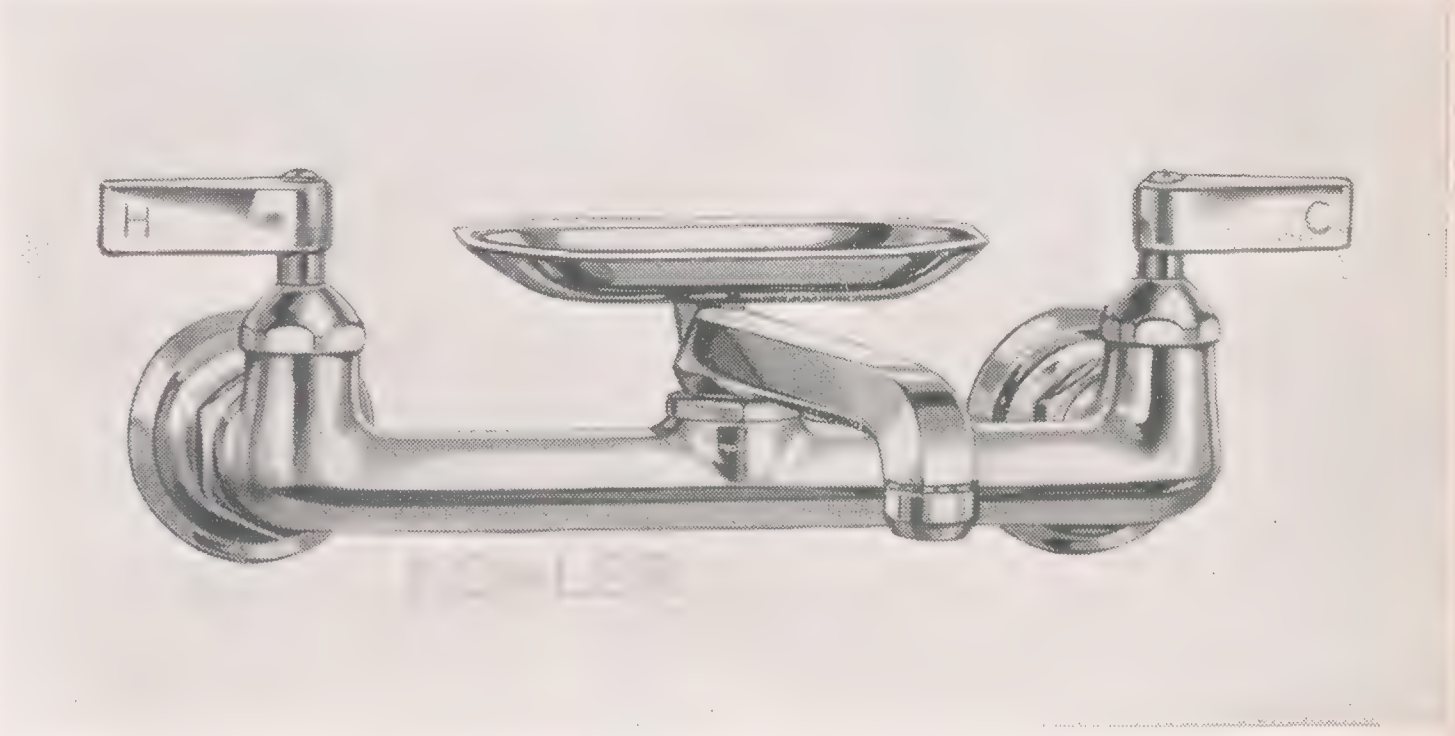
CLEARWATER K-8655-A

SINGLE SINK FAUCETS

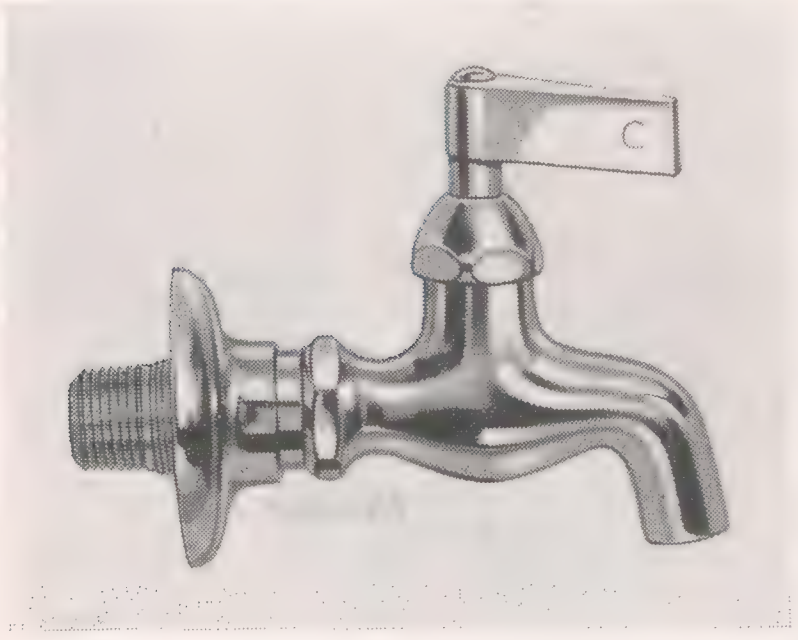
HEWITT K-8775

K-8775	Sink faucet, renewable seat, lever handle, adjustable flange, ½" I.P.S. outside threads.
K-8776	Same as **K-8775** except threaded for hose connection.
K-8786	Sink faucet, renewable seat, lever handle, solid flange, ½" I.P.S. inside threads.
K-8788	Same as **K-8786** except threaded for hose connection.

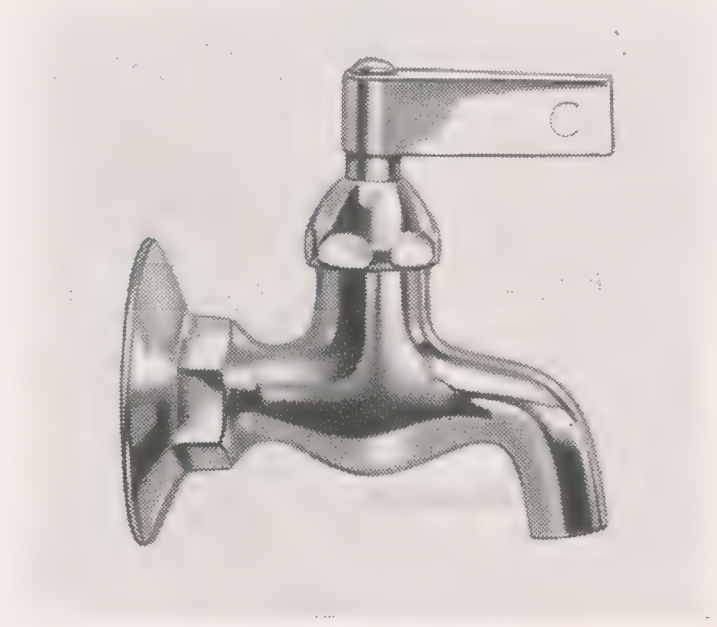
LANARK K-8786

PANTRY FAUCETS WITH GOOSENECK SPOUTS

SWING SPOUT


SIMPLEX K-8790-A

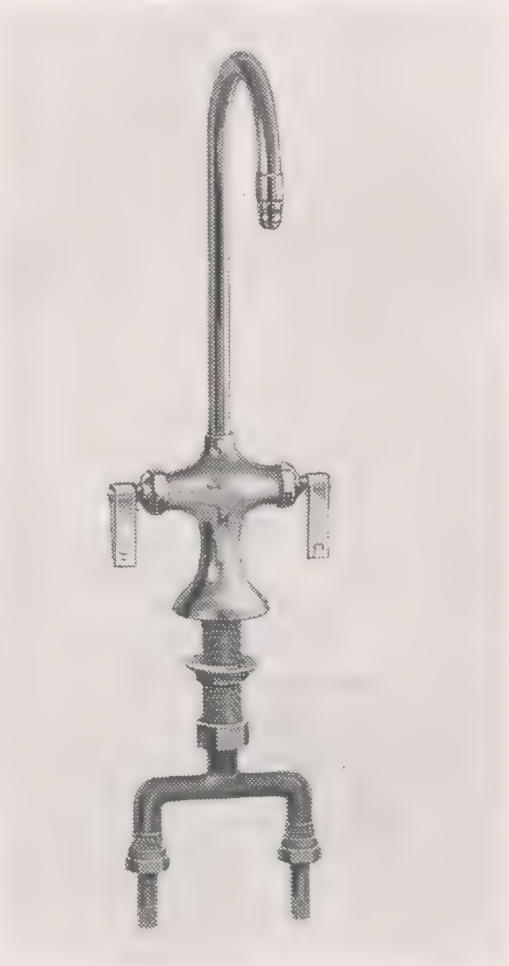
BLAGDON K-8794-A

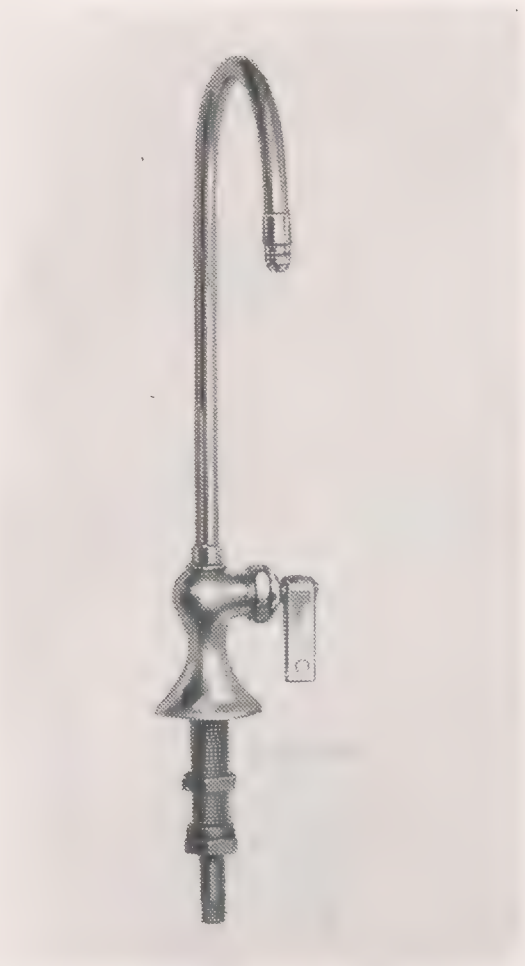
BARDNEY K-8795-A

K-8790-A	Double faucet with 8" swing spout with aerator, lever handles, renewable seats. Slab to spout outlet, 5".	**K-8794-A**	Double pantry faucet, gooseneck spout with aerator, lever handles, renewable seats.	**K-8795-A**	Pantry faucet, gooseneck spout with aerator, lever handle, renewable seat. (Specify if for hot or cold water.)

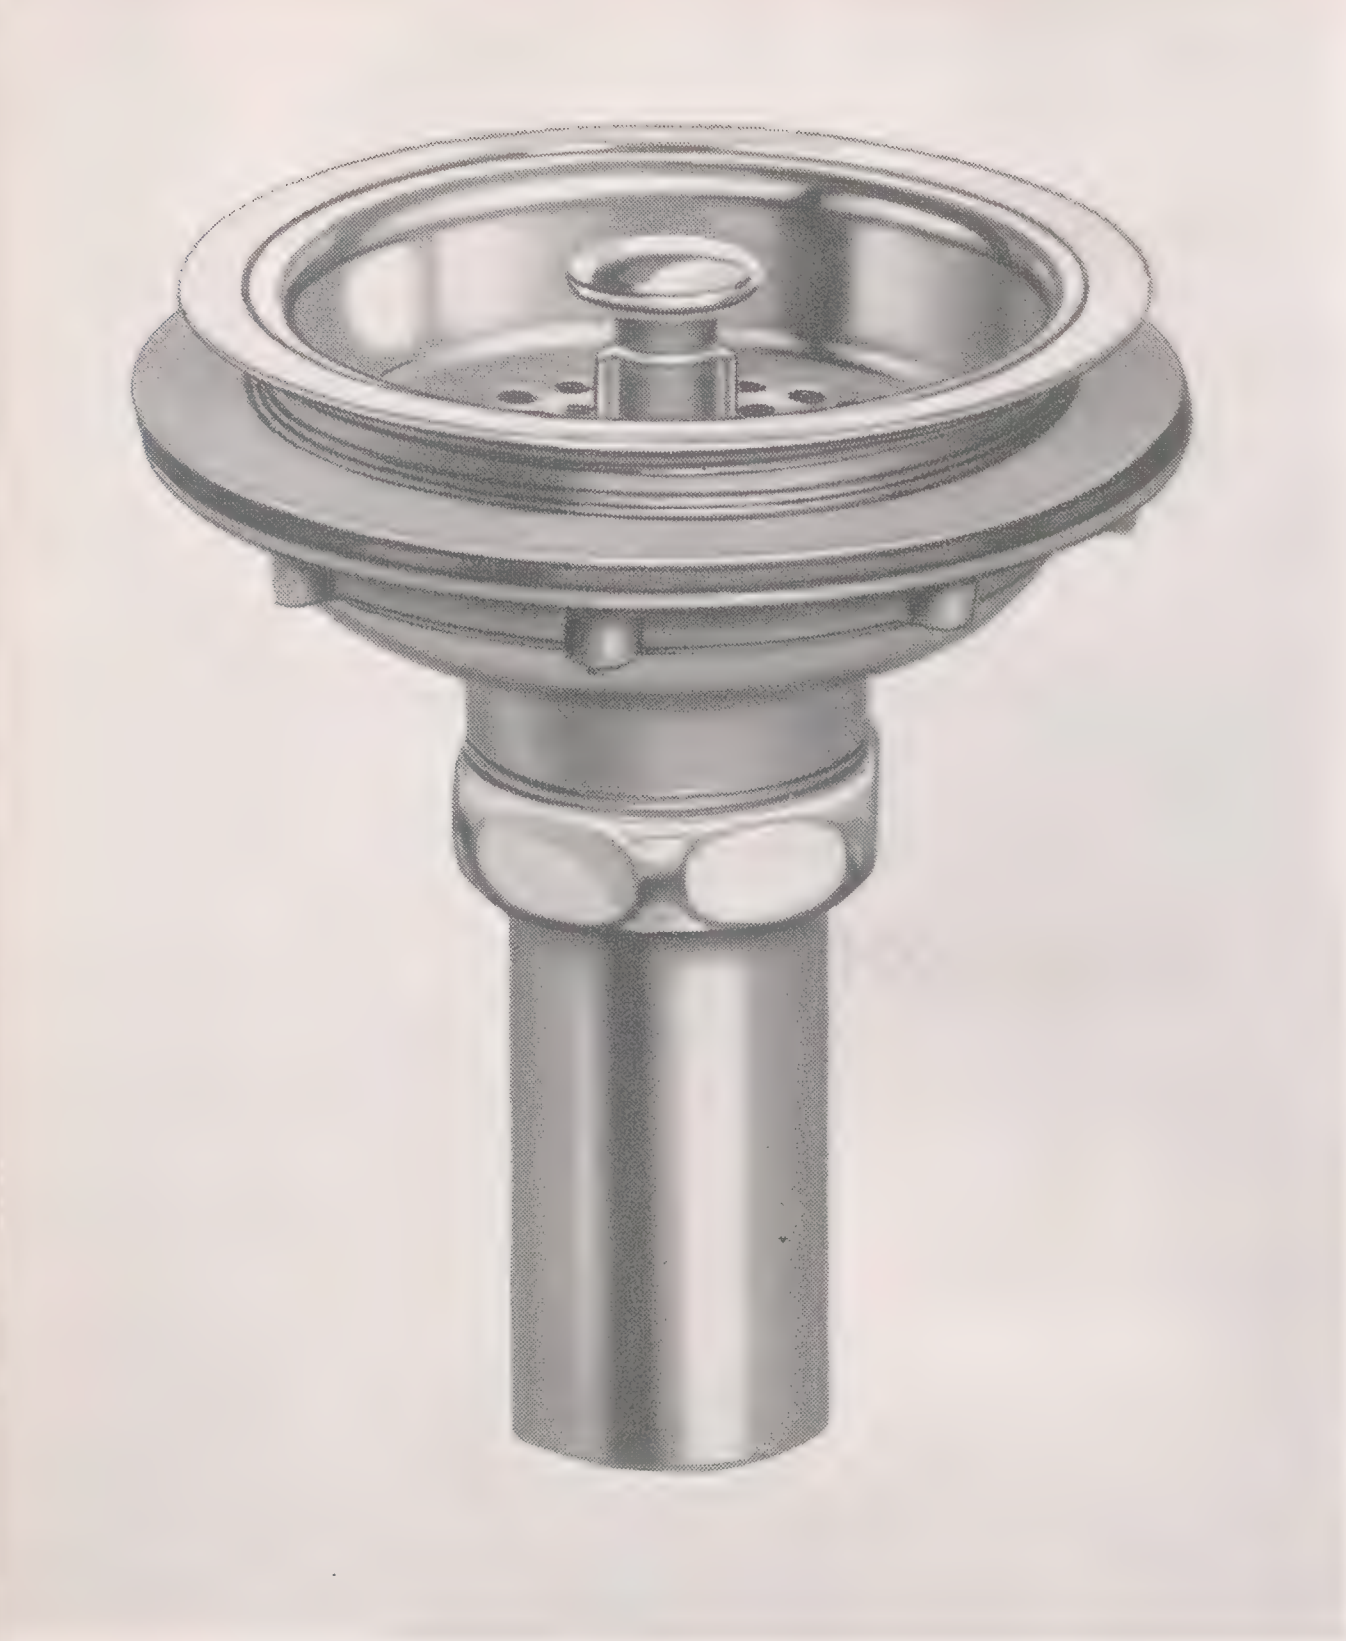

DUOSTRAINER

A STRAINER WITHIN A STRAINER

For Kitchen Sinks

Positive drain control is provided by the ground joint metal seat which holds water in the sink for washing dishes or vegetables.

A secondary strainer beneath the ground joint protects the trap from large pieces of waste and safeguards the user against loss of rings, pins and other small items.

The handy cup strainer is made of sturdy stainless steel which resists wear and is easy-to-clean.

K-8801	Duostrainer with 1½x4″ tailpiece. For sinks with 3½″ or 4″ outlets.

DUOSTRAINER K-8801

A	Removable, stainless steel cup strainer
B	Cast brass body
C	Drain control
D	Ground joint metal seat
E	Secondary strainer

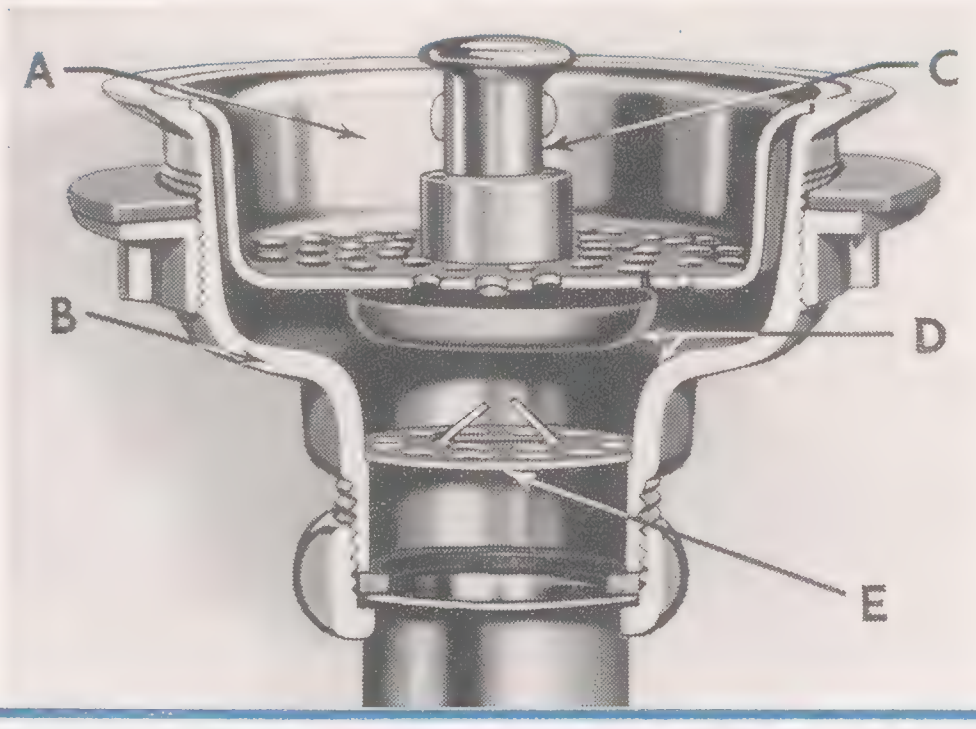

SINK AND LAUNDRY TRAY STRAINERS



K-8807

K-8820



K-8821

K-8807	Strainer with 1½x4″ tailpiece. For sinks with 3½″ or 4″ outlets.	**K-8820**	Strainer with 1½x4″ tailpiece. For sinks with 2″ outlets.	**K-8821**	Strainer with 1½x4″ tailpiece and stopper. For laundry trays with 2″ outlets.

Industrial Wash Sink Supply Fittings



CALDER K-8885

K-8885	Rough plated wash sink fitting with spray, lever handles, renewable seats, ½" I.P.S. outside threaded couplings.
K-8886	Same as **K-8885** except less spray.
K-8890	Rough plated wash sink fitting, spout and spray, lever handles, renewable seats, adjustable flanges, ½" I.P.S. outside threaded couplings.

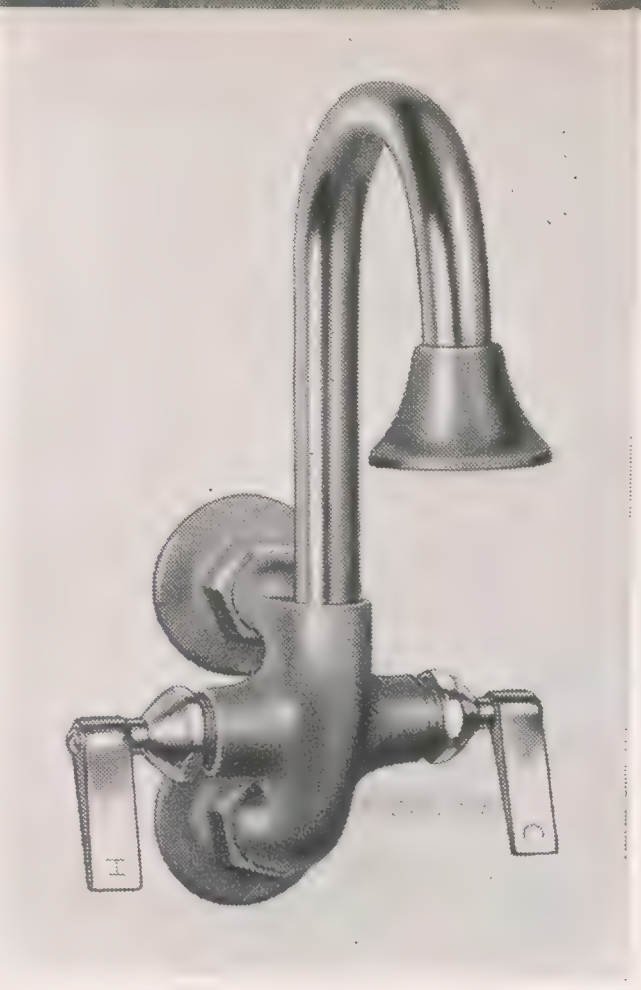

CANNOCK K-8890

Service Sink Supply Fittings

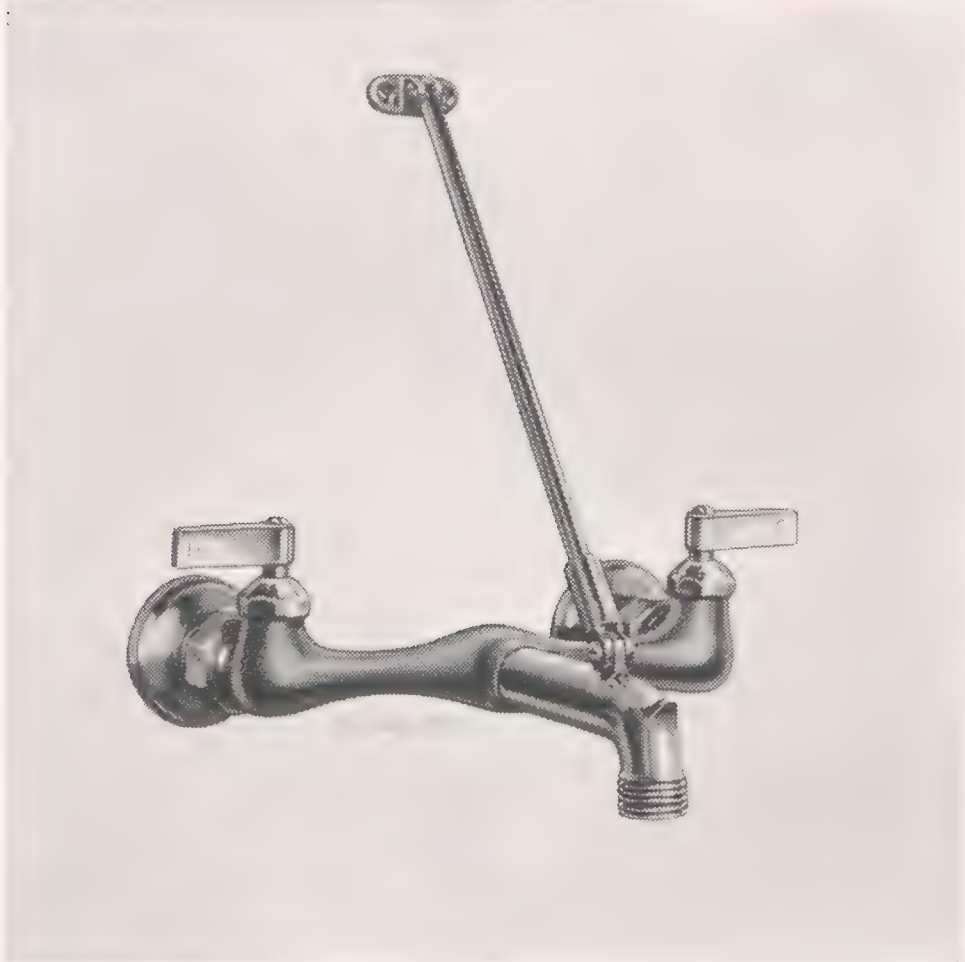

KINLOCK K-8910

K-8910	Rough plated service sink fitting, threaded spout, pail hook, wall brace, renewable seats, inside threaded couplings. (Wall to center of spout outlet 7".)
K-8909	Same as **K-8910** except with loose key stops in shanks. (Wall to center of spout outlet 8½".)

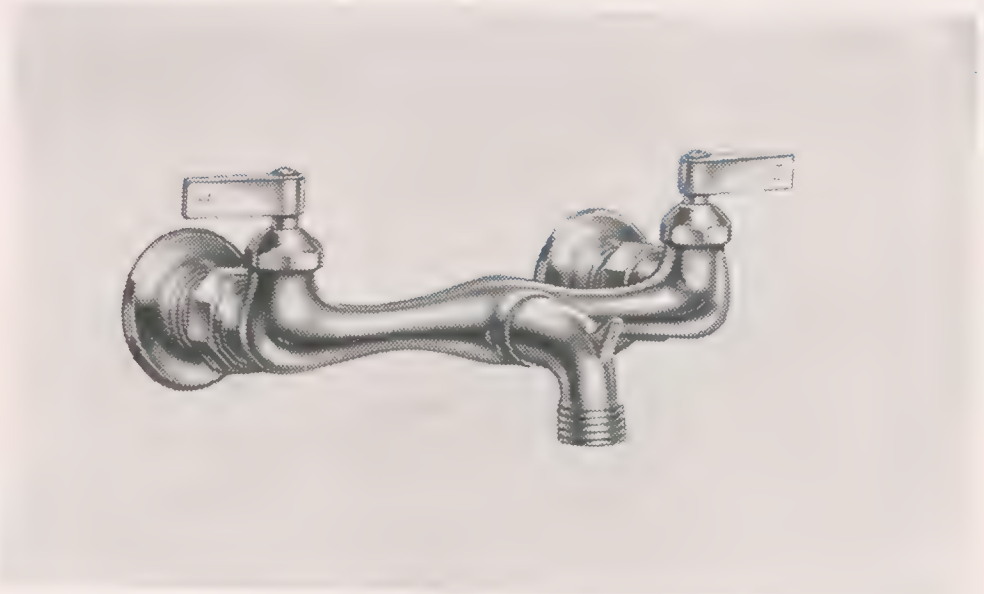

KNOXFORD K-8912

K-8912	Rough plated service sink fitting, threaded spout, pail hook, renewable seats, inside threaded couplings. (Wall to center of spout outlet 5½".)
K-8913	Same as **K-8912** except with loose key stops in shanks. (Wall to center of spout outlet 7".)
K-8914	Same as **K-8912** except with plain end spout less pail hook.
K-8920	Same as **K-8912** except with plain end spout with pail hook.

Note: Available with outside threaded couplings when specified.



GARDEN K-8980

Lawn Faucet

Extra heavy and substantially made. Flat exterior surface for wrench. 45° angle makes it easy to attach hose, and saves wear on hose.

K-8980	Rough plated lawn faucet, angle pattern, solid flange, brass handles, inside threaded connections.

SIZES ½" ¾"

BRASS "P" TRAPS FOR LAVATORIES, DRINKING FOUNTAINS, KITCHEN SINKS AND LAUNDRY TRAYS

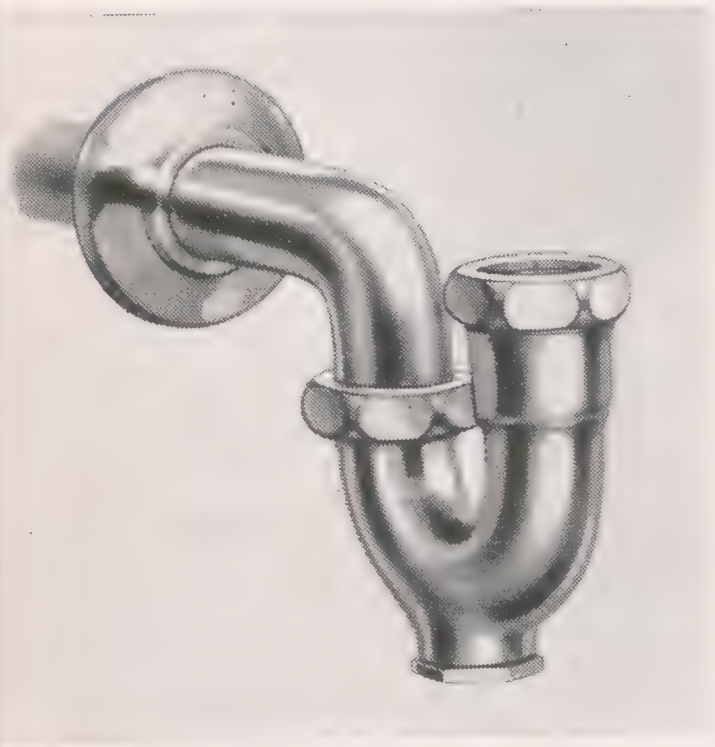
K-9000

K-9000	Cast brass adjustable P trap, cleanout plug, tubing outlet.
K-9004	Cast brass adjustable P trap, cleanout plug, outlet threaded inside for I.P.
K-9005	Same as **K-9004** except with 6″ C.P. brass I.P.S. nipple and flange.

SIZES 1¼x1¼″ 1¼x1½″ 1½″x1½″

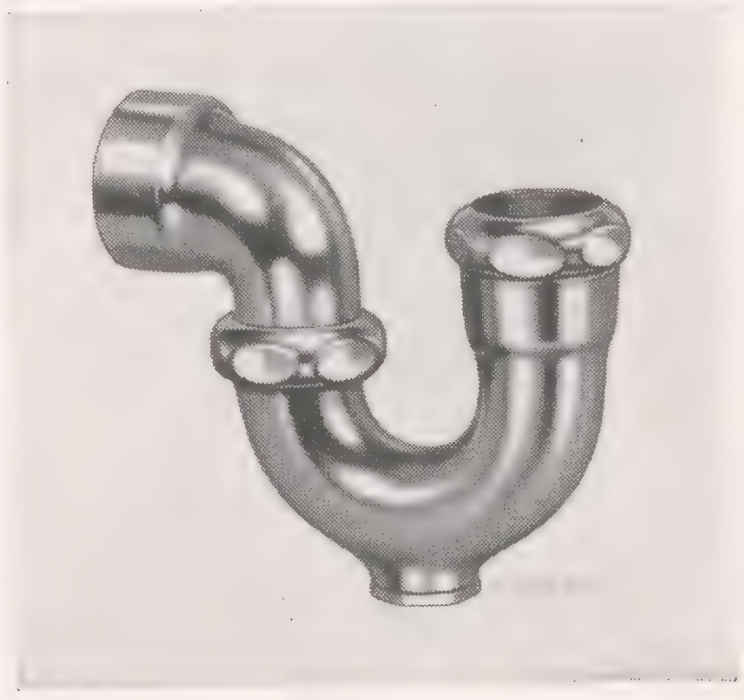
K-9004


K-9010

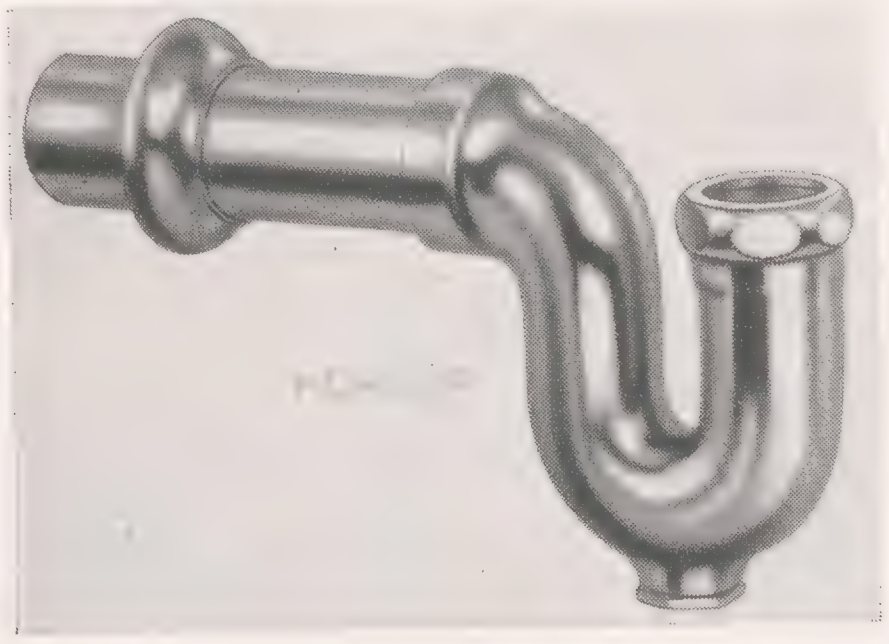
K-9011

K-9010	Cast brass one piece P trap, cleanout plug, outlet threaded inside for I.P.

SIZES 1¼x1¼″ 1¼x1½″ 1½x1½″

K-9011	Cast brass one piece P trap, cleanout plug, 6″ C.P. brass I.P.S. nipple and flange.

SIZES 1¼x1¼″ 1¼x1½″ 1½x1½″

CONTINUOUS DRAINS FOR SINKS AND TRAYS

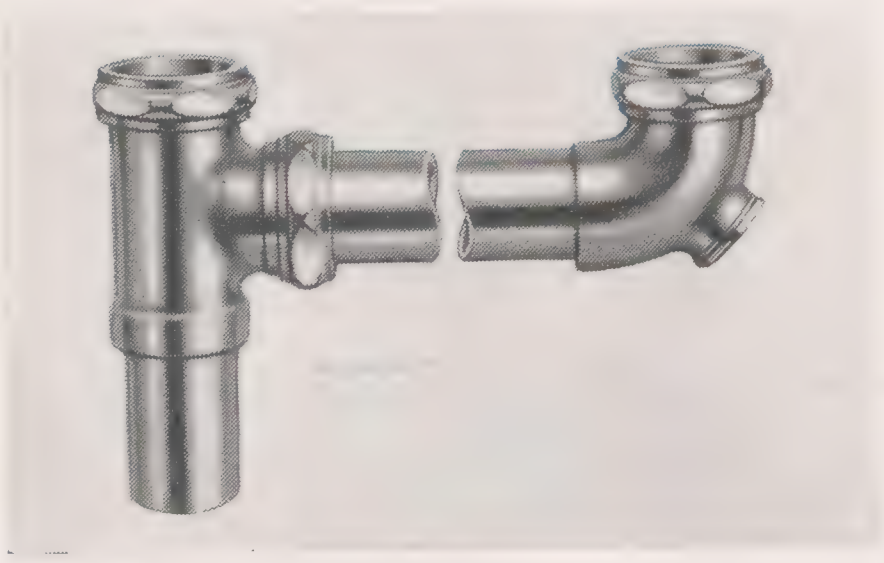
K-9060

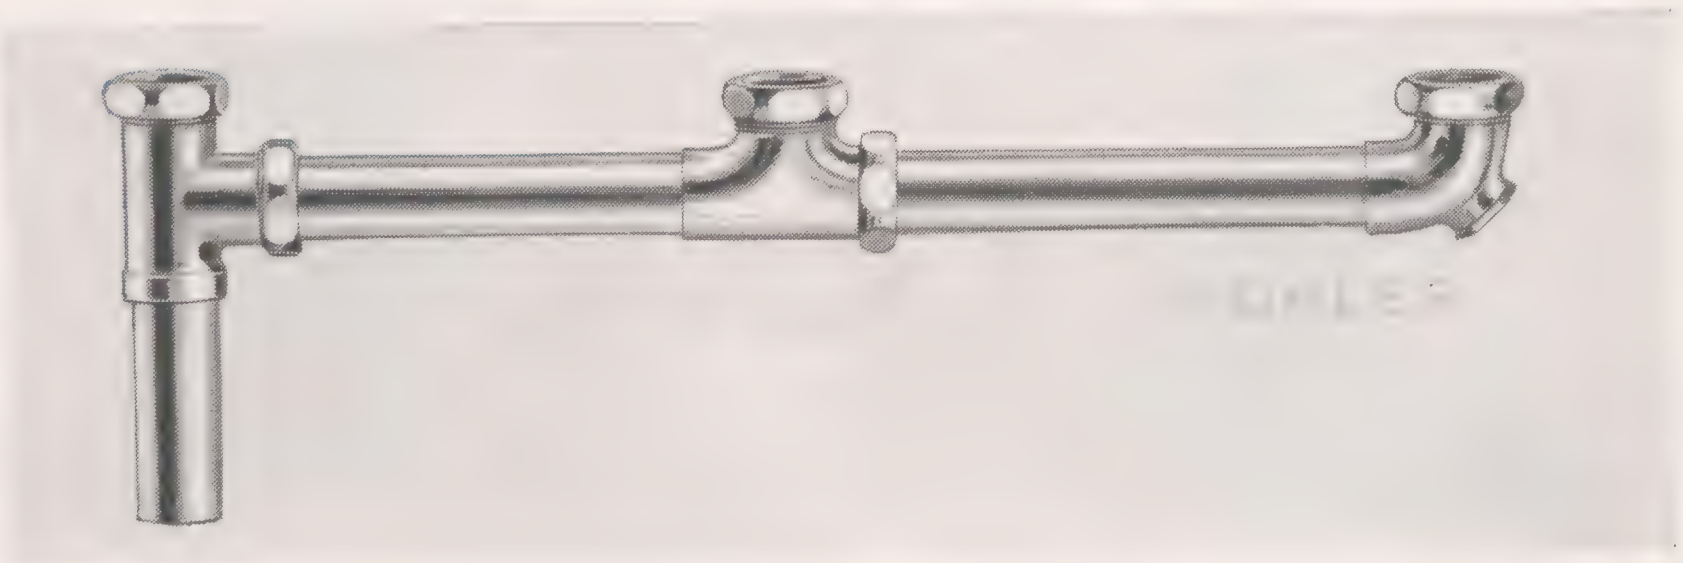
K-9062

K-9060	Continuous drain, 1½″ slip joint inlets and tailpiece. Available with centers of inlets 16, 21 and 24″.
K-9062	Continuous drain with three 1½″ slip joint inlets and tailpiece. Inlets 28″ centers.

URINAL FLUSH PIPES

FOR BRANDON, BRANHAM, BARDON AND DARFIELD URINALS



K-9201



K-9202



K-9203

K-9201	¾" O.D. single exposed urinal flush pipe with 1" offset.
K-9202	¾" O.D. two-part exposed urinal flush pipe with 1" offset and ¾" O.D. connections to urinals.
K-9203	1" O.D. three-part exposed urinal flush pipe with 1" offset and ¾" connections to urinals.

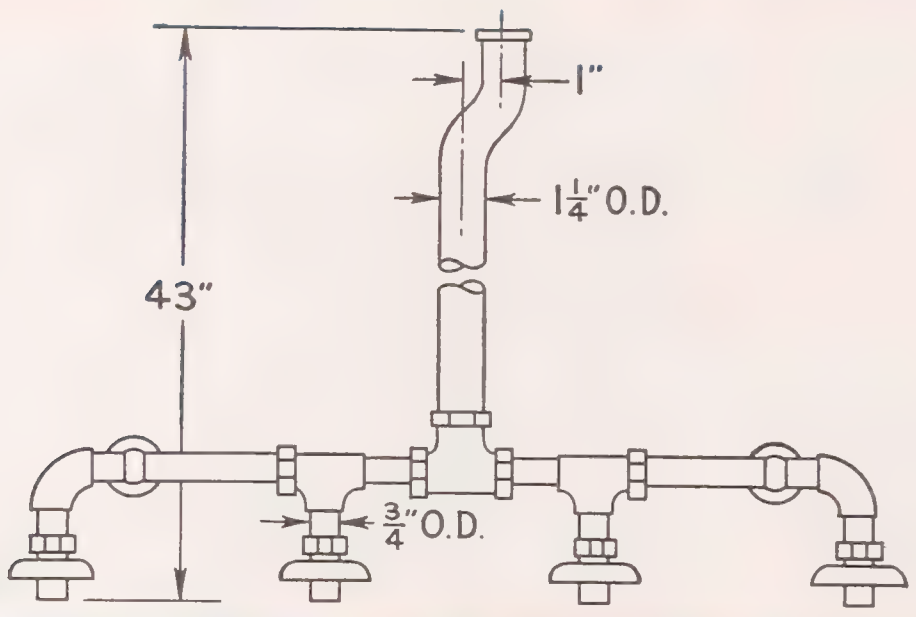

K-9204

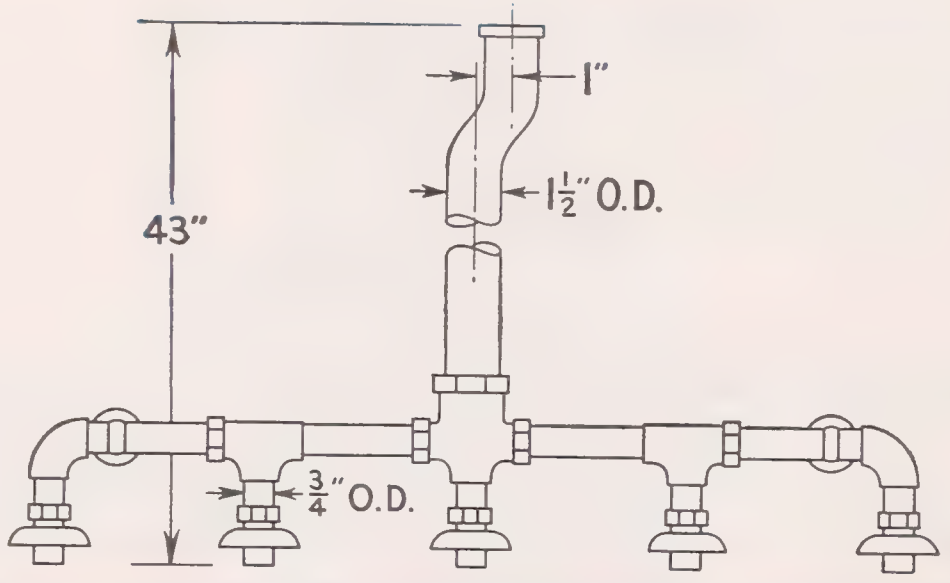

K-9205

K-9204	1¼" O.D. four-part exposed urinal flush pipe with 1" offset and ¾" O.D. connections to urinals.
K-9205	1½" O.D. five-part exposed urinal flush pipe with 1" offset and ¾" O.D. connections to urinals.

FOR DEXTER AND BRAMPFORD URINALS



K-9210



K-9211



K-9212

K-9210	1¼" O.D. single exposed urinal flush pipe with 1" offset for Dexter urinals.
K-9211	1½" O.D. two-part exposed urinal flush pipe with 1" offset and 1¼" connections to urinals. For Dexter urinals only.
K-9212	1¼" O.D. single exposed urinal flush pipe for Brampford urinals.

NOTE: Flush pipes for setting batteries on 24" centers.

CLOSET TANK FITTINGS

ANTI-SIPHONIC FLOAT VALVE

Fast Filling, Water Saving

The K of K float valve fills the closet tank quietly and quickly. Valve seat (A) of vitreous china resists the corrosive action of water. Hexagonal volume control screw (B) is easy to adjust for various water pressures.



Vacuum breaker (A)—a non-mechanical, atmospheric type—protects the water supply against back-siphonage from waste line. Hexagonal screw (B) controls volume under various water pressures. Adjusting screw (C) for setting float to control level of water is readily accessible.



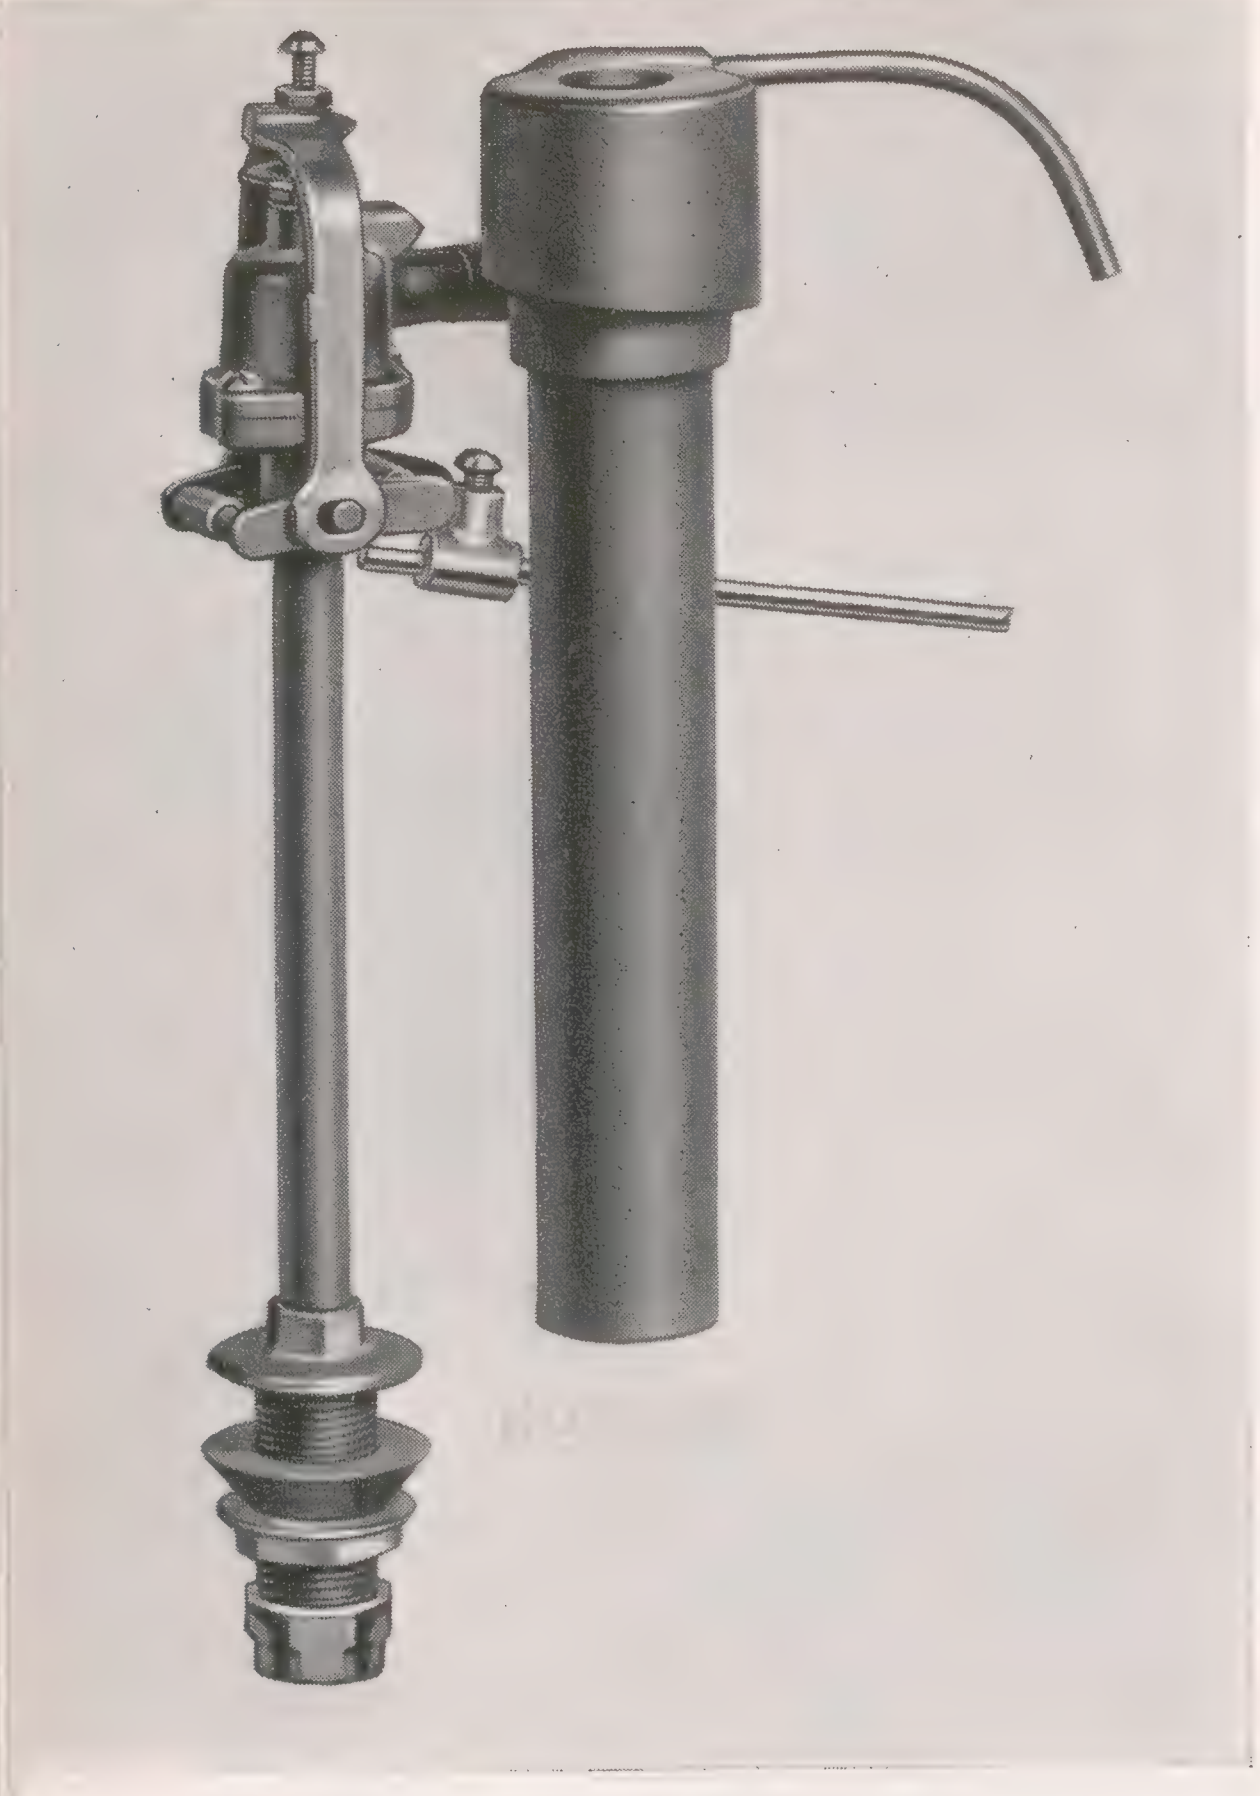

K-9252 FLOAT VALVE

K-9252	Float valve with china seat, vacuum breaker, float rod and refill tube, 2″ shank. For Channel, Bolton, Wellworth, Trylon, Brooklands and Trent closets; also **K-4508-A** tank.
K-9251	Same as above except for **K-4502-A** tank.
K-9248	Same as **K-9252** except for **K-3605-EB** Placid closet

K-9255	Float valve with china seat, float rod and refill tube, 2″ shank.
K-9256	Same as above except for **K-4502** tank.

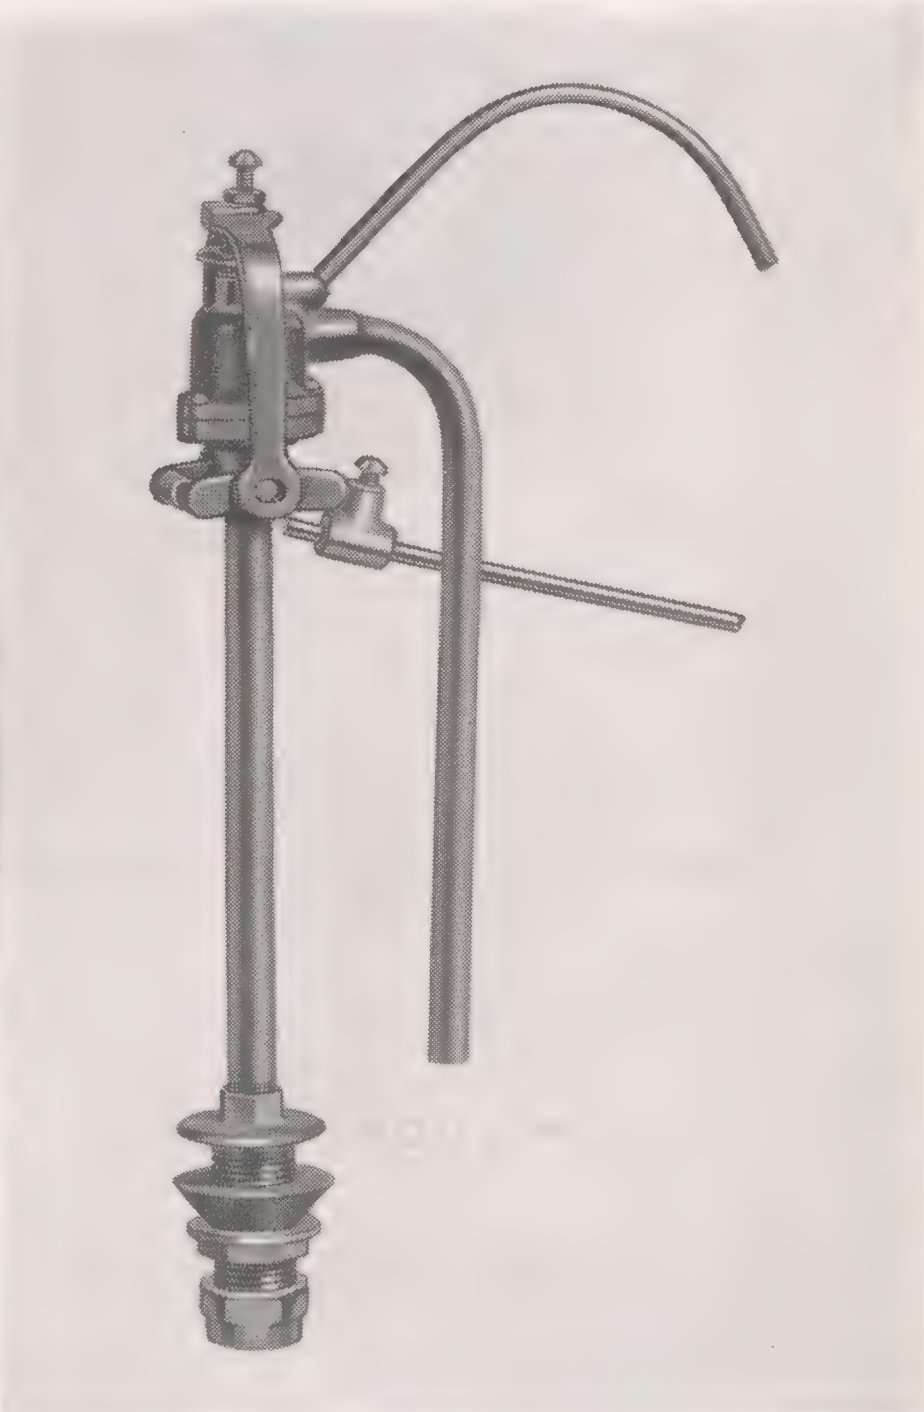

K-9255

TANK FLUSH VALVE

K-9355	Tank flush valve with rubber ball and lift wires.

When ordering, specify closet in which flush valve is to be used.

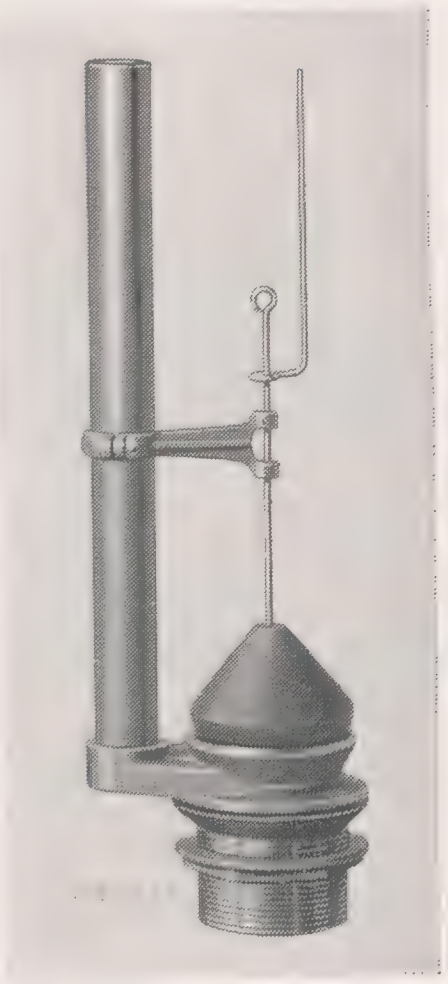

K-9355

TRIP LEVER

K-9400	Single acting trip lever with horizontal metal handle.



K-9400

METRO

PISTON-TYPE FLUSH VALVE

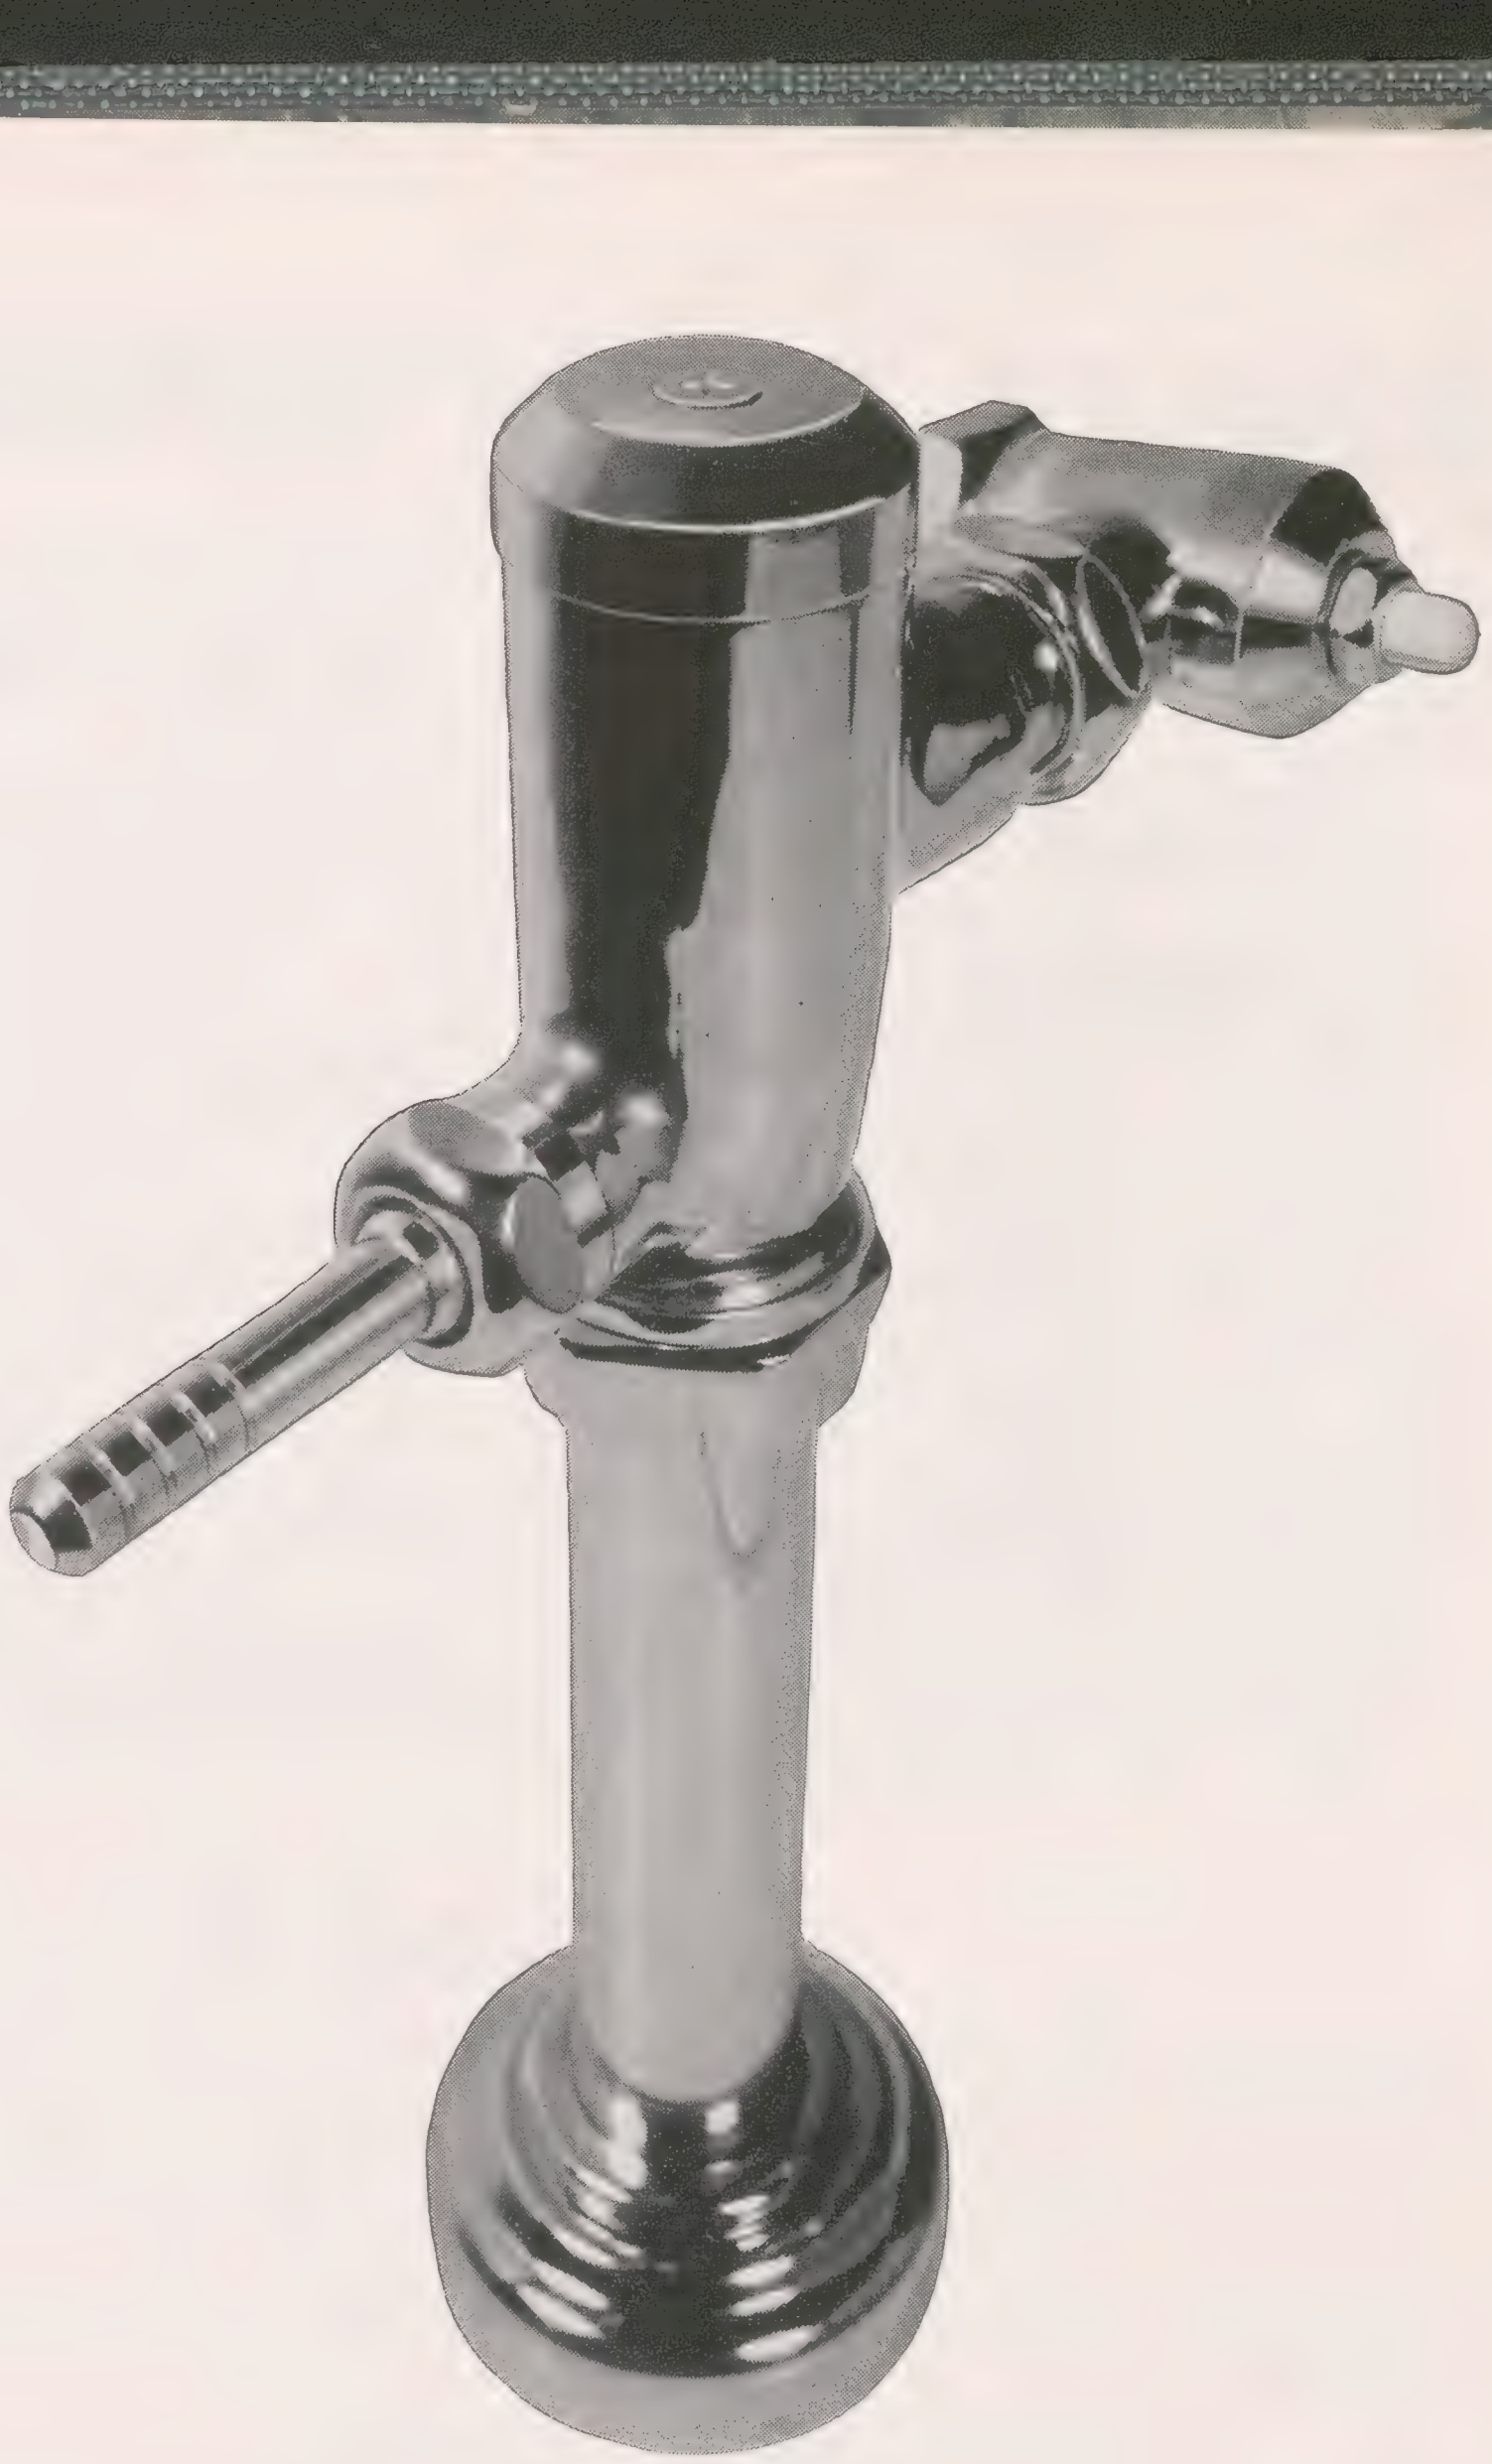

In the design and manufacture of Metro valves the company has drawn upon its experience in precision manufacture of highly specialized valves and controls.

A light pressure in any direction on the handle of the Metro will trip the valve for a normal, positive flush and refill. The valve is designed to work at pressures ranging from 6 to 120 pounds.

The length of each flushing action and the volume of water are regulated by easily accessible adjustment screws which may be permanently set with a screwdriver. They co-ordinate the pressure and volume necessary for efficient and economical operation.

The use of excessive water due to holding or wedging the handle in a tripped position is forestalled. No matter how long the handle is held down, only a normal flushing action results, making the Metro especially desirable for public washroom installations.

A cleansing surge of water through the valve passageways an instant before each flushing action takes place removes foreign particles and assures prompt, thorough operation. Cap and flush handle are sealed with O-rings. Sturdily constructed, the Kohler Metro Piston-type Flush Valve will give years of satisfactory service.

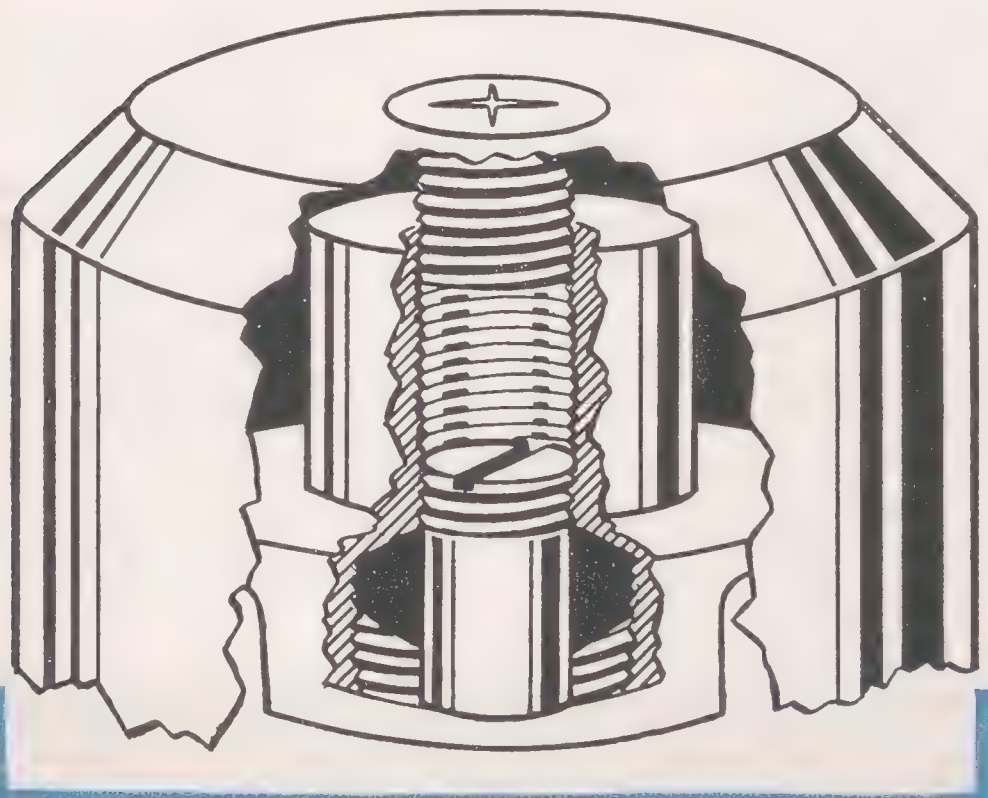

Left: Flow adjustment screw limits time of flushing action—saves water.

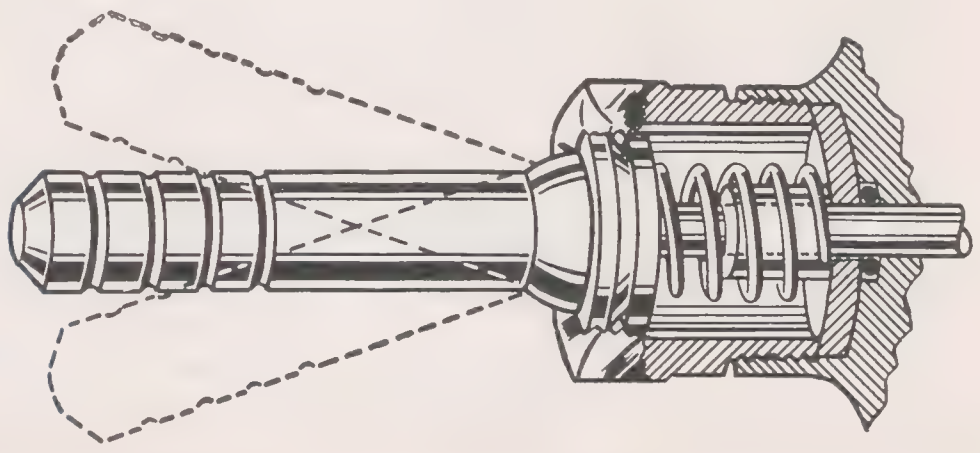

Right: Handle trips valve from any angle.

KOHLER METRO EXPOSED FLUSH VALVES

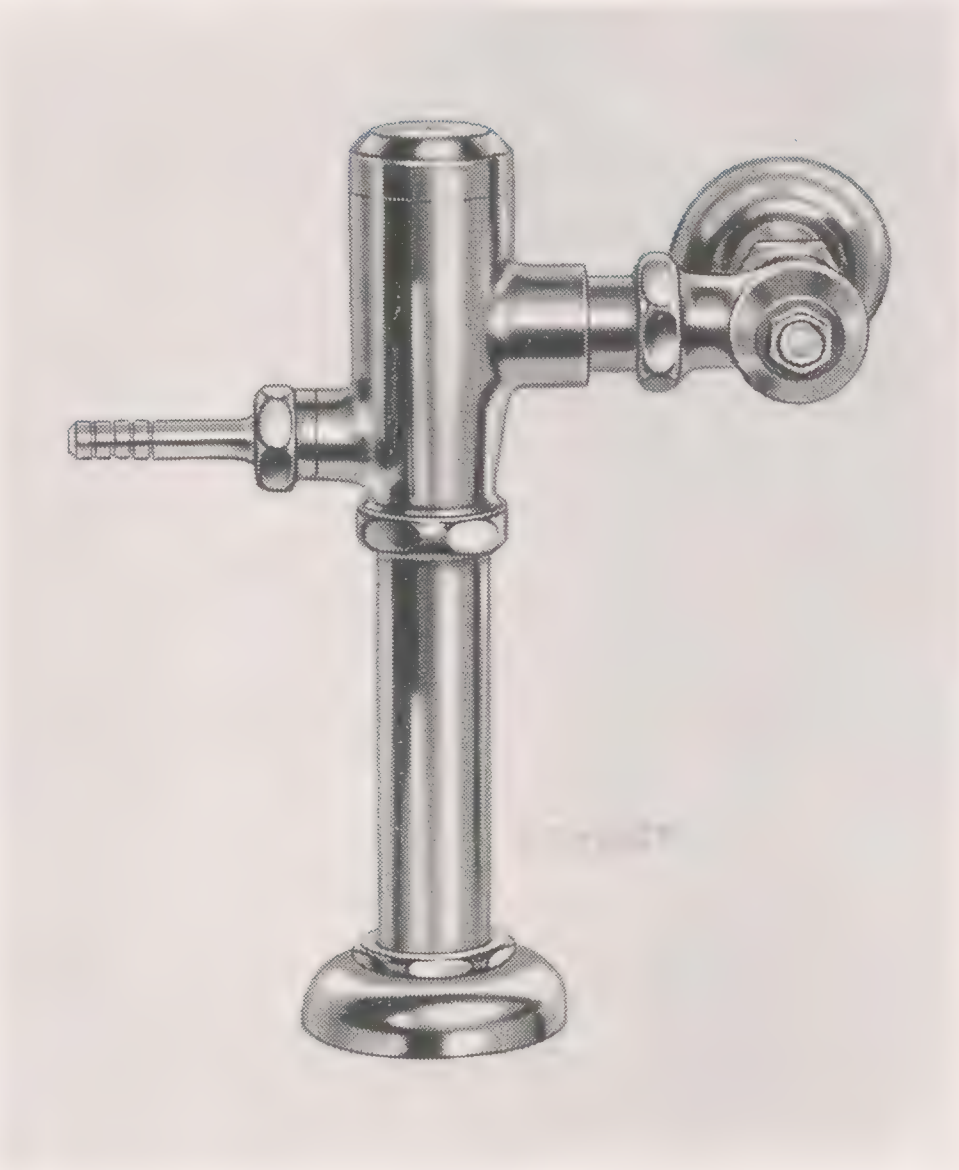

K-9420-S

FOR TOP INLET BOWLS, SERVICE SINKS AND URINALS

K-9420	C.P. exposed flush valve with metal oscillating handle, 1" screw driver angle stop, 1½" O.D. straight flush connection and coupling for 1½" top spud, wall and spud flanges.
K-9420-S	Same as **K-9420** except with bumper on stop for seat less cover (Illustrated).
K-9420-T	Same as **K-9420** except with bumper on valve body for seat with cover.
K-9421	Same as **K-9420** except with long flush connection. (For 24" roughing-in).
K-9424	Same as **K-9420** except with 1¼" O.D. flush connection (for Stanwell urinal).
K-9425	Same as **K-9421** except with 1¼" O.D. long flush connection (for Brampford urinal). (For 15" roughing-in).

FOR REAR INLET BOWLS

K-9428	C.P. exposed flush valve with metal oscillating handle, 1" screw driver angle stop, 1½" O.D. elbow flush connection and coupling for 1½" rear spud, wall and spud flanges.
K-9428-S	Same as **K-9428** except with bumper on stop for seat less cover.
K-9428-T	Same as **K-9428** except with bumper on valve body for seat with cover (Illustrated).

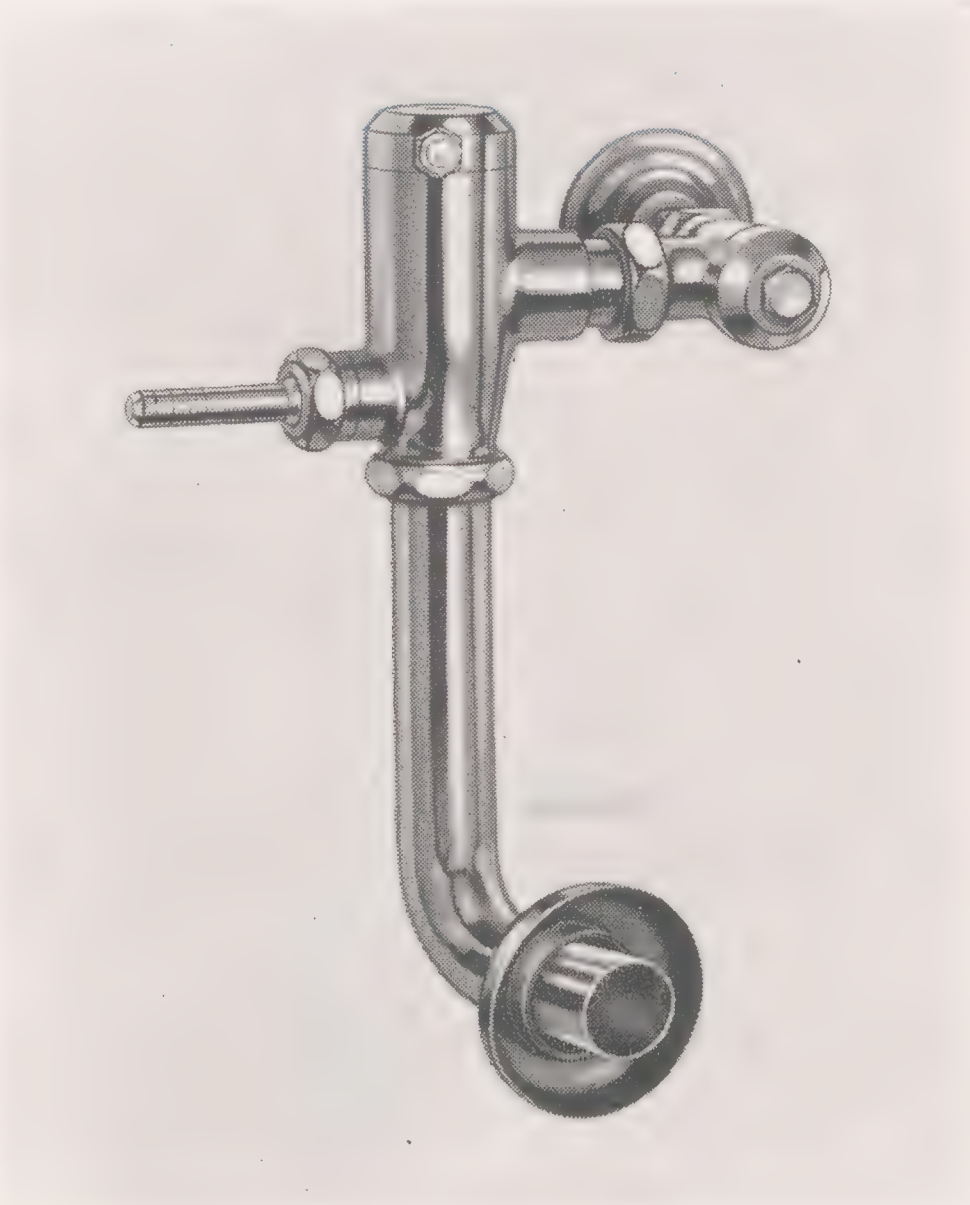

K-9428-T

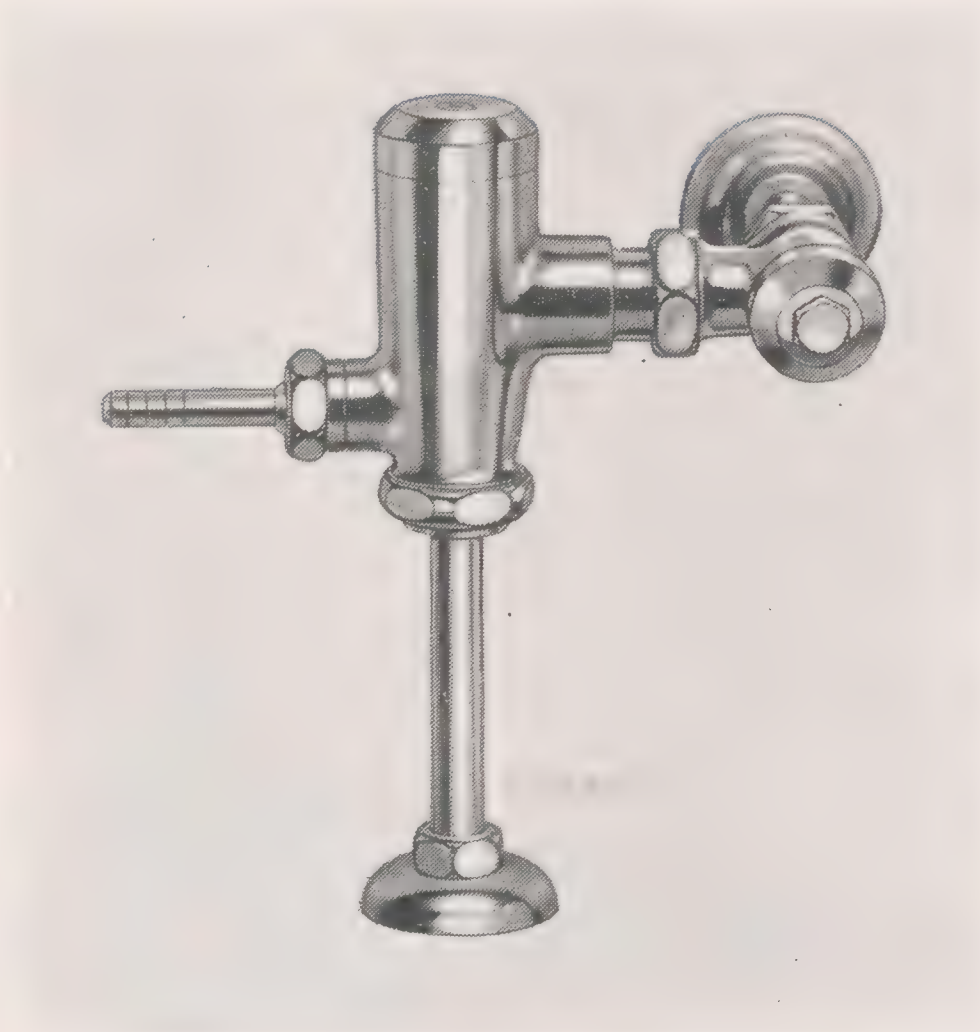

K-9435

FOR URINAL STALLS, DEXTER, BARDON AND DARFIELD WALL URINALS

K-9435	Flush valve with ¾" screw driver angle stop, ¾" O.D. straight flush connection.

NOTE: For flush valve with vacuum breaker, add suffix "V" to any of the above plate numbers.



Vacuum Breaker

BATHROOM ACCESSORIES

TOWEL BAR or WALL GRIP RAIL

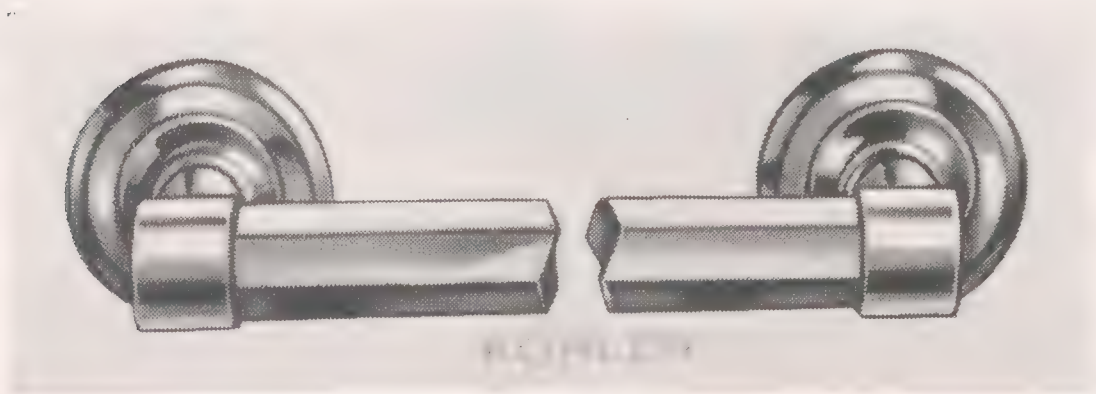

K-9612

K-9612	Towel bar or wall grip rail. Center to center of brackets, 9", 18", 24", and 30".

CURTAIN HOOK AND CHAIN

K-9720

K-9720	Curtain hook and chain

LAVATORY LEGS



K-9575



K-9580

K-9575	Hexagonal leg for vitreous china lavatories.
K-9580	Hexagonal leg for enameled iron lavatories.

CURTAIN RODS—Complete with Flanges

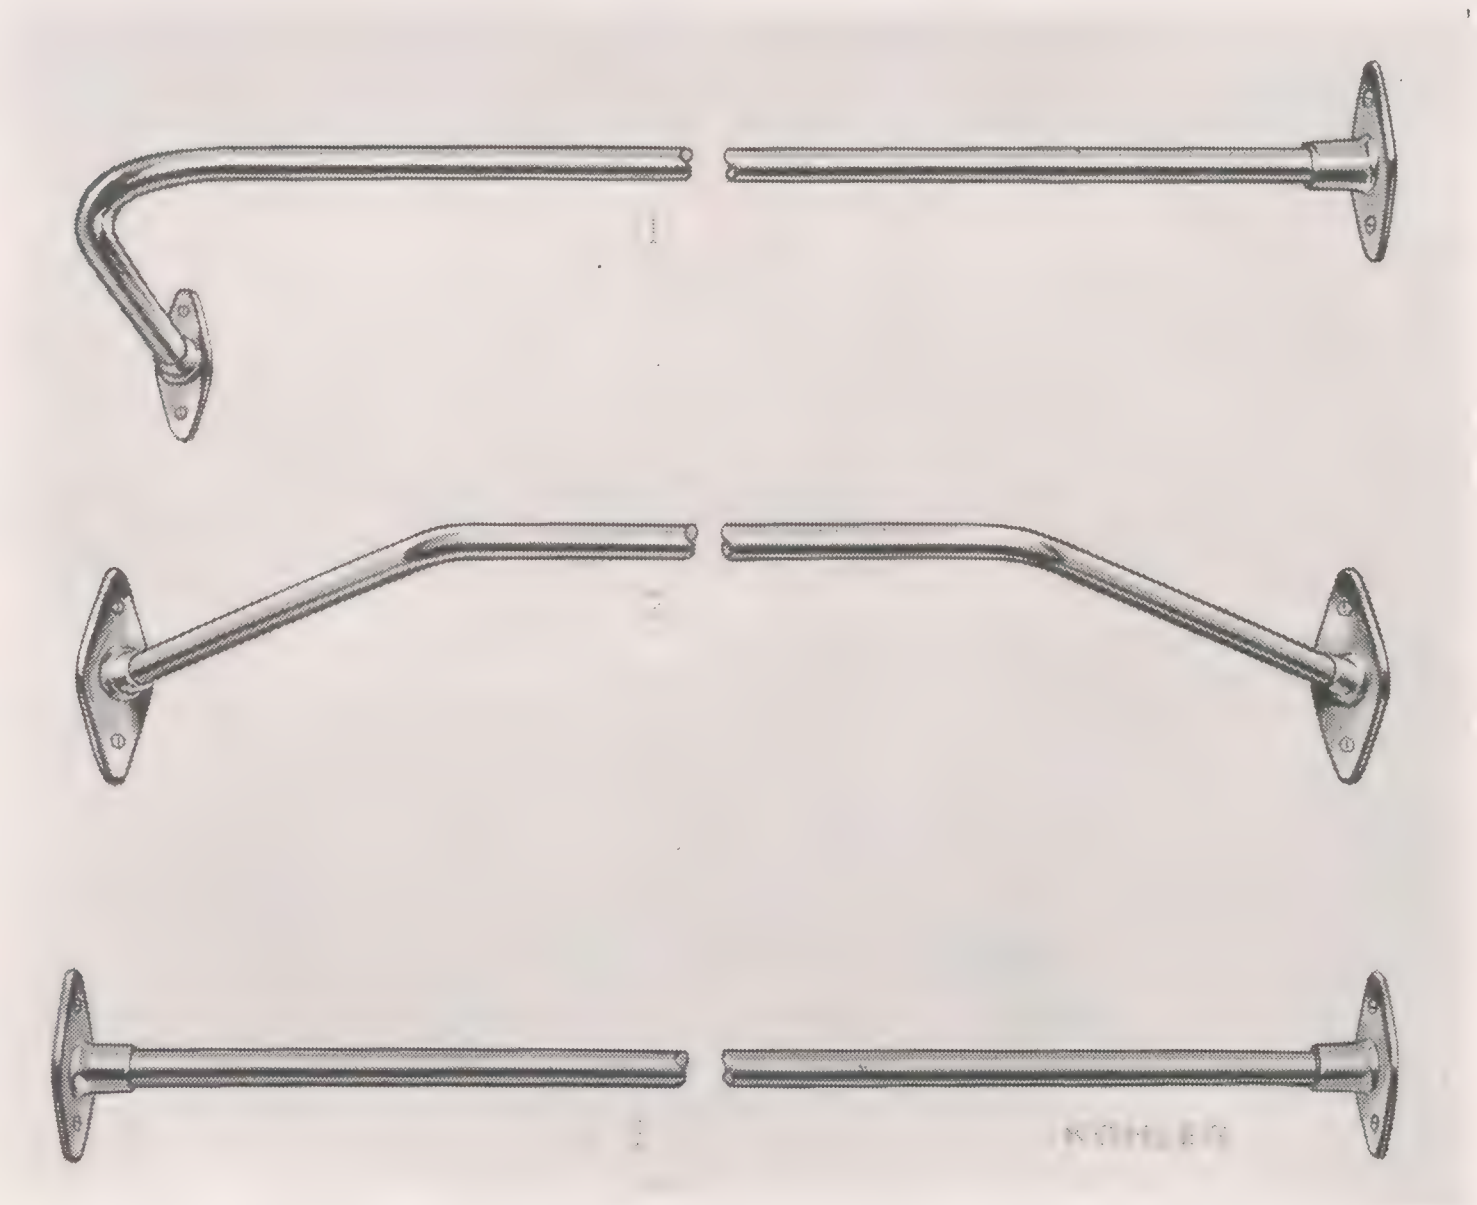

K-9700 (1) K-9702 (2) K-9710 (3)

K-9700	(1) For corner installation. Size 60x30".
K-9702	(2) For corner Mayflower bath.
K-9710	(3) For recess installation. Sizes 42", 48", 54", 60", 66".

LAVATORY TOWEL BARS

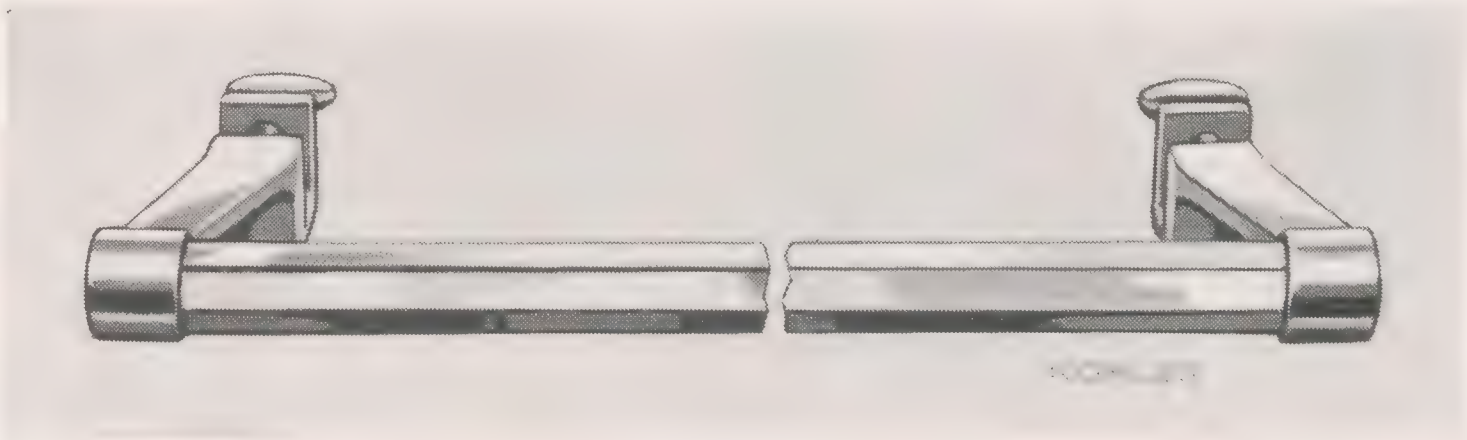

K-9565

K-9565	Towel bars for attaching to vitreous china or enameled iron lavatories.

NOTE: Specify proper number for various lavatories on which towel bars are to be used, as follows:

LAVATORY SIZE WALL TO FRONT	PLATE NUMBER
18" or less	K-9565-A
19" or 20"	K-9565-B
22"	K-9565-C

KOHLER BOILERS...

TYPE "22"

FOR ECONOMICAL OIL HEATING

"Wet base" construction of the popular Kohler "22" prevents loss of radiant heat through base sides and floor—because the combustion chamber is completely water-surrounded.

Fuel is further conserved by other features: multiple finned surfaces cast into the flues insure maximum heat absorption; large upper openings promote internal circulation between sections; the large fire box exposes abundant surfaces directly to the burner flame; aluminum foil insulation reflects 95% of the radiant heat back to the boiler.

All flues are accessible for cleaning through two doors at the front. Fire door has a shielded Pyrex peephole. Designed for use with any gun-type oil burner, provision has been made for a flange mounting of the burner on the back of the boiler.

Available are a built-in heater for low-cost domestic hot water, and a pre-cast refractory combustion chamber. The heavy-gauge jacket is in durable, green-blue baked finish.

Boiler shown has a jacket extension at the back which conceals the oil burner, instruments, controls and hot water heater. Door panels on both sides provide easy access for servicing the burner. Louvers provide ventilation. Boiler with a flush jacket is also available.

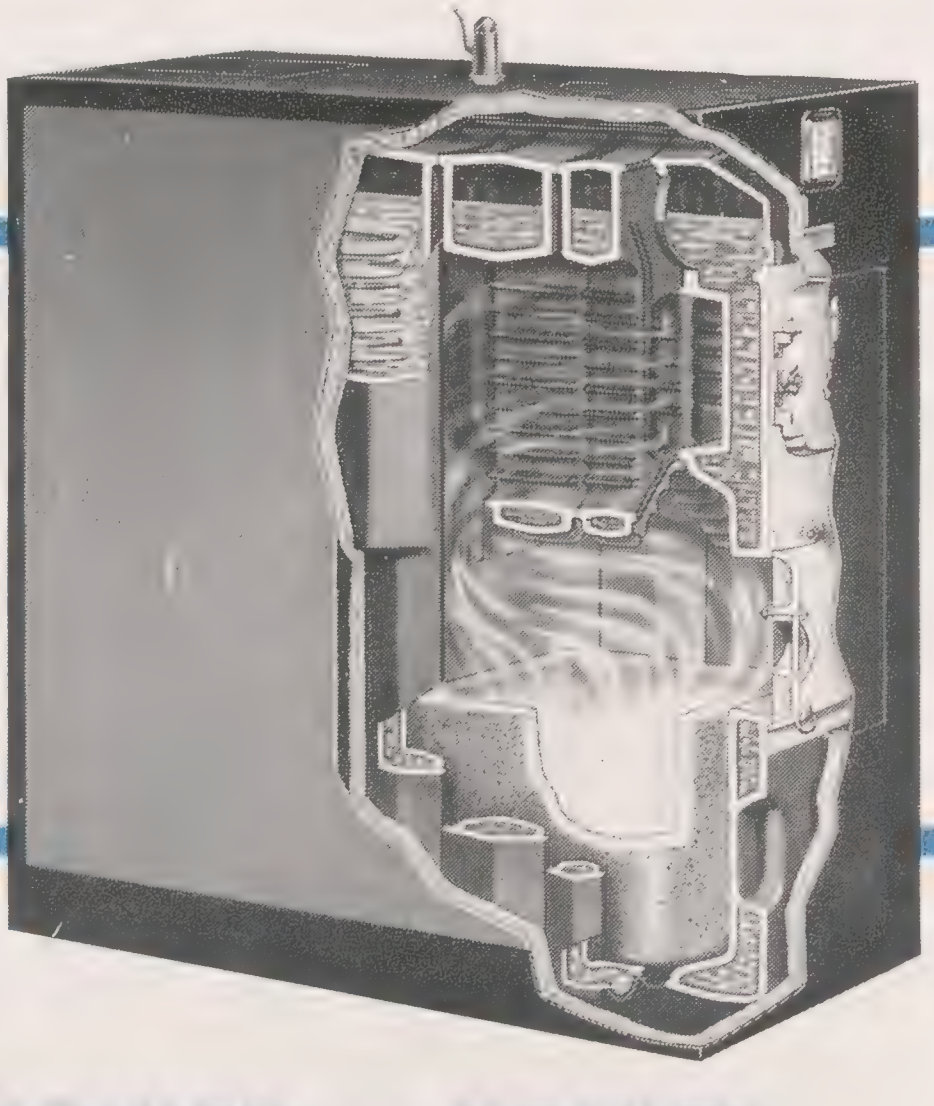

WET BASE CONSTRUCTION SAVES FUEL

• • •

NG

er "22"
es and
pletely

: mul-
maxi-
romote
ge fire
burner
of the

h two
Pyrex
ype oil
unting

mestic
cham-
en-blue

e back
ontrols
es pro-
ouvers
is also

. . . offer durability and fuel saving

TYPE "G"

FOR HAND OR AUTOMATIC FIRING

The type "C" Kohler boilers are designed for the efficient combustion of all fuels. The sections are made of rugged cast iron, time-tested for resistance to disintegrating rust and corrosion. Contacts between sections are gas and air tight.

Features that conserve fuel include a large fire box which permits long firing periods; large upper openings to promote internal circulation; heat-trapping flue design; high heat-retaining aluminum foil insulation which covers the boiler including the front. Built-in heater is available for low-cost domestic hot water. Damper control is concealed and is operated from the front. Gauges are flush to give boiler a sleek, modern appearance. The heavy-gauge jackets are handsome, easy to clean, with durable green-blue baked finish.

Like other Kohler products, Kohler Boilers are made in up-to-date factories at Kohler, where manufacturing experience of more than three quarters of a century is employed in their production.

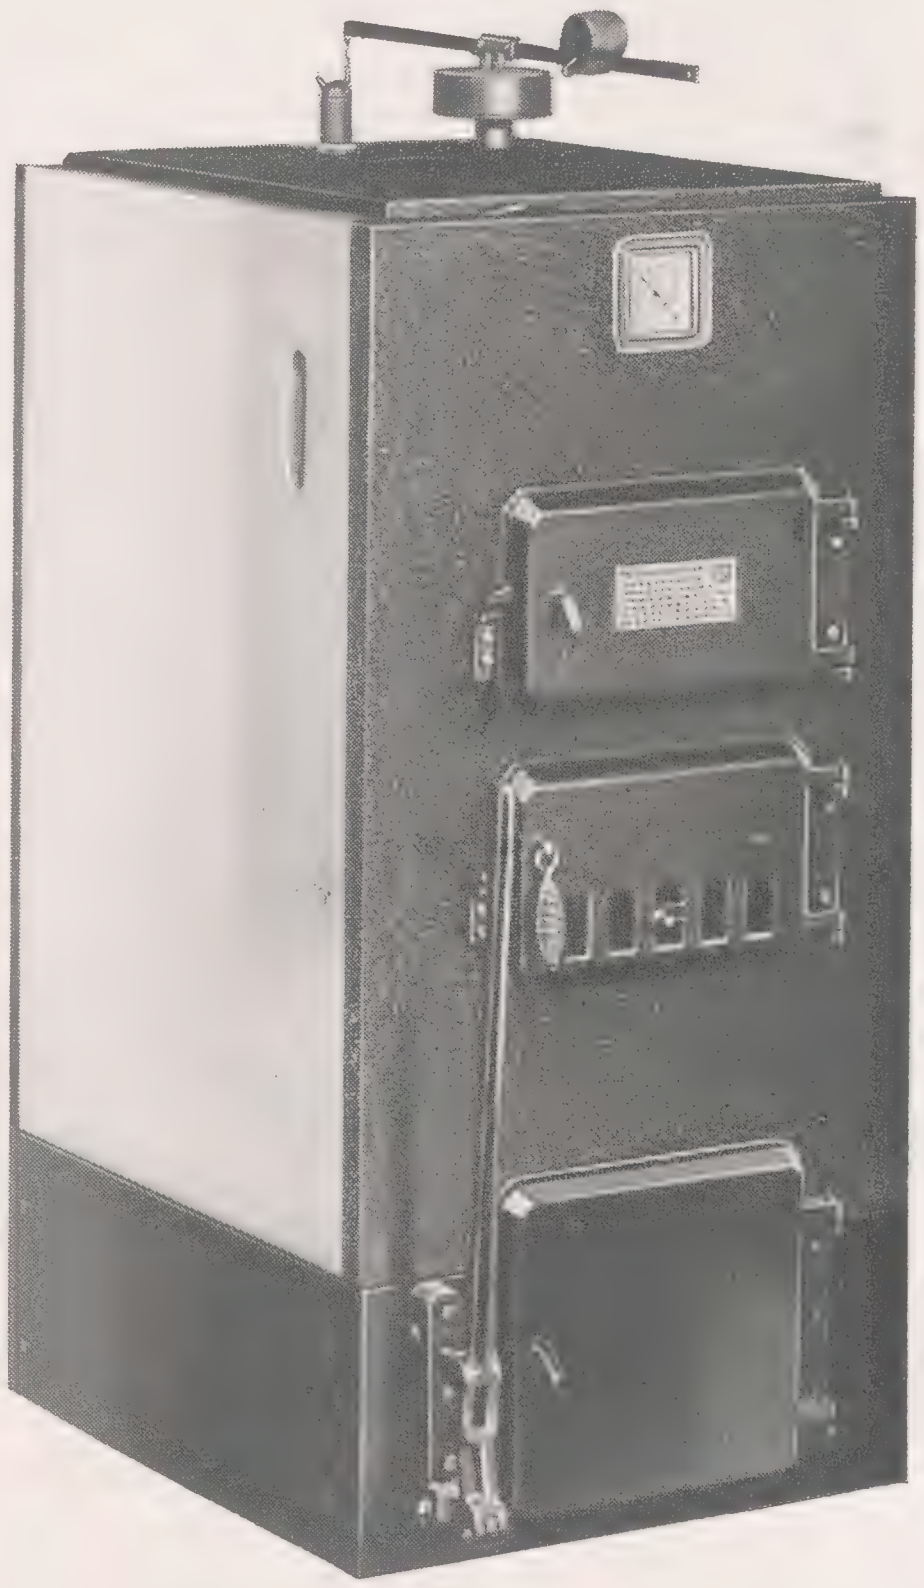

"GM" FOR STOKER FIRING

Available is the GM boiler for stoker firing. It is equipped with a high open-side base. Stoker can be placed at either side or in the front.

"GP" FOR OIL BURNING

The Kohler GP boiler for oil firing has large base door which allows ample space for all types of automatic combustion equipment.



DAMPER CONTROL. The damper is regulated from the front of the boiler with a rod which is concealed by the boiler jacket.



LARGE BASE DOOR. Unscrew the two bolts shown, and clinker opening and grates can be removed to accommodate front-fired oil burner or stoker.



4-WAY SMOKEHOOD. Smokehood can be adjusted to four positions—up, straight back, to the left and to the right.

TYPE "D"

FOR LARGER INSTALLATIONS

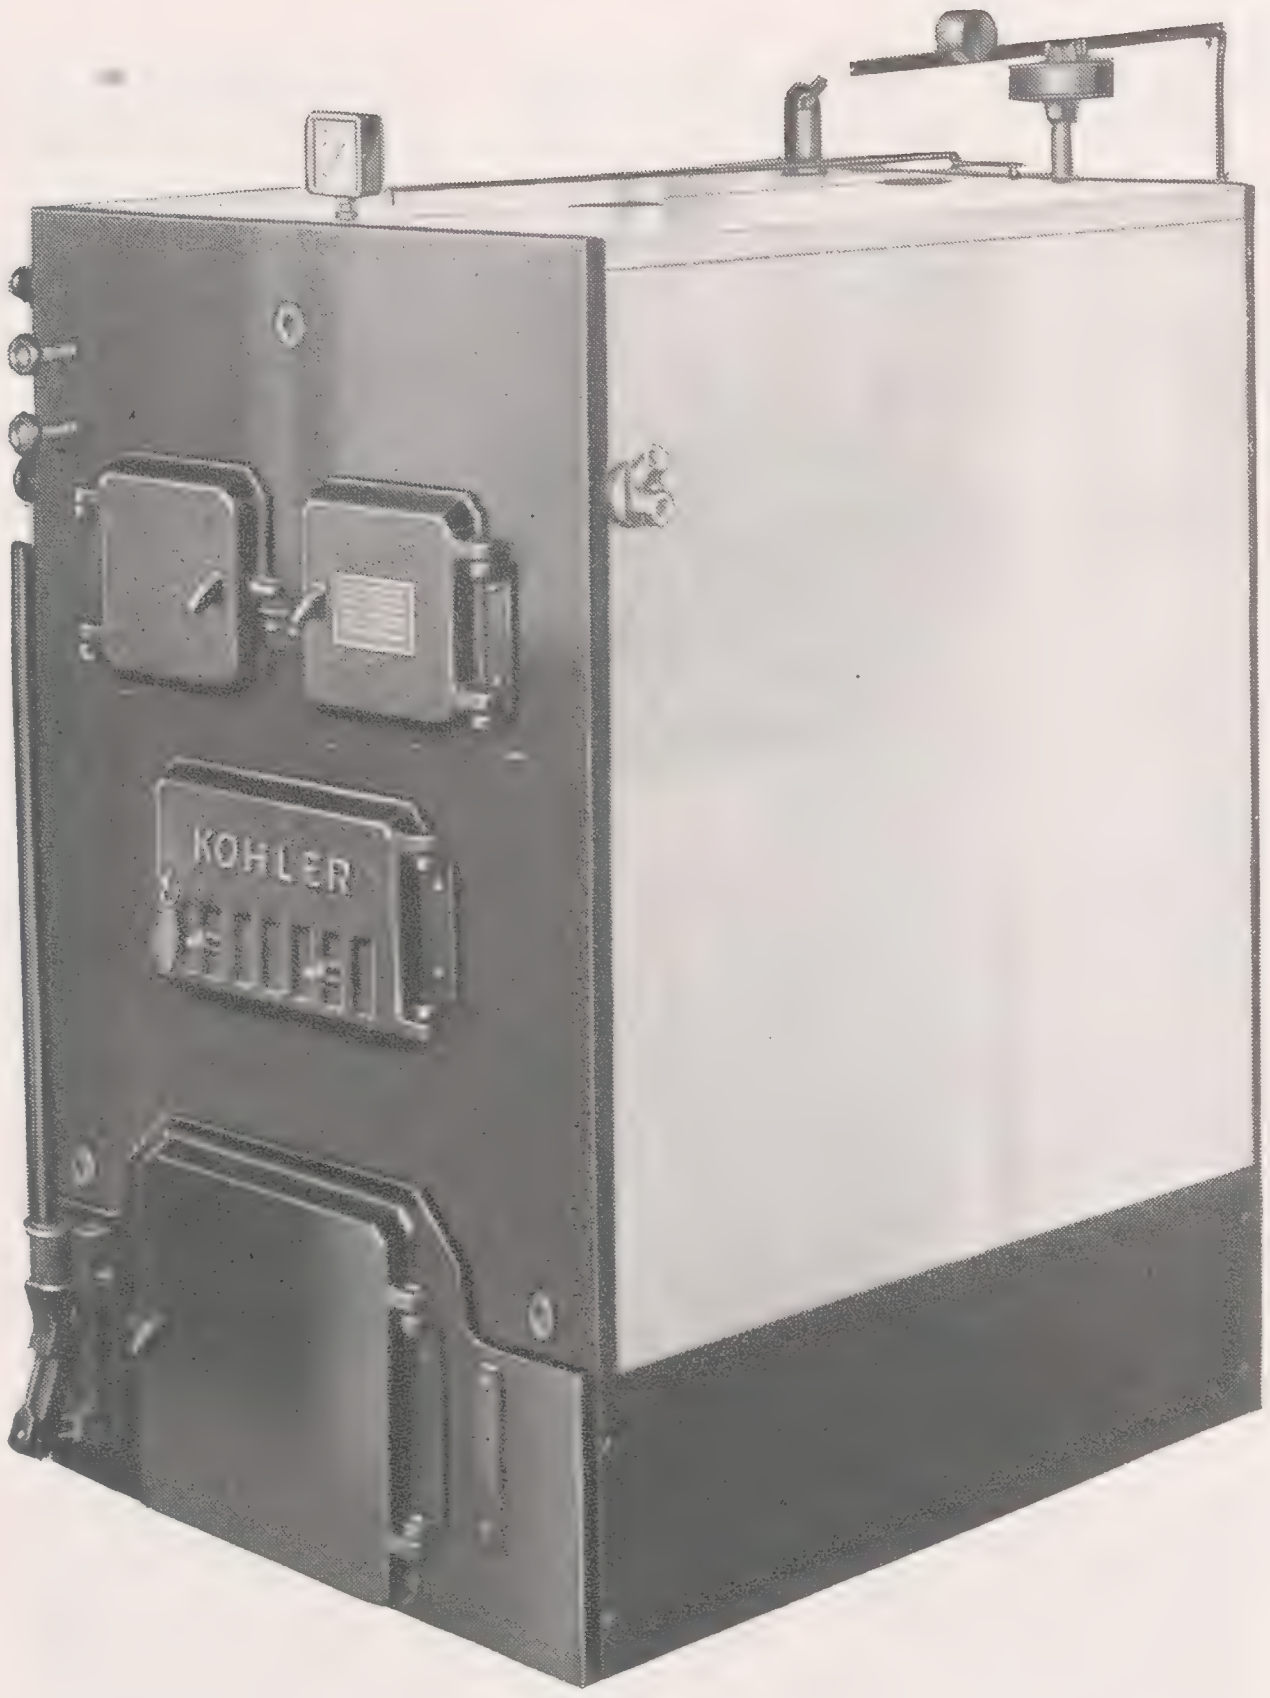

The type "D" Kohler boiler employs all the fuel saving features of the type "G" but is larger to accommodate greater heating loads required for more spacious residences, flats, stores or apartments.

Some of the outstanding features include large upper nipples to promote rapid internal circulation between the sections; large direct and indirect heat-absorbing surfaces; firebox with capacity to permit long firing periods; efficient heat-retaining insulation, and heavy gauge steel jacket finished in green-blue baked-on enamel. As on all Kohler hand-fired boilers, the choke damper is controlled from the front of the boiler. A built-in water heater to supply domestic hot water is available.

"DM" FOR STOKER FIRING

The "DM" boilers are equipped with high, open-side base for installation of a stoker at either side or in front.

"DP" FOR OIL BURNING

Kohler "DP" boilers for burning oil have a large base door for insertion of oil firing equipment.

I=B=R

I=B=R EMBLEM
Reg. U. S. Pat. Off.

The I-B-R emblem signifies that Kohler Boilers have been tested and rated according to the Testing and Rating Codes adopted by the Institute of Boiler and Radiator Manufacturers.

Use of the I-B-R emblem and I-B-R ratings is controlled by the Institute. Before a manufacturer may adopt and use the I-B-R emblem and I-B-R ratings for any series of boilers, test data must be submitted to the Technical Committee of the Institute for review and approval. This committee consists of a representative, impartial body of engineers. The purpose of this review is to determine that the tests have been accurately performed and that the ratings requested by the manufacturer conform to the limits of the I-B-R Codes.

Kohler Boilers also are designed and built to comply with the requirements of the ASME Code and we are authorized to apply the appropriate code symbols.

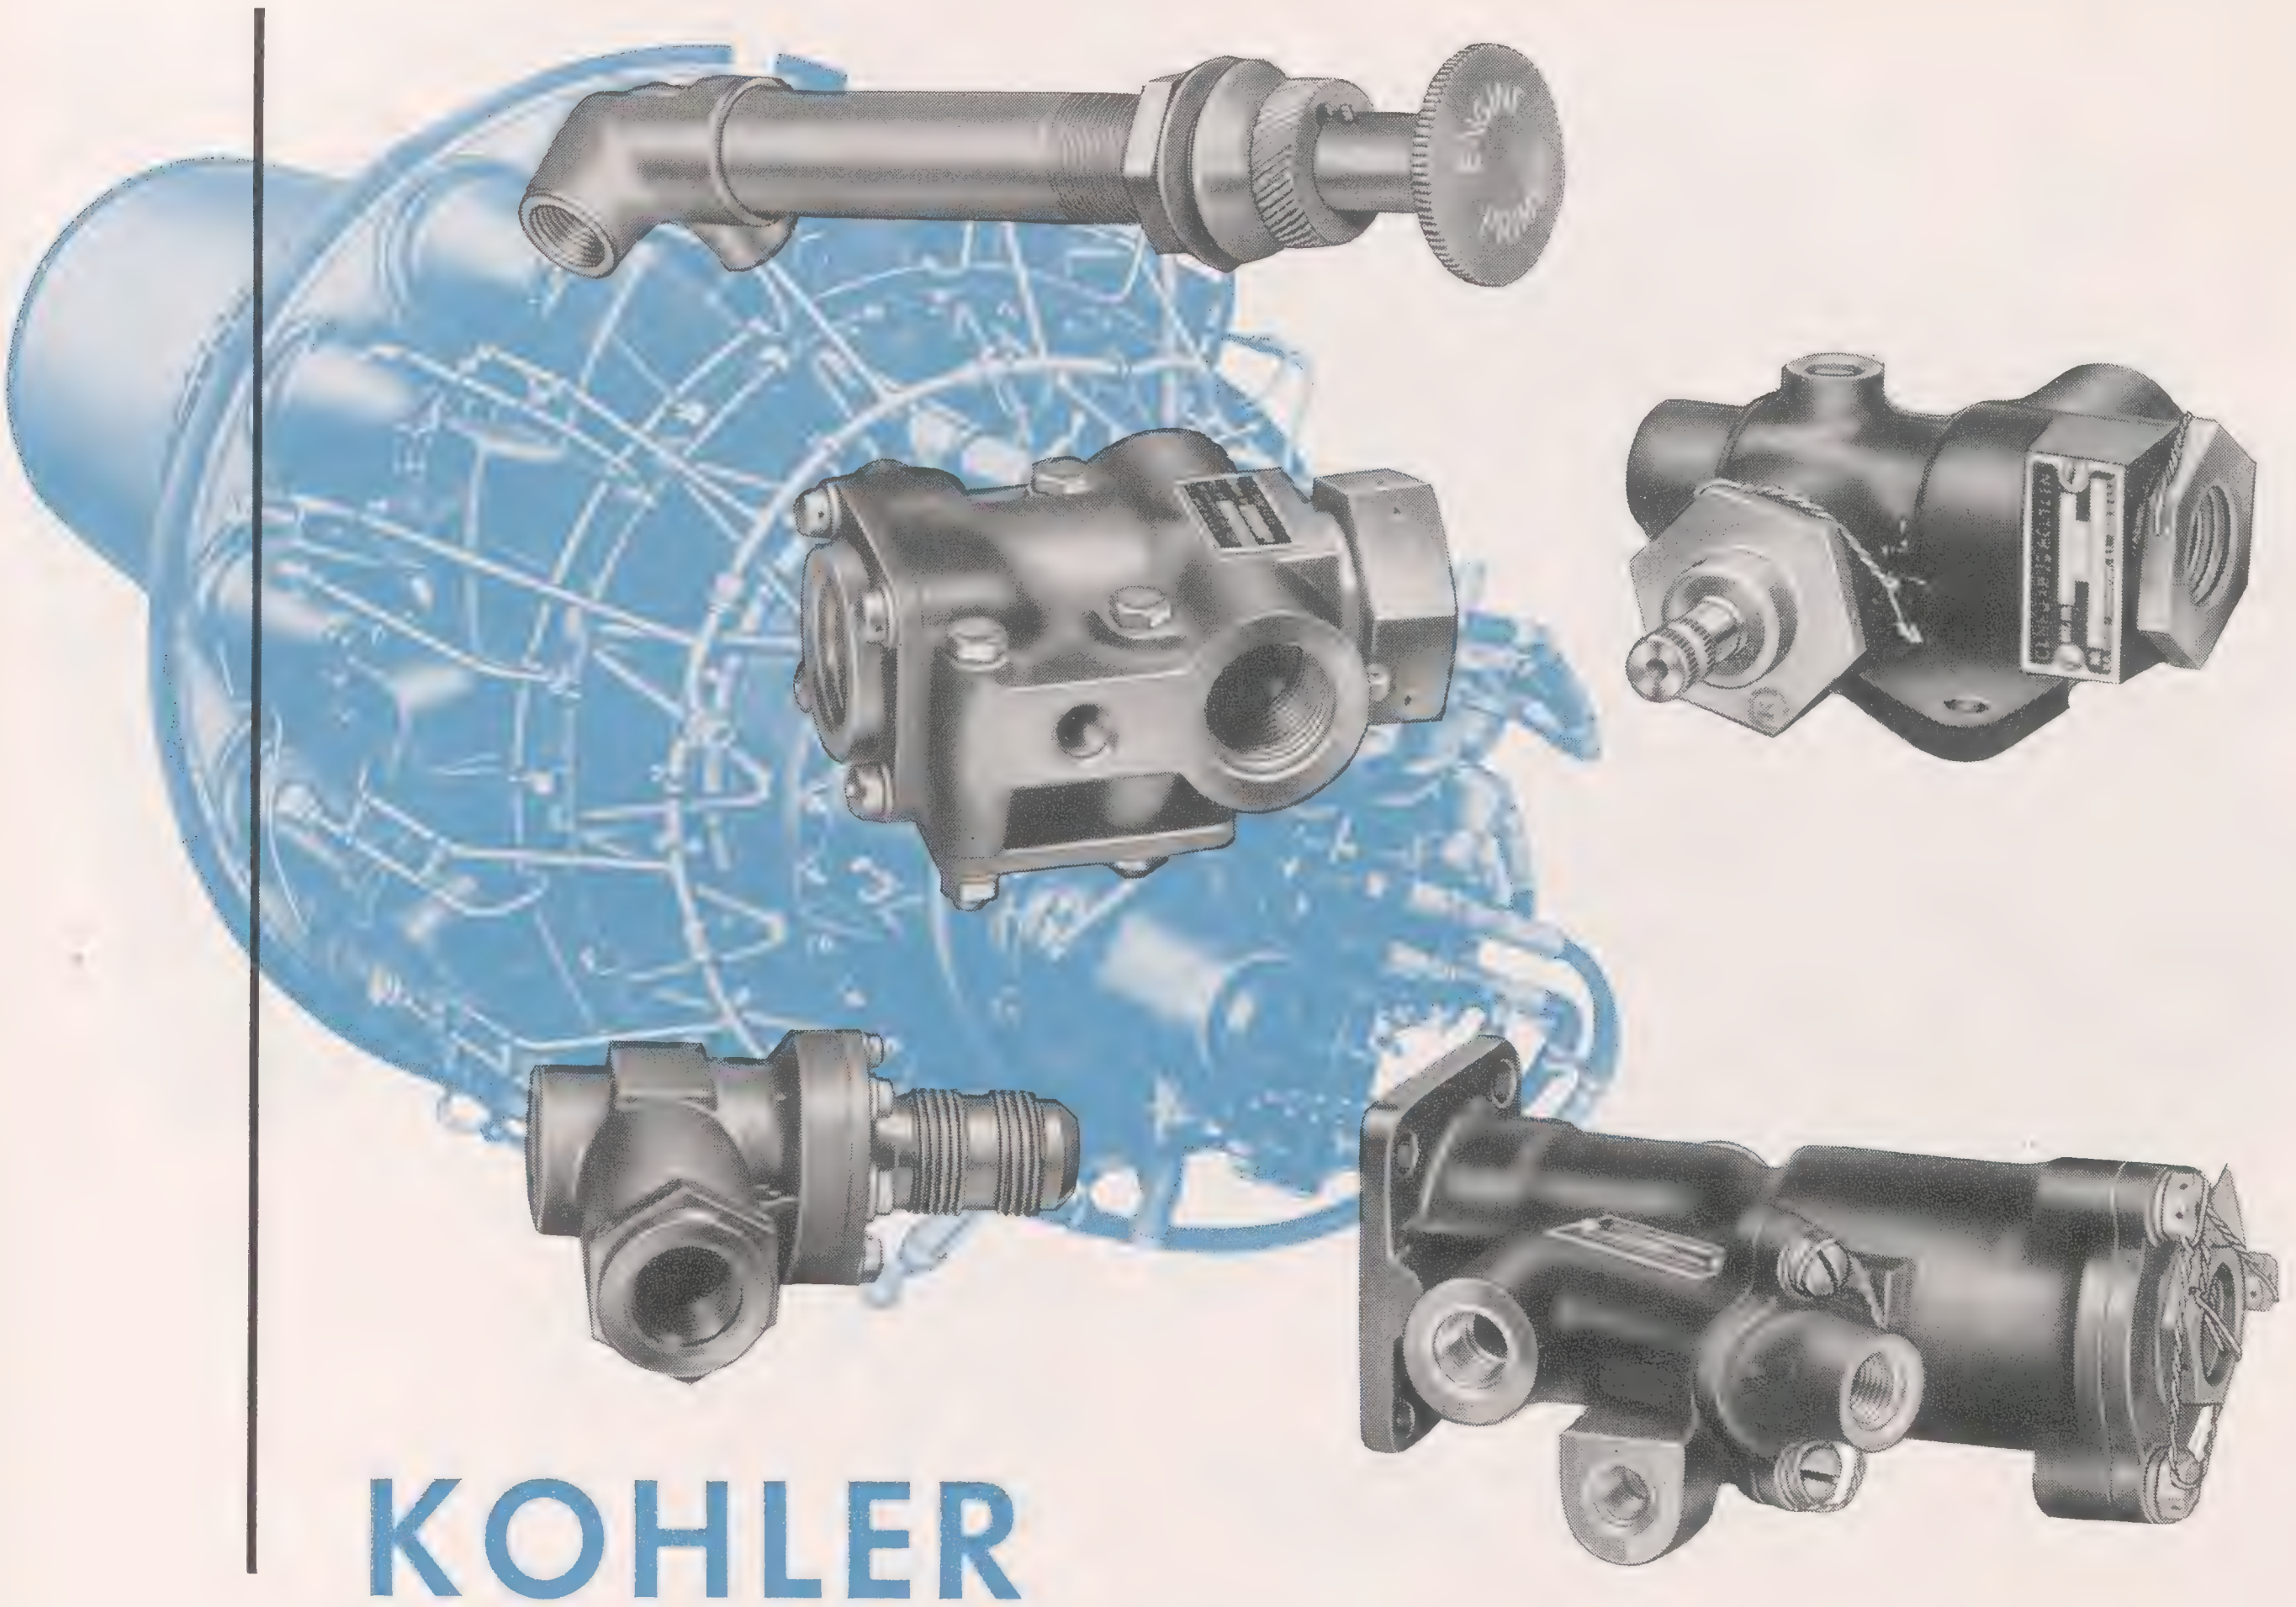

KOHLER PRECISION CONTROLS

Kohler Precision Controls have a multitude of uses for hydraulic, fuel, pneumatic, jet engine and airframe applications. The line includes valves that hold the fork of lift trucks, drain cocks for helicopter fuel systems, check valves for the hydraulic actuating lines for airplane landing gear, controls for machine tools, shut-offs for instrument air lines, and plug valves for industrial test stands.

Users of Kohler Precision Controls make up an impressive list of American manufacturers in aircraft, industrial and automotive fields.

Facilities for forging, die casting, machining, and anodizing are maintained in the Kohler plant, with an experienced organization skilled in precision workmanship. Kohler engineers develop controls to specification for volume production.

AIRCRAFT

DIESEL ENGINES

LIFT TRUCKS

AUTOMOTIVE

TRACTORS

KOHLER

WIDE RANGE OF SIZES

PORTABLE MOBILE

on the job power anywhere, anytime

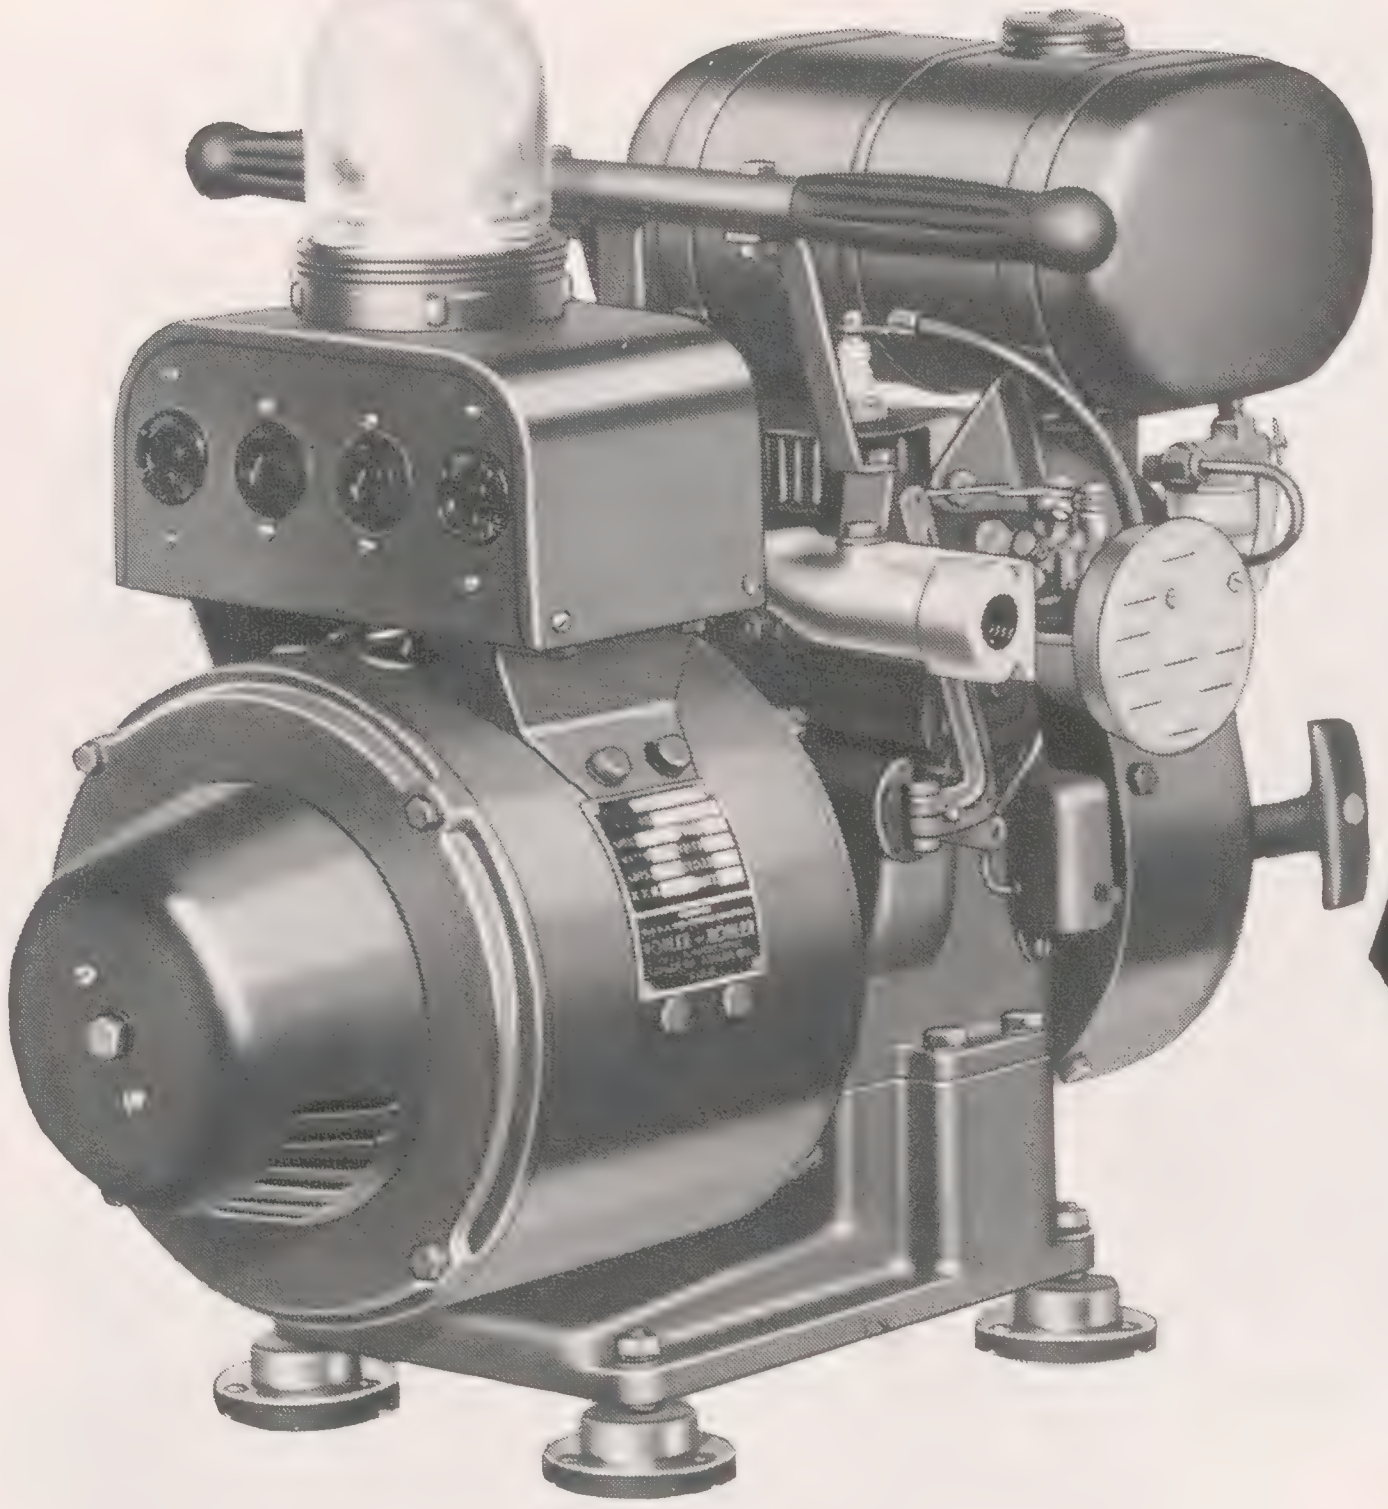

Model 1.5M25, 1500 watts, 115 volt AC. Manual start.

Kohler Portable Electric Plants save time and expense of arranging central station power hookups. This high-capacity, compact plant operates pipe cutters and threaders, drills, electric spades, chain saws, grass shears, hedge trimmers, floodlights.

The AC model shown weighs only 130 pounds. It has convenient carrying handles, pilot light, recoil starter, four receptacles for plugging in power tools or light cords. Suited also for cabins, hunting and fishing camps. A DC plant weighing 101 pounds is also available.

At right, Kohler plant installed on a two wheel cart for easy portability.

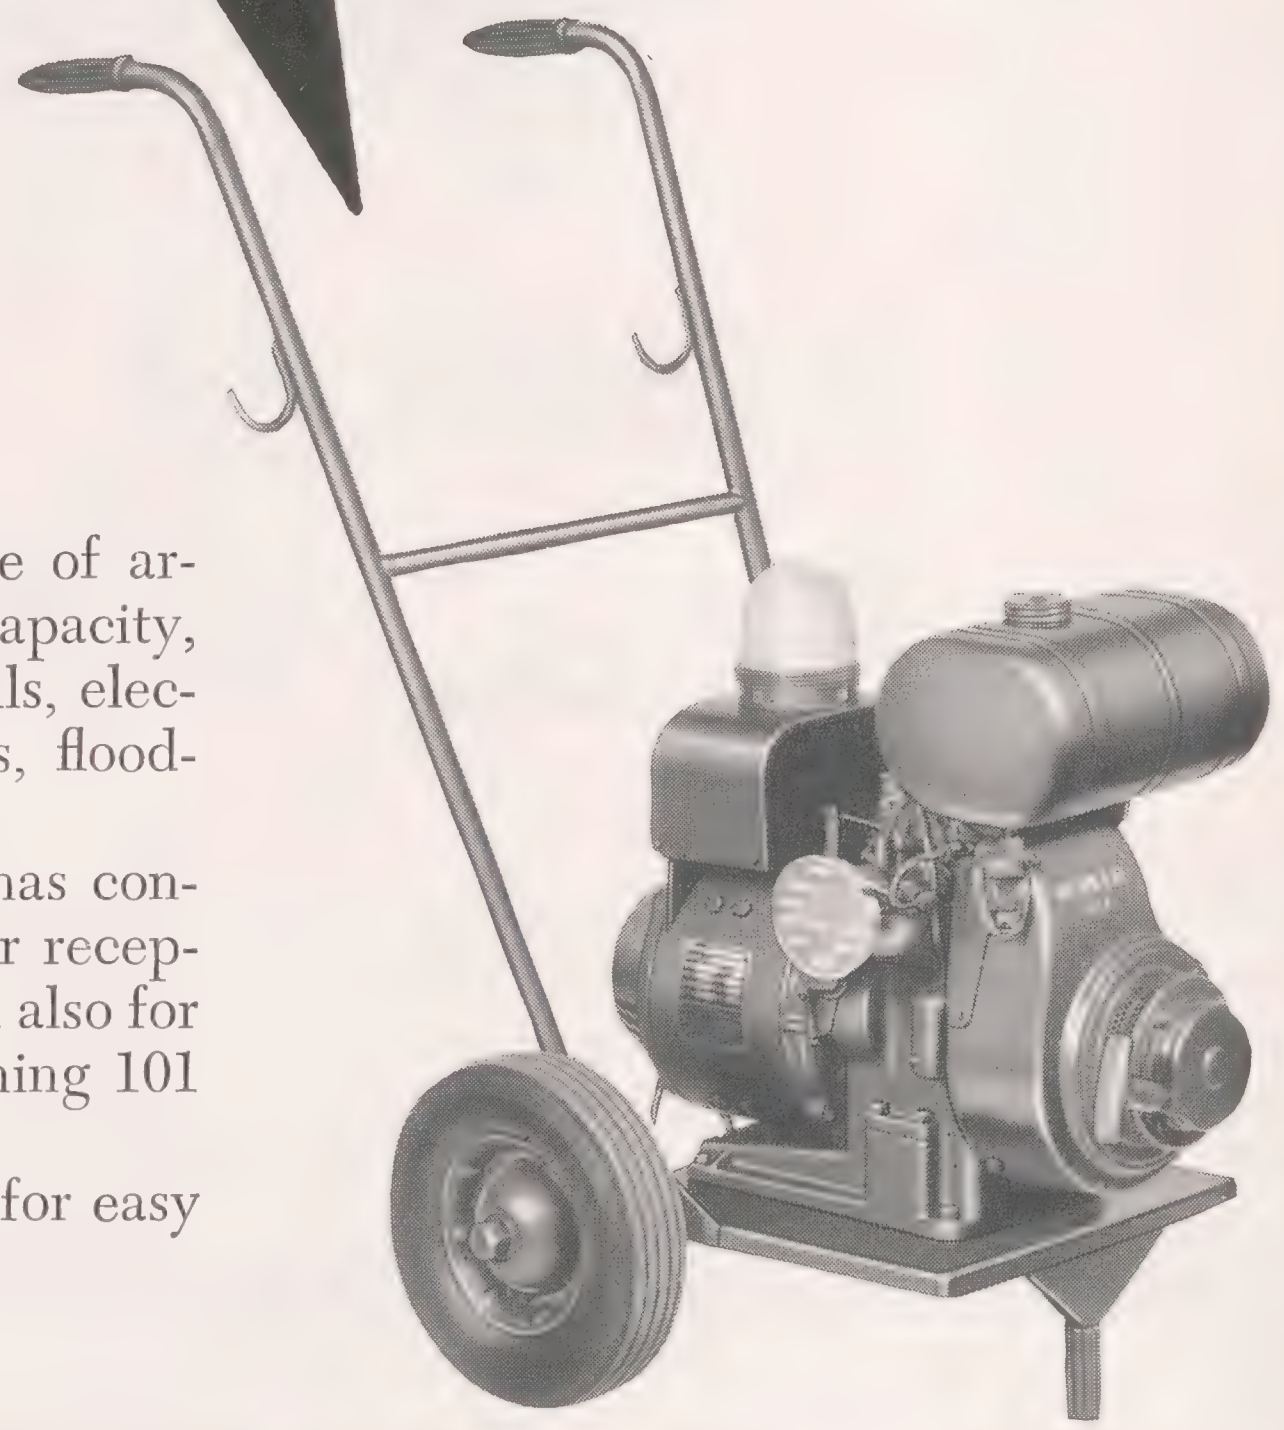

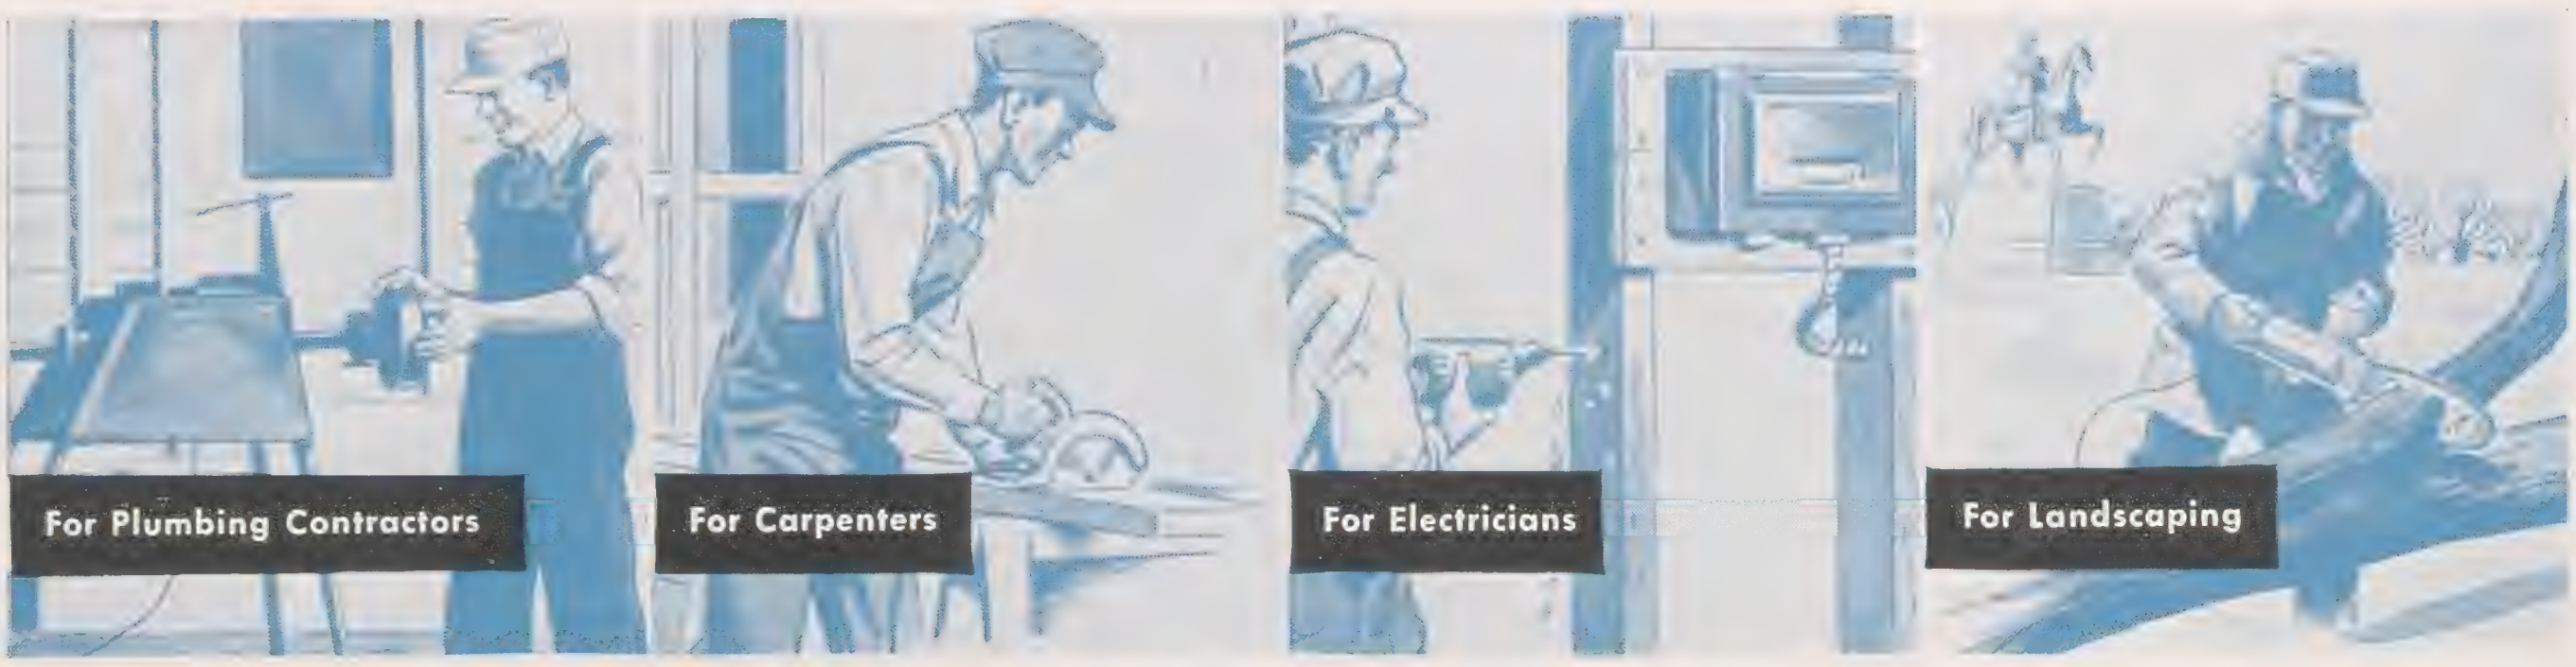

ELECTRIC PLANTS

500 WATTS TO 30 KW

AUTOMATIC STAND-BY

when central Station Current fails

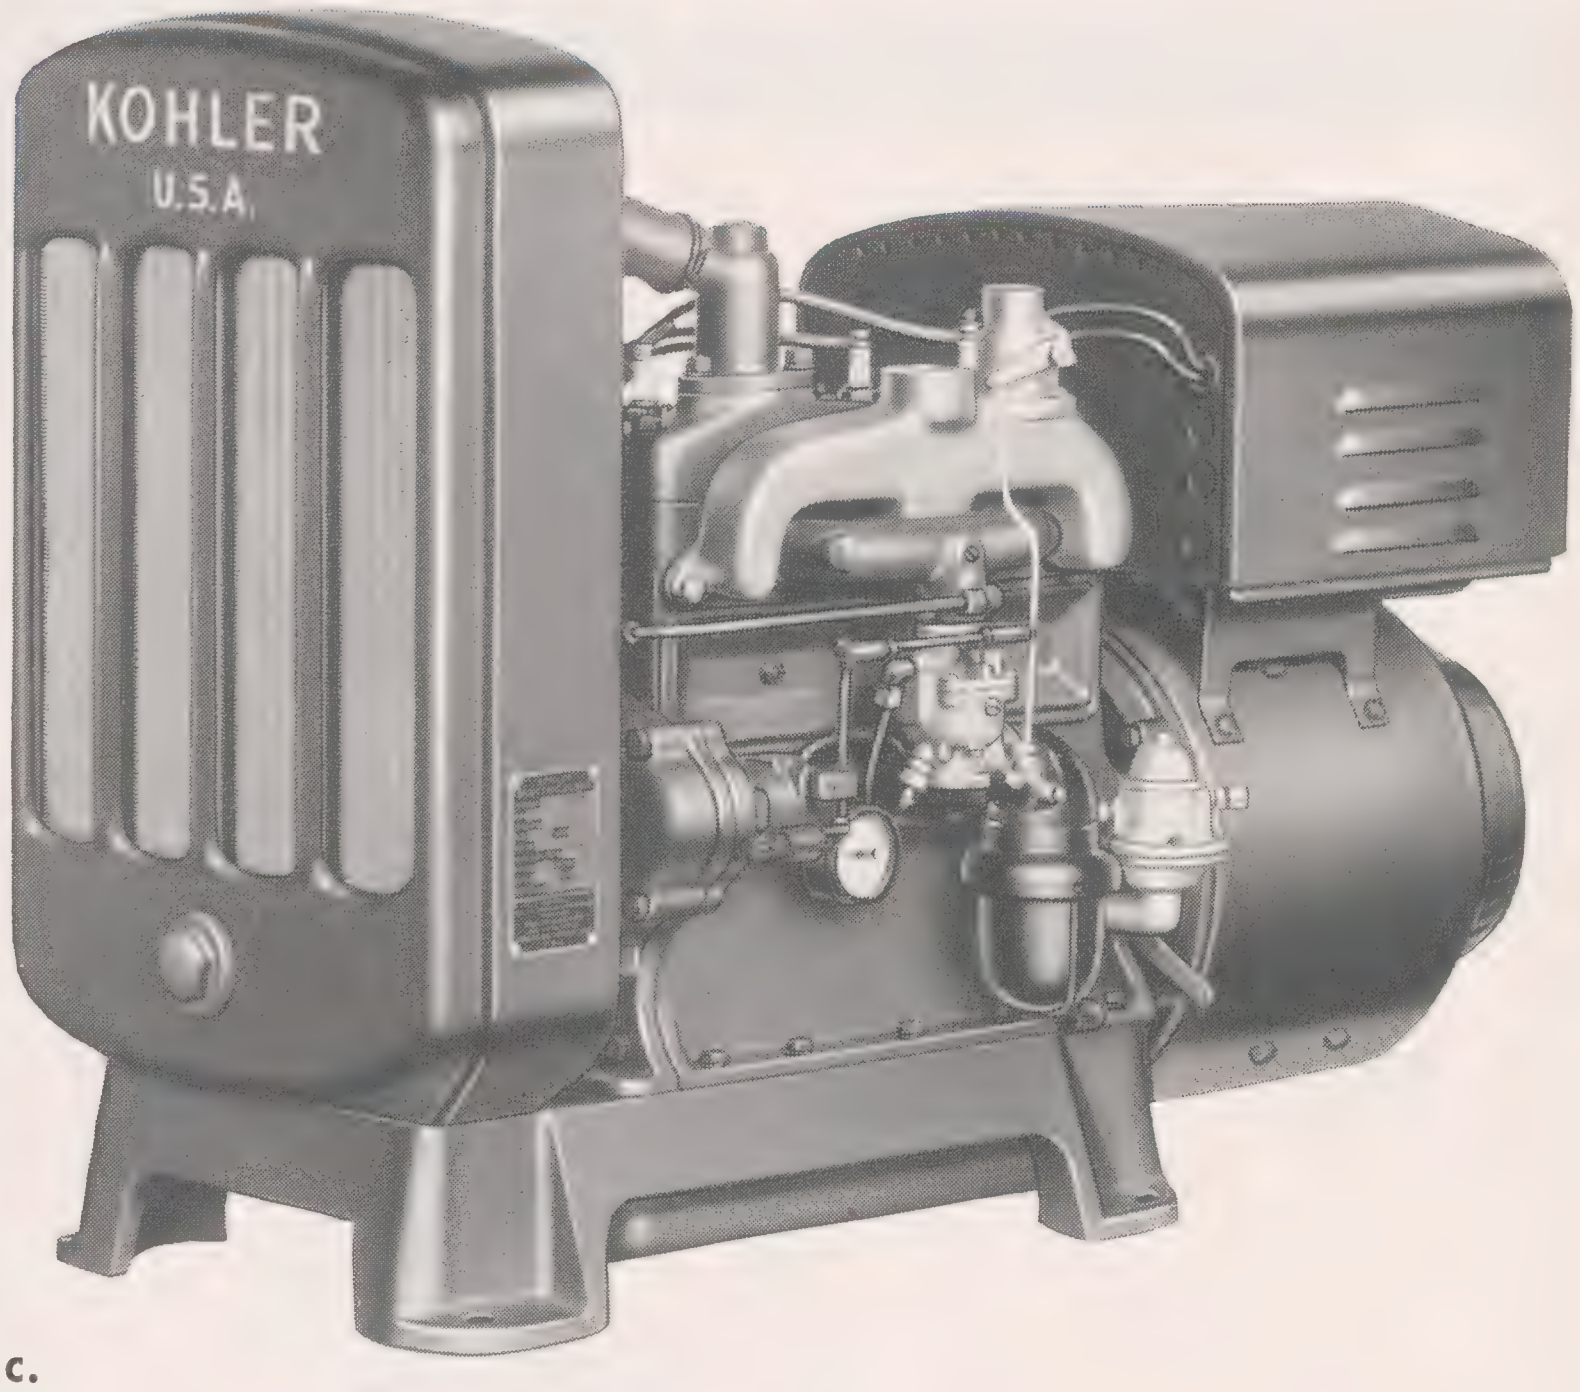

Model 5E61, 5 KW, 115/230 volt AC, Automatic.

More and more architects are specifying Kohler automatic stand-by plants to take over critical loads when storms, floods, fires or accidents cut off central station service.

When "blackouts" occur, hospitals with stand-by electricity have lights in operating rooms, and current for sterilizers, iron lungs, x-rays, heating systems. Schools, stores, and theatres enjoy the safety of stand-by protection. Processing equipment continues functioning. Homes and farms have automatic heat, refrigeration, water supply and power for milking machines. Hatcheries and greenhouses avert heavy losses of stock. A single power failure may cause losses exceeding the cost of a stand-by plant.

Kohler plants start promptly, furnishing light and power as long as regular service is off—and stop automatically when the current is restored. Kohler plants are available in standard voltages. Several types of automatic transfer switches used for stand-by protection are available. Write for catalog.

For Hospitals and Institutions

For Homes and Farms

For Public Buildings an
commercial applicatio

KOHLER
4-CYCLE

K90

Kohler Engines are compact, quick-starting—provide reliable power for a wide range of uses—to operate compressors, pumps, vibrators, concrete mixers, hoists, garden cultivators, tractors, weed cutters, mowers, saws, elevators, conveyors, and sprayers. Built to Kohler quality standards.

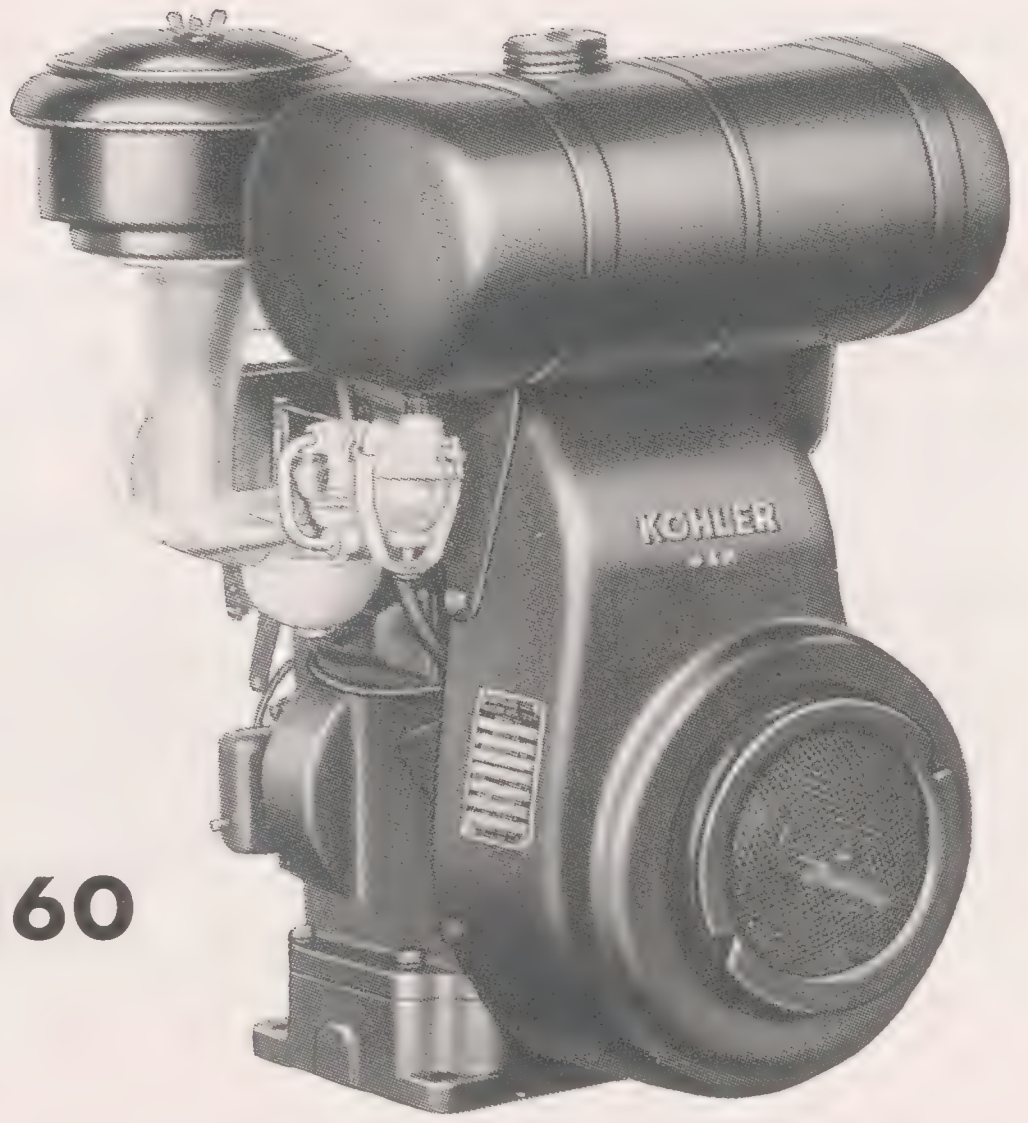

K160

K330

ENGINES
AIR-COOLED

2.5 H.P. to 25 H.P.

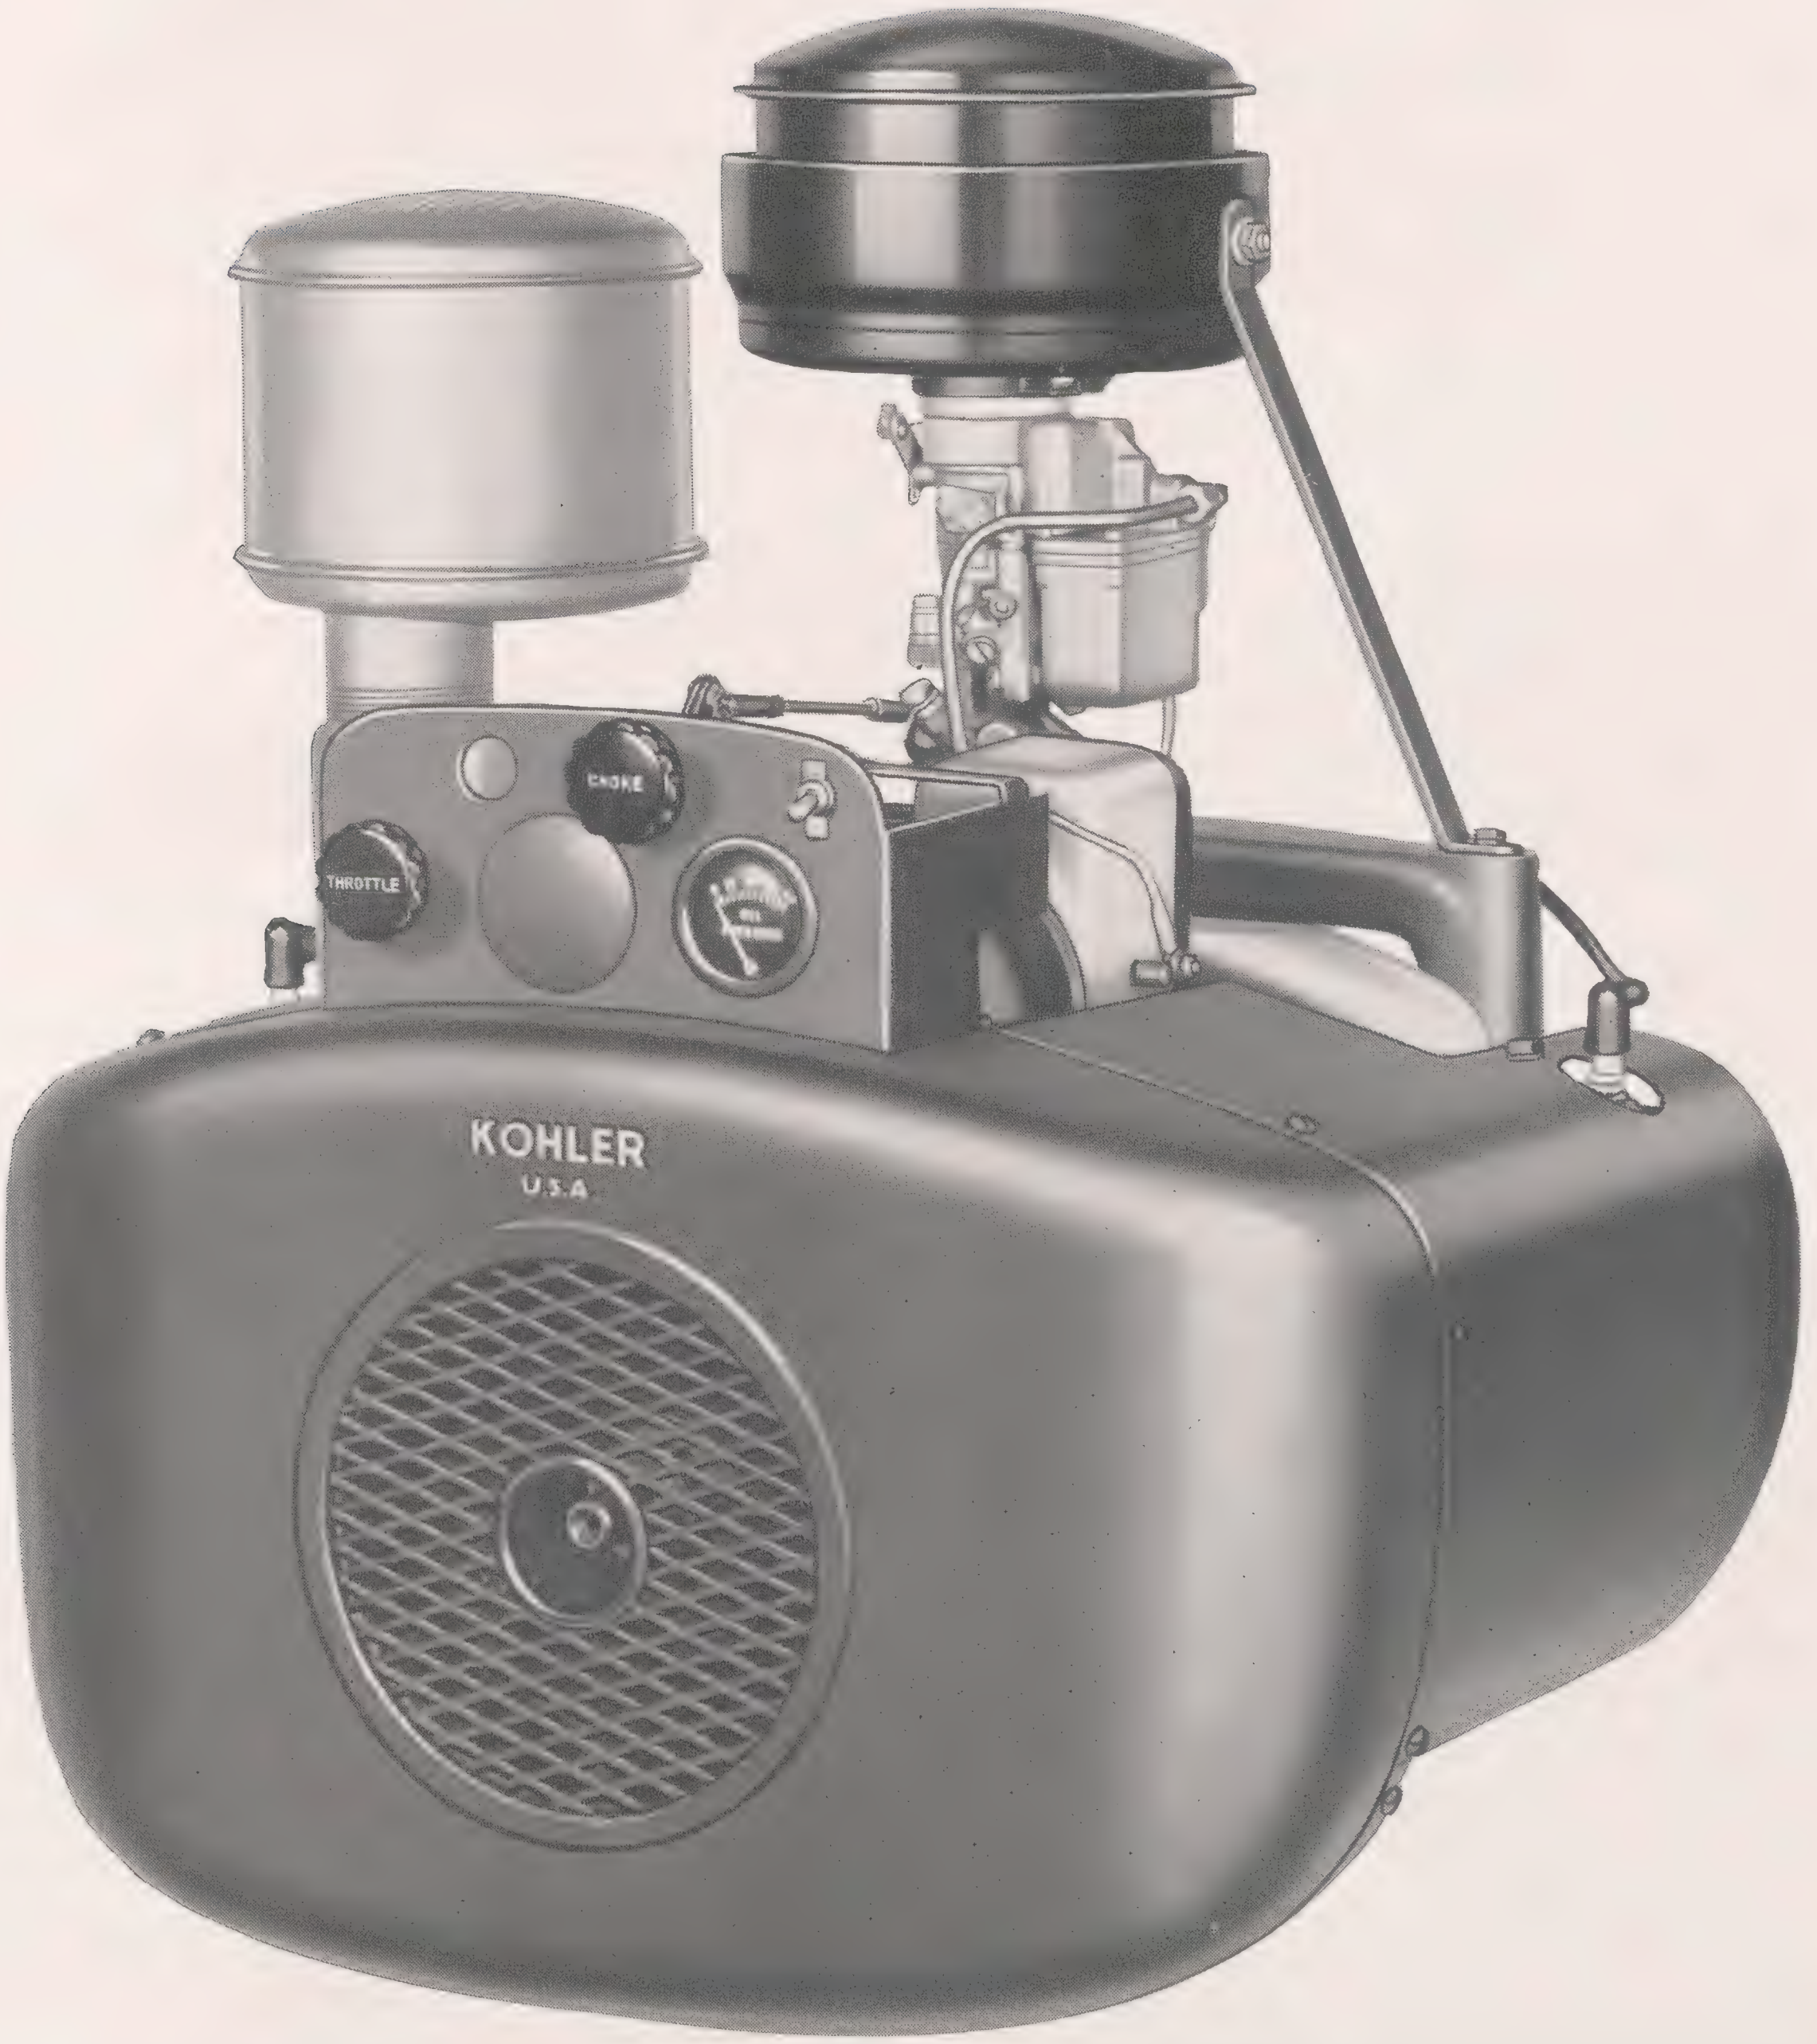
CHOKE
THROTTLE
KOHLER
U.S.A

**K 660
TWIN**

INDEX

PAGES

Baths 22–32
Bath Hanger—Tight Wall 32
Bidets 70
Boilers 138–140
Cabinets, Kitchen 108–111
Cabinets, Lavatory 41
Chair Carriers, Lavatory 39
Cleanser 90
Closets 54–66
Controls, Precision 141
Curtain Rods, Hook 137
Drinking Fountains
  Enameled Iron 89
  Vitreous China 84–88
Electric Plants 142–143
Engines, Air-cooled 144–145
Fittings, Brass 116–137
Flush Valves 135–136
Kitchen Sinks and Undersink Cabinets 91–105
Lavatories
  Enameled Iron 45–51
  Vitreous China 34–44
Laundry Trays 112–115
Protek Powder 32
Sacrarium 85
Seats, Closet 68–69
Service Sinks
  Enameled Iron 82
  Vitreous China 80–81
Sink and Trays 106–107
Tanks—Closet and Urinal 67
Urinals
  Enameled Iron 77
  Vitreous China 71–76, 78–79
Wash Sinks 52–53

KOHLER